

Graph Theory and Complex Networks: An Introduction

TABLE OF CONTENTS:

1. [Introduction](#)
 - 1.1 [Communication networks](#)
 - 1.2 [Social networks](#)
 2. [Foundations](#)
 - 2.1 [Formalities](#)
 - 2.2 [Graph representations](#)
 - 2.3 [Connectivity](#)
 - 2.4 [Drawing graphs](#)
 3. [Extensions](#)
 - 3.1 [Directed graphs](#)
 - 3.2 [Weighted graphs](#)
 - 3.3 [Colorings](#)
 4. [Network traversal](#)
 - 4.1 [Euler tours](#)
 - 4.2 [Hamilton cycles](#)
 5. [Trees](#)
 - 5.1 [Background](#)
 - 5.2 [Fundamentals](#)
 - 5.3 [Spanning trees](#)
 - 5.4 [Routing in communication network](#)
 6. [Network analysis](#)
 - 6.1 [Vertex degrees](#)
-

Chapter 1: Introduction

Complex Network (informal definition): "large collection of interconnected nodes".

- "Generally so huge that it is impossible to understand or predict their overall behavior by looking into the behavior of individual nodes or links".

1.1 Communication networks

Trees (informal definition): networks in which, between any two nodes, messages could travel only through a unique path.

Packet switching vs **circuit switching**:

- Packet switching: When a switch (or node) receives a packet, it only decides to which next switch to forward the packet.
- Circuit switching: Firstly, two endpoints establish a path and then let all communication pass through such path.

1.2 Social Networks

Small world (informal definition): "two people can reach each other through a chain of just a handful of messages".

Sociograms:

- Introduced by Jacob Moreno in the 1930s.
- Graphical representation of a network: people are represented by dots or vertices, their relationships by lines connecting the dots (edges).

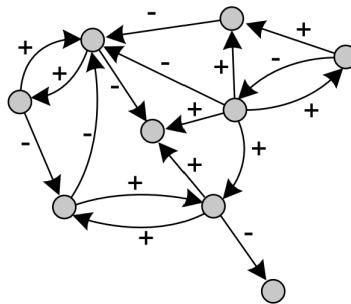


Figure 1.3: The representation of a sociogram expressing affection between people. The absence of a link indicates neutrality.

Chapter 2: Foundations

2.1 Formalities


Definition 2.1: A graph G consists of a collection V of vertices and a collection E of edges, which we write $G = (V, E)$. Each edge $e \in E$ is said to join two vertices, which are called its end points. If e joins $u, v \in V$, we write $e = \langle u, v \rangle$. Vertices u and v are said to be adjacent. Edge e is said to be incident with vertices u and v , respectively.

Special cases:

- **Simple graphs:** do not have loops (an edge linking a node to itself) or multiple edges between two nodes.
- **Empty graph:** trivial graph, with no nodes and consequently no edges.
- **Complete graph** (denoted K_n): a simple graph with n nodes, with each node being connected to all other nodes.
- **Complement of a graph G** (denoted $\overline{G}$): obtained from G by removing all its edges and joining the vertices that were *not* adjacent.

Definition 2.2: For any graph G and vertex $v \in V(G)$, the neighbor set $N(v)$ is the set of vertices (other than v) adjacent to v , that is:

$$N(v) \stackrel{\text{def}}{=} \{w \in V(G) \mid v \neq w, \exists e \in E(G) : e = \langle u, v \rangle\}.$$

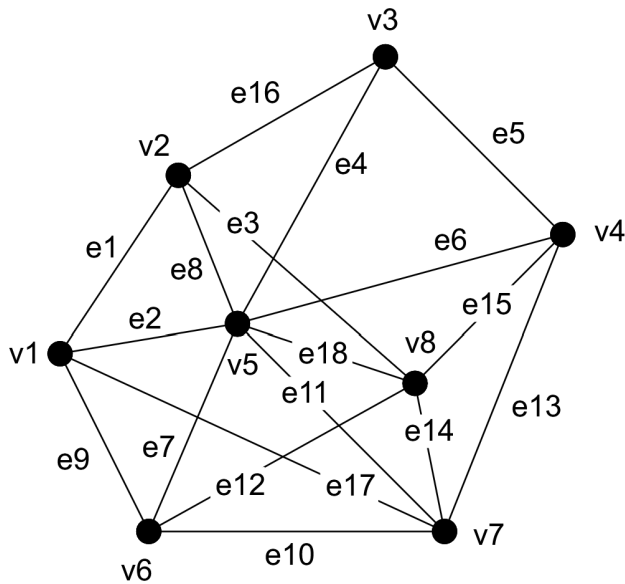

$$\begin{aligned}
 V(G) &= \{v_1, \dots, v_8\} \\
 E(G) &= \{e_1, \dots, e_{18}\} \\
 e_1 &= \langle v_1, v_2 \rangle & e_{10} &= \langle v_6, v_7 \rangle \\
 e_2 &= \langle v_1, v_5 \rangle & e_{11} &= \langle v_5, v_7 \rangle \\
 e_3 &= \langle v_2, v_8 \rangle & e_{12} &= \langle v_6, v_8 \rangle \\
 e_4 &= \langle v_3, v_5 \rangle & e_{13} &= \langle v_4, v_7 \rangle \\
 e_5 &= \langle v_3, v_4 \rangle & e_{14} &= \langle v_7, v_8 \rangle \\
 e_6 &= \langle v_4, v_5 \rangle & e_{15} &= \langle v_4, v_8 \rangle \\
 e_7 &= \langle v_5, v_6 \rangle & e_{16} &= \langle v_2, v_3 \rangle \\
 e_8 &= \langle v_2, v_5 \rangle & e_{17} &= \langle v_1, v_7 \rangle \\
 e_9 &= \langle v_1, v_6 \rangle & e_{18} &= \langle v_5, v_8 \rangle
 \end{aligned}$$

Figure 2.1: An example of a graph with eight vertices and 18 edges.

Degree of a vertex: number of edges that are incident with it.

Definition 2.3: The number of edges incident with a vertex v is called the *degree* of v , denoted as $\delta(v)$. Loops are counted twice.

Theorem 2.1: For all graphs G , the sum of vertex degrees is twice the number of edges, that is:

$$\sum_{v \in V(G)} \delta(v) = 2 \cdot |E(G)|.$$

Proof: When we count the edges of a graph G by enumerating for each vertex v of G the edges incident with that vertex v , we are counting each edge exactly twice.

Corollary 2.1: For any graph, the number of vertices with odd degree is even.

- Let us split all vertices into two sets (V_{odd} and V_{even}), based on whether the vertices have odd or even degree.
- We know that
 - $\sum_{v \in V} \delta(v)$ is even (Theorem 2.1);
 - $\sum_{v \in V} \delta(v) = \sum_{v \in V_{\text{odd}}} \delta(v) + \sum_{v \in V_{\text{even}}} \delta(v)$;
 - $\sum_{v \in V_{\text{even}}} \delta(v)$ is even;
- Thus, $\sum_{v \in V_{\text{odd}}} \delta(v)$ must add up to an even number, which means that the number of nodes with odd degree is even.

Degree sequence: list of degrees of all vertices in a graph.

- If every vertex in a graph has the same degree, the graph is called *regular*.
- A k -regular graph is one in which all vertices have degree k . Cubic graphs are a special case in which $k = 3$.

Theorem 2.2 (Havel-Hakimi): Consider a list $\mathbf{s} = [d_1, d_2, \dots, d_n]$ of n numbers in descending order. This list is graphic if and only if $\mathbf{s}^* = [d_1^*, d_2^*, \dots, d_{n-1}^*]$ of $n - 1$ numbers is graphic as well, where:

$$d_i^* = \begin{cases} d_{i+1} - 1, & \text{for } i = 1, 2, \dots, d_1 \\ d_{i+1}, & \text{otherwise} \end{cases}$$

Definition 2.4: A graph H is a *subgraph* of G if $V(H) \subseteq V(G)$ and $E(H) \subseteq E(G)$ such that for all $e \in E(H)$ with $e = \langle u, v \rangle$, we have that $u, v \in V(H)$. When H is a subgraph of G , we write $H \subseteq G$.

Definition 2.5: Consider a graph G and a subset $V^* \subseteq V(G)$. The *subgraph induced by V^** has vertex set V^* and edge set E^* defined by:

$$E^* \stackrel{\text{def}}{=} \{e \in E(G) \mid e = \langle u, v \rangle \text{ with } u, v \in V^*\}$$

Likewise, if $E^* \subseteq E(G)$, the subgraph induced by E^* has edge set E^* and vertex set V^* defined by:

$$V^* \stackrel{\text{def}}{=} \{u, v \in V(G) \mid \exists e \in E^* : e = \langle u, v \rangle\}$$

The subgraph induced by V^* or E^* is written as $G[V^*]$ or $G[E^*]$, respectively.

- Every graph $G = (V, E)$ having n vertices can be seen as a subgraph of the complete graph K_n .
- Considering the complement $\overline{G} = (V, \overline{E})$, then the *union* $G \cup \overline{G}$ (the graph with vertex set V and edge set $E \cup \overline{E}$) corresponds to K_n .

Definition 2.6: Consider a simple graph $G = (V, E)$. The *line graph* of G , denoted as $L(G)$ is constructed from G by representing each edge $e = \langle u, v \rangle$ from E by a vertex v_e in $L(G)$, and joining two vertices v_e and v_{e^*} if and only if edges e and e^* are incident with the same vertex in G .

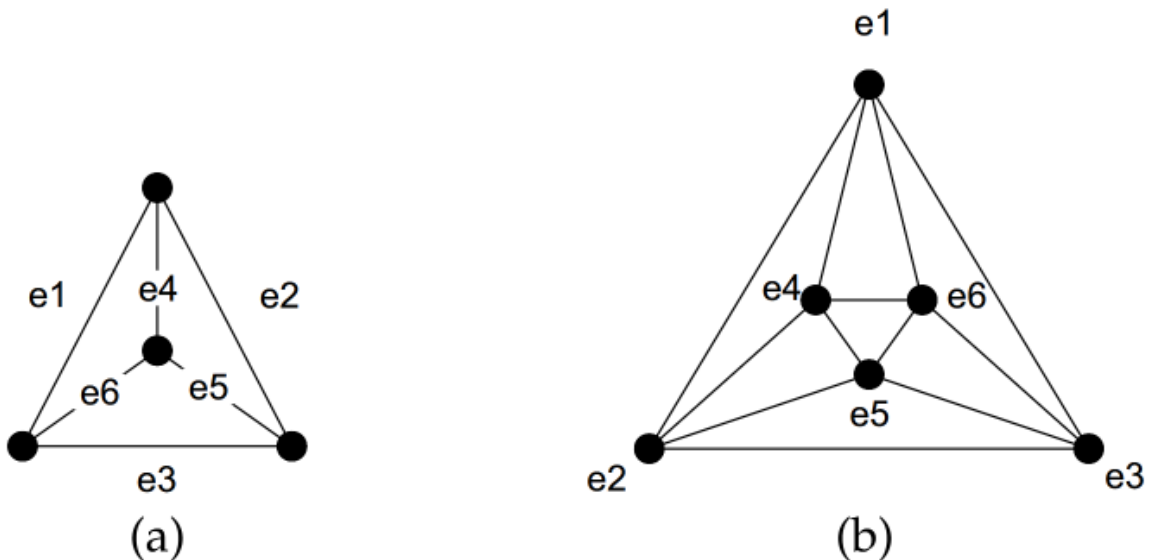



Figure 2.6: (a) A graph G and (b) its line graph $L(G)$.

Special induced graphs

- $G - v$ or $G[V(G) \setminus \{v\}]$: induced subgraph generated by removing vertex v .

- $G - e$ or $G[E(G) \setminus \{e\}]$: induced subgraph generated by removing edge e .

2.2 Graph representations

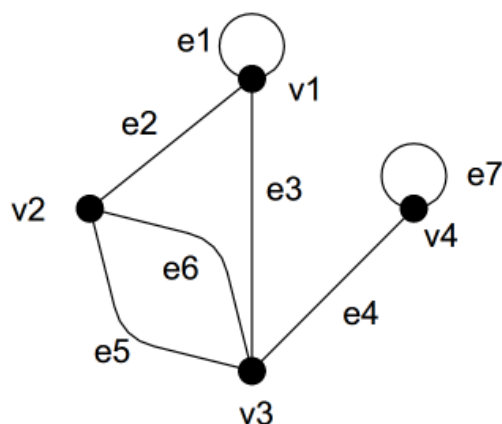


	v_1	v_2	v_3	v_4
v_1	2	1	1	0
v_2	1	0	2	0
v_3	1	2	0	1
v_4	0	0	1	2

Figure 2.7: A graph with its associated adjacency matrix.

Adjacency matrix

- Consider a graph G with n vertices and m edges.
- Its adjacency matrix A is a table with n rows and n columns (square matrix), so that each entry $A[i, j]$ denotes the number of edges joining vertices v_i to v_j .
- Properties:
 - An adjacency matrix is *symmetric*, that is, for all i, j , $A[i, j] = A[j, i]$. (This is a consequence of representing edges as unordered pairs of vertices: $e = \langle v_i, v_j \rangle = \langle v_j, v_i \rangle$.)
 - A graph G is simple if and only if for all i, j $A[i, j] \leq 1$, $i \neq j$ and $A[i, i] = 0$ (there is at most one edge joining v_i and v_j and no loops).
 - $\delta(v_i) = \sum_{j=1}^n A[i, j]$, that is, the sum of row i is equal to the degree of vertex v_i .

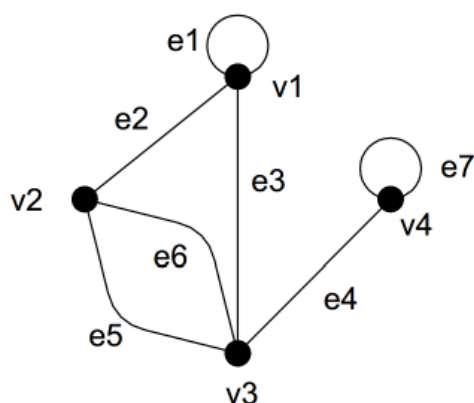

	e_1	e_2	e_3	e_4	e_5	e_6	e_7
v_1	2	1	1	0	0	0	0
v_2	0	1	0	0	1	1	0
v_3	0	0	1	1	1	1	0
v_4	0	0	0	1	0	0	2

Figure 2.8: A graph with its associated incidence matrix.

Incidence matrix

- The incidence matrix of a graph G has n rows and m columns (non-square), so that $\mathbf{M}[i, j]$ contains the number of times (0, 1 or 2) that edge e_j is incident with vertex v_i .
- Properties:
 - G has no loops if and only if for all i, j $\mathbf{M}[i, j] \leq 1$.
 - $\forall i : \delta(v_i) = \sum_{j=1}^m \mathbf{M}[i, j]$, that is, the sum of row i is equal to the degree of vertex v_i .
 - Since every edge connects two (not necessarily distinct) endpoints, then $\forall j : \sum_{i=1}^n \mathbf{M}[i, j] = 2$.

Edge list

- More efficient representation in terms of storage.
- It is a list of edges of graph G , specifying for each edge which vertices it is incident with.
- Example: $(\langle v_1, v_1 \rangle, \langle v_1, v_2 \rangle, \langle v_1, v_3 \rangle, \langle v_2, v_3 \rangle, \langle v_2, v_3 \rangle, \langle v_3, v_4 \rangle, \langle v_4, v_4 \rangle)$

Definition 2.7: Consider two graphs $G = (V, E)$ and $G^* = (V^*, E^*)$. G and G^* are *isomorphic* if there exists a one-to-one mapping $\phi : V \rightarrow V^*$ such that for every edge $e \in E$ with $e = \langle u, v \rangle$, there is a unique edge $e^* \in E^*$ with $e^* = \langle \phi(u), \phi(v) \rangle$.

"Stated differently, two graphs G and G^* are isomorphic if we can uniquely map the vertices and edges of G to those of G^* such that if two vertices were joined in G by a number of edges, their counterparts in G^* will be joined by the same number of edges." (p. 33)

Theorem 2.3: If two graphs G and G^* are isomorphic, then their respective ordered degree sequences should be the same.

- This is a necessary condition for isomorphism, but not a sufficient one.
- There are no known easy sufficient conditions to tell whether two graphs are isomorphic or not: once all necessary conditions are met, we have to resort to trial and error.
 - In the worst case, there are potentially $n!$ mappings to check!

2.3 Connectivity

Definition 2.8: Consider a graph G . A (v_0, v_k) -**walk** in G is an alternating sequence $[v_0, e_1, v_1, e_2, \dots, v_{k-1}, e_k, v_k]$ of vertices and edges from G with $e_i = \langle v_{i-1}, v_i \rangle$. In a **closed walk**, $v_0 = v_k$. A **trail** is a walk in which all edges are distinct; a **path** is a trail in which also all vertices are distinct. A **cycle** is a closed trail in which all vertices except v_0 and v_k are distinct.

Definition 2.9: Two distinct vertices u and v in graph G are *connected* if there exists a (u, v) -path in G . G is *connected* if all pairs of distinct vertices are connected.

Definition 2.10: A subgraph H of G is called a *component* of G if H is connected and not contained in a connected subgraph of G with more vertices or edges. The number of components of G is denoted by $\omega(G)$.

- A component is the *maximal, connected* subgraph.

Definition 2.11: For a graph G let $V^* \subset V(G)$ and $E^* \subset E(G)$. V^* is called a *vertex cut* if $\omega(G - V^*) > \omega(G)$. If V^* consists of a single vertex v , then v is called a *cut vertex*. Likewise, if $\omega(G - E^*) > \omega(G)$ then E^* is called an *edge cut*. If E^* consists of only a single edge e , then e is known as a *cut edge*.

Minimal vertex cut of a connected graph

- How many vertices do we need to remove from a connected graph before it becomes disconnected.
- Let $\kappa(G)$ denote the minimal vertex cut for G and $\lambda(G)$, the minimal edge cut for G .
- $\kappa(G)$ is less than or equal to $\lambda(G)$, $\lambda(G)$ is less or equal to the minimal vertex degree.

Theorem 2.4: $\kappa(G) \leq \lambda(G) \leq \min\{\delta(v) \mid v \in V(G)\}$

- **k-connected:** graph G for which $\kappa(G) \geq k$.
- **k-edge-connected:** graph G for which $\lambda(G) \geq k$.
- **Optimally connected:** graph G for which $\kappa(G) = \lambda(G) = \min\{\delta(v) \mid v \in V(G)\}$.

Definition 2.12: Consider a graph G and a collection $\mathbf{P}$ of (u, v) -paths in G , with $u, v \in V(G)$. $\mathbf{P}$ is *vertex independent* if for all (u, v) -paths $P_1, P_2 \in \mathbf{P}$ we have that $V(P_1) \cap V(P_2) = \{u, v\}$. The collection is *edge independent* if for all its (u, v) -paths P_1 and P_2 , we have that $E(P_1) \cap E(P_2) = \emptyset$.

- In other words, two (u, v) -paths P_1 and P_2 are *vertex independent* if they do not share any other vertices apart from u and v , and they are *edge independent* if they share no edge.

Theorem 2.5 (Menger): Let G be a connected graph and u and v two nonadjacent vertices in G . The minimum number of vertices in a vertex cut that disconnects u and v is equal to the maximum number of pairwise vertex-independent path between u to v . Analogously, the minimum number of edges in an edge cut that disconnects u and v , is equal to the maximum number of pairwise edge-independent paths between u and v .

Corollary 2.2: A graph G is k -connected if and only if any two distinct vertices are connected by at least k pairwise vertex-independent paths. G is k -edge-connected if and only if any two distinct vertices are connected by at least k pairwise edge-independent paths.

Corollary 2.3: Each edge of a 2-edge-connected graph lies on a cycle.

For any simple graph G a higher value of $\kappa(G)$ (size of a minimal vertex cut) implies more edges are needed.

- In every k -connected graph each vertex will have at least k incident edges.
- Given that $\sum \delta(v) = 2 \cdot m$ (the sum of vertex degrees is twice the number of edges), for a graph with n vertices, we would need $\frac{1}{2} \sum \delta(v)$ and thus at least $\frac{1}{2} \sum k = \frac{1}{2} n \cdot k$ edges.
- What is the minimal number of edges for a graph to be k -connected?

Definition 2.13: A Harary graph $\mathbf{H}_{k,n}$ is a k -connected simple graph with a minimal number of edges.

- $\mathbf{H}_{k,n}$ has exactly $\lceil k \cdot \frac{n}{2} \rceil$ edges.

Theorem 2.6: The Harary graph $\mathbf{H}_{k,n}$ is k -connected.

A Harary graph has a minimal number of edges

- For any k -connected graph, each vertex has degree $\delta(v) \geq k$.
- Let $m_k(n)$ be the minimal number of edges for any simple k -connected graph G .
- Since $|E(G)| = \frac{1}{2} \sum_{v \in V(G)} \delta(v) \geq \frac{1}{2} \sum_{v \in V(G)} \delta_{\min} \geq \frac{n \cdot k}{2}$, we know that $m_k(n) \geq \frac{n \cdot k}{2}$.
- It is not difficult to verify that $|E(\mathbf{H}_{k,n})| = \frac{nk}{2}$ (a Harary graph has minimal number of edges).

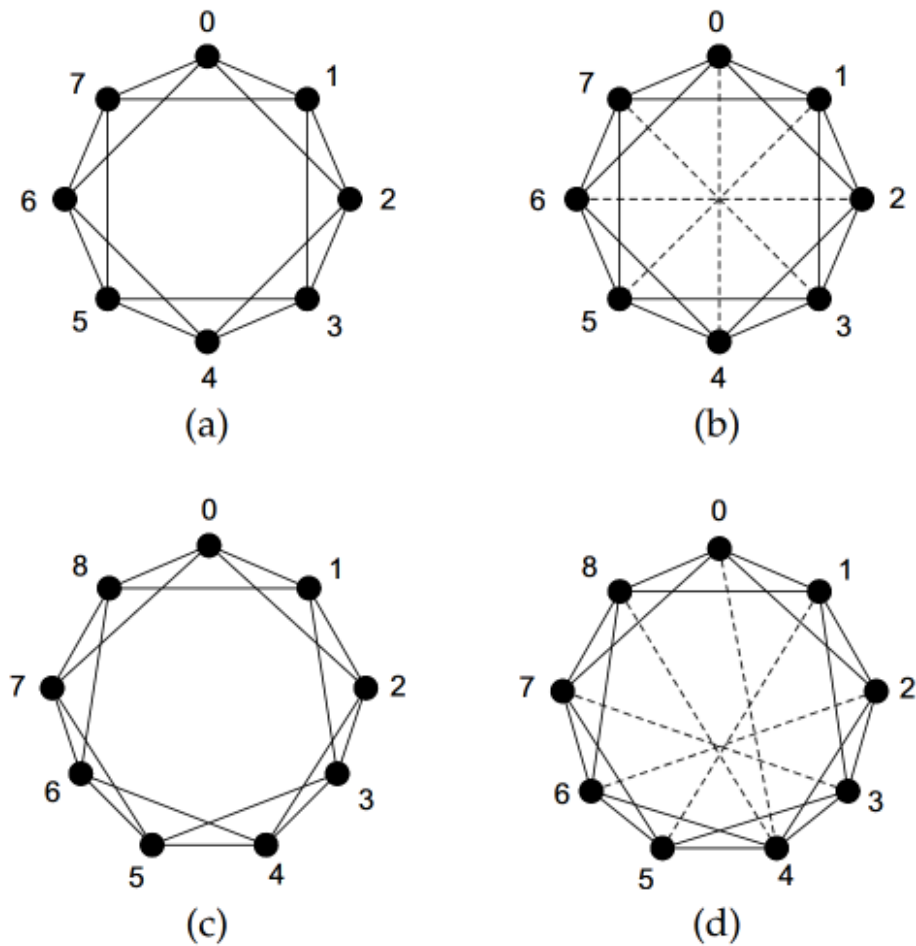


Figure 2.12: Various Harary graphs: (a) $H_{4,8}$, (b) $H_{5,8}$, (c) $H_{4,9}$, and (d) $H_{5,9}$. Dashed edges are the ones added to obtain $H_{5,8}$ from $H_{4,8}$, and $H_{5,9}$ from $H_{4,9}$, respectively.

2.4 Drawing graphs

Graph embeddings

"[A] representation of a graph on a surface where vertices are associated with points on that surface".

Circular embedding: vertices are placed at evenly spaced points on a circle.

- Advantage: no three vertices are ever collinear; each edge is visible and can be drawn as a straight line.

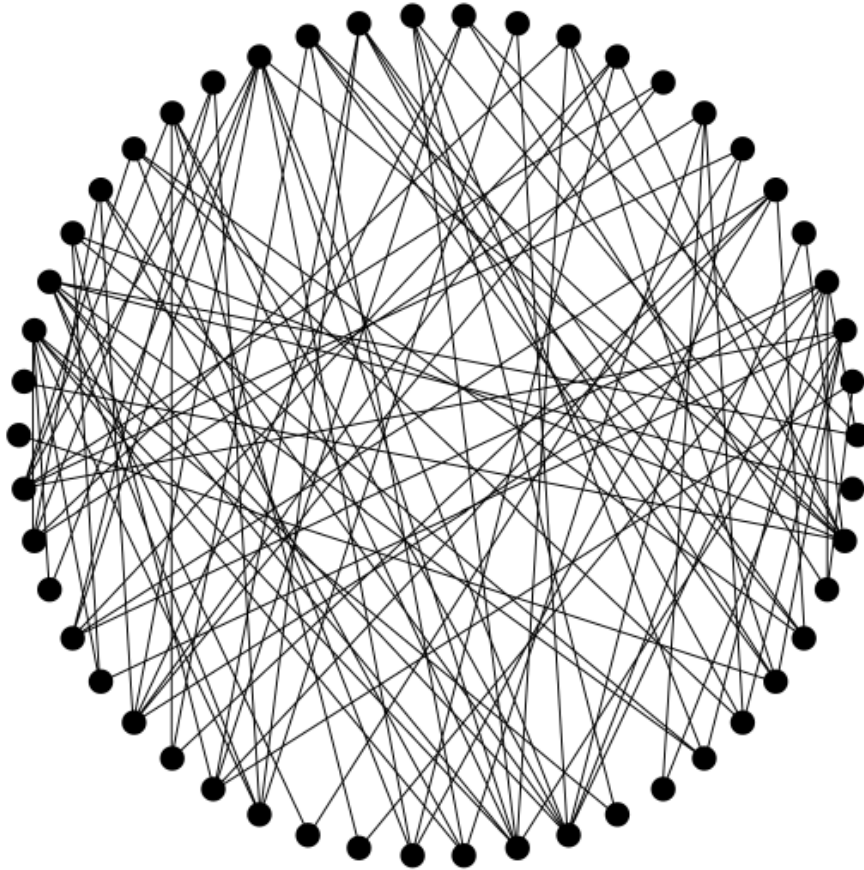


Figure 2.15: A random graph with 50 vertices and 103 edges. The circular embedding allows to draw each edge as a straight line that remains (reasonably) visible.

Definition 2.14: A graph G is *bipartite* if $V(G)$ can be partitioned into two disjoint subsets V_1 and V_2 such that each edge $e \in E(G)$ has one endpoints in V_1 and the other in V_2 , that is $E(G) \subseteq \{e = \langle u_1, u_2 \rangle \mid u_1 \in V_1, u_2 \in V_2\}$.

- Sometimes, bipartite graphs are conveniently drawn as *ranked embeddings*.

Ranked embeddings: vertices are ranked according to their distance to a v .

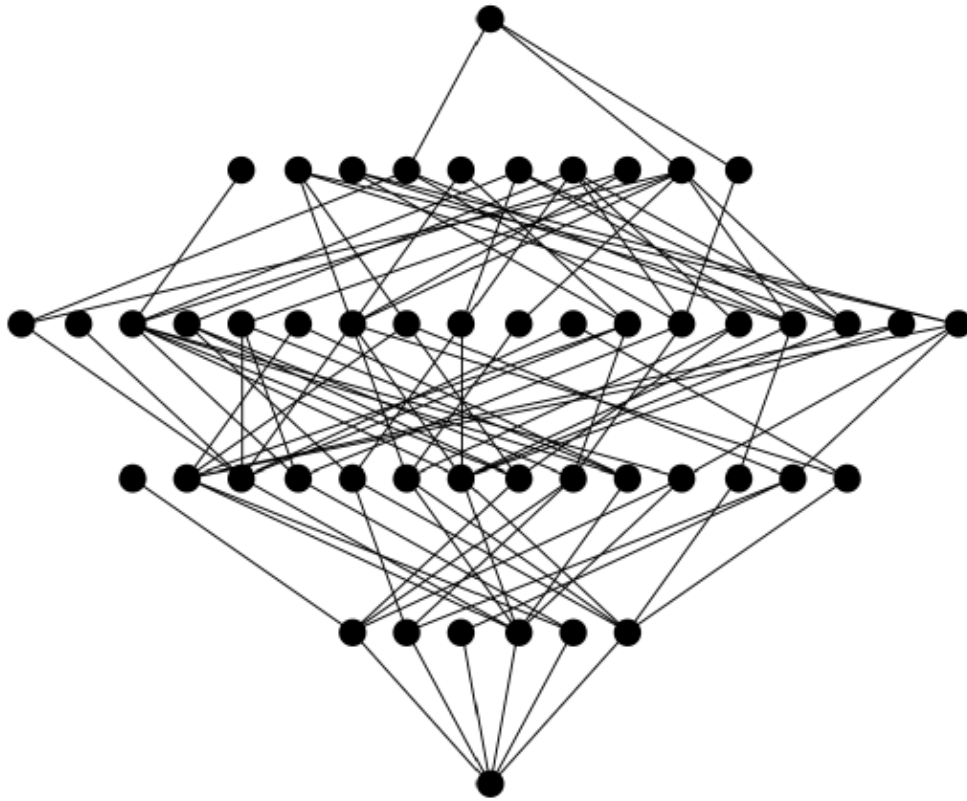


Figure 2.16: A ranked embedding of the graph from Figure 2.15.

Spring embeddings: vertices are modeled as springs connected by springs.

- This is essentially a computational approach.
- Main reference: [Eades \(1984\)](#).

Logic:

- Each vertex u is initially positioned at (u_x, u_y) .
- Each spring $e = \langle u, v \rangle$ exerts an attracting force $F_{att}(u, v)$ on vertices u and v , such that:

$$F_{att}(u, v) \stackrel{\text{def}}{=} \begin{cases} 2 \log(d(u, v)), & \text{if adjacent} \\ 0, & \text{otherwise} \end{cases}$$

where

$$d_{u,v} \stackrel{\text{def}}{=} \sqrt{(u_x - v_x)^2 + (u_y - v_y)^2}$$

is the length of the spring.

- Each pair of nonadjacent vertices are subject to a repelling force $F_{rep}(u, v)$, such that:

$$F_{rep}(u, v) \stackrel{\text{def}}{=} \begin{cases} 0, & \text{if adjacent} \\ 1/\sqrt{d(u, v)}, & \text{otherwise} \end{cases}$$

Algorithm 2.1 (Spring embedding):

1. Place the vertices at random locations;

2. For each vertex u , calculate the resulting forces in the x and y directions, respectively:

- $F_x(u) \stackrel{\text{def}}{=} \sum_{v \neq u} F_{att,x}(u, v) - F_{rep,x}(u, v)$
- $F_y(u) \stackrel{\text{def}}{=} \sum_{v \neq u} F_{att,y}(u, v) - F_{rep,y}(u, v)$

3. Reposition vertex u according to:

- $u_x \leftarrow u_x + 0.1 \cdot F_x(u)$
- $u_y \leftarrow u_y + 0.1 \cdot F_y(u)$

4. Goto Step 2. Stop after M iterations.

The attracting force in the x direction $F_{att,x}(u, v)$ is given by

$$F_{att,x}(u, v) \stackrel{\text{def}}{=} F_{att}(u, v) \cdot \frac{|v_x - u_x|}{d(u, v)}$$

The definitions of $F_{att,y}(u, v)$, $F_{rep,x}(u, v)$ and $F_{rep,y}(u, v)$ are analogous.

Planar graphs

Definition 2.15: A *plane graph* is a specific embedding of a graph G such that no edges intersect. If such an embedding exists, G is said to be planar.

- *Regions* (or *faces*): portions enclosed by the edges of the graph.

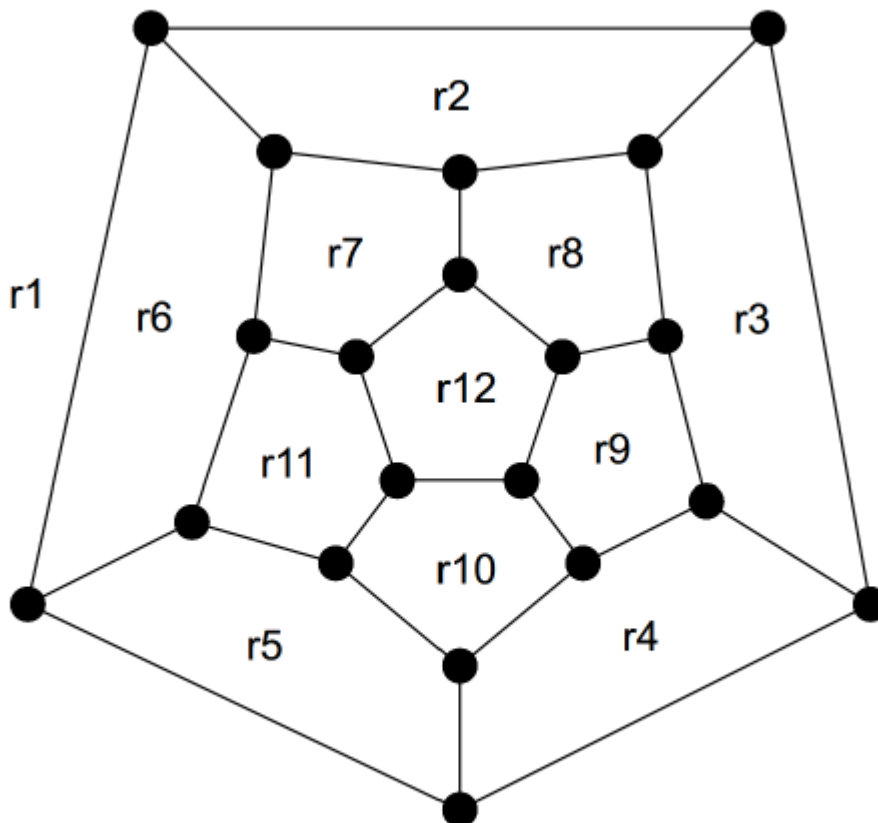


Figure 2.18: A plane graph with 12 regions.

Theorem 2.7 (Euler's formula): For a plane graph G with n vertices, m edges, and r regions, we have that $n - m + r = 2$.

Definition 2.16: A simple, connected graph with no cycles is called a *tree*. A simple graph having only trees as its components is called a *forest*.

Lemma 2.1: Any tree T with n vertices has $|E(T)| = n - 1$ edges.

Theorem 2.8 (Principle of induction): Let $S(n)$ be a mathematical statement formulated in terms of a natural number n . $S(n)$ is true if the following two statements are true:

1. $S(1)$ is true;
2. for any $k \in \mathbb{N}$, if $S(k)$ is true, then $S(k + 1)$ is true.

Theorem 2.9: For any connected simple planar graph G with $n \geq 3$ vertices and m edges, we have that $m \leq 3n - 6$.

- This theorem is a *necessary* condition for a simple graph to be planar.
- This theorem can be used to prove that K_5 (complete graph with 5 vertices) cannot be planar.

Corollary 2.4: The complete graph on 5 vertices, K_5 is nonplanar.

Theorem 2.10: The complete bipartite graph $K_{3,3}$ is nonplanar.

Corollary 2.5: Any connected, simple graph having a subgraph isomorphic to either K_5 or $K_{3,3}$ cannot be planar.

Chapter 3: Extensions

3.1 Directed graphs

Definition 3.1: A *directed graph* or *digraph* D consists of a collection of *vertices* V , a collection of *arcs* A , for which we write $D = (V, A)$. Each arc $a = \langle \overrightarrow{u, v} \rangle$ is said to join vertex $u \in V$ (called *tail*) to another (not necessarily distinct) vertex v (called *head*).

- The *underlying graph* $G(D)$ of a digraph D is obtained by replacing each arc $a = \langle \overrightarrow{u, v} \rangle$ with its undirected counterpart.
- An undirected graph G can be transformed into a digraph $D(G)$ by associating a direction with each edge. Such a digraph is known as *orientation*.

Definition 3.2: Consider a digraph D and vertex $v \in V(D)$. The *in-neighbor set* $N_{in}(v)$ consists of the adjacent vertices having an arc with v as its head. Likewise, the *out-neighbor set* $N_{out}(v)$ consists of the adjacent vertices having an arc with v as its tail. Formally,

$$N_{in}(v) \stackrel{\text{def}}{=} \{w \in D \mid v \neq w, \exists a = \langle \overrightarrow{w, v} \rangle : a \in A(D)\}$$

$$N_{out}(v) \stackrel{\text{def}}{=} \{w \in D \mid v \neq w, \exists a = \langle \overrightarrow{v, w} \rangle : a \in A(D)\}$$

- The set of neighbors $N(v)$ is simply the union:

$$N(v) \stackrel{\text{def}}{=} N_{in}(v) \cup N_{out}(v)$$

Strict digraph: has no loops and no two arcs with the same end points have the same orientation.

- Analogous to the simple (undirected) graph.


Definition 3.3: For a vertex $v \in V(D)$, the number of arcs with head v is called the *in-degree* $\delta_{in}(v)$. Likewise, the *out-degree* $\delta_{out}(v)$ is the number of arcs having v as tail.

Theorem 3.1: For any directed graph D the sum of in-degrees as well as the sum of out-degrees is equal to the total number of arcs:

$$\sum_{v \in V(D)} \delta_{in}(v) = \sum_{v \in V(D)} \delta_{out}(v) = |A(D)|$$

Adjacency matrix: matrix $\mathbf{A}$ in which $\mathbf{A}[i, j]$ is equal to the number of arcs joining vertex v_i to v_j .

- D is strict iff $\forall i, j : \mathbf{A}[i, j] \leq 1, \mathbf{A}[i, i] = 0$.
- For each vertex v_i , $\sum_j \mathbf{A}[i, j] = \delta_{out}(v_i)$ and $\sum_j \mathbf{A}[j, i] = \delta_{in}(v_i)$.
- For a digraph, the adjacency matrix is not necessarily symmetric.

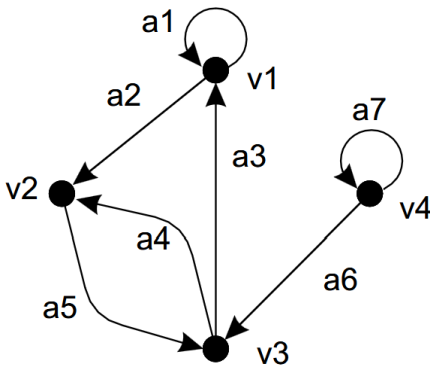

	v_1	v_2	v_3	v_4	Σ
v_1	1	1	0	0	2
v_2	0	0	1	0	1
v_3	1	1	0	0	2
v_4	0	0	1	1	2
Σ	2	2	2	1	7

Figure 3.1: A digraph with its associated adjacency matrix.

Incidence matrix: matrix $\mathbf{M}$ in which $\mathbf{M}[i, j]$ whether vertex v_i is incident to arc a_j , so that:

$$\mathbf{M}[i, j] = \begin{cases} 1, & \text{if } v_i \text{ is the tail of } a_j \\ -1, & \text{if } v_i \text{ is the head of } a_j \\ 0, & \text{otherwise} \end{cases}$$

- This representation will not work if the digraph has loops.

Definition 3.4: For a digraph D , a *directed* (v_0, v_k) -walk in D is an alternating sequence $[v_0, a_0, v_1, a_1, \dots, v_{k-1}, a_{k-1}, v_k]$ of vertices and arcs from D with $a_i = \overrightarrow{v_i, v_{i+1}}$. A *directed trail* is a directed walk in which all arcs are distinct; a *directed path* is a directed trail in which all vertices are also distinct. A *directed cycle* is a directed trail in which all vertices are distinct except for v_0 and v_k .

Definition 3.5: A digraph D is *strongly connected* if there exists a directed path between every pair of distinct vertices from D . A digraph is *weakly connected* if its underlying graph (i.e., its undirected counterpart) is connected.

Algorithm 3.1 (Reachable vertices): Let $R_0(u)$ denote the set of reachable vertices from u found after t steps.

1. Set $t \leftarrow 0$ and $R_0(u) \leftarrow \{u\}$
2. Construct the set $R_{t+1}(u) \leftarrow R_t(u) \cup_{v \in R_t(u)} N_{out}(v)$

3. If $R_{t+1}(u) = R_t(u)$, stop: $R(u) \leftarrow R_t(u)$. Otherwise, increment t and repeat the previous step.

- This is an example of **breadth-first algorithm**.
- D will be strongly connected iff $\forall u \in V(D) : R(u) = V(D)$

Question: Can we provide an orientation for a given (connected) undirected graph such that the resulting digraph is strongly connected?

Theorem 3.2 (Robbins' theorem): There exists an orientation $D(G)$ for a connected undirected graph G that is strongly connected iff $\lambda(G) \geq 2$ (i.e., G cannot be 1-edge-connected).

3.2 Weighted graphs

Definition 3.6: A *weighted graph* G is a graph for which each edge e has an associated real-valued number $w(e)$ called its *weight*. For any subgraph $H \subseteq G$, the weight of H is simply the sum of the weights of its edges: $w(H) = \sum_{e \in E(H)} w(e)$.

- Conventions: $w(\langle u, v \rangle) = \infty$, when u and v are not adjacent; thus, for each edge $e \in E(G)$, $w(e) < \infty$

Definition 3.7: Consider an undirected graph G and two vertices $u, v \in V(G)$. Let P be a (u, v) -path having minimal weight among all (u, v) -paths in G . The weight of P is known as the (*geodesic*) *distance* $d(u, v)$ between u and v . Path P is called a *shortest path* (u, v) -path, or a *geodesic* between u and v .

Dijkstra's algorithm

- Efficient algorithm for finding the shortest path from a vertex u to all other vertices in a given undirected graph.
- Another example of breadth-first algorithm.
- Creates a tree rooted at u : $T(u)$.

Algorithm 3.2 (Dijkstra's algorithm): Consider an undirected, simple weighted graph G , whose weights are nonnegative, and a vertex $u \in V(G)$.

- Let $S_t(u)$ be the set of vertices to which a shortest path from u has been found after step t .
- Each vertex v is assigned a label $\mathbf{L}(v) \stackrel{\text{def}}{=} (L_1(v), L_2(v))$, in which $L_1(v)$ is the vertex preceeding v in the shortest (u, v) -path found so far, and $L_2(v)$ the total weight of that path.
- Let $R_t(u) \stackrel{\text{def}}{=} S_t(u) \cup_{v \in S_t(u)} N(v)$, with $N(v)$ denoting the neighbor set of v (i.e., $R_t(u)$ consists of all vertices in $S_t(u)$ and their neighbors).

Algorithm:

1. Initialize $t \leftarrow 0$ and $S_0(u) \leftarrow \{u\}$. Furthermore, for all $v \in V(G)$:

$$\mathbf{L}(v) = \begin{cases} (u, 0) & \text{if } v = u \\ (-, \infty) & \text{otherwise} \end{cases}$$

2. For each vertex $y \in R_t(u) \setminus S_t(u)$, consider the vertices $N'(y)$ that are neighbors of y that lie in $S_t(u)$, i.e., $N'(y) \stackrel{\text{def}}{=} N(y) \cap S_t(u)$. Select $x \in N'(y)$ for which $L_2(x) + w(\langle x, y \rangle)$ is minimal. Set

$$\mathbf{L}(y) \leftarrow (x, L_2(x) + w(e))$$

3. Let $z \in R_t(u) \setminus S_t(u)$ for which $L_2(z)$ is minimal. Set $S_{t+1}(u) \leftarrow S_t(u) \cup \{z\}$. If $S_{t+1} = V(G)$, stop. Otherwise, $t \leftarrow t + 1$, compute $R_t(u)$ again and repeat the previous step.

Pseudocode:

```

 $S(u) \leftarrow \{u\}$ 
 $\mathbf{L}(u) \leftarrow (u, 0)$ ; for each  $v \in V(G), u \neq v : \mathbf{L}(v) \leftarrow (-, \infty)$ ;
while  $S(u) \neq V$  do
     $R(u) \leftarrow S(u) \cup_{v \in S(u)} N(v)$ ;
    for all  $y \in R(u) \setminus S(u)$  do
        for all  $x \in N(y) \cap S(u)$  do
            if  $L_2(x) + w(\langle x, y \rangle) < L_2(y)$  then
                 $\mathbf{L}(y) \leftarrow (x, L_2(x) + w(\langle x, y \rangle))$ 
            end if
        end for
    end for
    select  $v \notin S(u)$  where  $L_2(v)$  is minimal;
     $S(u) \leftarrow S(u) \cup \{v\}$ ;
end while

```

3.3 Colorings

Edge coloring

Assigning colors such that edges incident with the same vertex have different colors.

Definition 3.8: Consider a connected, loopless graph G . G is k -edge-colorable if there exists a partitioning of $E(G)$ into k disjoint sets $E_1, \dots, E_k$ such that no two edges from the same E_i are incident with the same vertex.

- A partitioning of a set is formally defined as a collection of sets $S_1, \dots, S_k$ such that:
 - $\forall i : S_i \subseteq S$
 - $\bigcup_{i=1}^k S_i = S$
 - $\forall i \neq j : S_i \cap S_j = \emptyset$

Edge chromatic number: minimal k for which G is k -edge-colorable.

- Denoted by $\chi'(G)$.
- If $\Delta(G)$ is the maximal degree of a vertex in graph G , it is obvious that $\chi'(G) \geq \Delta(G)$.

Theorem 3.3 (Vizing's theorem): For any simple graph G , either $\chi'(G) = \Delta(G)$ or $\chi'(G) = \Delta(G) + 1$.

Vertex colorings

Definition 3.9: Consider a simple connected graph G . G is k -vertex-colorable if there exists a partitioning of $V(G)$ into k disjoint set $V_1, \dots, V_k$ such that no two vertices from the same V_i are adjacent.

- $\forall V_i, \forall x, y \in V_i : \nexists e \in E(G) : e = \langle x, y \rangle$

Chromatic number of G : minimal k for which G is k -vertex-colorable.

- Denoted by $\chi(G)$.

Theorem 3.4: The minimum number of time slots needed for the class-scheduling problem is the value of $\chi(G)$.

Theorem 3.5: For any (simple, connected) graph G , $\chi(G) \leq \Delta(G) + 1$.

Theorem 3.6: For any planar graph G , $\chi(G) \leq 4$.

Theorem 3.7: Every planar graph G has a vertex v with $\delta(v) \leq 5$.

Theorem 3.8: For any planar graph G , $\chi(G) \leq 5$.

Chapter 4: Network traversal

4.1 Euler tours

Definition 4.1: A *tour* of a graph is a (u, v) -walk in which $u = v$ (i.e., a closed walk) and that traverses each edge in G . An *Euler tour* is a tour in which all edges are traversed exactly once.

Theorem 4.1: A connected graph G (with $n > 1$) has an Euler tour iff it has no vertices of odd degree.

Theorem 4.2: A connected graph G (with $n > 1$) has an Euler trail iff it has two vertices of odd degree. Moreover, the trail originates and ends in the vertices of odd degree.

Algorithm 4.1 (Fleury): Consider an Eulerian graph G .

1. Choose an arbitrary vertex $v_0 \in V(G)$ and set $W_0 = v_0$.
2. Assume that we have constructed a trail $W_k = [v_0, e_1, \dots, e_k, v_k]$.
 - Choose an edge incident to v_k , but which is not yet part of W_k , that is, $e_{k+1} = \langle v_k, v_{k+1} \rangle$ and $e_{k+1} \in E(G) \setminus E(W_k)$.
 - In addition, make sure that e_{k+1} is not a cut edge of the induced subgraph $G_k = G - E(W_k)$, unless there is no other option.
3. We now have a trail W_{k+1} . If there is no edge $e_{k+2} = \langle v_{k+1}, v_{k+2} \rangle$ to select from $E(G) \setminus E(W_{k+1})$, stop. Otherwise, repeat the previous step.

Theorem 4.3: A trail constructed by Fleury's algorithm in an Eulerian graph is an Euler tour of G .

The Chinese postman problem: Consider a weighted graph G in which each edge has a nonnegative weight.

- The problem is to find a closed walk $W = [v_0, e_1, v_1, \dots, e_n, v_n]$ that covers all edges of G , but with minimal weight.
- In other words, $E(W) = E(G)$ and $\sum_{i=1}^n w(e_i)$ is minimal.

- Related traversal problems:
 - *Routing garbage trucks*: neighborhood is an undirected graph, each junction is a vertex and each street is an edge (whose weight is interpreted as the length of the street).
 - *Routing a postman*: In this a junction is still a vertex, but a street with houses in both sides is represented by two edges.
 - *Checking a Web site*: Web site is an undirected graph, where a page is a vertex and a link is an edge of weight 1.
- To solve it, we transform an non-Eulerian graph into an Eulerian one by *duplicating* edges.
 - Duplicating an edge $e = \langle u, v \rangle$ means adding an edge $e^* = \langle u, v \rangle$ with the same weight as e .
 - The trick is to duplicate as few edges as possible, so that the total weight of the resulting graph is minimal.
 - Once we have transformed the graph into an Eulerian one, we apply Fleury's algorithm to find an Euler tour.
 - By ensuring that the weight of the transformed graph is minimal, we also ensure that the Euler tour is minimal.
 - Unfortunately, transforming a graph to a Eulerian one that has as less weight as possible is not trivial.

Algorithm 4.2: Consider a weighted, connected graph G with odd-degree vertices $V_{\text{odd}} = \{v_1, \dots, v_{2k}\}$ where $k \geq 1$.

1. For each pair of distinct odd-degree vertices v_i and v_j , find a minimum weight (v_i, v_j) -path $P_{i,j}$.
2. Construct a weighted complete graph on $2k$ vertices in which vertex v_i and v_j are joined by an edge having weight $w(P_{i,j})$.
3. Find the set E of k edges $e_1, \dots, e_k$ such that $\sum w(e_i)$ is minimal and no two edges are incident with the same vertex.
4. For each edge $e \in E$, with $e = \langle v_i, v_j \rangle$, duplicate the edges of $P_{i,j}$ in graph G .

The resulting graph G^* is Eulerian with minimal weight, for which we then apply Fleury's algorithm to find a minimum-weight Euler tour.

4.2 Hamilton cycles

Definition 4.2: Consider a connected graph G . A *Hamilton path* of G is a path that contains every vertex of G . Likewise, a *Hamilton cycle* is a cycle containing every vertex of G . G is called *Hamiltonian* if it has a Hamilton cycle.

Representative problems (instances of the [Travelling Salesman Problem](#)):

- *Transportation problems*: picking up people at n locations with roads as weighted edges between them. The solution is a minimal weighted Hamiltonian subgraph containing all vertices.
- *Drilling holes*: minimize the distance a machine needs to run to drill holes in a board. This can be modeled as a complete graph with vertices as holes and edges' weights being the geometric distance between them.

Theorem 4.4: If a graph is Hamiltonian, then for every proper nonempty subset $S \subset V(G)$, we have that $\omega(G - S) \leq |S|$.

- Necessary condition for a graph to be Hamiltonian.

Theorem 4.5 (Dirac's theorem): If G is a simple graph with $n = |V(G)|$ vertices, $n \geq 3$ and each vertex v has degree $\delta(v) \geq \frac{n}{2}$, then G is Hamiltonian.

- Sufficient condition for a graph to be Hamiltonian.

Theorem 4.6 Ore's theorem: Let G be a simple graph with n vertices. If u and v are distinct, nonadjacent vertices $\delta(u) + \delta(v) \geq n$, then G is Hamiltonian iff $G + \langle u, v \rangle$ is Hamiltonian.

Definition 4.3: Consider a graph G with n vertices. The *closure* of G is obtained by iteratively joining each nonadjacent pair of vertices u and v for which $\delta(u) + \delta(v) \geq n$, until no such pairs exist anymore.

Theorem 4.7 (Bondy-Chvátal theorem): A simple graph G with n vertices is Hamiltonian iff its closure is Hamiltonian.

Algorithm 4.3 (Pósa's algorithm): Consider a graph G and let $u \in V(G)$ be a randomly selected vertex. This vertex forms the first vertex of a path P that is expanded as follows. Let $\text{last}(P)$ denote the last vertex of P . Note that initially $\text{last}(P) = u$.

1. Randomly select a neighboring vertex $v \in N(\text{last}(P))$, such that (1) preferably, v does not lie on P , and (2) if $v \in V(P)$, then v has not been previously selected as neighbor of a last vertex before. If no such vertex exists, stop.
2. If $v \notin V(P)$, set $P \leftarrow P + \langle \text{last}(P), v \rangle$.
3. If $v \in V(P)$ then apply a **rotational transformation** of P using $\langle \text{last}(P), v \rangle$, leading to a path P^* with a new last vertex $\text{last}(P^*)$. If $\text{last}(P^*)$ has not yet been the last vertex for paths of the current length, set $P \leftarrow P^*$.
4. If in the possibly modified version of P we now have that $V(P) = V(G)$, check if $\langle u, \text{last}(P) \rangle \in E(G)$. If so, we have found a Hamilton cycle. Otherwise, continue with step 1.

Theorem 4.8: A directed graph D is Hamiltonian iff its **transformed undirected version** $\hat{D}$ is Hamiltonian.

Chapter 5: Trees

5.1 Background

Trees in transportation networks

- Boils down to minimizing transportation costs from a source to multiple destinations (i.e., the cheapest path in a network).
- *Connector problem*: setting up a communication infrastructure between a collection of nodes but such that the total costs are minimized.

Trees as data structures

- *Rooted trees*: trees with a single vertex designated as root.
- Example of using trees to represent data: consider the expression:

$$x = \frac{-b + \sqrt{b^2 - 4ac}}{2a}$$

- *Leaf nodes* should contain variables and constants; *intermediate nodes* represent operations.
 - Look up **Infix notation** and **Infix To Prefix Notation**.

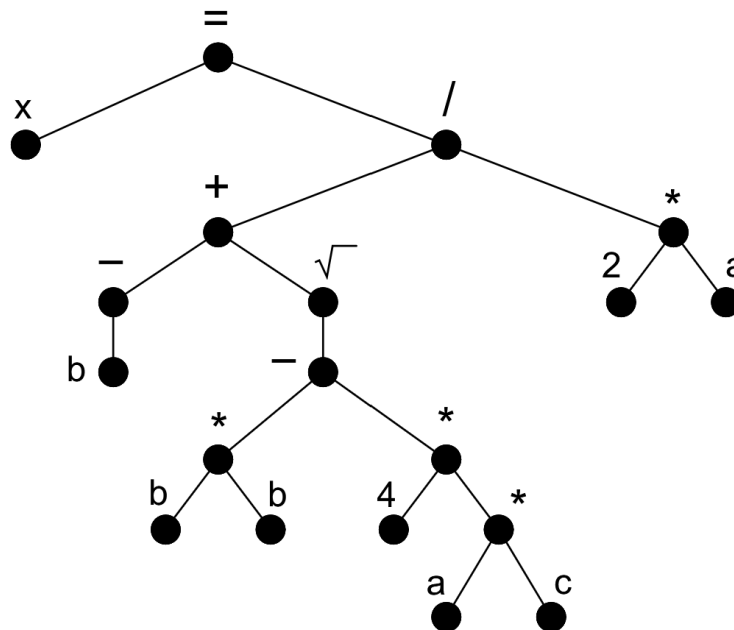


Figure 5.2: The representation of an arithmetic expression as a tree.

- *Binary trees*: special case of rooted trees, in which there are exactly two descendants for each intermediate node.

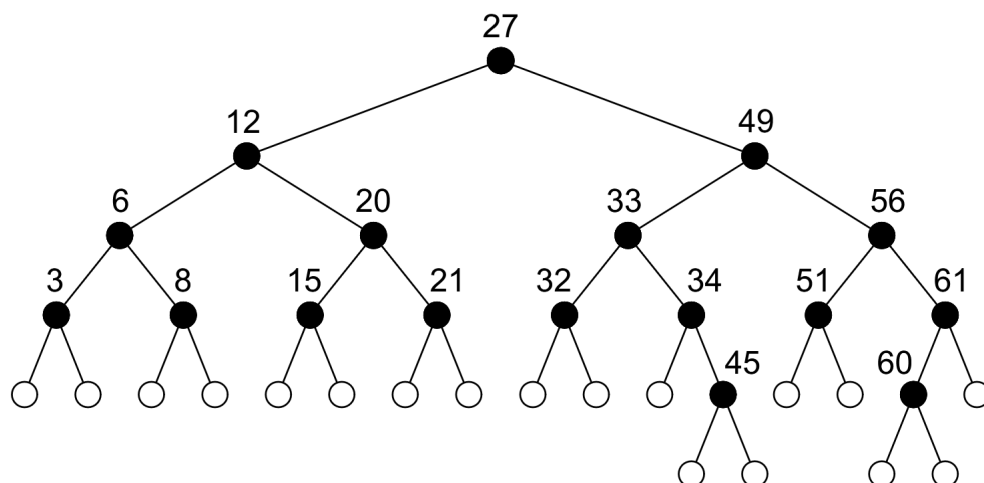


Figure 5.3: The representation of a set of natural numbers as a binary tree.

5.2 Fundamentals

Theorem 5.1: For any connected (simple) graph G with n vertices and m edges, $n \leq m + 1$.

Theorem 5.2: For any tree T with n vertices and m edges, $n = m + 1$.

Theorem 5.3: A connected graph G with n vertices and m edges for which $n = m + 1$ is a tree.

Theorem 5.4: A graph G is a tree iff there exists exactly one path between every two vertices u and v .

Theorem 5.5: An edge e of a graph G is a cut edge iff e is not part of cycle of G .

Theorem 5.6: A connected graph G is a tree iff every edge is a cut edge.

5.3 Spanning trees

Spanning tree: an acyclic connected subgraph containing all vertices.

Algorithm 5.1 (Kruskal's algorithm): Consider a weighted graph G where each edge e has been assigned a real-valued weights $w(e) \in \mathbb{R}$.

1. Suppose that edges $E_k = \{e_1, e_2, \dots, e_k\}$ have been chosen so far. Choose a next edge e_{k+1} from $E(G) \setminus E_k$ such that the following two conditions are met:
 - (1) The induced subgraph $G_{k+1} = G[\{e_1, e_2, \dots, e_k\}]$ is acyclic.
 - (2) The weight $w(e_{k+1})$ is minimal, i.e., $\forall e \in E(G) \setminus E_k : w(e) \geq w(e_{k+1})$.
2. Stop when there is no more edge to select in the previous step.

Theorem 5.7: Consider a weighted graph G with n vertices. Any spanning tree T_{Kruskal} of G constructed by Kruskal's algorithm has minimal weight.

5.4 Routing in communication network

NOTE: A *sink tree* is a tree structure that represents the optimal paths from all nodes to a specific destination node (source).

Dijkstra's algorithm

Algorithm 5.2 (Dijkstra's algorithm, sink tree construction): Consider a directed, weighted graph D where weights are nonnegative, and a vertex $u \in V(D)$. We introduce the following sets and labels:

- Let $S_t(u)$ be the set of vertices from which a shortest path to vertex u has been found after step t .
- Each vertex v is assigned a label $\mathbf{L}(v) \stackrel{\text{def}}{=} (L_1(v), L_2(v))$ in which $L_1(v)$ is the vertex succeeding v in the shortest (v, u) -path found so far, and $L_2(v)$ the total weight of the path.
- Let $R_t(u) \stackrel{\text{def}}{=} S_t(u) \cup_{v \in S_t(u)} N_{in}(v)$.

1. Initialize $t \leftarrow 0$ and $S_0(t) \leftarrow \{u\}$. Furthermore, for all $v \in V(G)$:

$$\mathbf{L}(v) \leftarrow \begin{cases} (u, 0) & \text{if } v = u \\ (-, \infty) & \text{otherwise} \end{cases}$$

2. For each vertex $y \in R_t(u) \setminus S_t(u)$, consider $N'_{out}(y) \stackrel{\text{def}}{=} N_{out}(y) \cap S_t(u)$. Select $x \in N'_{out}(y)$ for which $L_2(x) + w(\overrightarrow{y, x})$ is minimal. Set $\mathbf{L}(y) \leftarrow (x, L_2(x) + w(e))$.
3. Let $z \in R_t(u) \setminus S_t(u)$ for which $L_2(z)$ is minimal. Set $S_{t+1}(u) \leftarrow S_t(u) \cup \{z\}$. If $S_{t+1}(u) = V(G)$, stop. Otherwise, $t \leftarrow t + 1$, compute $R_t(u)$ again and repeat the previous step.

Theorem 5.8: Given a weighted directed graph D . When applying Dijkstra's algorithm to a vertex u , each time a vertex z is added to the set $S_t(u)$, $L_2(z)$ corresponds to the length of a shortest (z, u) -path.

The Bellman-Ford Algorithm

Useful for computing optimal sink trees *without* having to know the topology in advance.

Let $d^t(i, j)$ denote the total weight of the optimal (v_i, v_j) -path that vertex v_i has found after iteration t (aka **routing cost**).

Initially:

$$d^0(i, j) \leftarrow \begin{cases} 0 & \text{if } i = j \\ \infty & \text{otherwise} \end{cases}$$

Then:

$$d^{t+1}(i, j) \leftarrow \min_{k \in N(v_i)} \{w(v_i, v_k) + d^t(k, j)\}$$

Observations:

- The [algorithm](#) is completely decentralized.
- [Count-to-infinity problem](#).

A note on algorithmic performance

In most cases, Dijkstra's algorithm will outperform the Bellman-Ford solution.

- Particularly when the graph is large and has many edges.

Dijkstra's algorithm has computational time roughly proportional to n^2 . The computational time for Bellman-Ford algorithm is approximately proportional to $n \cdot m$.

- [Big O Notation](#).

While more elegant and decentralized than Dijkstra's algorithm, Bellman-Ford solution is still less popular.

- In situations where weights change too often, and propagation takes more time than the weight changes, Bellman-Ford runs into a real problem.

Chapter 6: Network Analysis

6.1 Vertex degrees