



The attribution gap

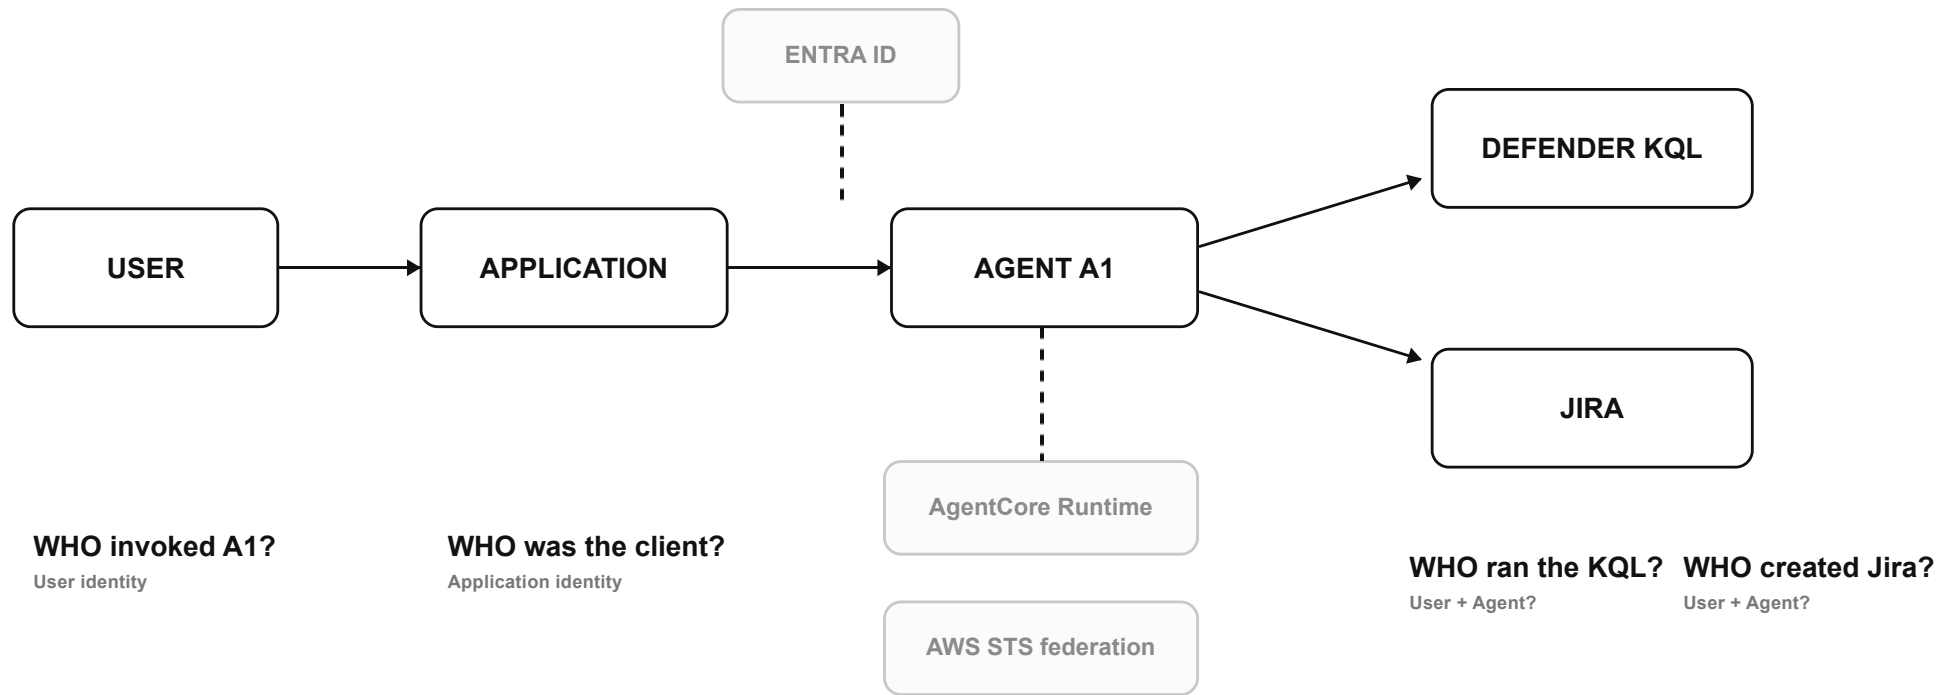


Two Steps

Narrow the problem to inbound authorization and downstream OBO.

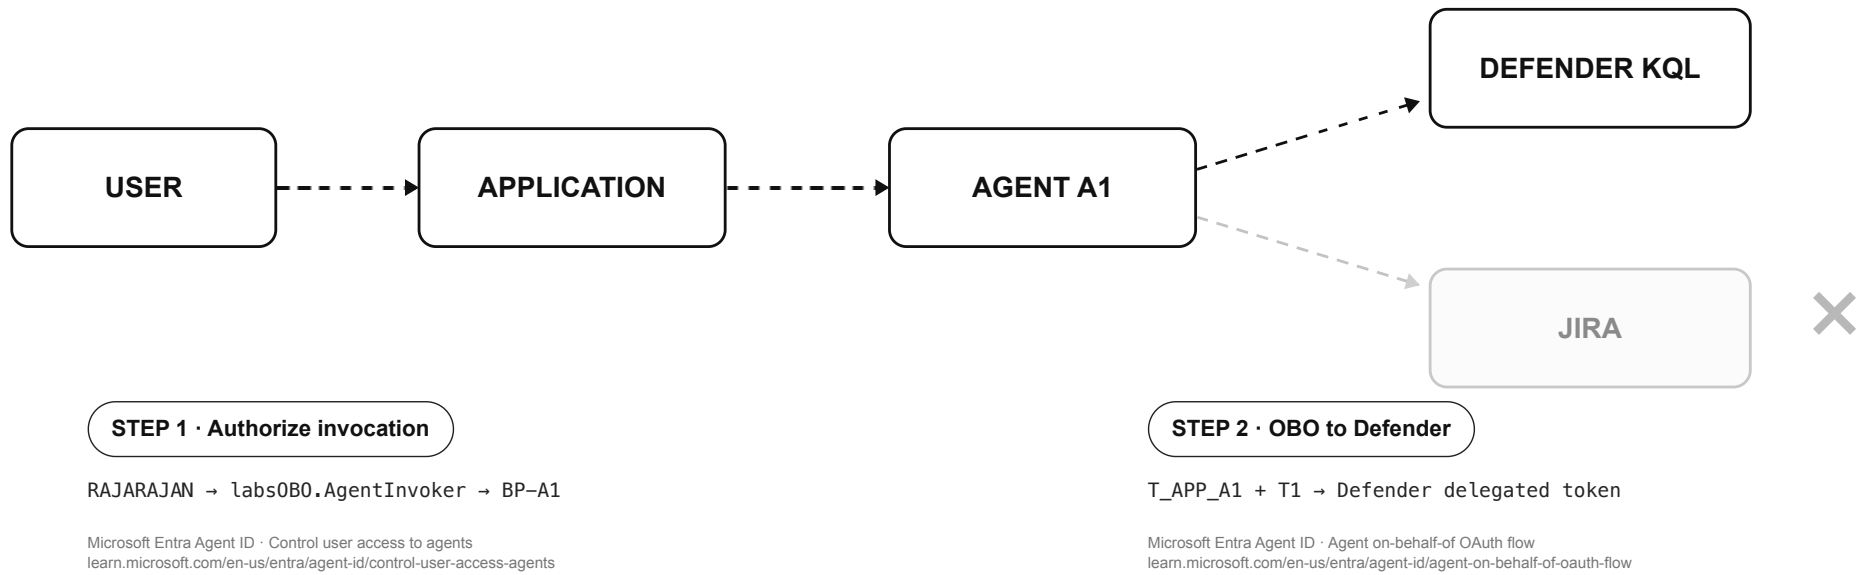


STEP 1: Can RAJARAJAN enter A1? STEP 2: Can A1 act downstream as RAJARAJAN?

STEP 1 · Make the user → agent relationship explicit

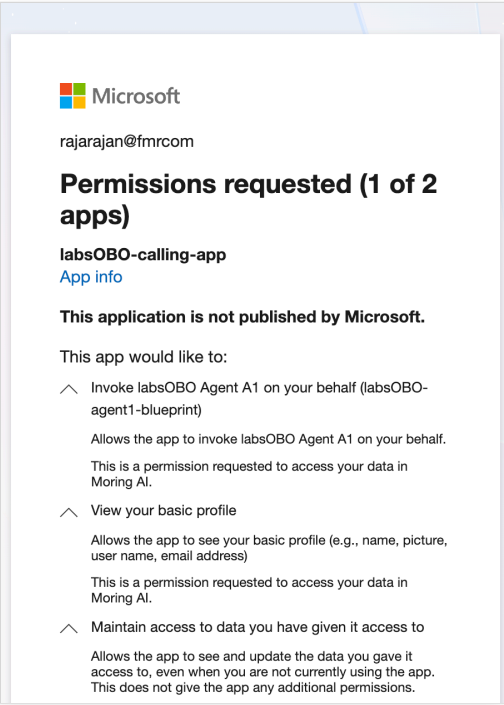

- 1 **Deploy A1**
AgentCore runtime
- 2 **Create Blueprint**
labsOBO-agent1-blueprint
- 3 **Expose API**
labsOBO_access_agent
- 4 **Create App Role**
labsOBO.AgentInvoker
- 5 **Assign User**
RAJARAJAN → AgentInvoker → BP-A1
- 6 **Enforce assignment**
appRoleAssignmentRequired = true

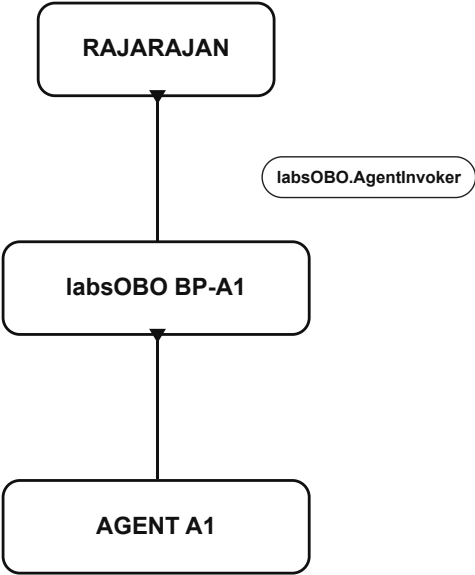

T_APP_A1 · captured agent-invocation token

eyJ0eXAiOiJKV1QiLCJhbGciOiJSUzI1NiIsImtpZCI6IjE1IiwiaWF0Ij0iIiwiaXNjaW50Ij0iLCJpc3MiOiJodHRwczovL2xvZ2luLm1pY3Jvc29mdG9ubGluZS5jb20v... (payload 1252). (signature 342)

OID
RAJARAJAN
who

AZP
05d1bf77...dd45
labsOBO-calling-app


AUD
5e5c2e3c...6865
labsOBO BP-A1

SCP
labsOBO_access_agent
delegated operation

ROLES
labsOBO.AgentInvoker
why RAJARAJAN is allowed


STEP 2 · Preserve RAJARAJAN while A1 calls Defender

Agent identity becomes the actor. RAJARAJAN remains the subject.

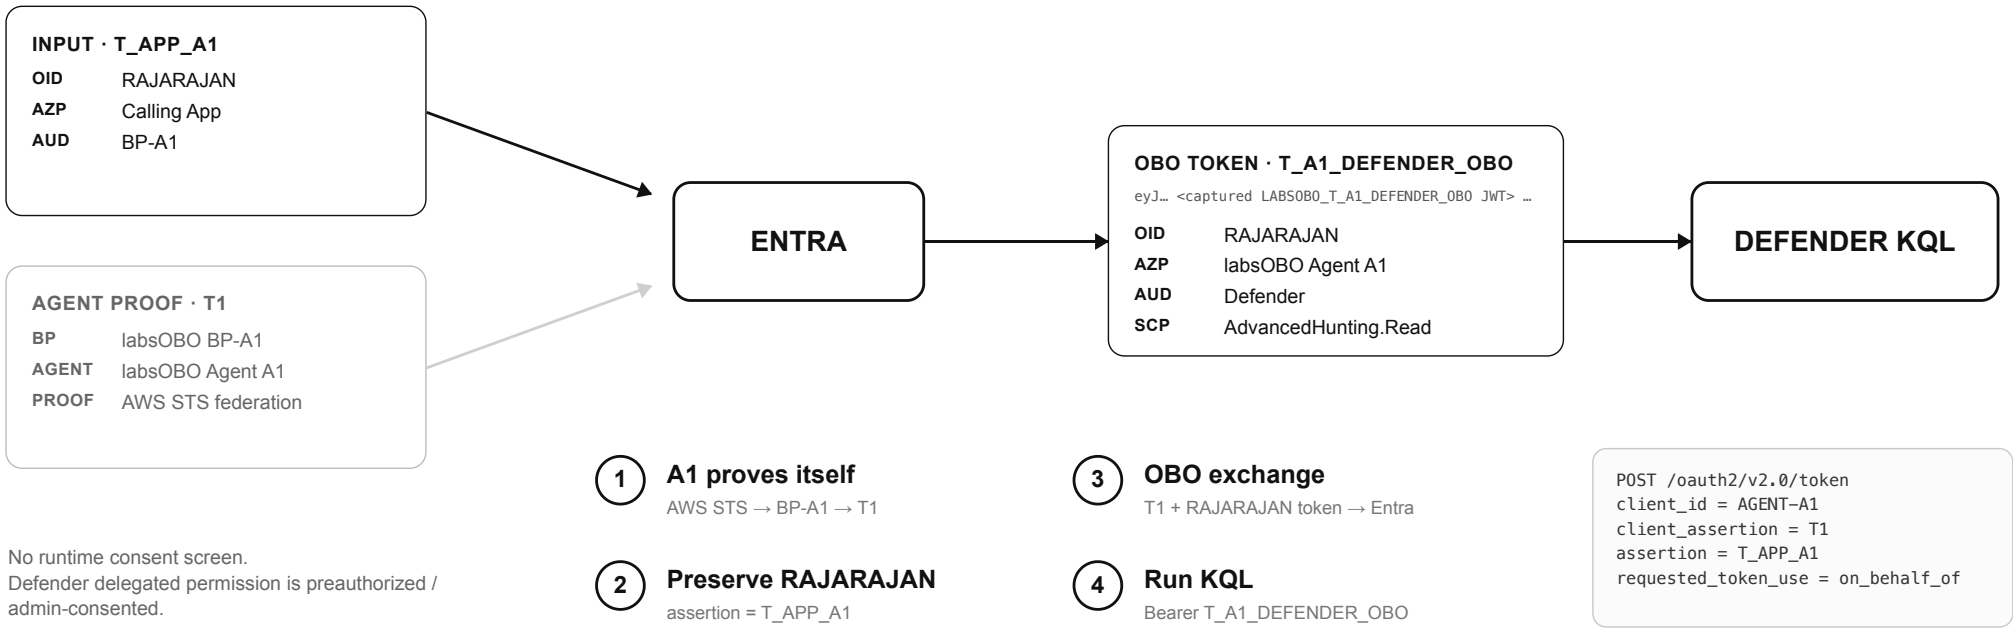

RAJARAJAN preserved. Actor changed: APP → A1.

Traceable authority

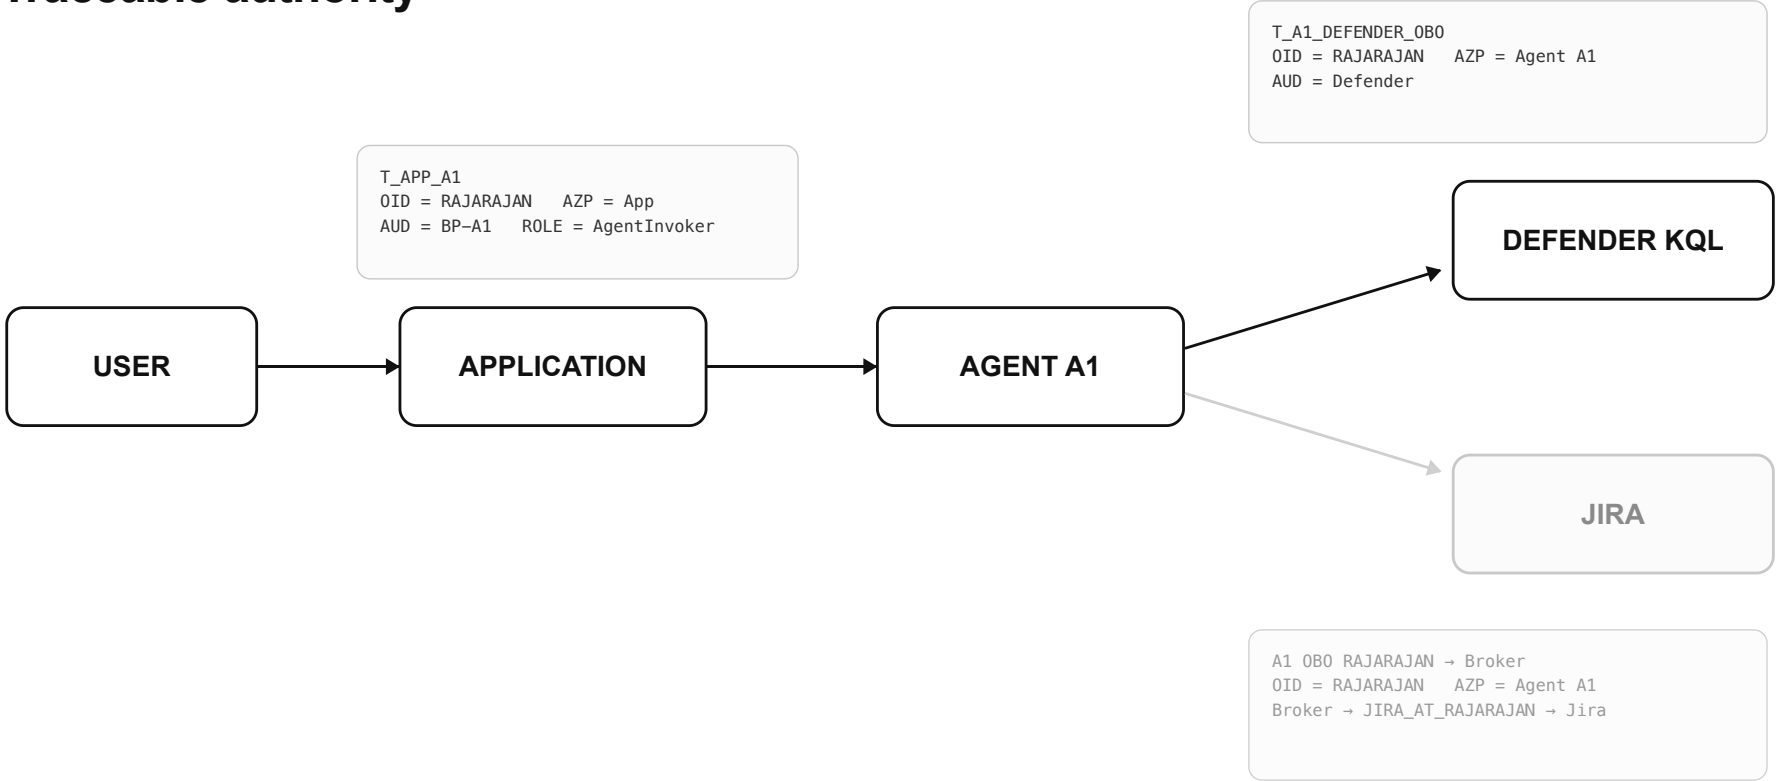

User authority survives the agent hop. Agent identity survives the downstream hop.