


Machine Learning Practices Using Python

**Mohammad Saad
-AI CLUB NITC**

Correlation Heatmap

- A correlation heatmap is a graphical representation of a correlation matrix representing the correlation between different variables.
- The value of correlation can take any value from -1 to 1.
- Correlation between two random variables or bivariate data does not necessarily imply a causal relationship.
- Correlation between two variables can also be determined using a scatter plot between these two variables.

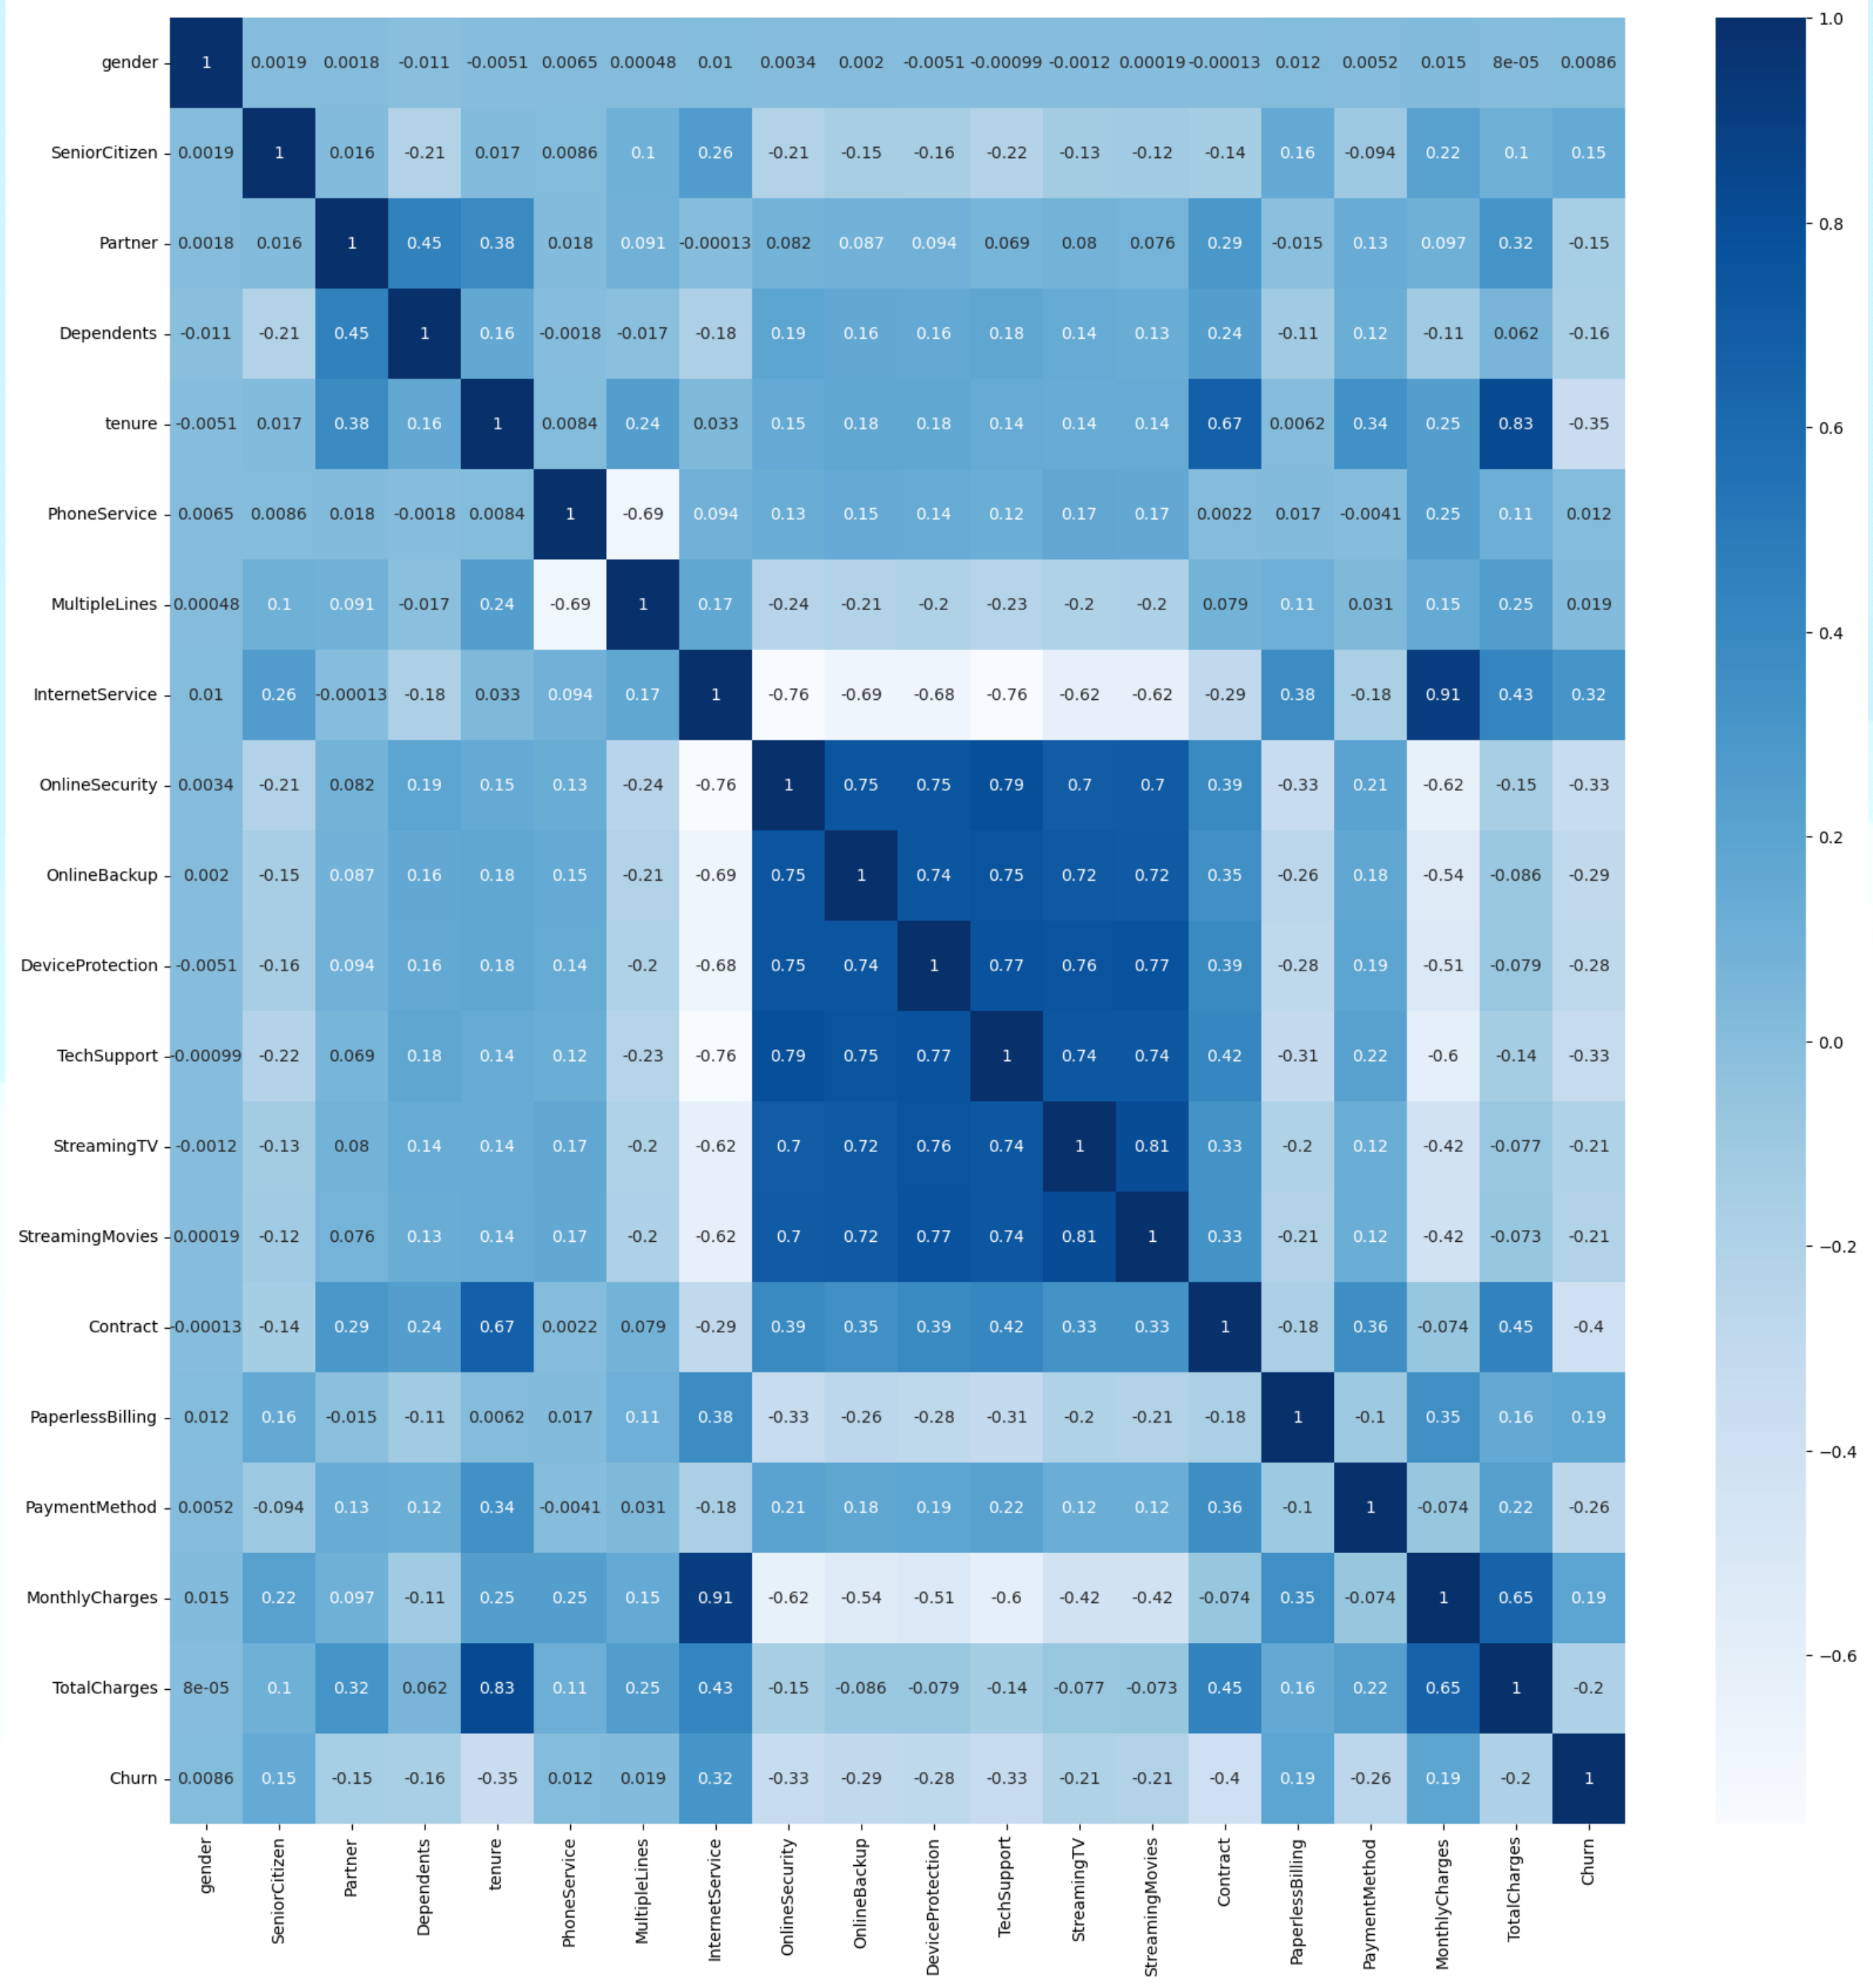

Logistic Regression

This type of statistical model (also known as *logit model*) is often used for classification and predictive analytics. Logistic regression estimates the probability of an event occurring, such as voted or didn't vote, based on a given dataset of independent variables. Since the outcome is a probability, the dependent variable is bounded between 0 and 1. In logistic regression, a logit transformation is applied on the odds—that is, the probability of success divided by the probability of failure. This is also commonly known as the log odds, or the natural logarithm of odds, and this logistic function is represented by the following formulas:


$$\text{Logit}(\pi) = 1/(1 + \exp(-\pi))$$

$$\ln(\pi/(1-\pi)) = \text{Beta}_0 + \text{Beta}_1 * X_1 + \dots + B_k * K_k$$

Support Vector Machine

SVM chooses the extreme points/vectors that help in creating the hyperplane. These extreme cases are called as support vectors, and hence algorithm is termed as Support Vector Machine.

Consider the below diagram in which there are two different categories that are classified using a decision boundary or hyperplane.


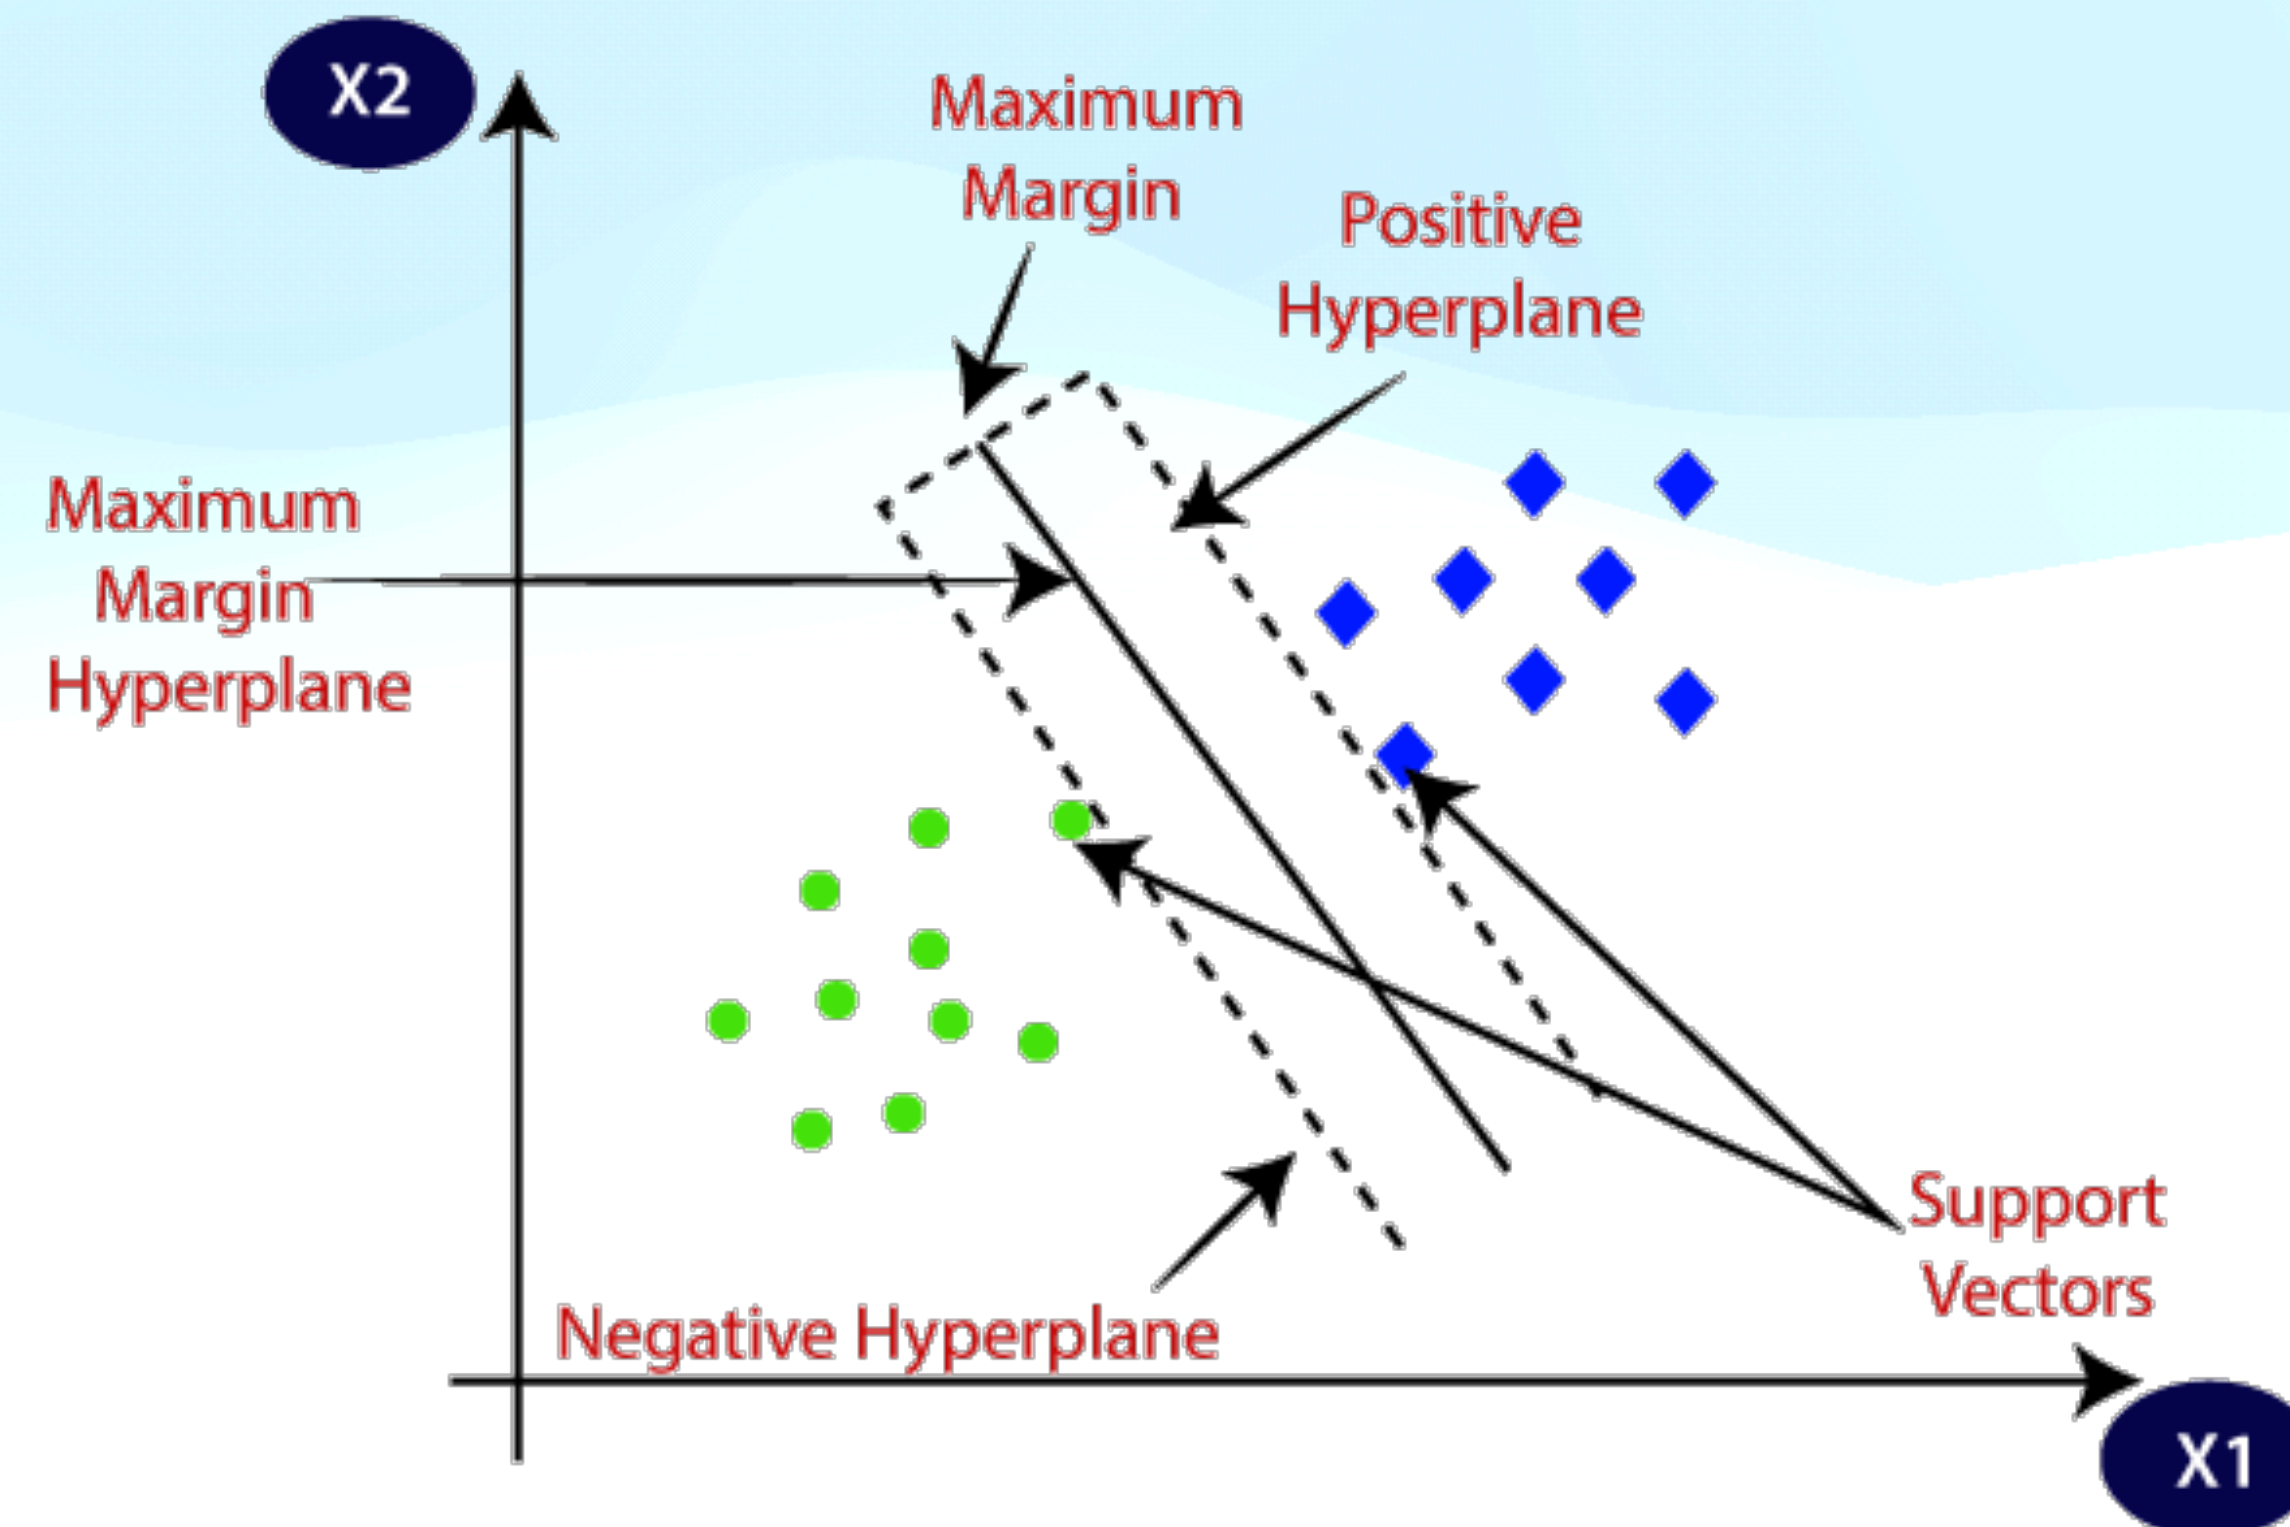


K Nearest Neighbor

- K-Nearest Neighbour is one of the simplest Machine Learning algorithms based on Supervised Learning technique.
- K-NN algorithm assumes the similarity between the new case/data and available cases and put the new case into the category that is most similar to the available categories.
- K-NN algorithm stores all the available data and classifies a new data point based on the similarity. This means when new data appears then it can be easily classified into a well suite category by using K- NN algorithm.
- K-NN algorithm can be used for Regression as well as for Classification but mostly it is used for the Classification problems.

Decision Tree

- Decision Tree is a **Supervised learning technique** that can be used for both classification and Regression problems, but mostly it is preferred for solving Classification problems. It is a tree-structured classifier, where **internal nodes represent the features of a dataset, branches represent the decision rules** and **each leaf node represents the outcome**.
- In a Decision tree, there are two nodes, which are the **Decision Node** and **Leaf Node**. Decision nodes are used to make any decision and have multiple branches, whereas Leaf nodes are the output of those decisions and do not contain any further branches.
- The decisions or the test are performed on the basis of features of the given dataset.
- It is a graphical representation for getting all the possible solutions to a problem/decision based on given conditions.
- It is called a decision tree because, similar to a tree, it starts with the root node, which expands on further branches and constructs a tree-like structure.

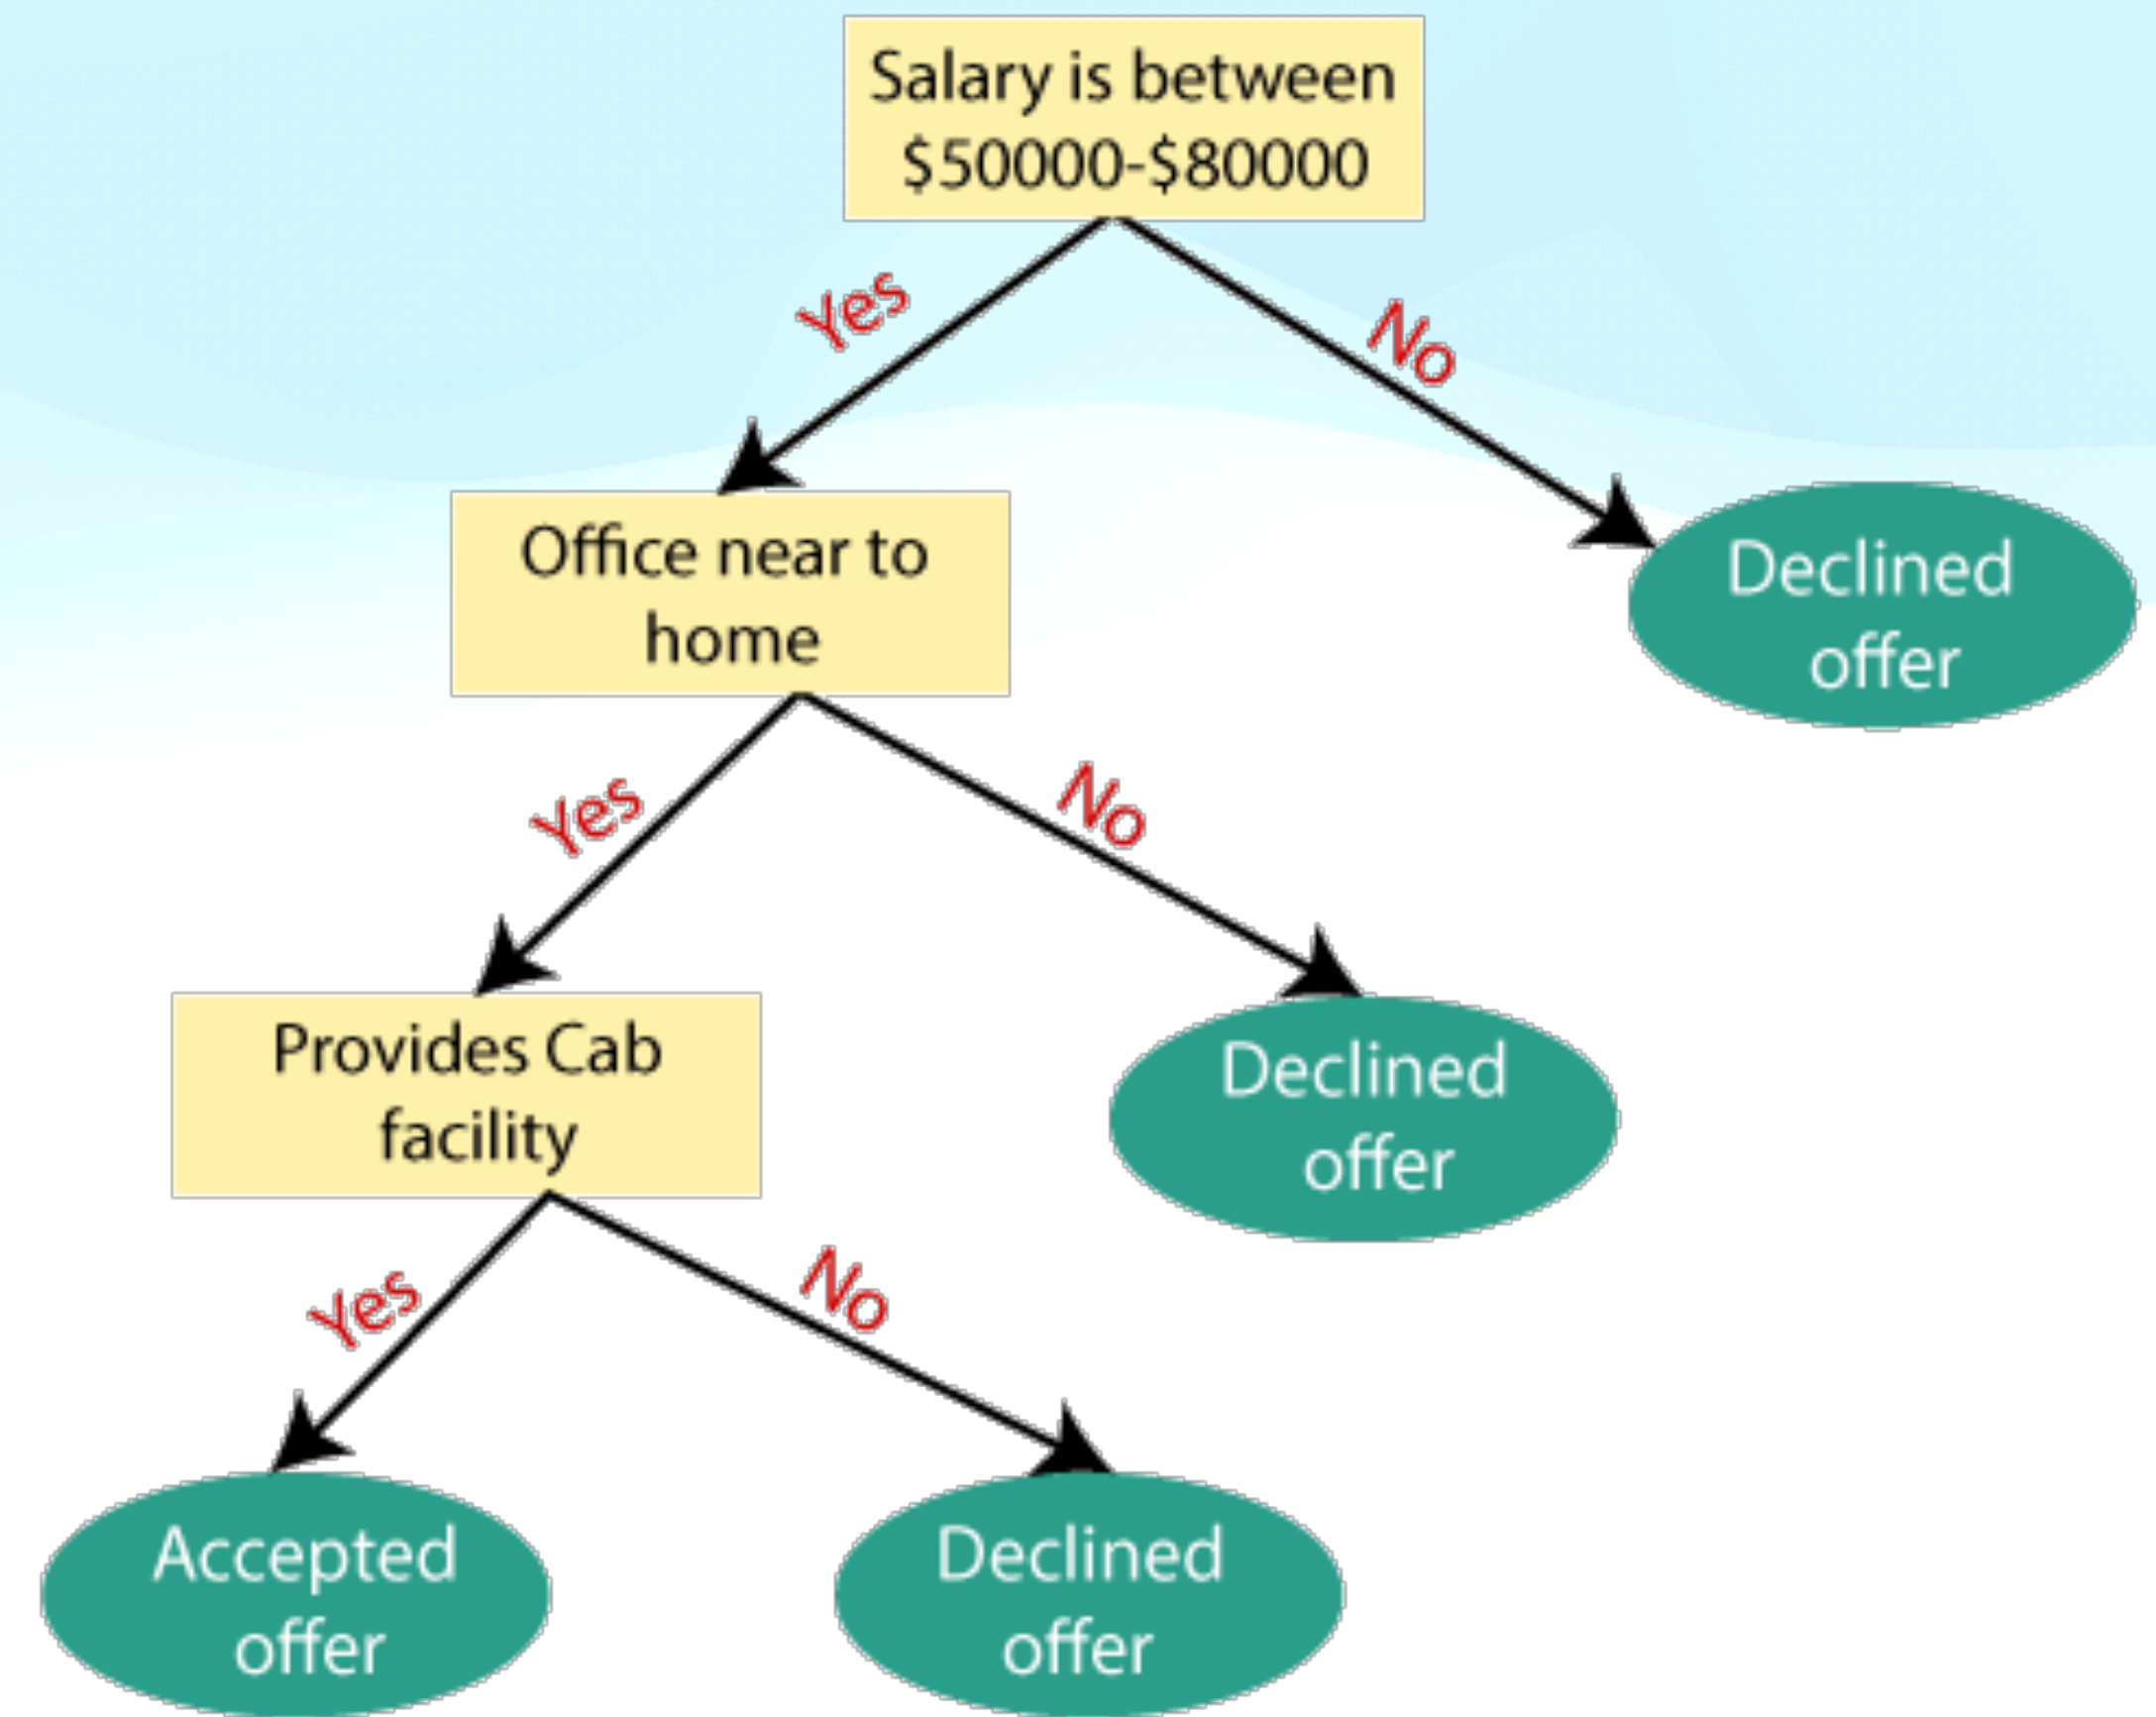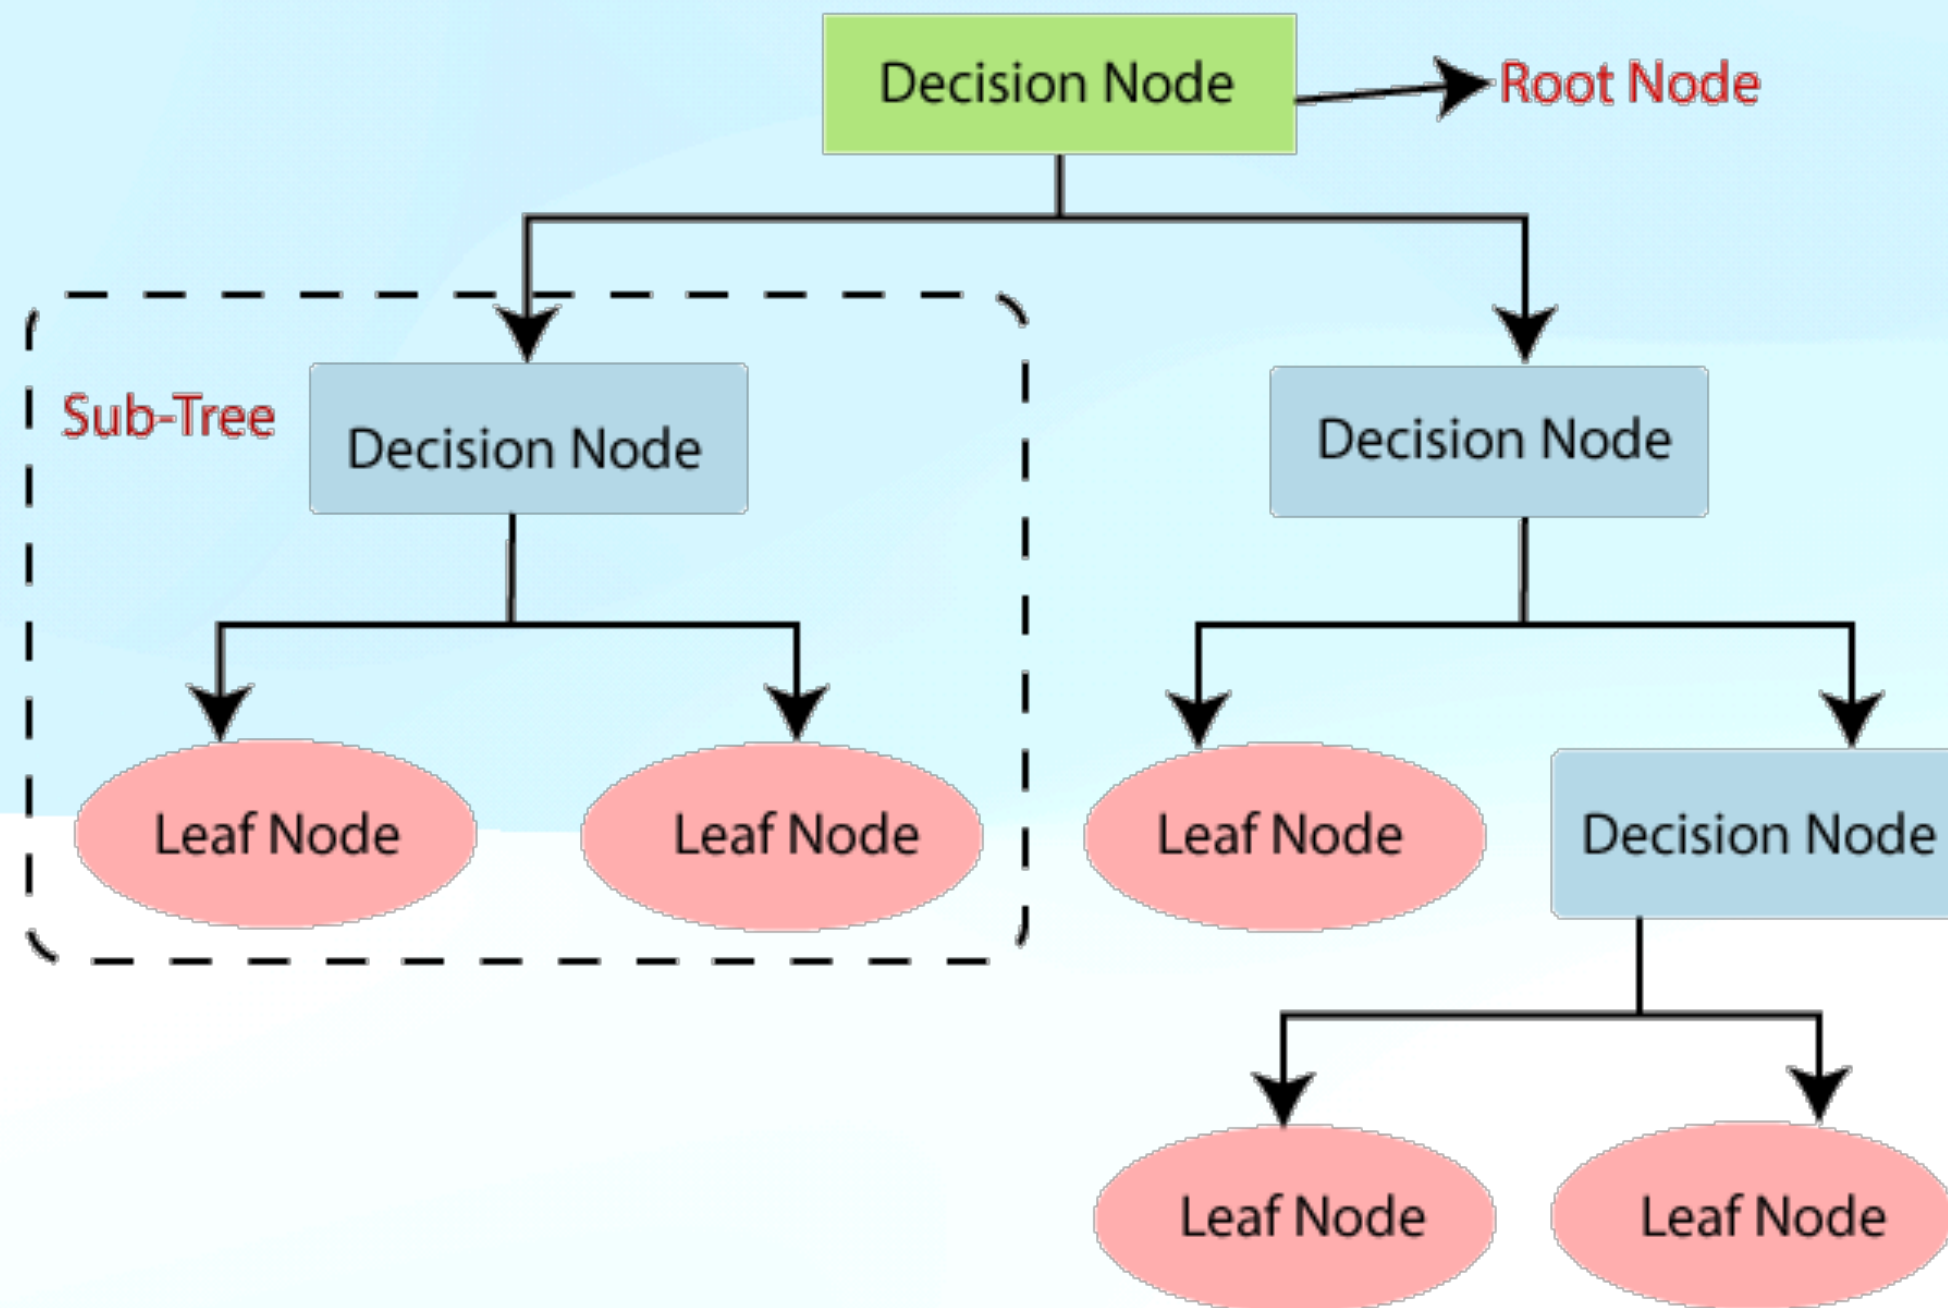

Random Forest Algorithm

Random Forest is a popular machine learning algorithm that belongs to the supervised learning technique. It can be used for both Classification and Regression problems in ML. It is based on the concept of **ensemble learning**, which is a process of *combining multiple classifiers to solve a complex problem and to improve the performance of the model*.

As the name suggests, "Random Forest is a classifier that contains a number of decision trees on various subsets of the given dataset and takes the average to improve the predictive accuracy of that dataset." Instead of relying on one decision tree, the random forest takes the prediction from each tree and based on the majority votes of predictions, and it predicts the final output.

The greater number of trees in the forest leads to higher accuracy and prevents the problem of overfitting.

Naive Bayes Algorithm

- Naïve Bayes algorithm is a supervised learning algorithm, which is based on **Bayes theorem** and used for solving classification problems.
- It is mainly used in *text classification* that includes a high-dimensional training dataset.
- Naïve Bayes Classifier is one of the simple and most effective Classification algorithms which helps in building the fast machine learning models that can make quick predictions.
- It is a probabilistic classifier, which means it predicts on the basis of the probability of an object.
- Some popular examples of Naïve Bayes Algorithm are spam filtration, Sentimental analysis, and classifying articles.

Moving to the code-