


User Test

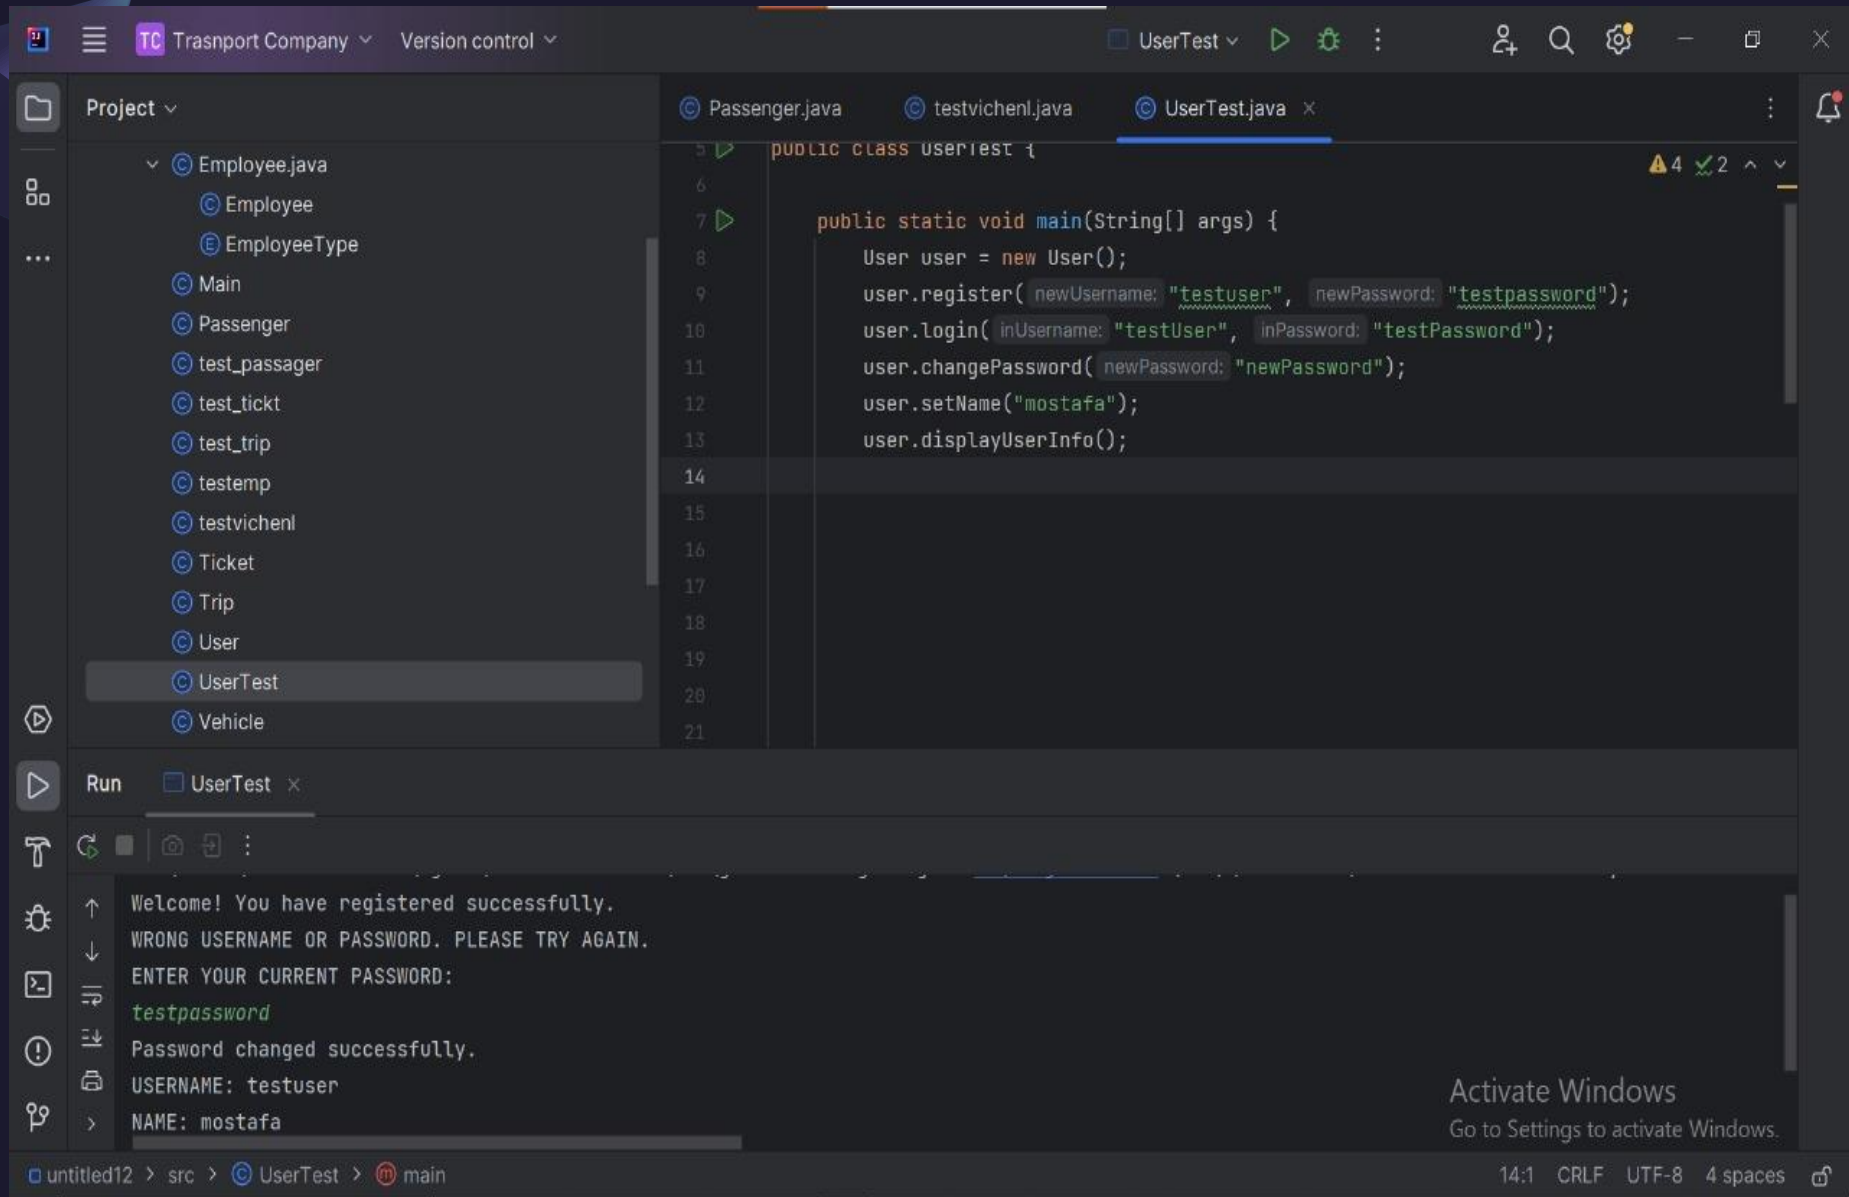

The screenshot displays an IDE window for a project named "Transport Company". The "Project" view on the left shows a hierarchy of files, with "UserTest" selected. The "Run" view at the bottom shows the output of the "UserTest" class execution.

Project Structure:

- Employee.java
 - Employee
 - EmployeeType
- Main
- Passenger
- test_passager
- test_tickt
- test_trip
- testemp
- testvichenl
- Ticket
- Trip
- User
- UserTest
- Vehicle

Code Snippet (UserTest.java):


```
public class UserTest {  
  
    public static void main(String[] args) {  
        User user = new User();  
        user.register( newUsername: "testuser", newPassword: "testpassword");  
        user.login( inUsername: "testUser", inPassword: "testPassword");  
        user.changePassword( newPassword: "newPassword");  
        user.setName("mostafa");  
        user.displayUserInfo();  
    }  
}
```

Run Output:

```
Welcome! You have registered successfully.  
WRONG USERNAME OR PASSWORD. PLEASE TRY AGAIN.  
ENTER YOUR CURRENT PASSWORD:  
testpassword  
Password changed successfully.  
USERNAME: testuser  
NAME: mostafa
```

Status Bar: untitled12 > src > UserTest > main | 14:1 CRLF UTF-8 4 spaces

Passenger Test

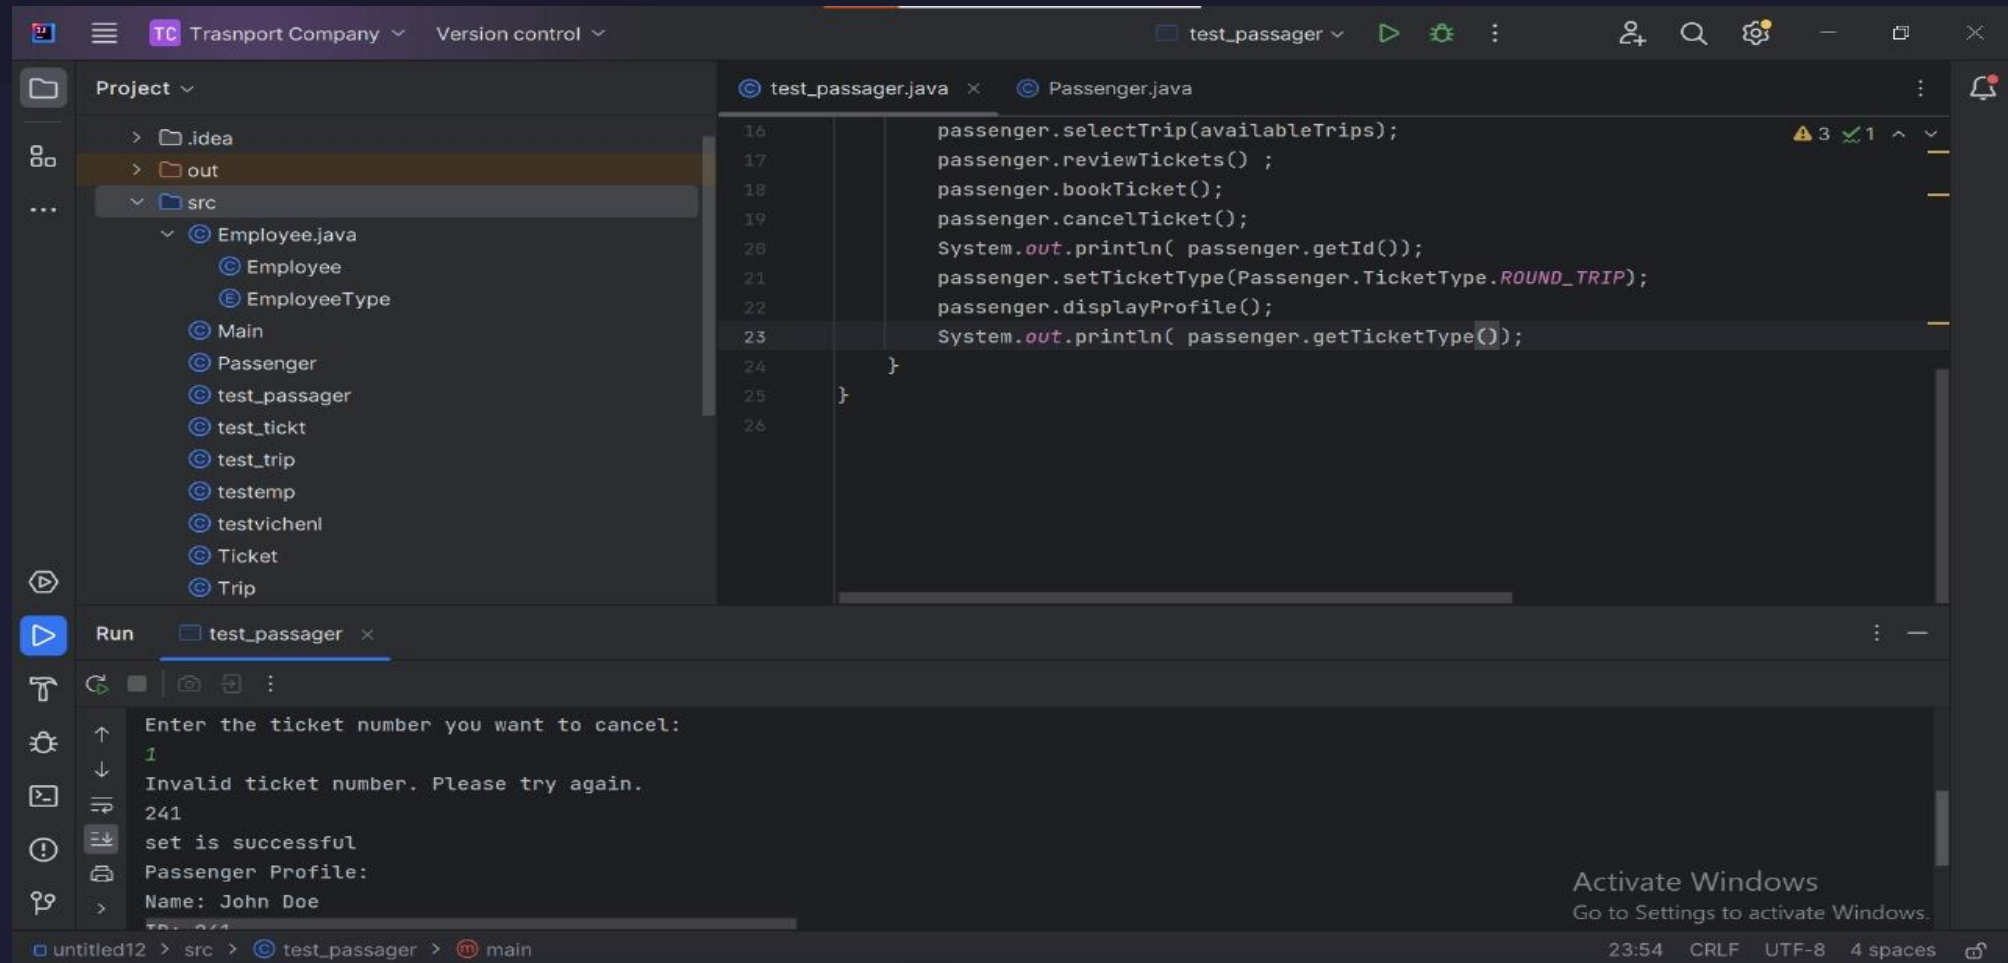

Project

- .idea
- out
- src
 - Employee.java
 - Employee
 - EmployeeType
 - Main
 - Passenger
 - test_passager
 - test_tickt
 - test_trip
 - testemp
 - testvichenl
 - Ticket
 - Trip

```
test_passager.java x Passenger.java
16 passenger.selectTrip(availableTrips);
17 passenger.reviewTickets();
18 passenger.bookTicket();
19 passenger.cancelTicket();
20 System.out.println( passenger.getId());
21 passenger.setTicketType(Passenger.TicketType.ROUND_TRIP);
22 passenger.displayProfile();
23 System.out.println( passenger.getTicketType());
24 }
25 }
26
```

Run test_passager

Available Trips:
Enter the trip number you want to select:
1
Invalid trip selection. Please try again.
Booked Tickets:
Please select a trip first.
Booked Tickets:
Enter the ticket number you want to cancel:

Project


- .idea
- out
- src
 - Employee.java
 - Employee
 - EmployeeType
 - Main
 - Passenger
 - test_passager
 - test_tickt
 - test_trip
 - testemp
 - testvichenl
 - Ticket
 - Trip

```
test_passager.java x Passenger.java
16 passenger.selectTrip(availableTrips);
17 passenger.reviewTickets();
18 passenger.bookTicket();
19 passenger.cancelTicket();
20 System.out.println( passenger.getId());
21 passenger.setTicketType(Passenger.TicketType.ROUND_TRIP);
22 passenger.displayProfile();
23 System.out.println( passenger.getTicketType());
24 }
25 }
26
```

Run test_passager

↑ Name: John Doe
↓ ID: 241
⇌ Ticket Type: ROUND_TRIP
⇌ ROUND_TRIP
⏏ Process finished with exit code 0

Employee Test

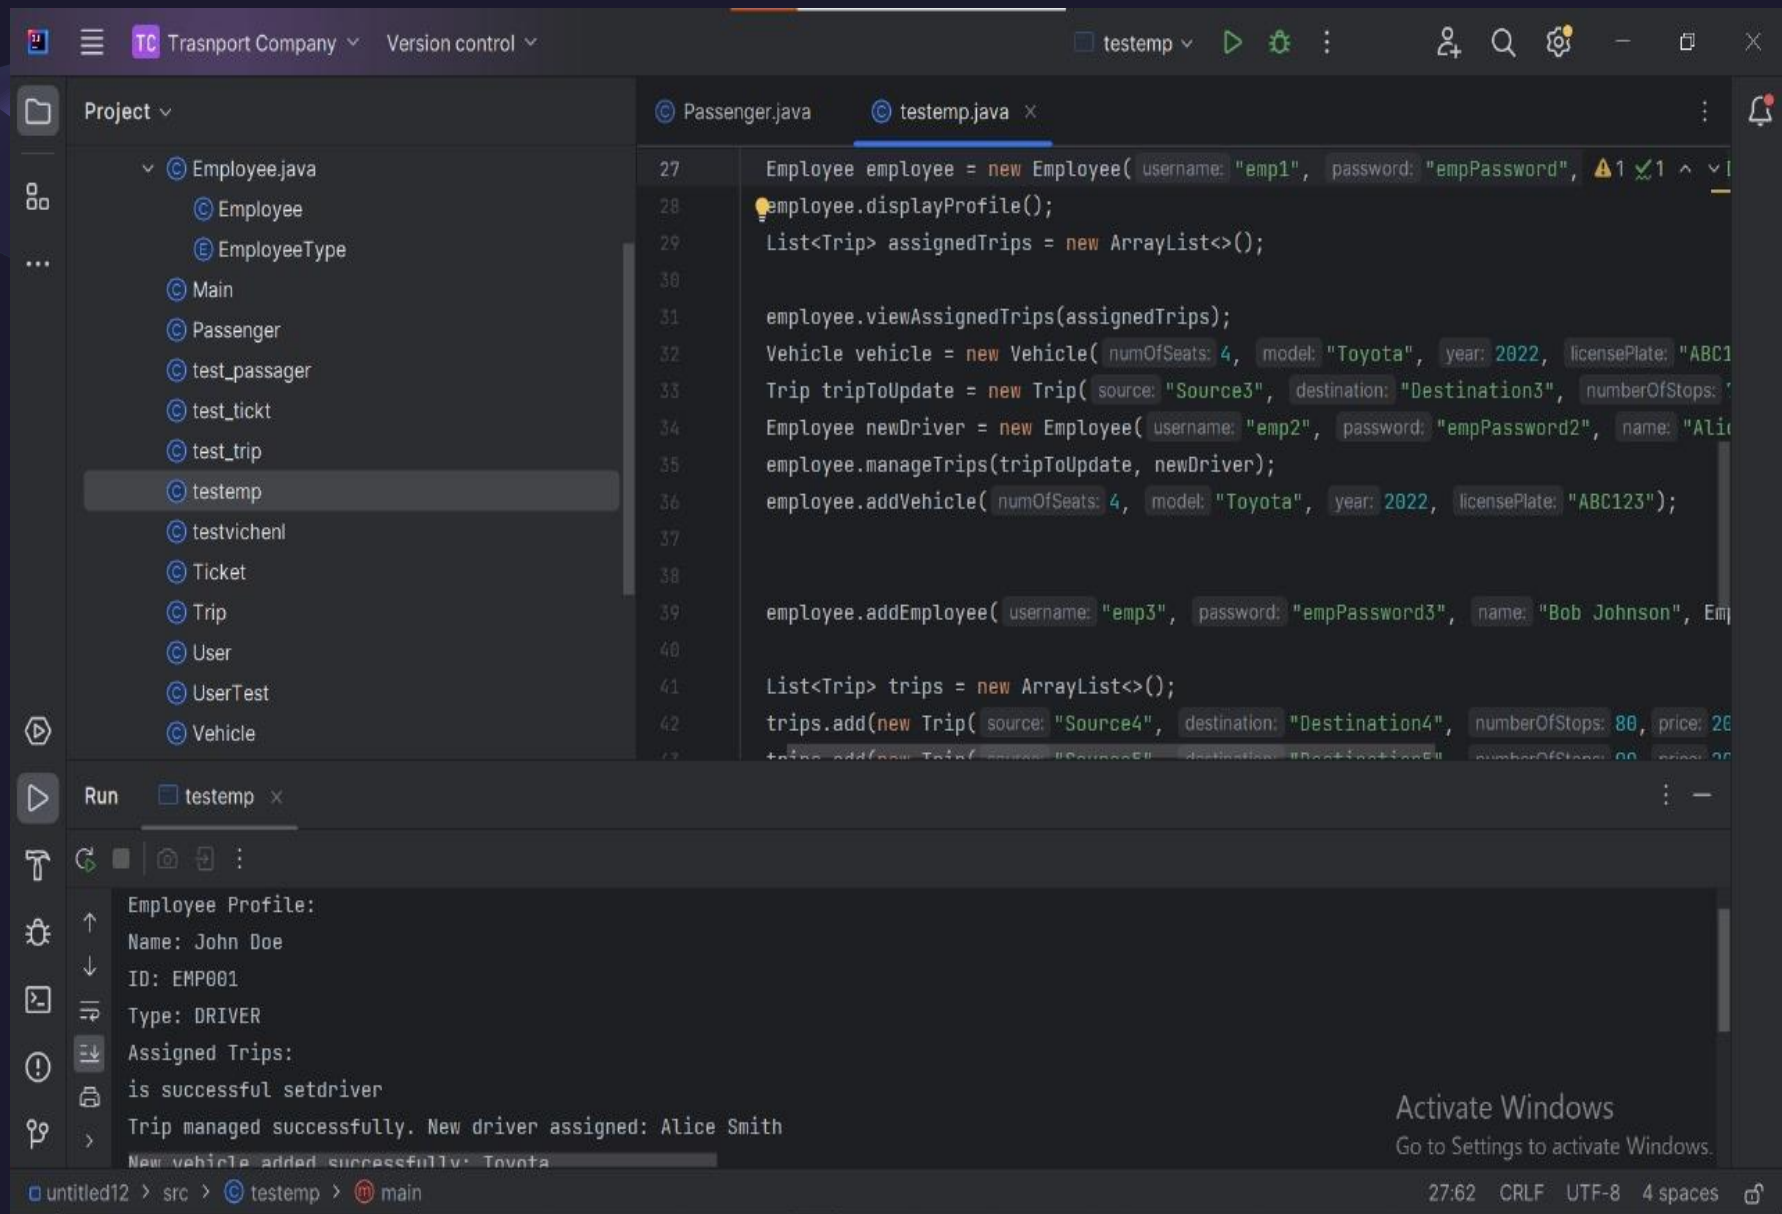



The screenshot displays an IDE window for a project named "Transport Company". The left sidebar shows a project tree with files like Employee.java, Passenger.java, and testtemp.java. The main editor shows the code for testtemp.java, which includes creating an Employee object, adding a vehicle, and managing trips. The bottom panel shows the output of the test, including the employee profile and assigned trips.

```
Project
├── Employee.java
│   ├── Employee
│   └── EmployeeType
├── Main
├── Passenger
├── test_passager
├── test_ticket
├── test_trip
├── testtemp
├── testvichenl
├── Ticket
├── Trip
├── User
├── UserTest
└── Vehicle
```


```
Passenger.java
testtemp.java x
27 Employee employee = new Employee( username: "emp1", password: "empPassword",
28 employee.displayProfile();
29 List<Trip> assignedTrips = new ArrayList<>();
30
31 employee.viewAssignedTrips(assignedTrips);
32 Vehicle vehicle = new Vehicle( numOfSeats: 4, model: "Toyota", year: 2022, licensePlate: "ABC1
33 Trip tripToUpdate = new Trip( source: "Source3", destination: "Destination3", numberOfStops:
34 Employee newDriver = new Employee( username: "emp2", password: "empPassword2", name: "Ali
35 employee.manageTrips(tripToUpdate, newDriver);
36 employee.addVehicle( numOfSeats: 4, model: "Toyota", year: 2022, licensePlate: "ABC123");
37
38
39 employee.addEmployee( username: "emp3", password: "empPassword3", name: "Bob Johnson", Emp
40
41 List<Trip> trips = new ArrayList<>();
42 trips.add(new Trip( source: "Source4", destination: "Destination4", numberOfStops: 80, price: 28
43 trips.add(new Trip( source: "Source5", destination: "Destination5", numberOfStops: 80, price: 28
```


```
Run testtemp x
Employee Profile:
Name: John Doe
ID: EMP001
Type: DRIVER
Assigned Trips:
is successful setdriver
Trip managed successfully. New driver assigned: Alice Smith
New vehicle added successfully: Toyota
```

untitled12 > src > testtemp > main 27:62 CRLF UTF-8 4 spaces

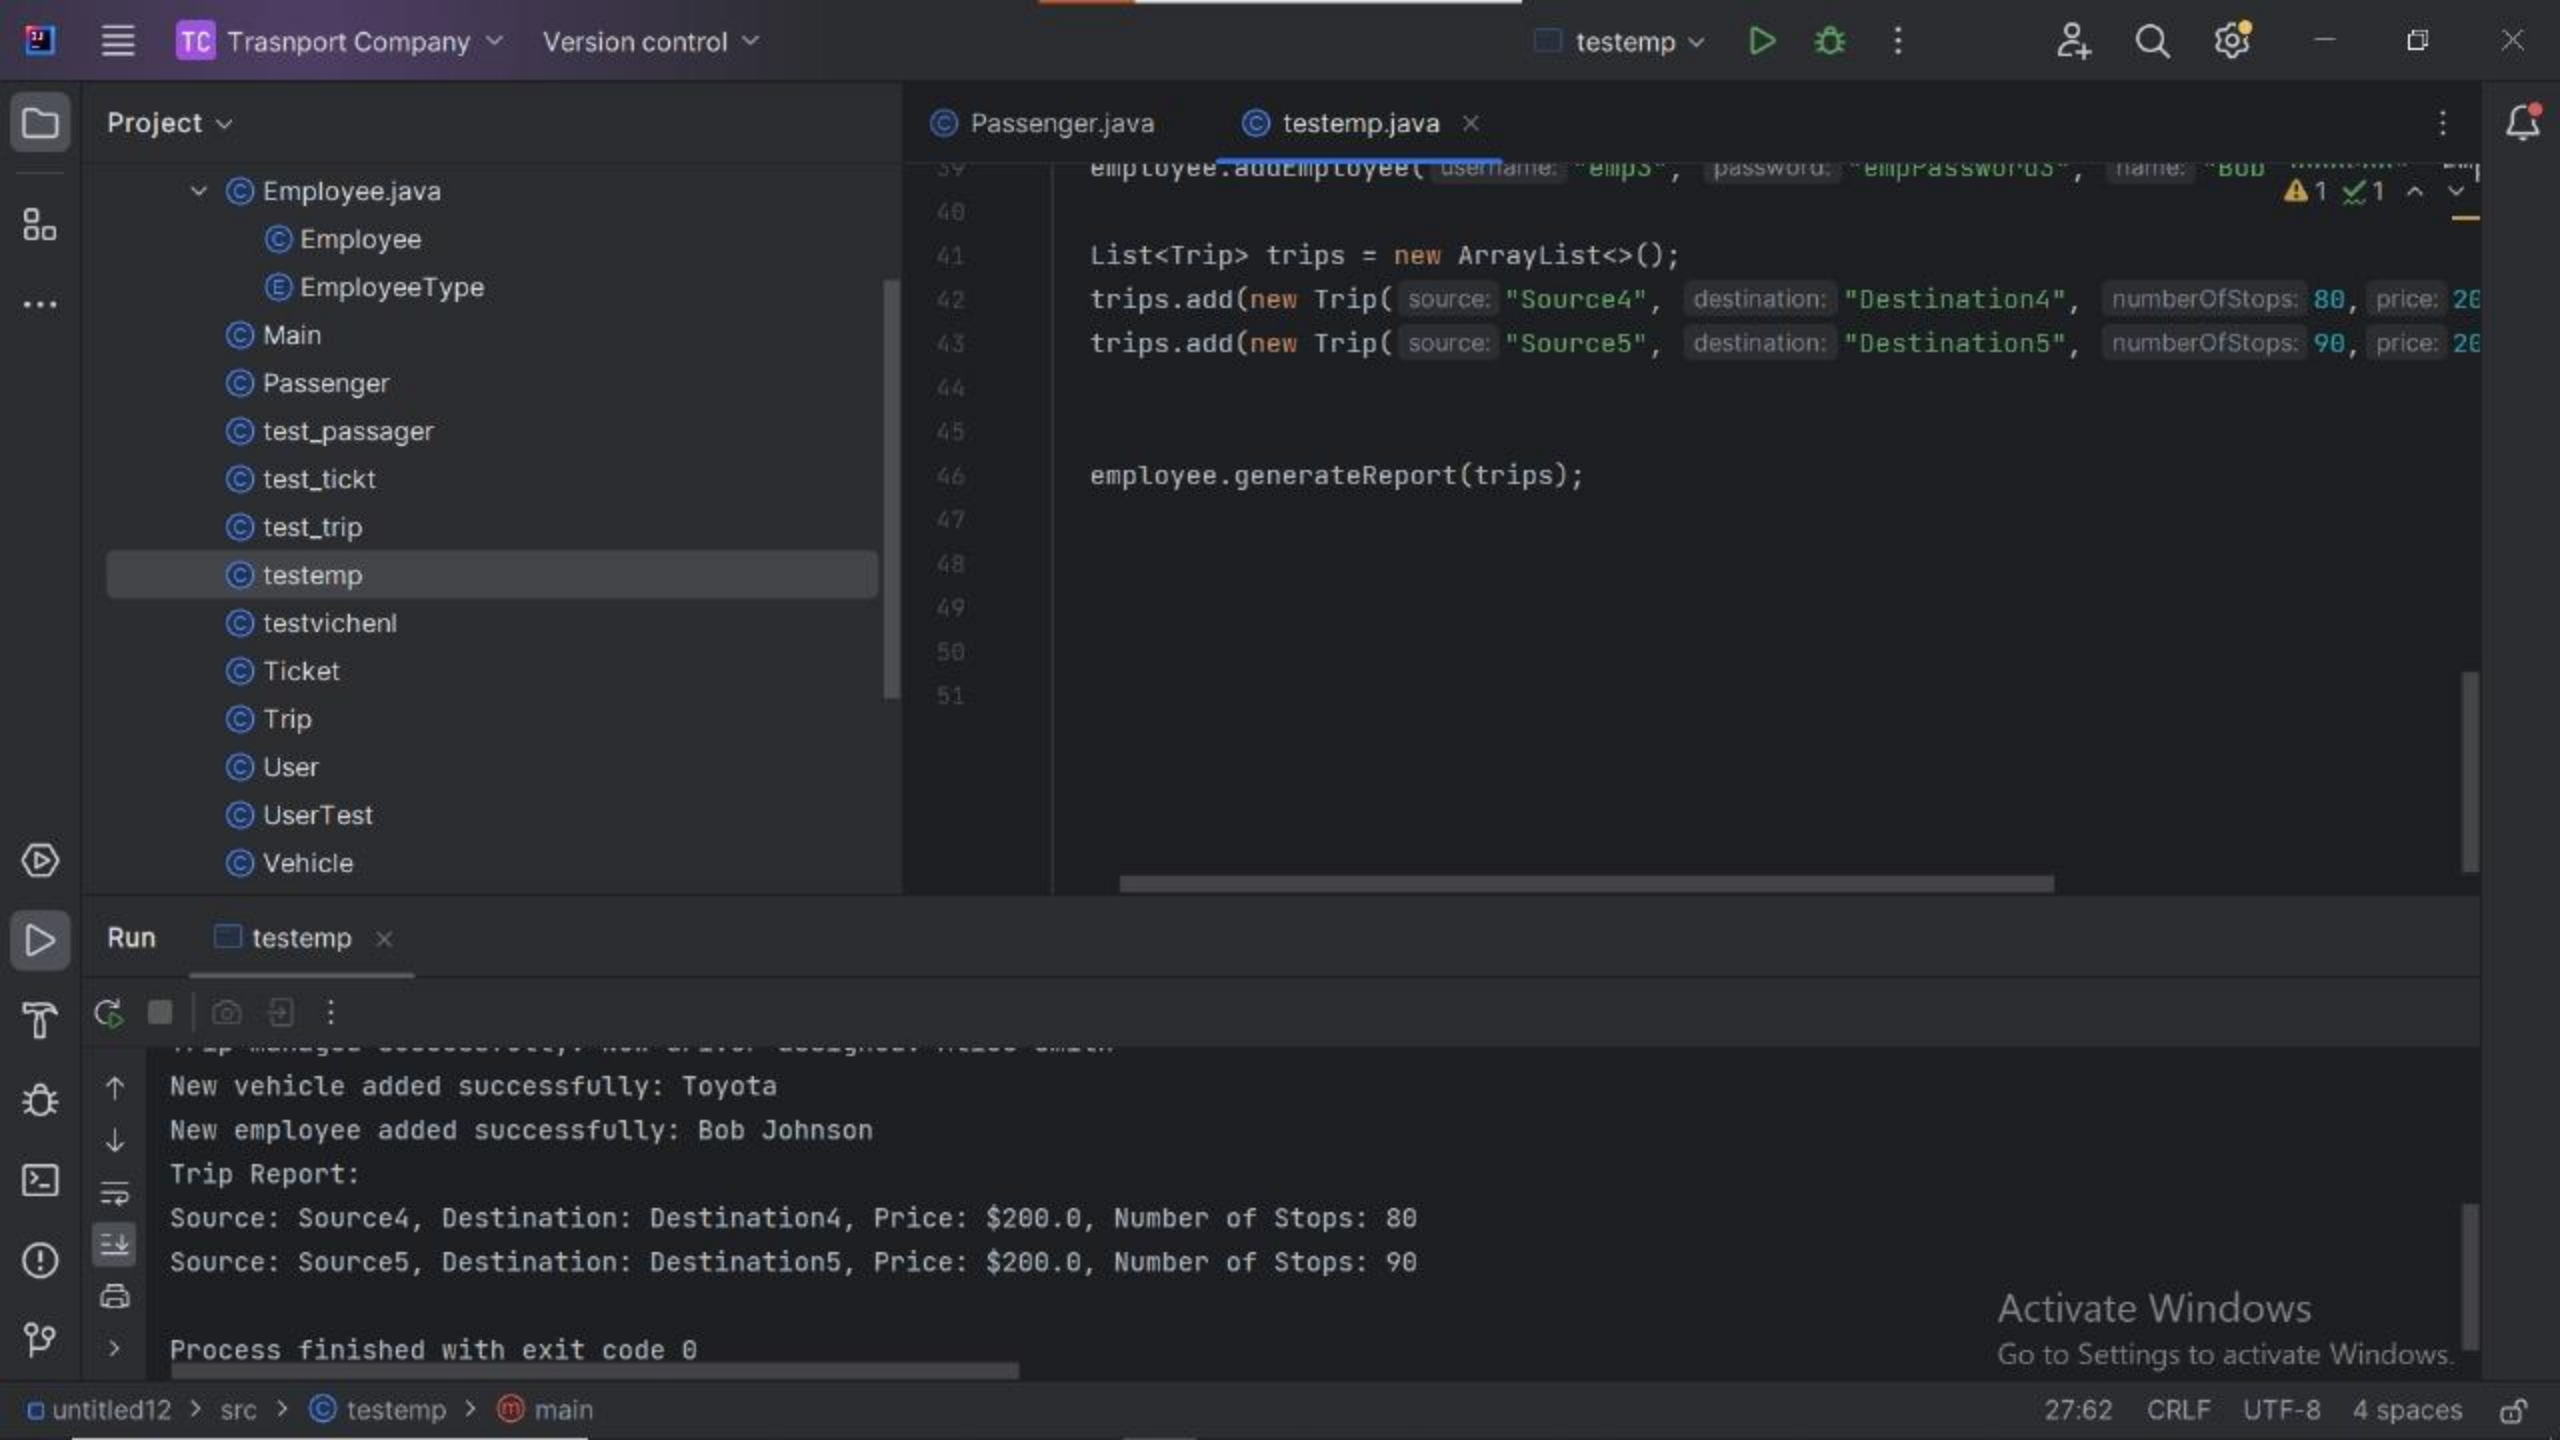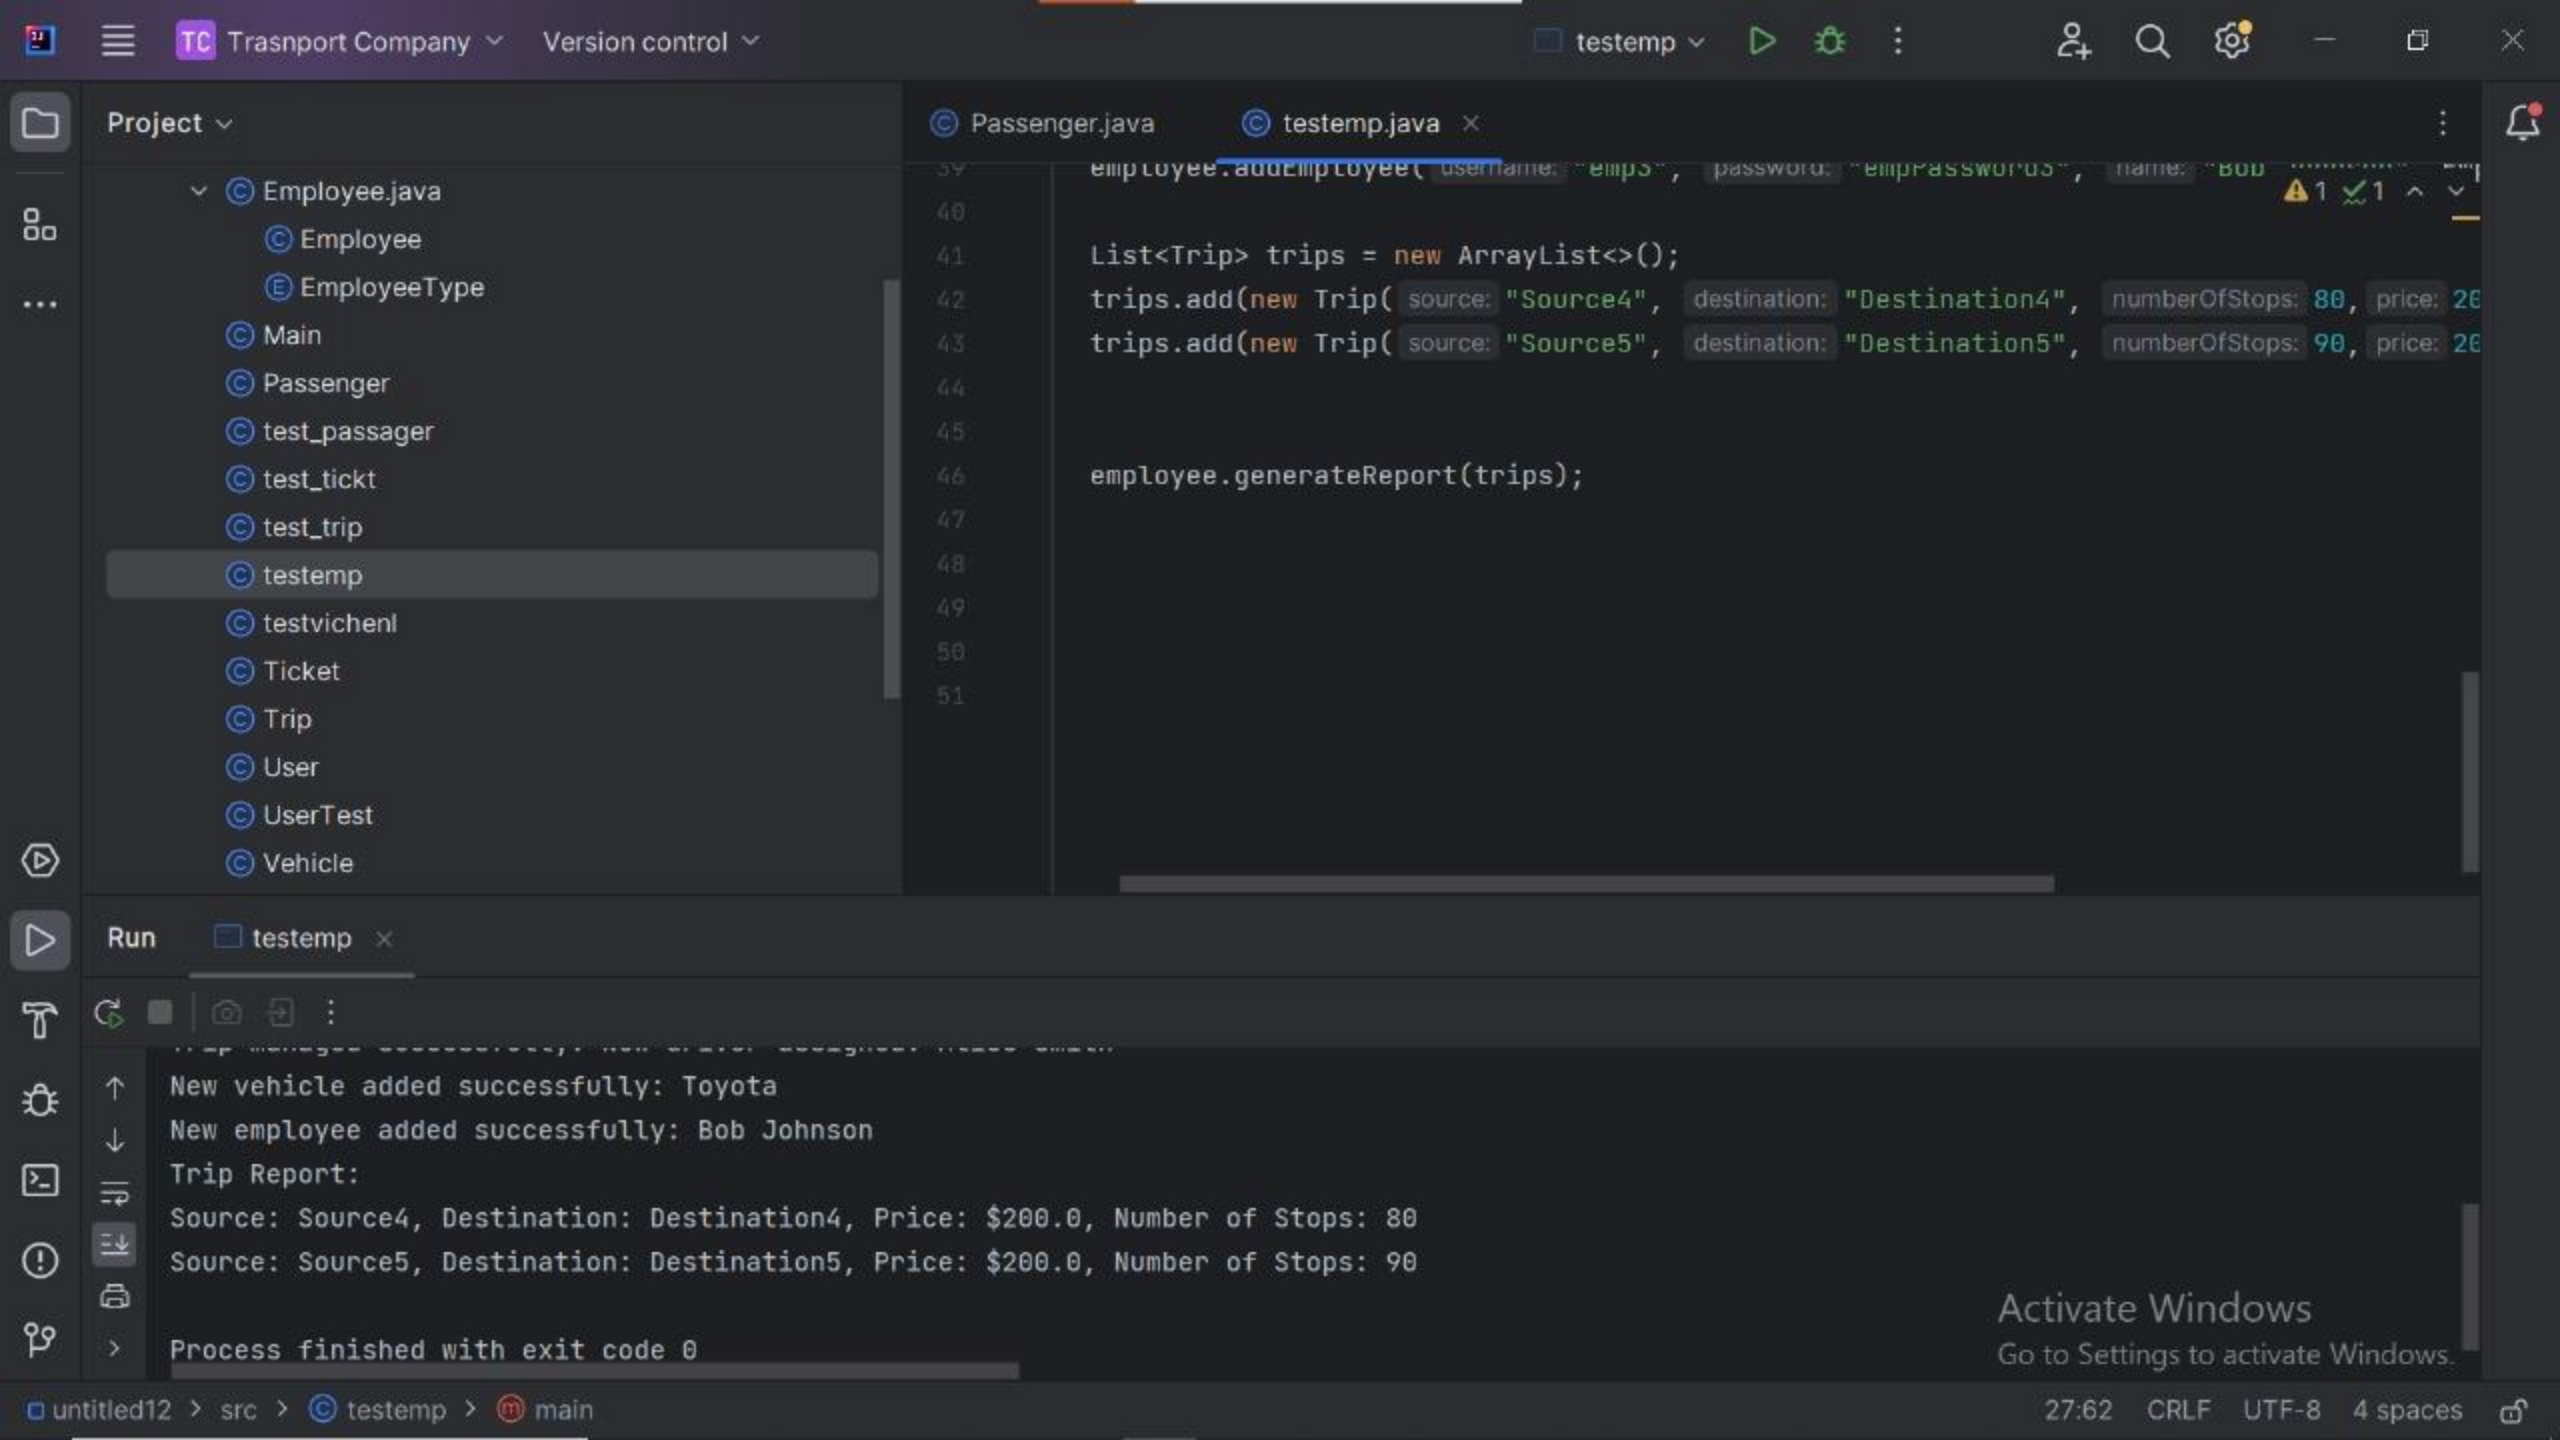

Trip Test

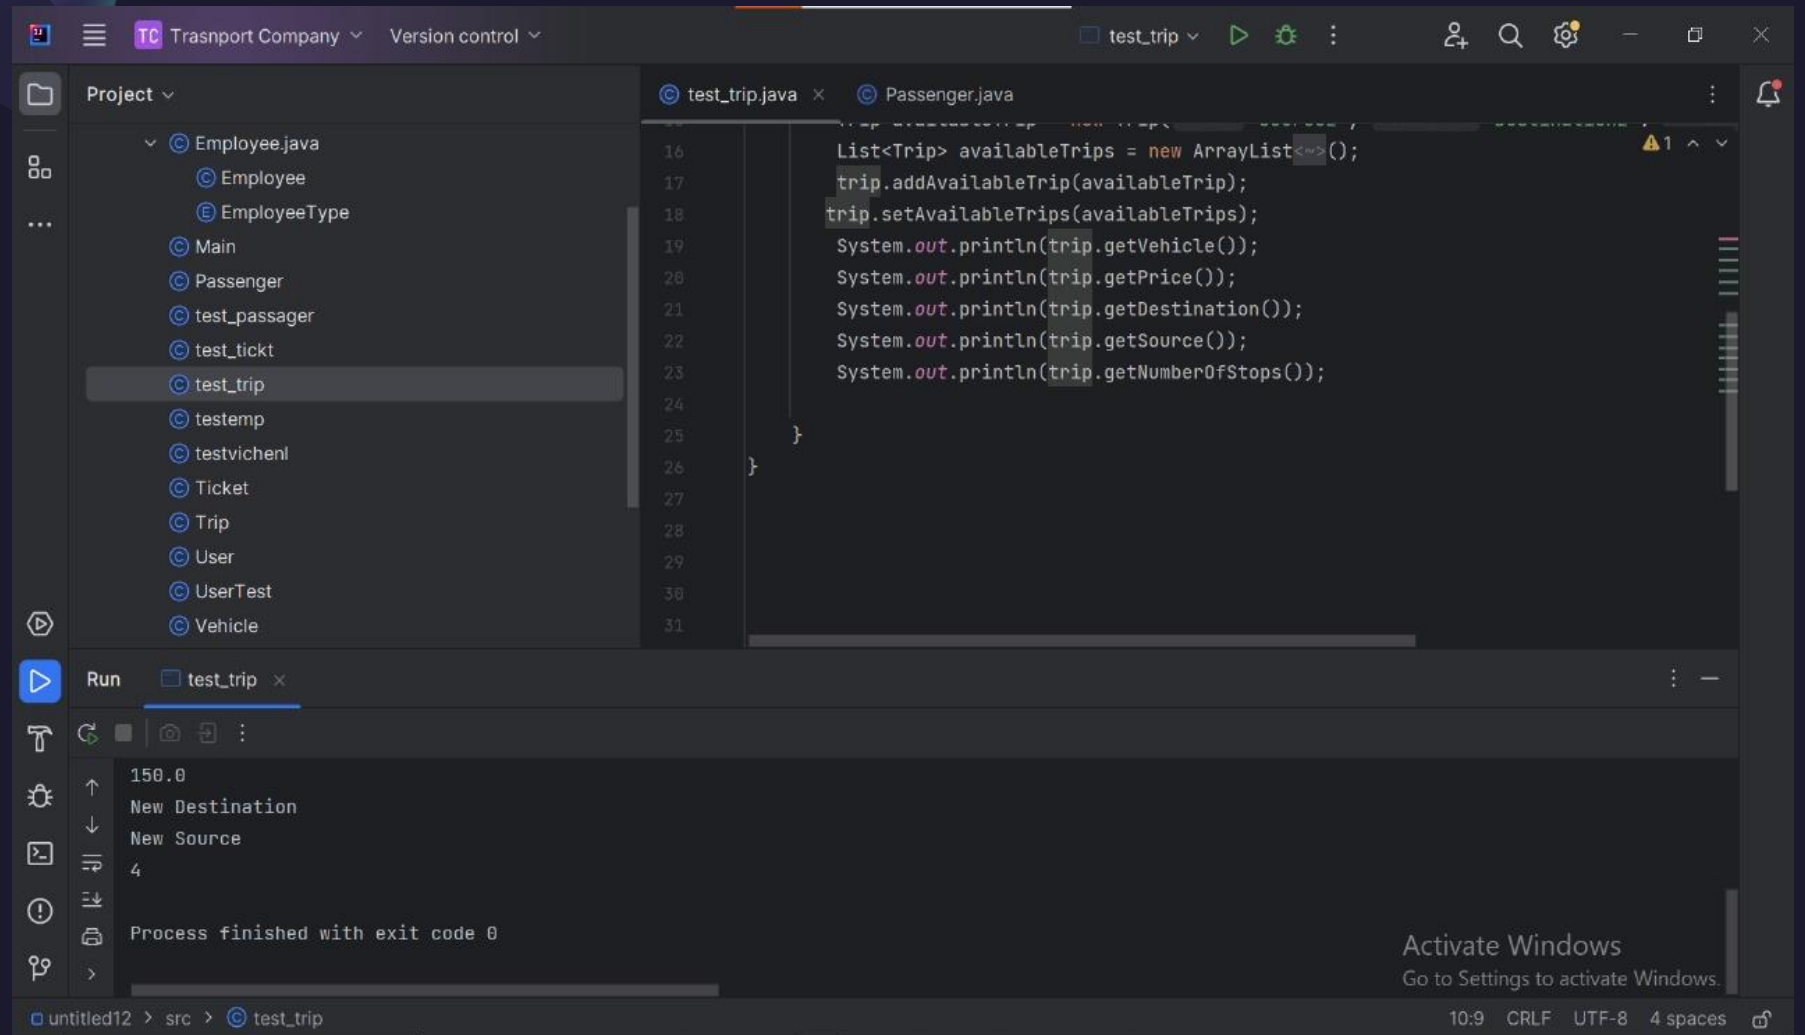

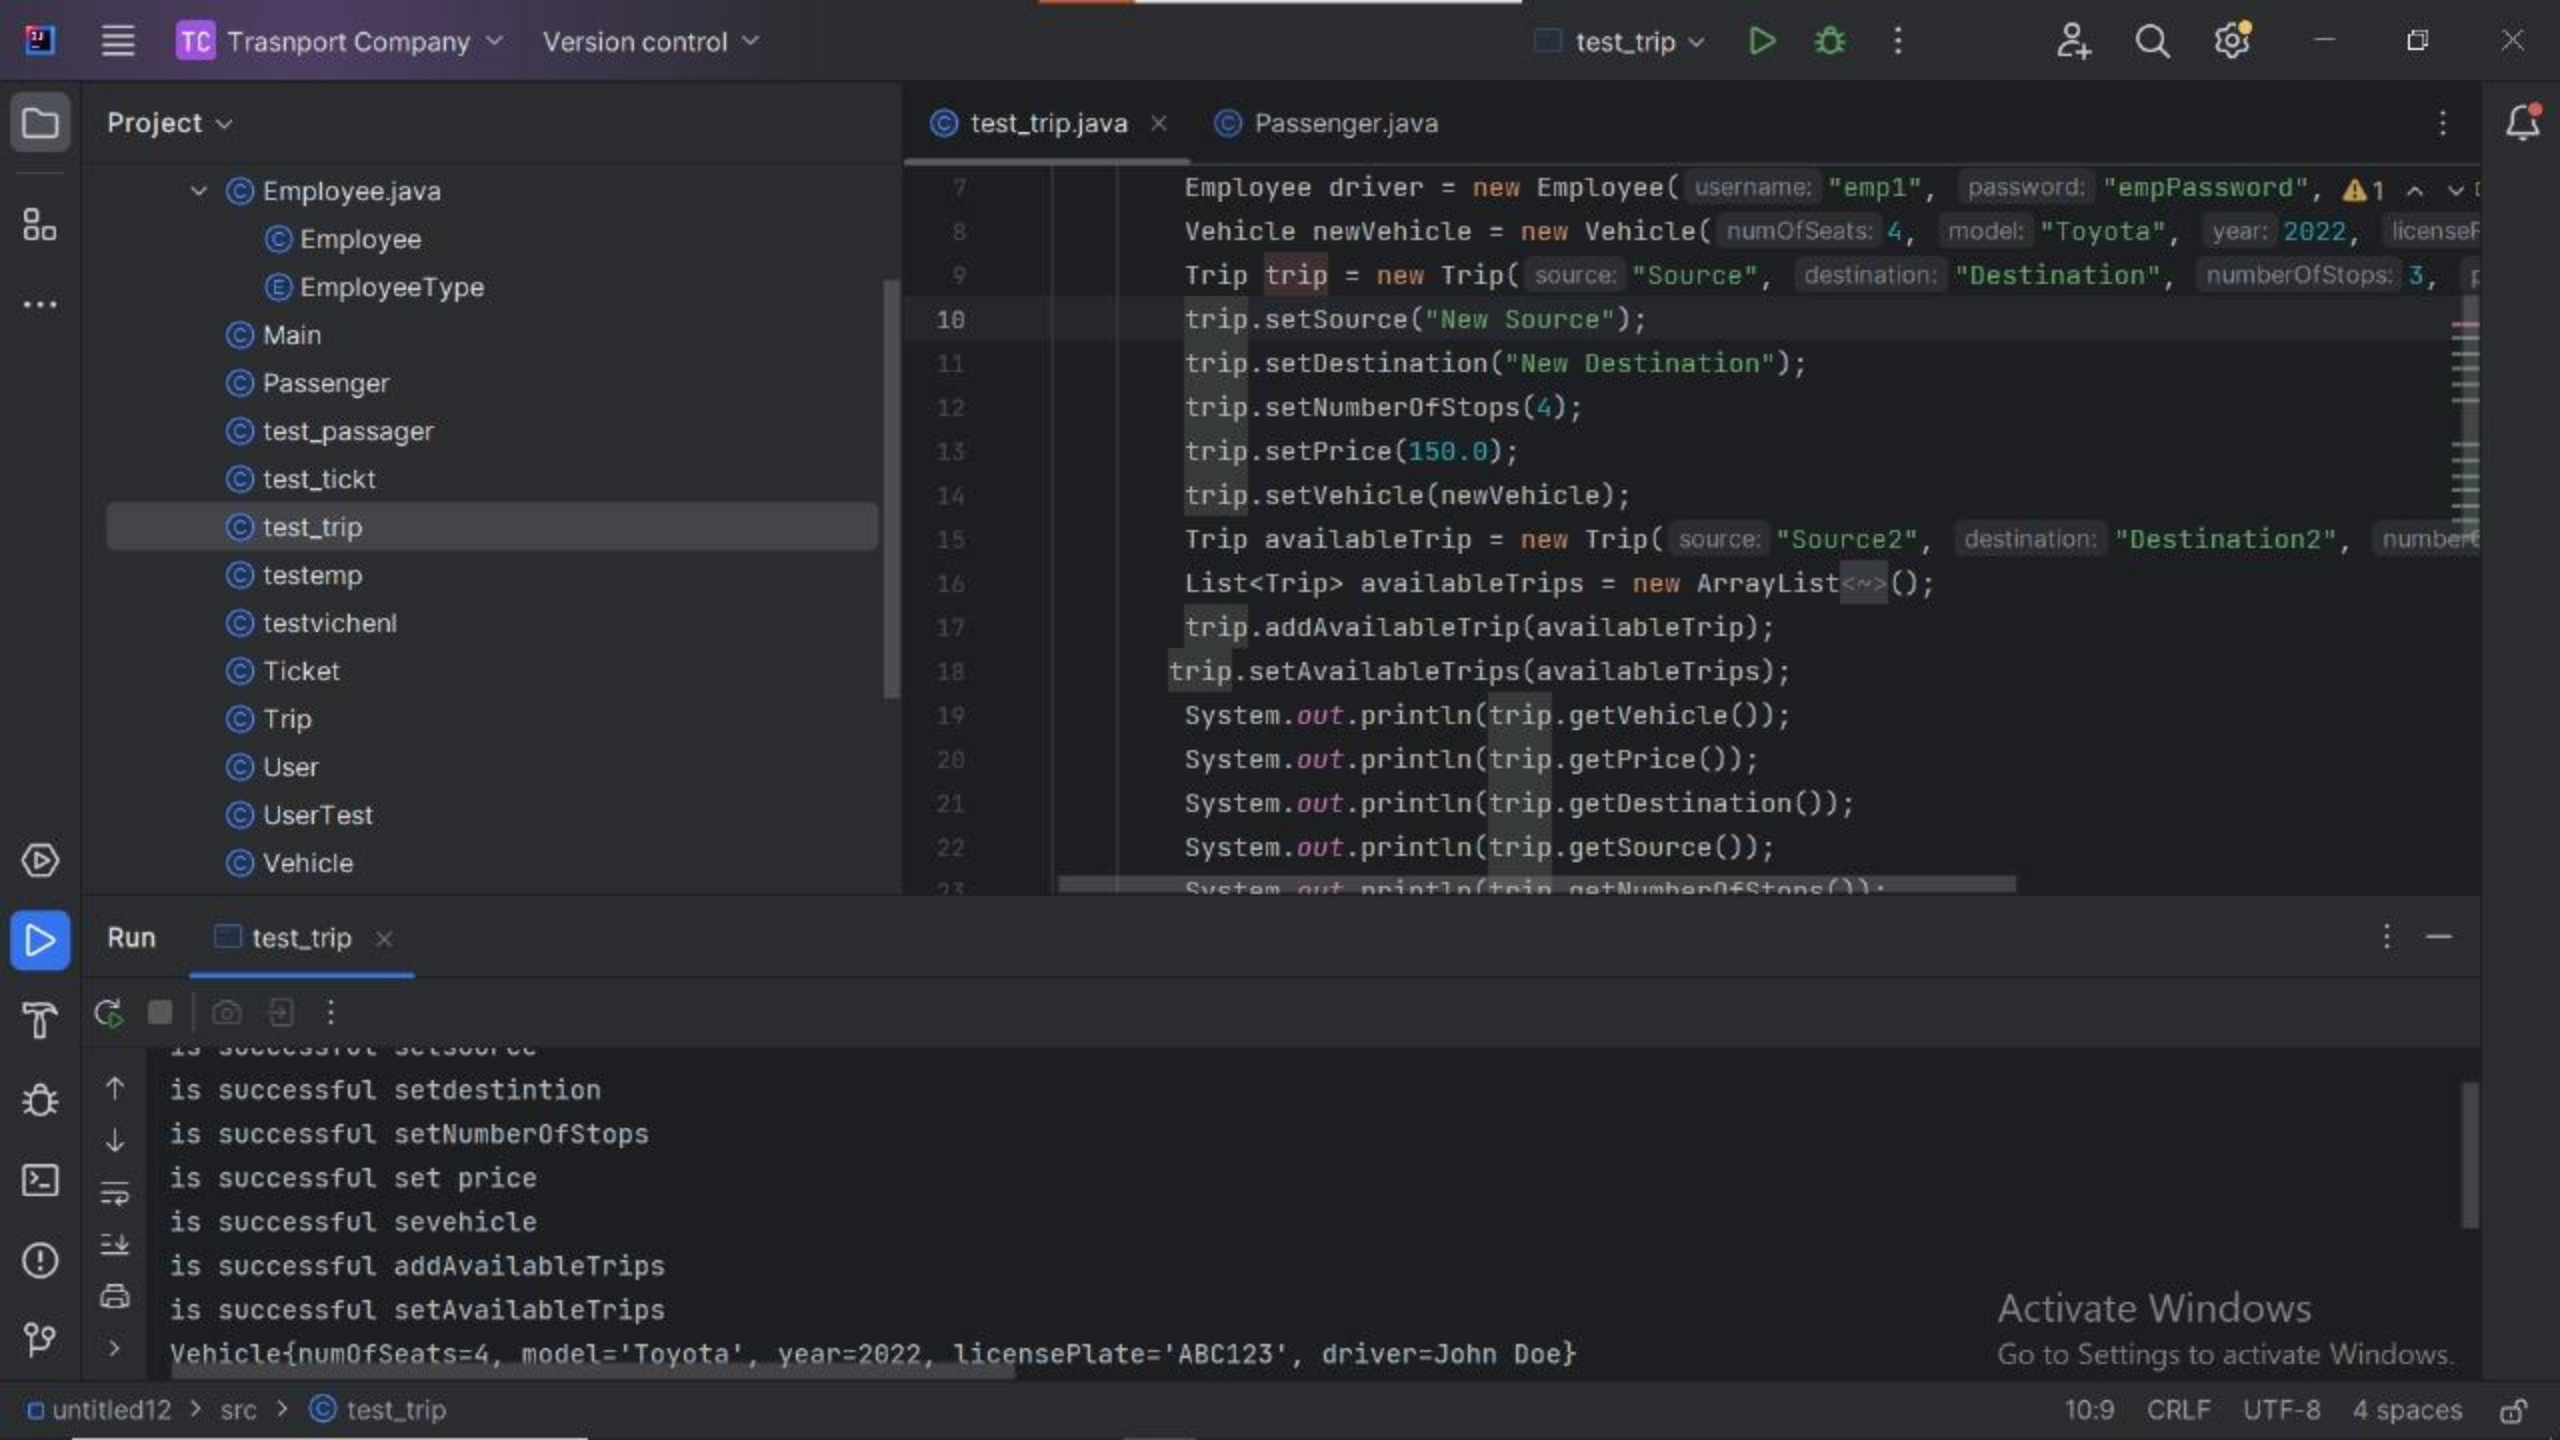

Project

- Employee.java
 - Employee
 - EmployeeType
- Main
- Passenger
- test_passager
- test_tickt
- test_trip
- testemp
- testvichenl
- Ticket
- Trip
- User
- UserTest
- Vehicle

test_trip.java x Passenger.java

```
7 Employee driver = new Employee( username: "emp1", password: "empPassword",
8 Vehicle newVehicle = new Vehicle( numOfSeats: 4, model: "Toyota", year: 2022, licenseF
9 Trip trip = new Trip( source: "Source", destination: "Destination", numberOfStops: 3,
10 trip.setSource("New Source");
11 trip.setDestination("New Destination");
12 trip.setNumberOfStops(4);
13 trip.setPrice(150.0);
14 trip.setVehicle(newVehicle);
15 Trip availableTrip = new Trip( source: "Source2", destination: "Destination2", numberC
16 List<Trip> availableTrips = new ArrayList<>();
17 trip.addAvailableTrip(availableTrip);
18 trip.setAvailableTrips(availableTrips);
19 System.out.println(trip.getVehicle());
20 System.out.println(trip.getPrice());
21 System.out.println(trip.getDestination());
22 System.out.println(trip.getSource());
23 System.out.println(trip.getNumberOfStops());
```

Run test_trip x

```
is successful setsource
is successful setdestination
is successful setNumberOfStops
is successful set price
is successful sevehicle
is successful addAvailableTrips
is successful setAvailableTrips
Vehicle{numOfSeats=4, model='Toyota', year=2022, licensePlate='ABC123', driver=John Doe}
```

Activate Windows

Go to Settings to activate Windows.

Ticket Test

test_passager.java test_tickt.java x Passenger.java

```
public class test_tickt {  
    public static void main(String[] args) {  
        Passenger passenger = new Passenger( username: "passenger1", password: "password1", name: "John Smith",  
        Trip trip = new Trip( source: "Source", destination: "Destination", numberOfStops: 3, price: 150);  
        Ticket ticket = new Ticket(passenger, trip, price: 150);  
        System.out.println(    ticket.getDestination()  
    );  
        System.out.println(    ticket.getPassenger());  
        System.out.println(    ticket.getTrip()  
    );  
        System.out.println(    ticket.getPrice()  
    );  
        ;System.out.println(    ticket.getPassengerId()  
    );  
        ticket.displayInfo();  
    }  
}
```

Run test_tickt x

```
Destination  
Passenger@433c675d  
Trip@3f91beef  
150  
241  
Passenger: John Smith  
Trip: Source to Destination  
Price: $150
```

Activate Windows
Go to Settings to activate Windows.

untitled12 > src > test_tickt

6:1 CRLF UTF-8 4 spaces

Vehicle Test

The screenshot shows an IDE with the following components:

- Top Bar:** Includes icons for file operations, a menu, and a version control status bar showing "TC Trasnport Company" and "Version control".
- Left Panel (Project Explorer):** Displays a project structure with files like `Employee.java`, `Employee`, `EmployeeType`, `Main`, `Passenger`, `test_passager`, `test_ticket`, `test_trip`, `testemp`, `testvichenl`, `Ticket` (highlighted), `Trip`, `User`, `UserTest`, and `Vehicle`.
- Editor (testvichenl.java):** Contains the following Java code:

```
2 import java.util.ArrayList;
3 import java.util.List;
4 import java.util.Scanner;
5 public class testvichenl {
6     public static void main(String[] args) {
7         Employee driver = new Employee( username: "emp1", password: "empPassword", name: "John Doe");
8         Vehicle vehicle = new Vehicle( numOfSeats: 4, model: "Toyota", year: 2022, licensePlate: "XYZ456");
9
10        vehicle.setNumOfSeats(5);
11        vehicle.setModel("Honda");
12        vehicle.setYear(2023);
13        vehicle.setLicensePlate("XYZ456");
14        vehicle.setDriver(driver);
15        vehicle.display();//the getter is in this method
16
17    }
```
- Run Panel:** Shows the execution output:

```
is sucffule setNumOfSeats
is successful setmodel
is successful setyear
is successful setlicensePlate
is successful setdriver
Vehicle{numOfSeats=5, model='Honda', year=2023, licensePlate='XYZ456', driver=John Doe}
```
- Bottom Bar:** Displays the file path `untitled12 > src > Ticket`, the time `5:14`, and encoding settings `CRLF UTF-8 4 spaces`.

