Tools name: nessus
Target machine: metaspolit-2

scan on m2 / Plugin #12217 /

‹ Back to Vulnerability Group

Configure | Audit Trail | Launch | Report | Export

Vulnerabilities 11

MEDIUM DNS Server Cache Snooping Remote Information Disclosure

Description

The remote DNS server responds to queries for third-party domains that do not have the recursion bit set.

This may allow a remote attacker to determine which domains have recently been resolved via this name server, and therefore which hosts have been recently visited.

For instance, if an attacker was interested in whether your company utilizes the online services of a particular financial institution, they would be able to use this attack to build a statistical model regarding company usage of that financial institution. Of course, the attack can also be used to find B2B partners, web-surfing patterns, external mail servers, and more.

Note: If this is an internal DNS server not accessible to outside networks, attacks would be limited to the internal network. This may include employees, consultants and potentially users on a guest network or WiFi connection if supported.

Solution

Contact the vendor of the DNS software for a fix.

Plugin Details

Severity:	Medium
ID:	12217
Version:	1.26
Type:	remote
Family:	DNS
Published:	April 27, 2004
Modified:	April 7, 2020

Risk Information

Risk Factor: Medium

CVSS v3.0 Base Score: 5.3

CVSS v3.0 Vector: CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:N/A:N

CVSS v2.0 Base Score: 5.0

scan on m2 / Plugin #90509

‹ Back to Vulnerabilities

Configure | Audit Trail | Launch | Report | Export

Vulnerabilities 11

HIGH Samba Badlock Vulnerability

Description

The version of Samba, a CIFS/SMB server for Linux and Unix, running on the remote host is affected by a flaw, known as Badlock, that exists in the Security Account Manager (SAM) and Local Security Authority (Domain Policy) (LSAD) protocols due to improper authentication level negotiation over Remote Procedure Call (RPC) channels. A man-in-the-middle attacker who is able to able to intercept the traffic between a client and a server hosting a SAM database can exploit this flaw to force a downgrade of the authentication level, which allows the execution of arbitrary Samba network calls in the context of the intercepted user, such as viewing or modifying sensitive security data in the Active Directory (AD) database or disabling critical services.

Solution

Upgrade to Samba version 4.2.11 / 4.3.8 / 4.4.2 or later.

Plugin Details

Severity:	High
ID:	90509
Version:	1.9
Type:	remote
Family:	General
Published:	April 13, 2016
Modified:	November 17, 2025

VPR Key Drivers

Threat Recency: No recorded events

Tools name: nessus
Target :creativeitinstitute.com

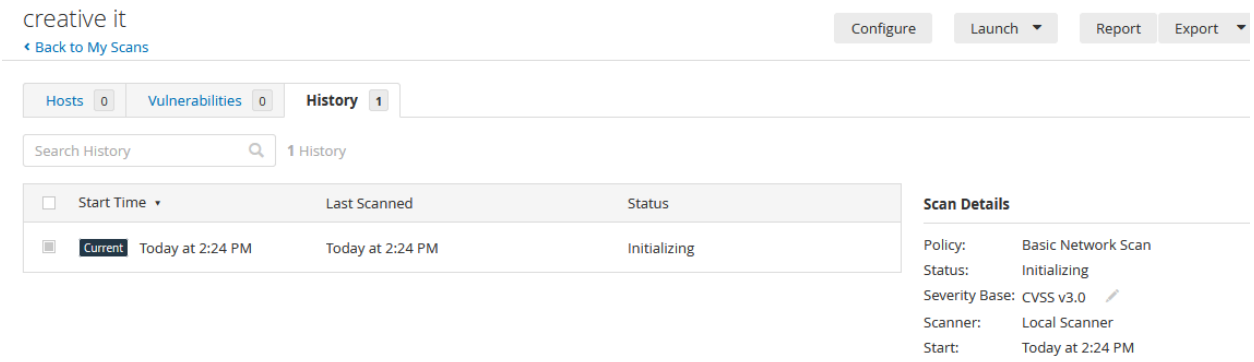

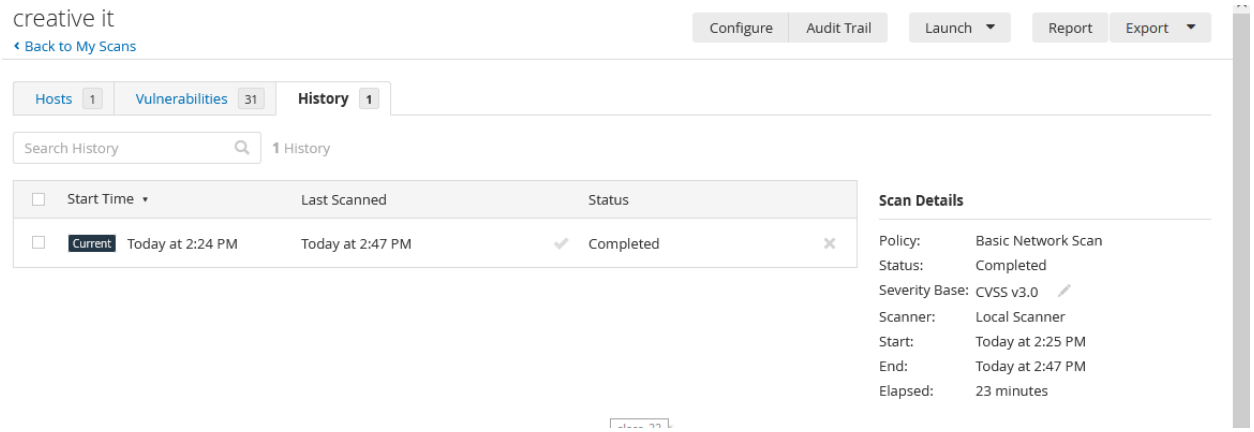

Sev	CVSS	VPR	EPSS	Nam...	Family	Count
MIXED	...	...	...	4	ISDNS	4
MIXED	...	...	...	4	HWeb Servers	6
MIXED	...	...	...	4	DDNS	5
INFO	...	...	...	3	SSGeneral	3
INFO	...	...	...	SSH (Multiple Issues)		3
INFO	...	...	...	2	SSGeneral	2
INFO	...	...	...	2	SSMisc.	2
INFO	...	...	...	2	TIMisc.	2
INFO	...	...	...	2	TIService detection	2
INFO	...	...	...	2	WWeb Servers	2

Scan Details

Policy:	Basic Network Scan
Status:	Completed
Severity Base:	CVSS v3.0
Scanner:	Local Scanner
Start:	Today at 2:25 PM
End:	Today at 2:47 PM
Elapsed:	23 minutes

Vulnerabilities



Creative IT / ISC Bind (Multiple Issues)

‹ Back to Vulnerabilities

Configure | Audit Trail | Launch | Report | Export

Hosts 1 | **Vulnerabilities 31** | History 1

Search Vulnerabilities | 4 Vulnerabilities

Sev	CVSS	VPR	EPSS	Nam...	Family	Count
HIGH	7.5	3.6	0.369	D...	DNS	1
MEDIUM	5.0 *	4.2	0.0132	D...	DNS	1
INFO				D...	DNS	1
INFO				D...	DNS	1

Scan Details

Policy:	Basic Network Scan
Status:	Completed
Severity Base:	CVSS v3.0
Scanner:	Local Scanner
Start:	Today at 2:25 PM
End:	Today at 2:47 PM
Elapsed:	23 minutes

Vulnerabilities