



CRC for
Water Sensitive Cities



Australian Government
Department of Industry and Science

Business
Cooperative Research
Centres Programme

The state of climate science for informing urban cooling

Dr. Kerry Nice

University of Melbourne
Monash University
CRCWSC

26-28 March 2019



THE UNIVERSITY OF
MELBOURNE



MONASH
University

Climate science context around urban cooling

Urban heat impacts
Climate Change

Global
Regional
Cities

Urban heat
Urban cooling
Modelling



CRC for
Water Sensitive Cities



watersensitivocities.org.au

Urban heat: impacts, or why this is important

Impacts of urban heat are wide ranging including:

Increased mortality and morbidity, especially among children and elderly.

Impacts on mental health, increased suicides, domestic violence, road rage

Increased strain on health and emergency services

Increased power consumption, carbon emissions, consumer financial costs, increased anthropogenic heat

Increased air pollution, then further impacting health

Social inequity (air conditioner vs. non air conditioner, leafy vs. non-leafy)

Damage to urban infrastructure (rail lines, roads, etc.)

Strain on urban vegetation


Fires

Increased water usage

Economic costs due to disruption to work activities, agriculture/horticulture damages, power outages

Climate Change: Global trends


Warming currently at 1.0C. Could reach 1.5C before 2040. 1.5C is a political goal. Already seeing impacts at 1.0C.

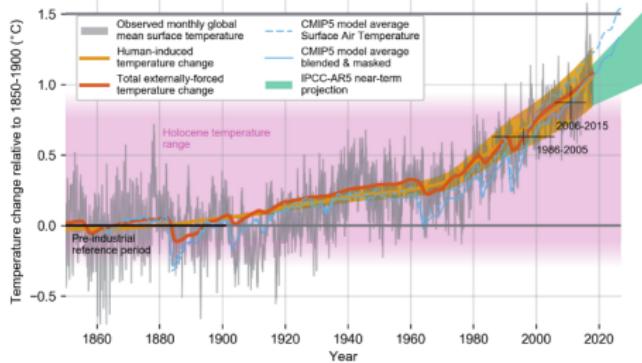

Allen et al. (2018)

FAQ1.2: How close are we to 1.5°C?

Human-induced warming reached approximately 1°C above pre-industrial levels in 2017

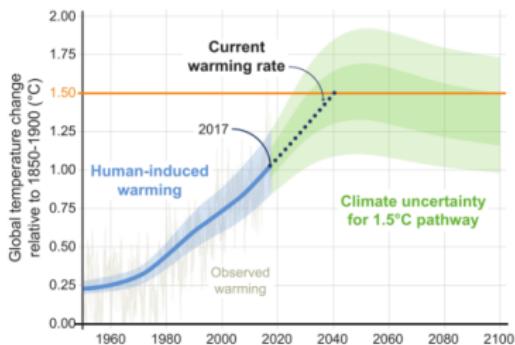

CRC for
Water Sensitive Cities




watersensitivocities.org.au

Climate change: Can we limit warming to 1.5C?

Paris commitments (by largest emitters) already inadequate for 2.0C (Lewis et al., 2019).
2.0-4.9C by 2100 most likely (Raftery et al., 2017). Largest uncertainty in climate change is emissions pathway. Requires immediate and drastic reductions to meet Paris agreement
- Australia not on track.

Overall change since the 2017 projections

Figure 4 Australia's emissions trends, 1990 to 2030

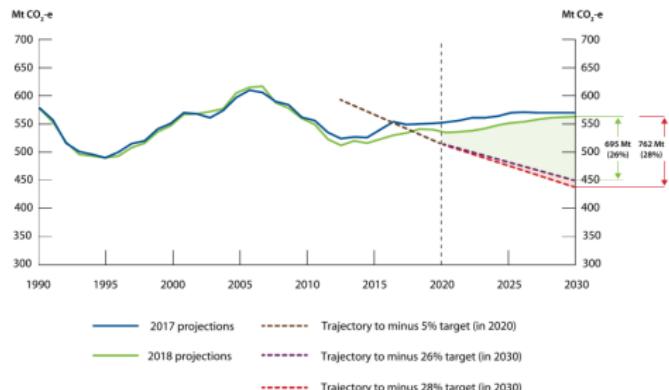



CRC for
Water Sensitive Cities



Commonwealth of Australia (2018)
watersensitivocities.org.au

Climate change: regional impacts



Australia has already experienced approx 1.0C warming. Some regions have experienced greater warming (i.e. Arctic region).

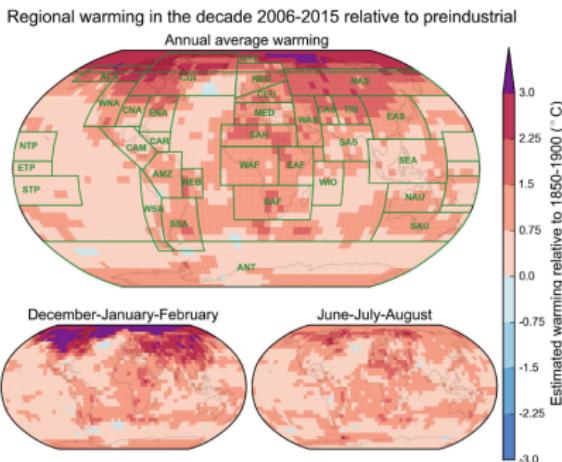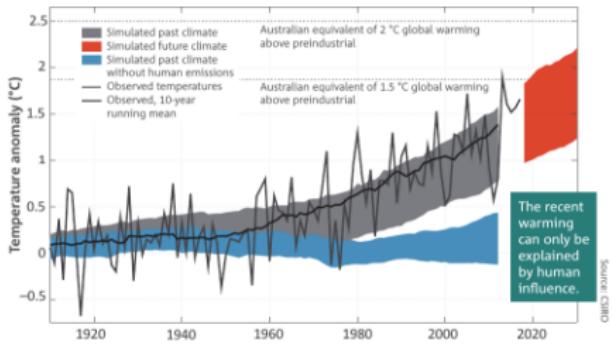

CSIRO and Bureau of Meteorology (2018); Allen et al. (2018)

Australia's shifting climate: temperature




Australia has experienced rising temperatures and frequency of extreme heat events. Adaptation strategies must account for anticipated ranges of temperatures and increased extremes.

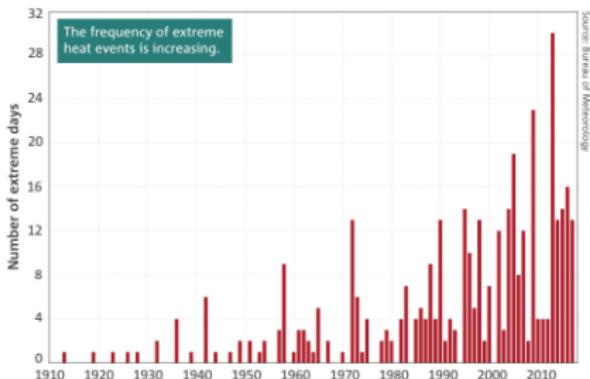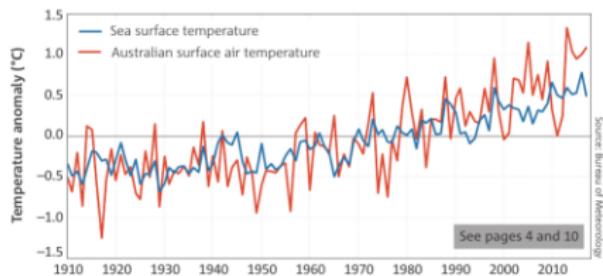

CSIRO and Bureau of Meteorology (2018)

Australia's shifting climate: rainfall

Australia has experienced shifts in rainfall patterns, locations and amounts.

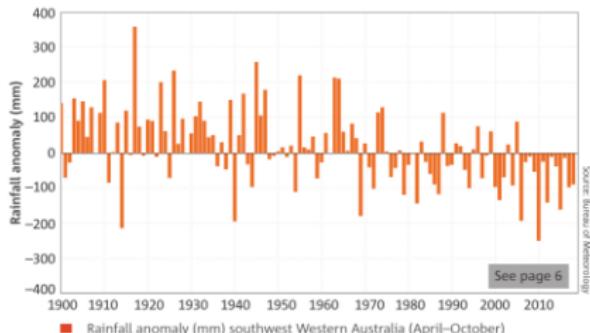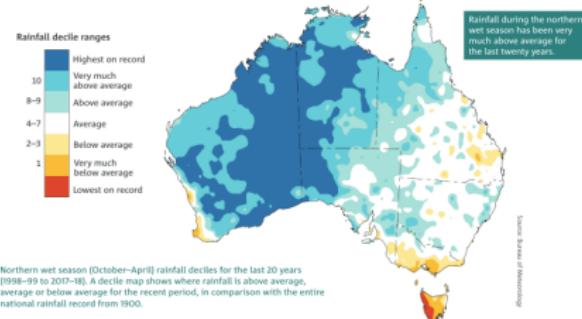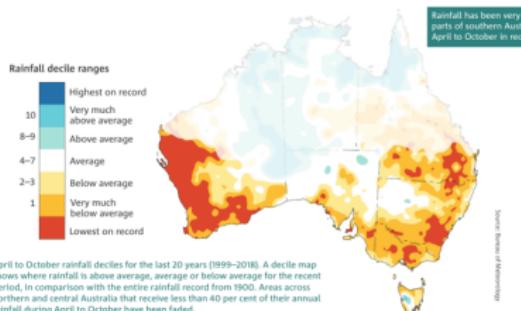

Shifts in climate zones, impacts on vegetation

Shifts in climate are impacting types of vegetation that can be grown in regions. Some species might no longer be suitable as urban vegetation in the future.


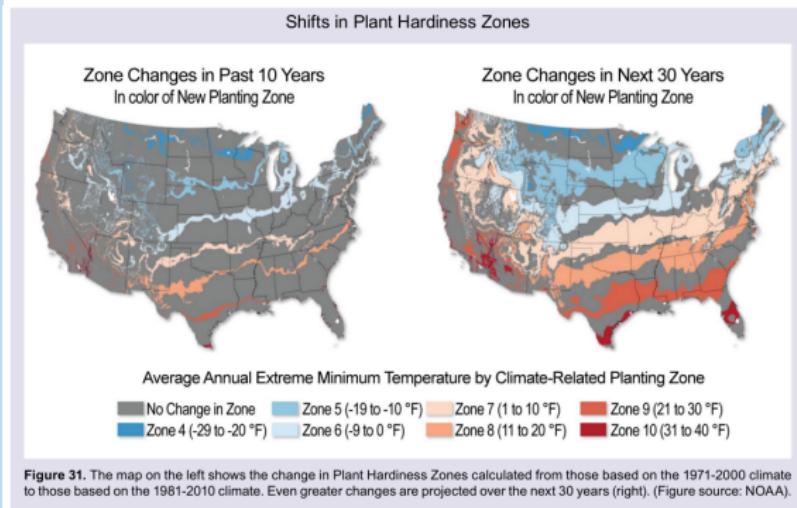


Figure 31. The map on the left shows the change in Plant Hardiness Zones calculated from those based on the 1971-2000 climate to those based on the 1981-2010 climate. Even greater changes are projected over the next 30 years (right). (Figure source: NOAA).

<http://www.pleanetwork.com.au/wp-content/uploads/2016/03/Australia-Changing-climate-zones.jpg>, Walsh et al. (2014)



CRC for
Water Sensitive Cities

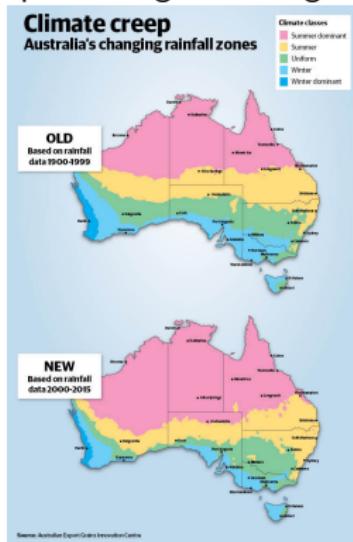

watersensitivocities.org.au

Australia's shifting climate: impacts at cities level

Different emissions pathways, RCP4.5 (moderate emission reduction) and RCP8.5 (no reductions) will have varying impacts on future temperatures and extreme events.

Table 11-X Average warming and range of warming (various models) for the capital cities, 2030 and 2090 (°C).

	2030 RCP4.5	2090 RCP4.5	2090 RCP8.5
Adelaide	0.7 (0.5-0.9)	1.5 (1.0-1.9)	2.9 (2.4-3.9)
Brisbane	0.9 (0.6-1.2)	1.8 (1.2-2.6)	3.7 (2.5-4.7)
Canberra	0.8 (0.6-1.1)	1.8 (1.3-2.4)	3.8 (2.7-4.5)
Darwin	0.9 (0.6-1.3)	1.8 (1.3-2.8)	3.7 (2.8-5.1)
Hobart	0.6 (0.4-1.0)	1.4 (0.9-1.9)	2.9 (2.3-4.0)
Melbourne	0.6 (0.5-0.9)	1.5 (1.1-1.9)	3.0 (2.4-3.8)
Perth	0.8 (0.6-1.0)	1.7 (1.1-2.1)	3.5 (2.6-4.2)
Sydney	0.9 (0.6-1.1)	1.9 (1.3-2.5)	3.7 (2.9-4.6)

Source data: Webb and Hennessy (2015).

Table 11-X1 Projected frequency and spread of frequencies (various models) of extremely hot summer days (>40 °C) for Australian capital cities.

	Current	2030 RCP4.5	2090 RCP4.5	2090 RCP8.5
Adelaide	3.7	5.9 (4.7-7.2)	9.0 (6.8-12)	16 (12-22)
Brisbane	0.8	1.2 (1.1-1.6)	2.1 (1.5-3.9)	6.0 (2.9-11)
Canberra	0.3	0.6 (0.4-0.8)	1.4 (0.8-2.8)	4.8 (2.3-7.5)
Darwin	0.0	0.0 (0.0-0.0)	0.0 (0.0-0.2)	1.3 (0.2-11)
Hobart (>35°C)	1.6	2.0 (1.9-2.1)	2.6 (2.0-3.1)	4.2 (3.2-6.3)
Melbourne	1.6	2.4 (2.1-3.0)	3.6 (2.8-4.9)	6.8 (4.6-11)
Perth	4	6.7 (5.4-7.5)	9.7 (6.9-13)	20 (12-25)
Sydney	0.3	0.5 (0.5-0.8)	0.9 (0.8-1.3)	2.0 (1.3-3.3)

Source data: Webb and Hennessy (2015).



Urban Heat: factors leading to increased urban heat island

In addition to climate change, city design also contributes to urban heat effects.

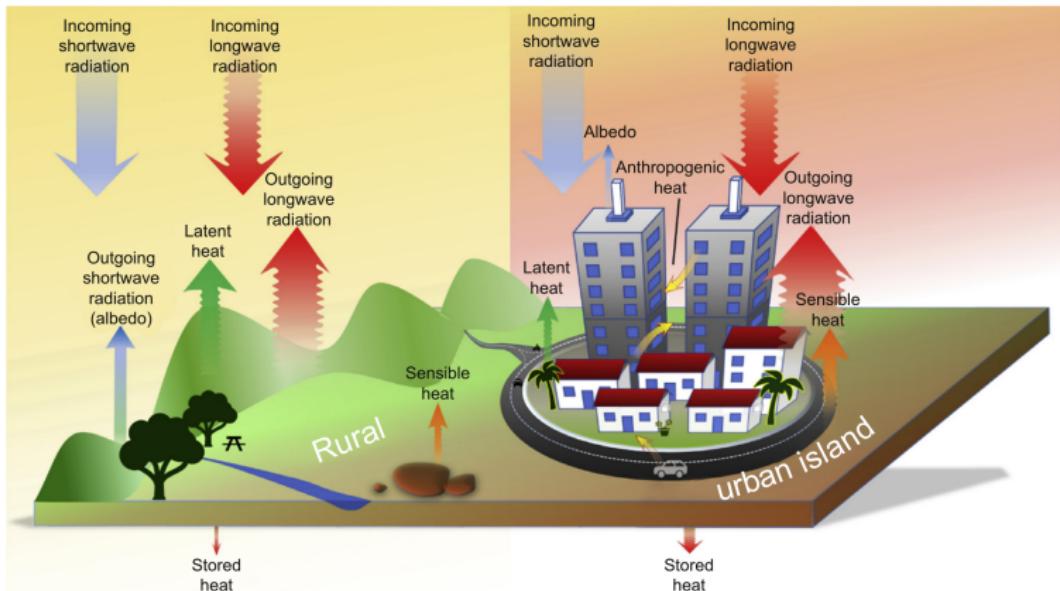


FIGURE 19.2 Schematic depiction of energy flux in urban area. Graphic by Alison Vieritz, adapted from Oke, T.R., 1988. *The urban energy balance*. *Progress in Physical Geography* 12, 471–508.



Urban Heat: factors leading to increased urban heat island

Urban vegetation can reduce UHI while impervious surfaces can exacerbate UHI effects.

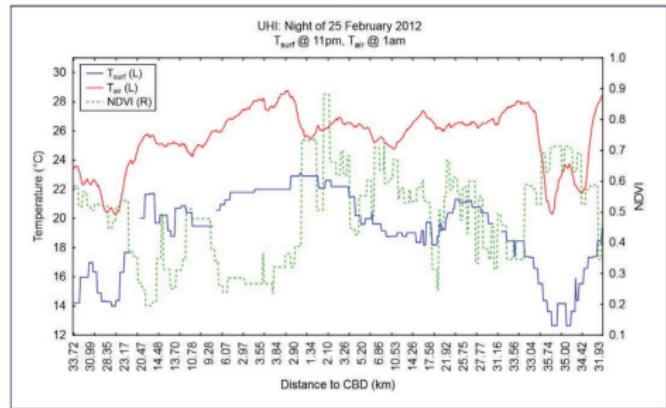


Figure 13: West-east UHI transect 25 February 2012. The air temperature transect is corrected to 1am. The MODIS surface temperature data corresponds to 1.05am. NDVI values indicate fraction of vegetation cover. CBD was taken as 37° 48' 51.0906", 144° 57' 47.2782" (intersection of Swanson St and Bourke St, Melbourne).

Table 5: Average LSTs of the major land surface types for the City of Port Phillip focus areas.

	DAY (°C)	St. Dev. (°C)	NIGHT (°C)	St. Dev. (°C)
South Melbourne				
Concrete	50.45	7.66	31.63	5.26
Irrigated grass	42.81	8.34	25.59	3.92
Non irrigated grass	48.00	6.80	26.27	3.74
Road	48.83	7.63	29.16	4.28
Tile roof	52.20	7.82	30.35	4.35
Galv. steel roof	51.95	11.20	26.53	8.60
Trees	41.59	6.66	26.62	2.90
Water	44.41	7.97	27.72	3.90
AVERAGE	47.53		27.98	
Middle Park	DAY (°C)	St. Dev. (°C)	NIGHT (°C)	St. Dev. (°C)
Concrete	50.22	7.61	28.69	4.97
Irrigated grass	45.56	7.75	26.04	4.57
Non irrigated grass	49.14	6.54	24.94	3.14
Road	51.14	7.00	28.20	3.46
Tile roof	53.54	7.18	28.69	3.90
Tin roof	52.95	9.01	28.38	6.89
Trees	43.61	6.56	26.03	3.19
Water	48.02	6.71	29.42	5.04
AVERAGE	49.27		27.55	

Coutts and Harris (2013)



CRC for
Water Sensitive Cities



watersensitivocities.org.au

Urban Heat: Green infrastructure

Numerous studies show heat mitigation effects due to green infrastructure. Perhaps 0.5-2°C reductions in air temperature, 5-20°C reductions in surface temperatures, 5-10°C thermal comfort indexes (i.e. UTCI). (Jamei and Tapper, 2019)

TABLE 19.1 Studies Conducted on the Effectiveness of Green Infrastructure in Mitigating Urban Heat Island (UHI) and Improving Thermal Comfort

City	Climate	Findings
Tel-Aviv, Israel	Mediterranean	Shading from the increased tree canopy coverage contributed to 80% of the overall cooling effect (Shashua-Bar and Hoffman, 2000)
Bangalore, India	Tropical	5.6°C temperature difference between the sections of the streets with trees and without trees (Valleyey et al., 2013)
Hong Kong	Humid-subtropical	15% increase in tree coverage resulted in 5.6°C temperature reduction (Ng et al., 2012)
Saga, Japan	Humid-subtropical	20% increase in the number of the trees resulted in 2.27°C reduction in maximum temperature (Suzuki and Hokes, 2013)
Singapore	Hot-humid	From 1.5 to 2.8°C lower air temperature under tree canopies (Nichol, 1996)
Kumamoto, Japan	Humid-subtropical	3.8°C lower air temperature under tree canopies (Saito et al., 1990)
Serdang, Malaysia	Hot-humid	Trees with high values of leaf area index contribute to lower air temperatures (Ghahdani et al., 2010)
Ghardaïa, Algeria	Subtropical-desert	Shading trees significantly improve the pedestrian thermal comfort (Ali-Toudert and Moyer, 2007)
Beijing, China	Humid-continental	Tree canopy coverage and shading level significantly influence the thermal comfort (Wu et al., 2012)
Sao Paulo, Brazil	Humid-subtropical	Thermal comfort index (Temperature of Equivalent Perception, TEP) was improved by 0.15°C (Bonomi et al., 2013)
Mendoza, Argentina	Mid-latitude desert	Green infrastructure along the street significantly improved the thermal condition (Corma et al., 2012)
Shanghai	Humid-subtropical	Dense tree or grass on the pavement contributed to a significant reduction (Yang et al., 2011)
Sao Paulo, Brazil	Humid-subtropical	12.7°C reduction in thermal comfort index (physiological equivalent temperature, PET) level (Spengerg et al., 2000)
London, UK	Temperate-oceanic	1°C reduction in the air temperature as a result of installing green roofs (Virk et al., 2015)
Toronto, Canada	Semi-continental	0.4°C reduction in the air temperature as a result of installing green roofs (Berndt, 2010)
Madrid, Spain	Mediterranean	Only a moderate effect of green roofs on the surrounding microclimate, but a large contribution when combined with vegetation at pedestrian level (Alzola et al., 2016)
Tehran, Iran	Dry-summer subtropical	Average air temperature above the green roof was 3.06–3.7°C cooler than that of the reference roof (Moqbel and Iranian Salim, 2017)
Adelaide, Australia	Mediterranean	Significant cooling effects in summer as a result of green roofs, green walls, street trees and other water sensitive urban design strategies (Kazaghmanesh et al., 2016)
Padua, Italy	Humid sub-tropical	The “Green ground” scenario allows up to 1.4 and 3°C decrease in air temperature during the night and day, respectively (Nomi and Lazarus, 2015)
Paris, France	Oceanic climate	0.79°C reduction in the air temperature as a result of green pavement (Hendri et al., 2016)
Nottingham, UK	Oceanic climate	Green wall enabled 6.1°C temperature reduction in sunny days compared with bare wall (Xue, 2017)
Cosenza, Italy	Oceanic climate	Vegetated roof was able to halve summer daily temperature excursions (Belluccopiet al., 2017)
Kuala Lumpur, Malaysia	Tropical	Urban greening resulted in 4°C reduction in the air temperature (Afukui et al., 2017)
Phoenix, United States	Warm humid continental	Urban trees reduced the air temperature by about 1–5°C (Ijzerlo et al., 2017)
Montreal, Canada	Continental	Tree cover reduced the air temperature at the tree level by 4 and 2°C at 60 m from the ground (Wang and Akbari, 2016)

TABLE 19.1 Studies Conducted on the Effectiveness of Green Infrastructure in Mitigating Urban Heat Island (UHI) and Improving Thermal Comfort—cont'd

City	Climate	Findings
Freiburg, Germany	Mediterranean	Trees on grasslands lead to 2.7 K (2.7°C) reduction in the air temperature (Lee et al., 2016)
Hong Kong	Humid-subtropical	Roadside trees reduced the thermal comfort index (PET) to 29.4°C in urban areas (Fan et al., 2017)
Hong Kong	Humid-subtropical	Trees with a large crown, short trunk, and dense canopy are the most efficient in mitigating the UHI effect (Kong et al., 2017)
Taipei, Taiwan	Humid-subtropical	Urban parks were 0.81 K (0.81°C) cooler than their surrounding built-up areas (Blower et al., 2010)
Athens, Greece	Subtropical—Mediterranean	The average nighttime and daytime park cool island varied between 0.7 K (0.7°C) and 2.6 K (2.6°C), respectively (Soudakis et al., 2014)
Melbourne, Australia	Oceans	2.5°C temperature difference between an urban park and its surrounding areas (Torok et al., 2001)
Singapore	Hot-humid	Large urban parks significantly mitigate the UHI effect (Tomiyoshi et al., 2009)
Taipei, Taiwan	Humid-subtropical	The park cooling effect largely depends on the evapotranspiration rate of the trees inside the park (Li and Li, 2013)
Addis Ababa, Ethiopia	Sabotenopetal—highland	The park cooling effect is a variable of the park area (Feyisa et al., 2014)
Florida, United States	Humid-subtropical	Lower air temperature under the shade of the trees compared to the surrounding areas (Garcia and Vitoria, 2003)
Netherlands, Europe	Temperate	Improvement in the thermal comfort index (PET) by 5 K (5°C) as a result of grassland (Kleinen et al., 2013)
Sacramento and Vancouver	Mediterranean—oceanic	Frequent irrigation produced from 1 to 2°C and 5 to 7°C cooling effect in Vancouver and Sacramento, respectively (Spektor-Smith, 1998)
Athens, Greece	Subtropical—Mediterranean	Park cooling effect was reduced because of congested areas and traffic in the surrounding area of a large urban park (Eduardo et al., 2009)
Göteborg, Sweden	Oceans	High-rise buildings in surrounding area of urban parks reduce the cooling impact of parks (Örnman and Chen, 1999)
Sacramento and Vancouver	Mediterranean—oceanic	The park cooling impact extended equal to the width of the park (Spektor-Smith, 1998)
Athens, Greece	Subtropical—Mediterranean	The greatest zone of influence for park cooling effect extended downwind from the park (Dimakou and Nikiopoulou, 2003)
Singapore	Hot-humid	Areas close to parks were on average 1.3 K (1.3°C) cooler than the surrounding areas (Tu and Hien, 2008)
Mexico	Humid-subtropical	The park cooling impact with the area of 500 ha extended equal to the width of the park (2 km) (Jauregi, 1990)
Japan	Humid-subtropical	The park cooling impact with the area of 100 and 400 m ² extends to 300 and 400 m, respectively (Horio and Takakura, 1990)
Tokyo, Japan	Humid-subtropical	The park cooling impact with an area of 0.6 km ² was found to be 1.58°C, extending for 1 km (Ca et al., 1990)

Urban Heat: vegetation and irrigation

Irrigated grass can have large surface temperature cooling impacts during the day but small effects at night. Trees also have large cooling effect during the day.

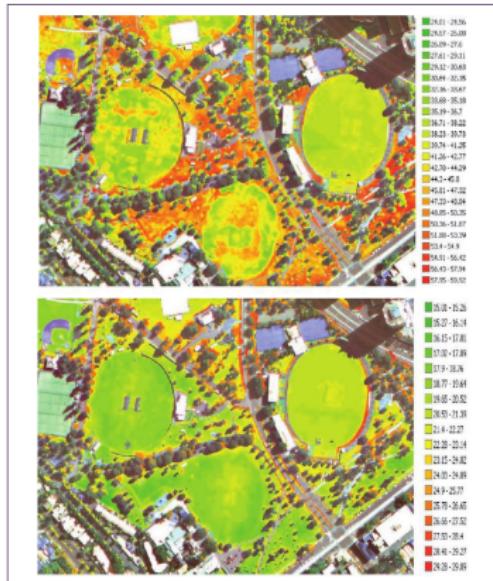


Figure 16: Example of the effects of irrigation in CoPP – irrigated ovals during the day (upper panel) can be clearly seen in contrast with the surrounding non-irrigated grass. At night (lower panel) there is little difference between the irrigated and non-irrigated grass. Please note different scales are used.


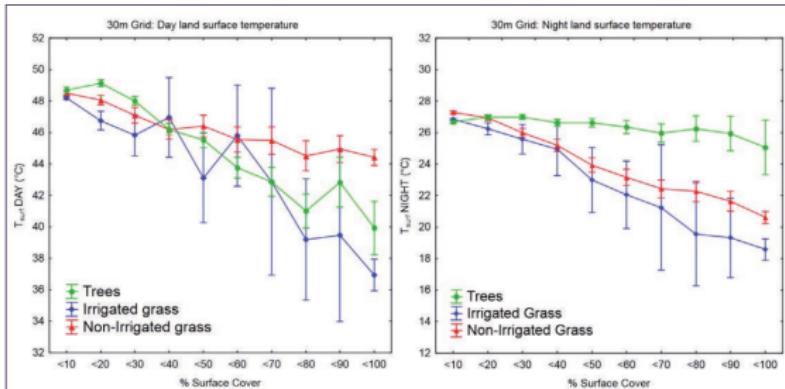


Figure 18: Relationships between per cent tree cover, per cent irrigated grass cover and per cent non-irrigated grass cover with land surface temperature during the day (left panel) and night (right panel), divided into 10 per cent categories. Error bars denote 95 per cent confidence level.

Framework for optimizing cooling benefits

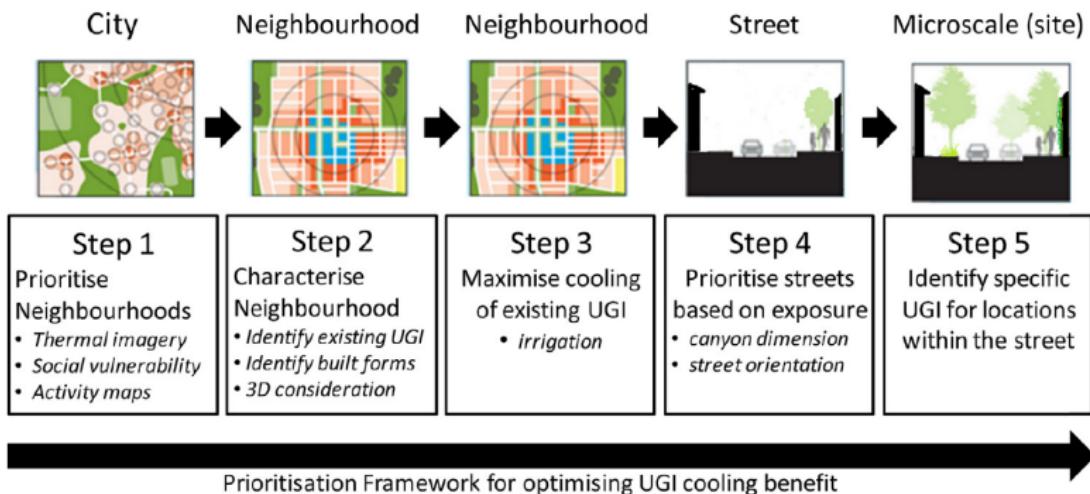

Norton et al. (2015)

Most effective use of street trees

c) Canyon Width

Prioristation: Street Trees

Canyon Orientation

		Very Wide	Wide	Medium	Narrow					
		40 m	30 m	20 m	10 m					
		Metres	Metres	Metres	Metres					
		0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
		0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
		0.13	0.27	0.40	0.53	0.67	0.80	0.93	1.07	1.20
		0.13	0.27	0.40	0.53	0.67	0.80	0.93	1.07	1.20
		0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80
		0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80
		0.40	0.80	1.20	1.60	2.00	2.40	2.80	3.20	3.60
		0.40	0.80	1.20	1.60	2.00	2.40	2.80	3.20	3.60
		4	8	12	16	20	24	28	32	36
		1	2	3	4	5	6	7	8	9
		Low		Medium			Tall			
		Canyon Height								



High priority



Moderate priority



Lower priority



Not a priority

Recommendations for urban green infrastructure

Table 2

Modes of cooling provided by different urban green infrastructure options during summer and priority locations to optimise those cooling benefits.

UGI	Green open spaces	Trees	Green roofs	Vertical greening
Shades canyon surfaces?	Yes, if grass rather than concrete	Yes	Shades roof, not internal canyon surfaces	Yes
Shades people?	Yes, if treed	Yes	No, only very intensive green roofs	No
Increases solar reflectivity?	Yes, when grassed	Yes	Yes, if plants healthy	Yes
Evapo-transpirative cooling?	Yes, with water	Yes	Yes, with water when hot	Yes, with water when hot
	No, without water	(unless severe drought)	No, without water	No, without water
Priority locations	<ul style="list-style-type: none">Wide streets with low buildings – both sidesWide streets with tall buildings – sunny side	<ul style="list-style-type: none">Wide streets, low buildings – both sidesWide streets, tall buildings – sunny sideIn green open spaces	<ul style="list-style-type: none">Sun exposed roofsPoor insulated buildingsLow, large buildingsDense areas with little available ground space	<ul style="list-style-type: none">Canyon walls with direct sunlightNarrow or wide canyons where trees are unviable

Norton et al. (2015)



CRC for
Water Sensitive Cities



4th water sensitive cities conference

watersensitivocities.org.au

Urban cooling modelling tools developed by the CRC

Contents lists available at ScienceDirect

Urban Climate

journal homepage: www.elsevier.com





Development of the VTUF-3D v1.0 urban micro-climate model to support assessment of urban vegetation influences on human thermal comfort

Kerry A. Nice^{a, b, c, *}, Andrew M. Coutts^{a, c}, Nigel J. Tapper^{a, c}

Geosci. Model Dev., 12, 785–803, 2019
<https://doi.org/10.5194/gmd-12-785-2019>
© Author(s) 2019. This work is distributed under the Creative Commons Attribution 4.0 License.



Open Access


The Air-temperature Response to Green/blue-infrastructure Evaluation Tool (TARGET v1.0): an efficient and user-friendly model of city cooling

Ashley M. Broadbent^{1,2,3,4}, Andrew M. Coutts^{3,4}, Kerry A. Nice^{3,4,5}, Matthias Demuzere^{6,7}, E. Scott Krayenhoff^{8,1,2}, Nigel J. Tapper^{3,4}, and Hendrik Wouters^{7,6}




CRC for
Water Sensitive Cities

(Nice et al., 2018; Broadbent et al., 2019)
4th water sensitive cities conference
watersensitivocities.org.au

Target model validation

Now that the models have been built and validated, they can be built into the CRC scenario tools. The real work begins now as the CRC community starts planning our future.

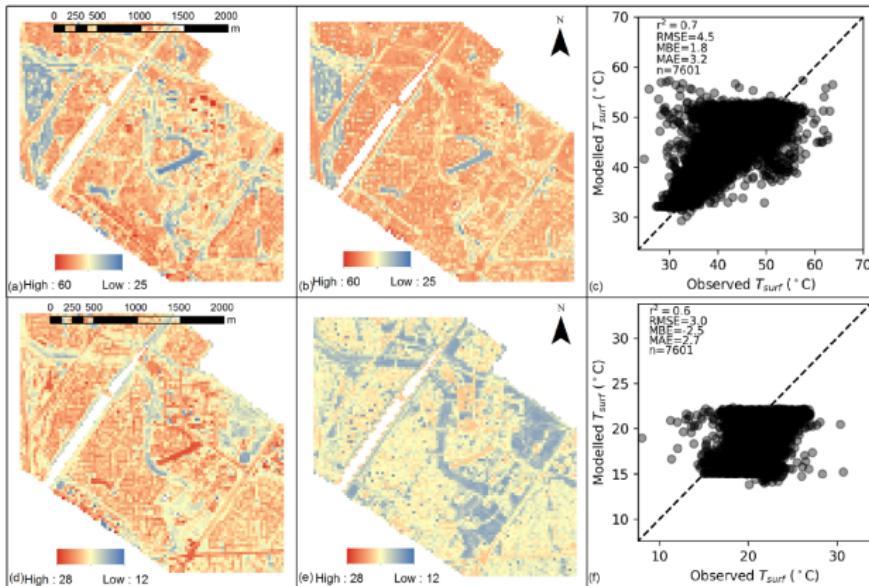

Bibliography

- Allen, M., Dube, O., Solecki, W., Aragón-Durand, F., Cramer, W., Humphreys, S., Kainuma, M., Kala, J., Mahowald, N., Mulugetta, Y., Perez, R., Wairiu, M., and Zickfeld, K. (2018). Framing and Context. In *Global Warming of 1.5C. An IPCC Special Report on the impacts of global warming of 1.5C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change*, chapter 1.
- Broadbent, A. M., Coutts, A. M., Nice, K. A., Demuzere, M., and Krayenhoff, E. S. (2019). The Air-temperature Response to Green/blue-infrastructure Evaluation Tool (TARGET v1.0): an efficient and user-friendly model of city cooling. *Geoscientific Model Development*, 12:785–803.
- Burke, M., González, F., Baylis, P., Heft-Neal, S., Baysan, C., Basu, S., and Hsiang, S. (2018). Higher temperatures increase suicide rates in the United States and Mexico. *Nature Climate Change*, 8(8):723–729.
- Commonwealth of Australia (2018). Australia's emissions projections 2018. Technical report, Australian Government Department of Environment and Energy.
- Coutts, A. M. and Harris, R. (2013). A multi-scale assessment of urban heating in Melbourne during an extreme heat event: policy approaches for adaptation. Technical report, Victorian Centre for Climate Change Adaptation Research.
- CSIRO and Bureau of Meteorology (2018). State of the Climate 2018. Technical report.
- Harlan, S. L. and Ruddell, D. M. (2011). Climate change and health in cities: impacts of heat and air pollution and potential co-benefits from mitigation and adaptation. *Current Opinion in Environmental Sustainability*, 3:126–134.
- Jamei, E. and Tapper, N. (2019). WSUD and Urban Heat Island Effect Mitigation. In *Approaches to Water Sensitive Urban Design*, chapter 19, pages 381–407. Elsevier Inc.
- Lewis, S. C., Perkins-Kirkpatrick, S. E., Althor, G., King, A. D., and Kemp, L. (2019). Assessing contributions of major emitters' Paris-era decisions to future temperature extremes. *Geophysical Research Letters*.
- Nice, K. A., Coutts, A. M., and Tapper, N. J. (2018). Development of the VTUF-3D v1.0 urban micro-climate model to support assessment of urban vegetation influences on human thermal comfort. *Urban Climate*, pages 1–25.
- Nicholls, N., Skinner, C., Loughnan, M., and Tapper, N. (2008). A simple heat alert system for Melbourne, Australia. *International Journal of Biometeorology*, 52(5):375–84.
- Norton, B. A., Coutts, A. M., Livesley, S. J., Harris, R. J., Hunter, A. M., and Williams, N. S. G. (2015). Planning for cooler cities: A framework to prioritise green infrastructure to mitigate high temperatures in urban landscapes. *Landscape and Urban Planning*, 134:127–138.
- Raftery, A. E., Zimmer, A., Frierson, D. M. W., Startz, R., and Liu, P. (2017). Less than 2C warming by 2100 unlikely. *Nature Climate Change*.
- Walsh, J., Ruebbles, D., Hayhoe, K., Kossin, J., Kunkel, K., Stephens, G., Thorne, P., Vose, R., Wehner, M., Willis, J., Anderson, D., Kharin, V., Knutson, T., Landerer, F., Lenton, T., Kennedy, J., and Somerville, R. (2014). Appendix 3: Climate Science Supplement. In Melillo, J. M., Richmond, T. T., and Yohe, G. W., editors, *Climate Change Impacts in the United States: The Third National Climate Assessment*, pages 735–789. U.S. Global Change Research Program.
- Zuo, J., Pullen, S., Palmer, J., Bennetts, H., Chileshe, N., and Ma, T. (2015). Impacts of heat waves and corresponding measures: a review. *Journal of Cleaner Production*, 92:1–12.

Thank you

Questions?



CRC for
Water Sensitive Cities



4th water sensitive cities conference

watersensitivocities.org.au