



Usecase Analyse


Client

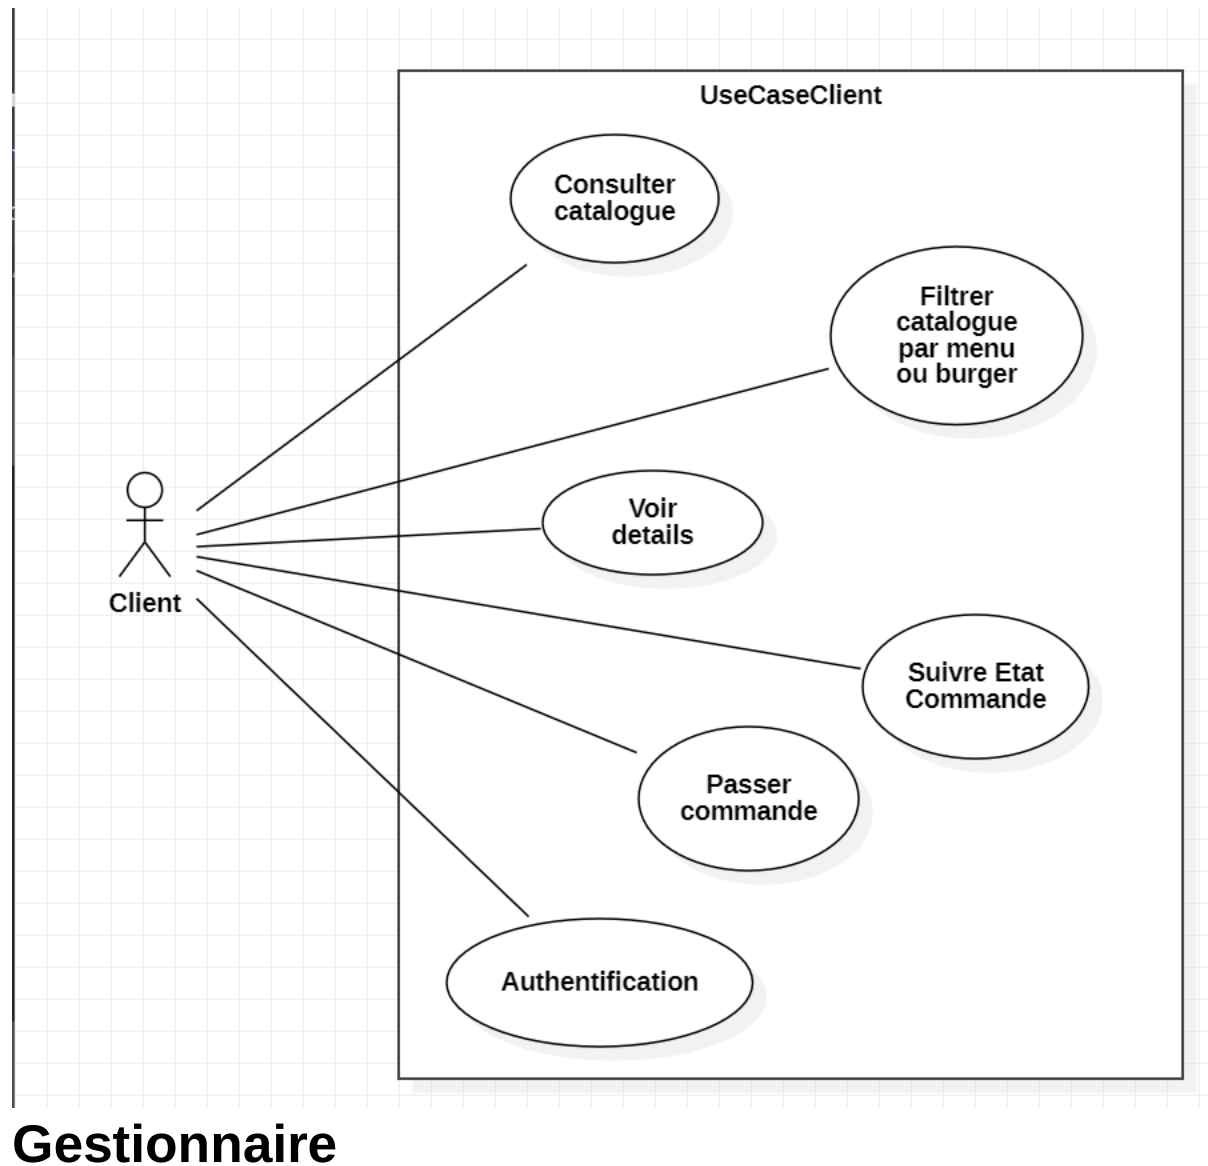

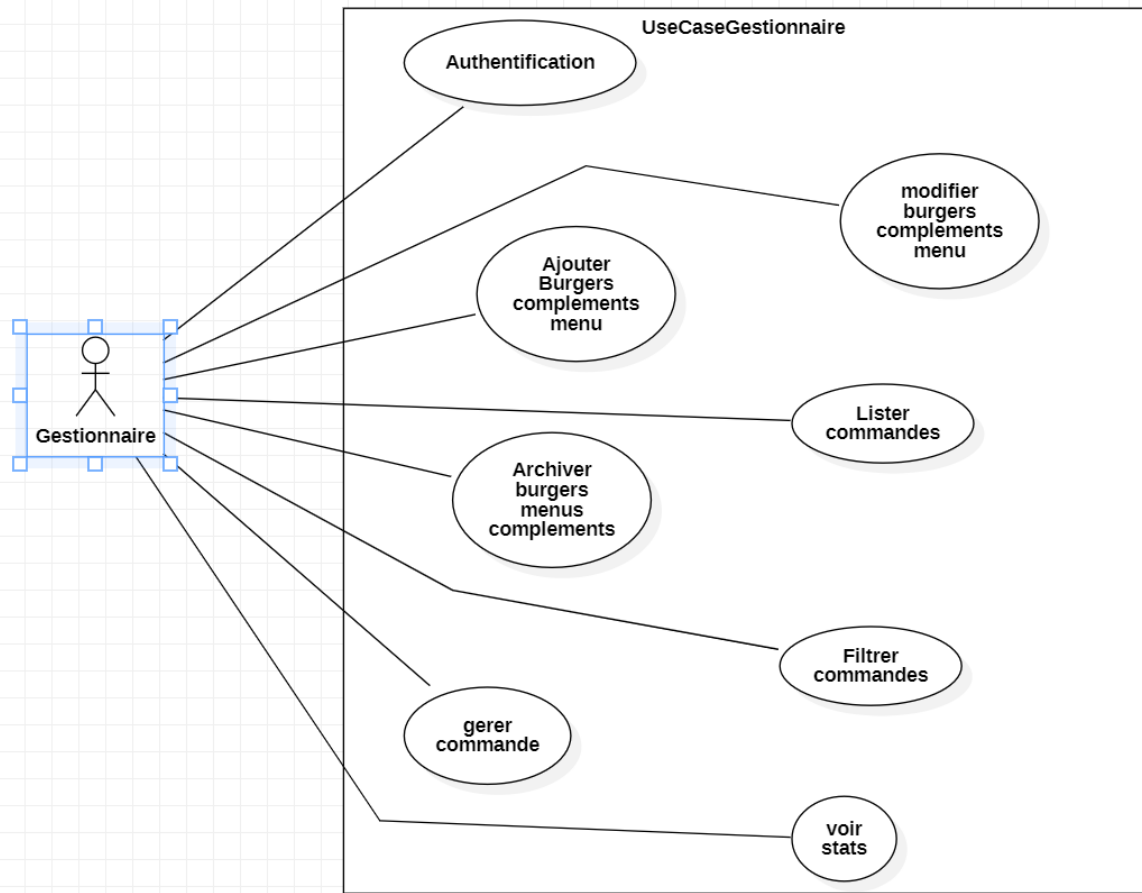


UseCase Conception


Client

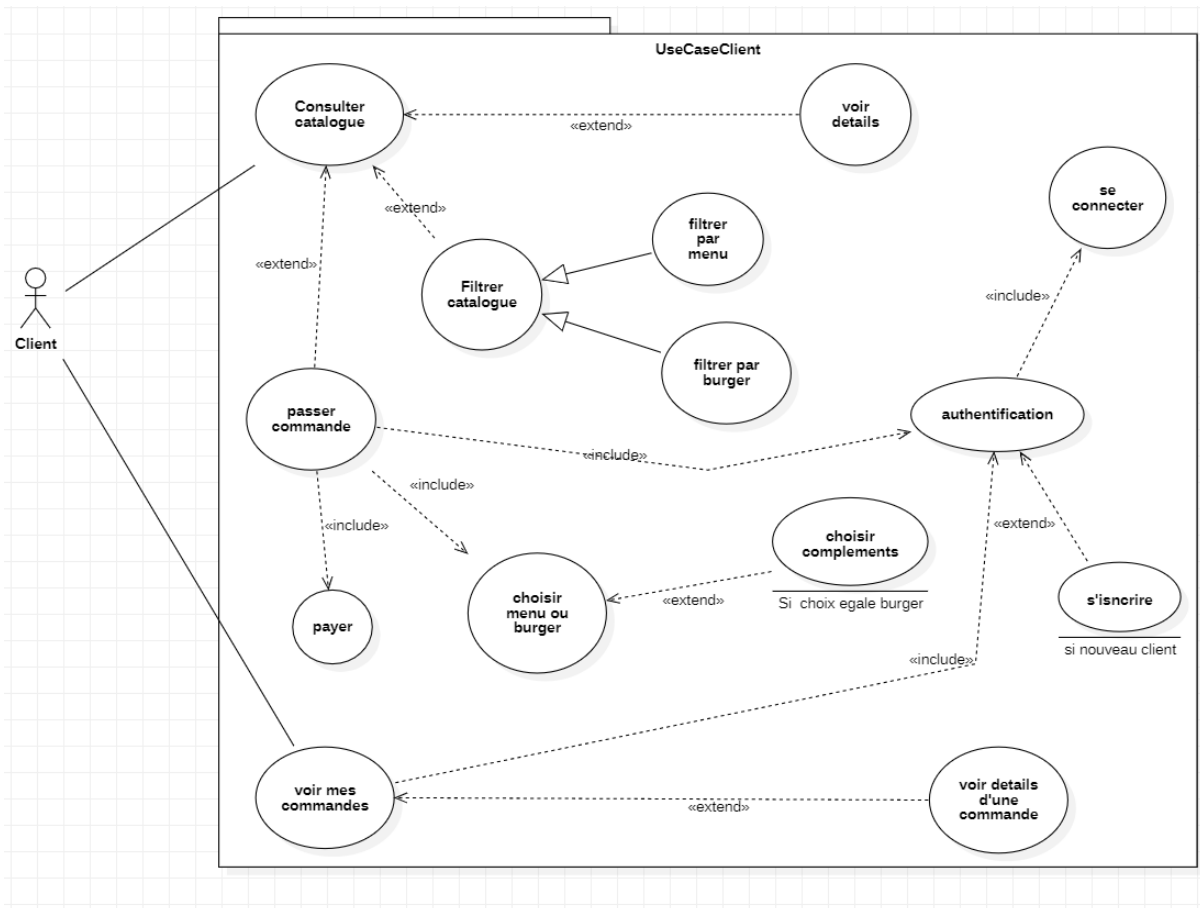

Gestionnaire

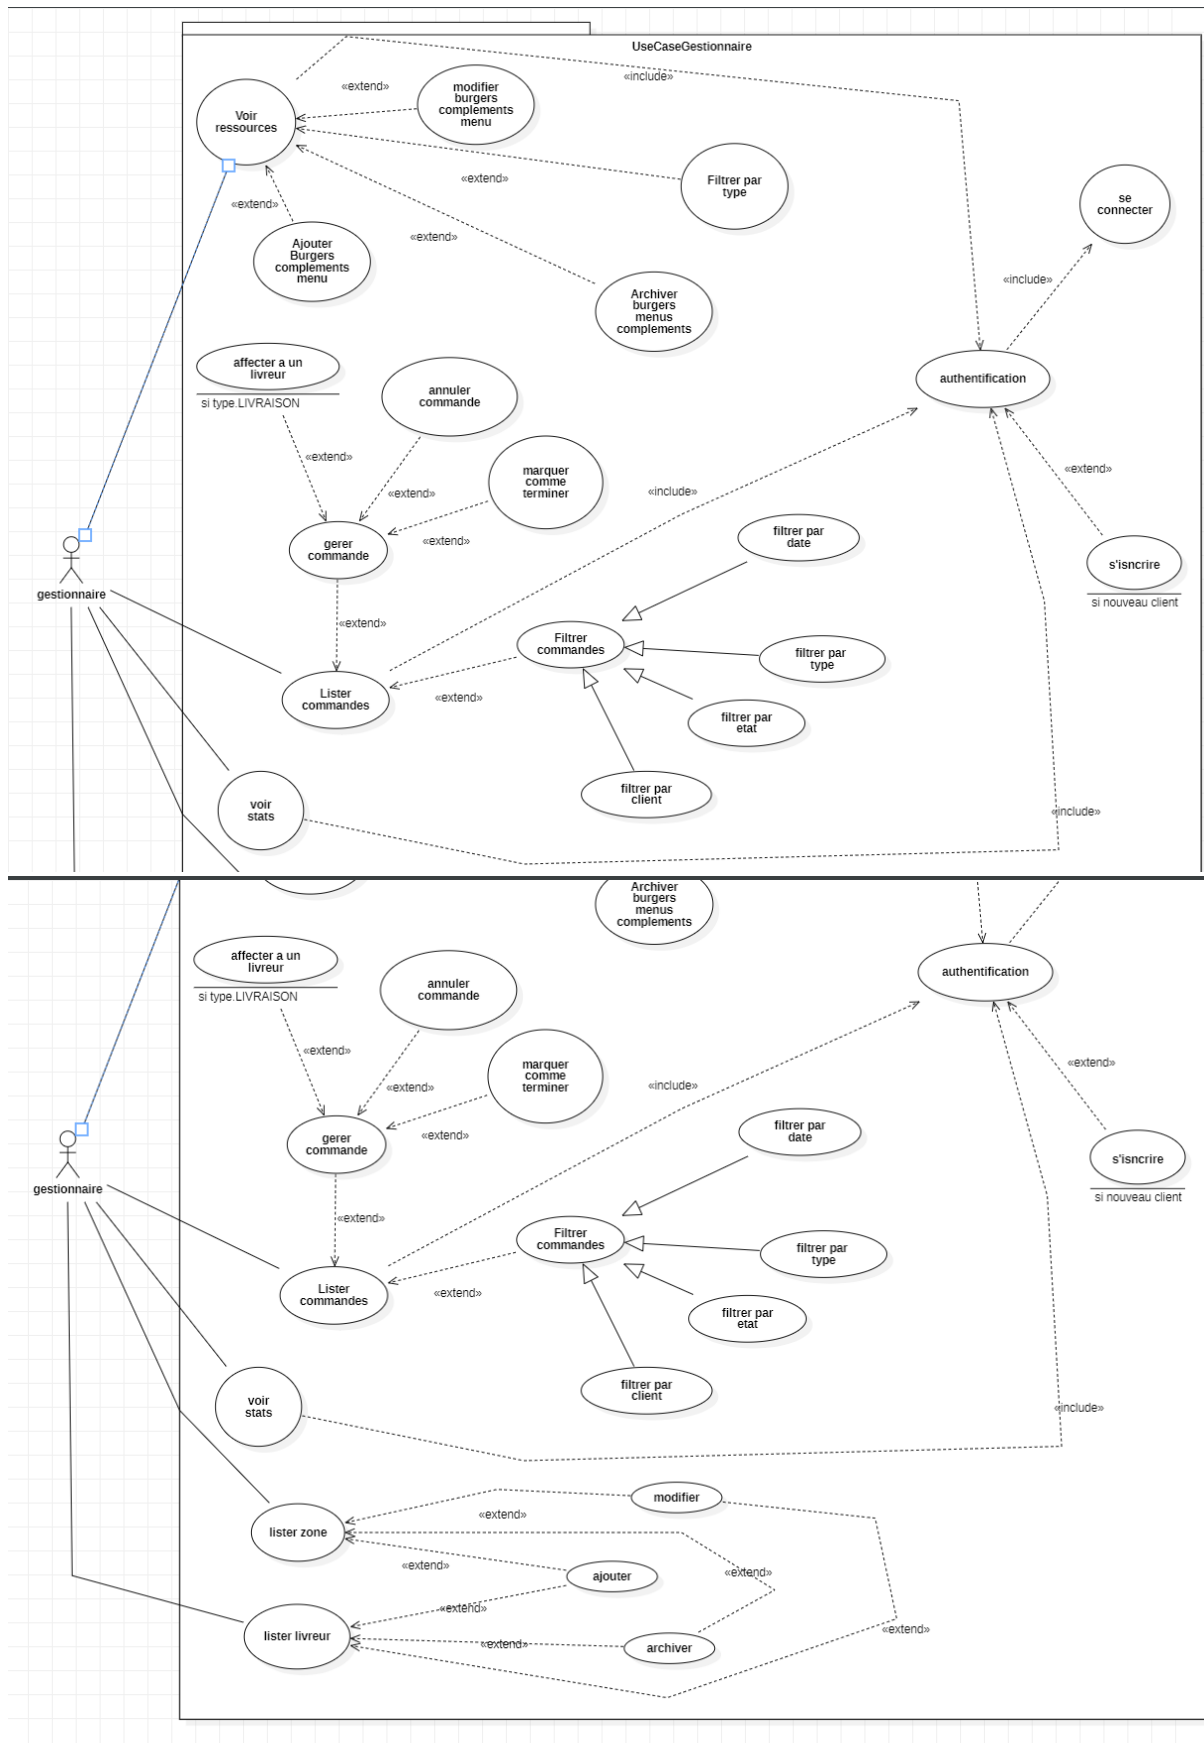


Class Diagram Analyse

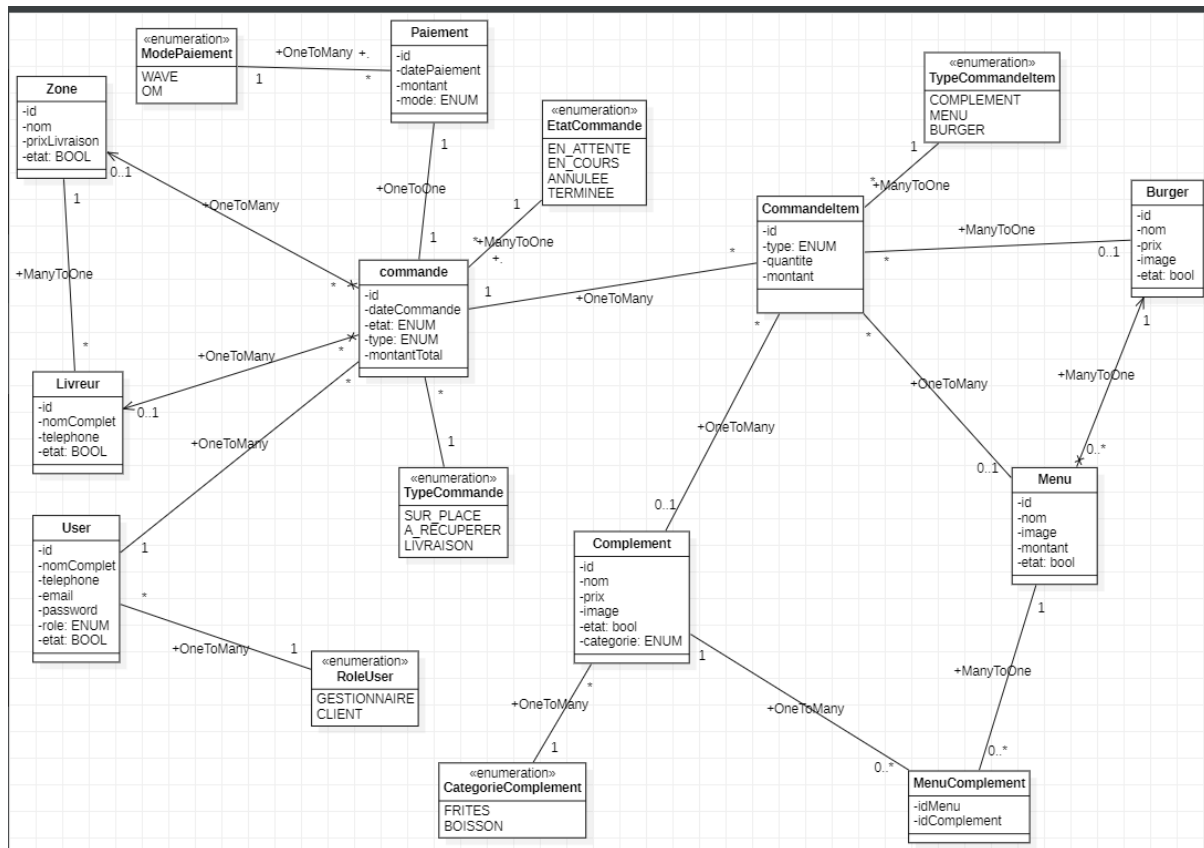


Classe Diagram Java


Entity

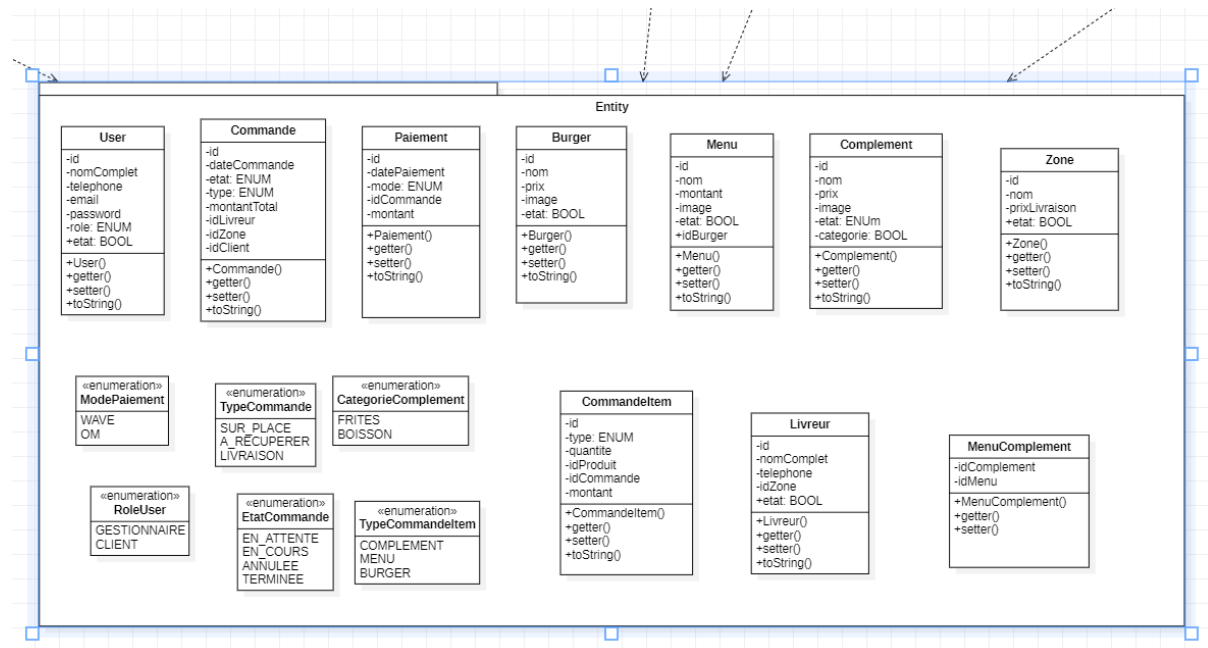


Repository et Services

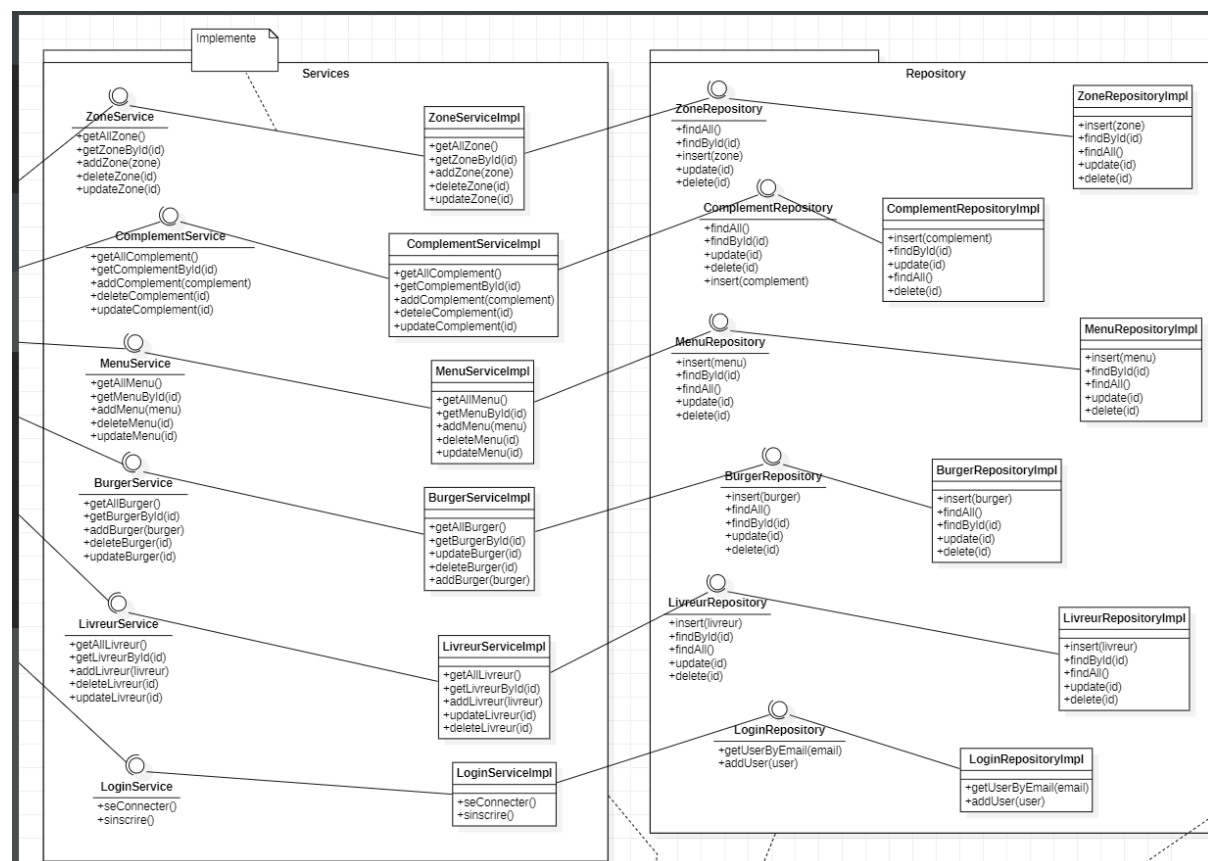


Views

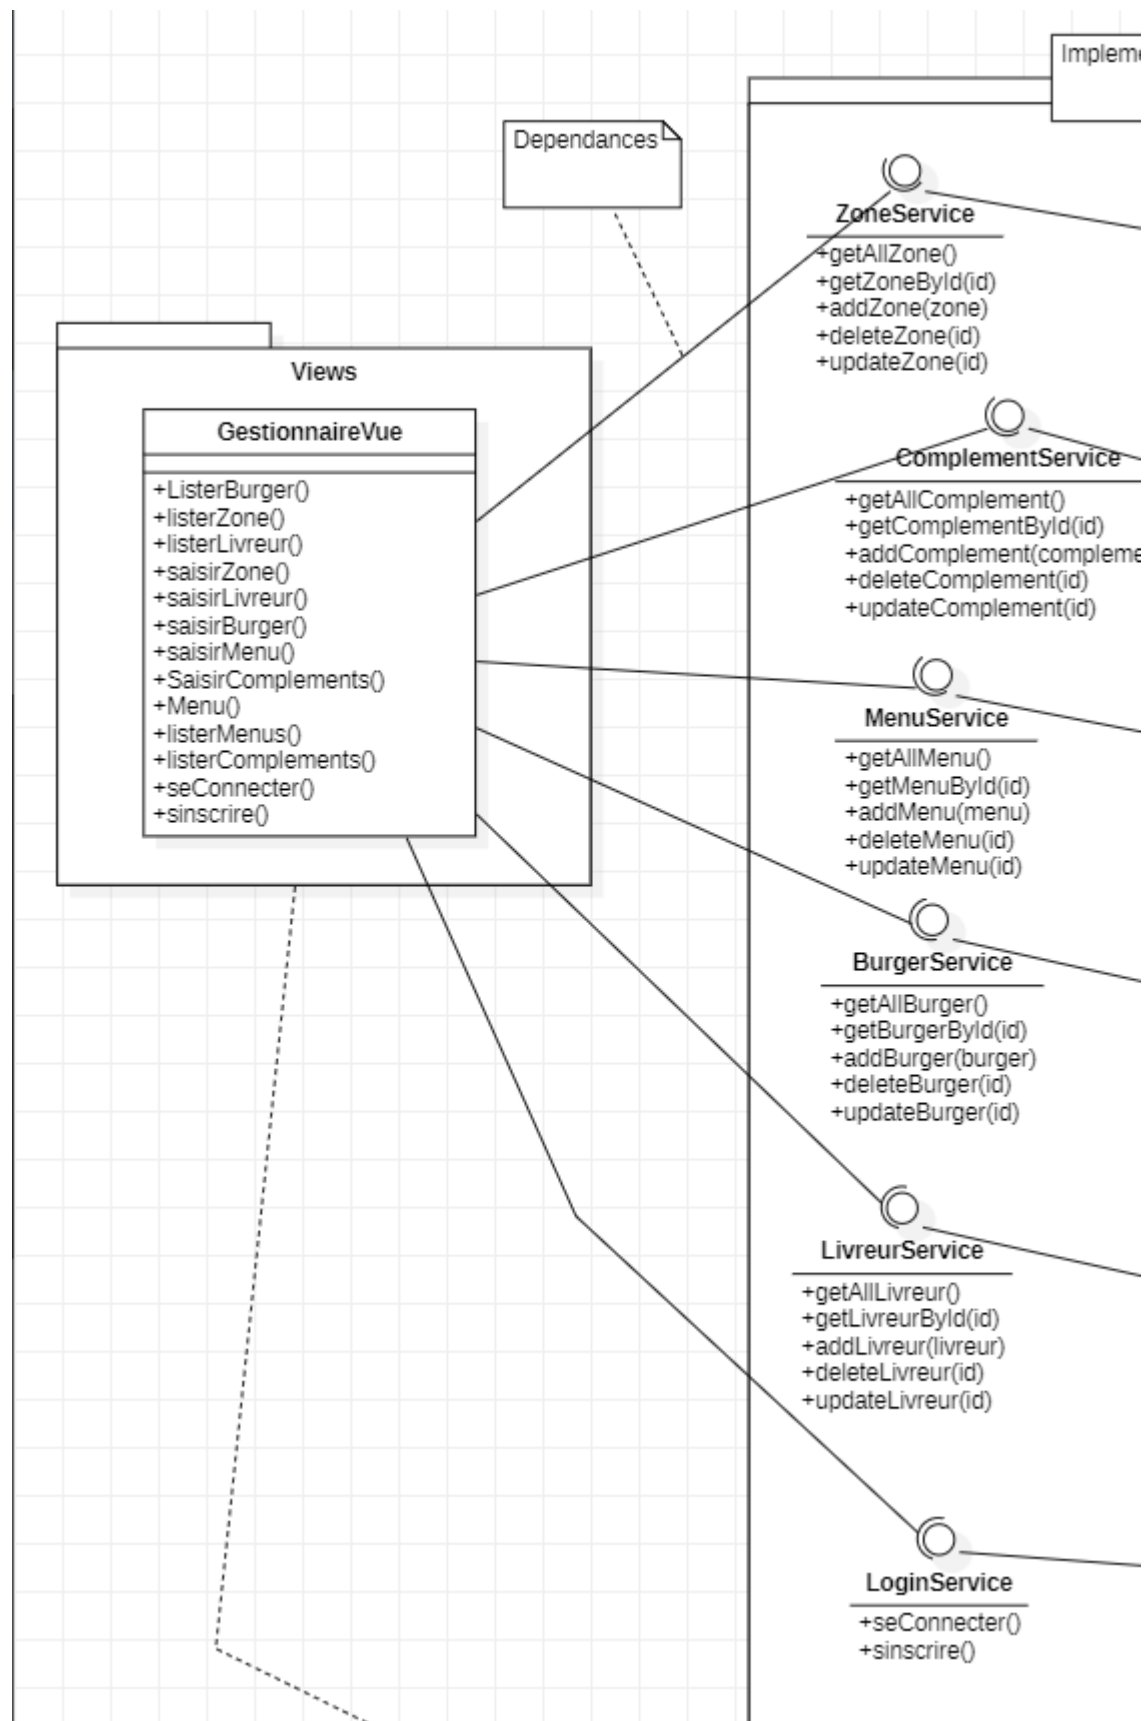


Config

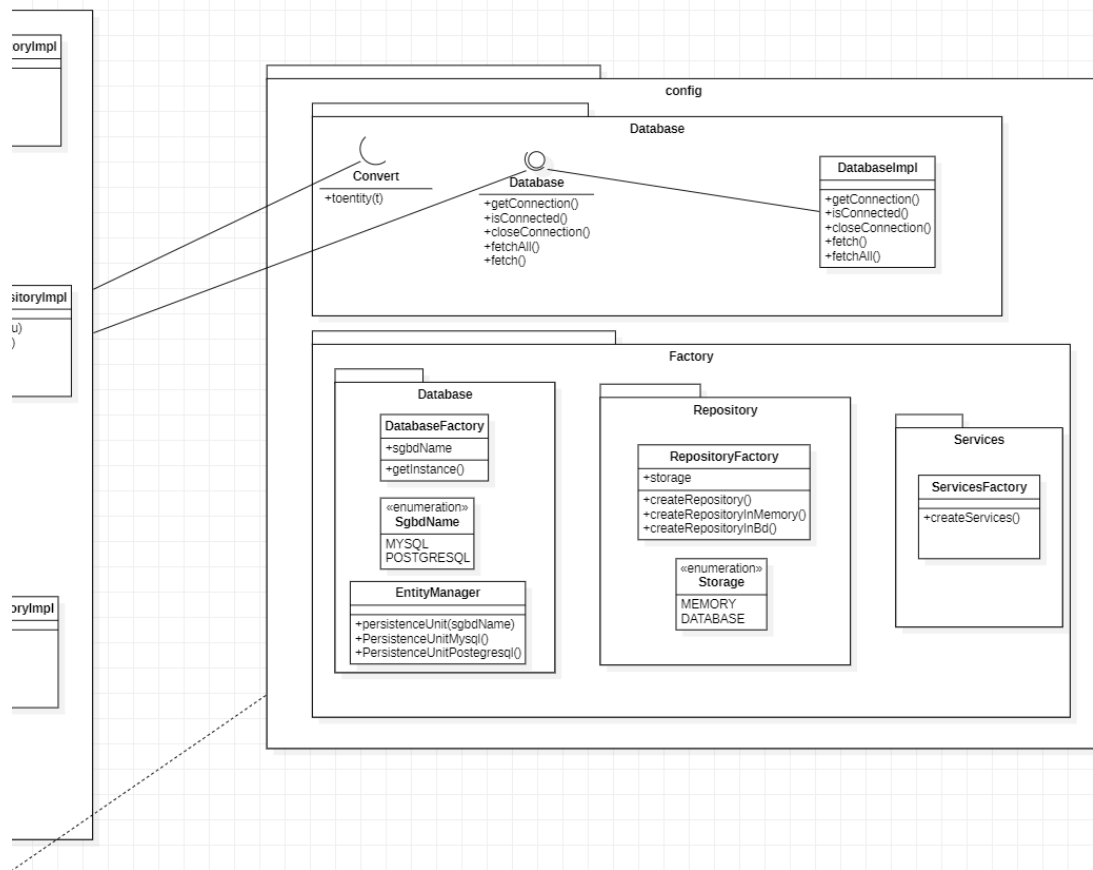


Classe Diagram C# Models

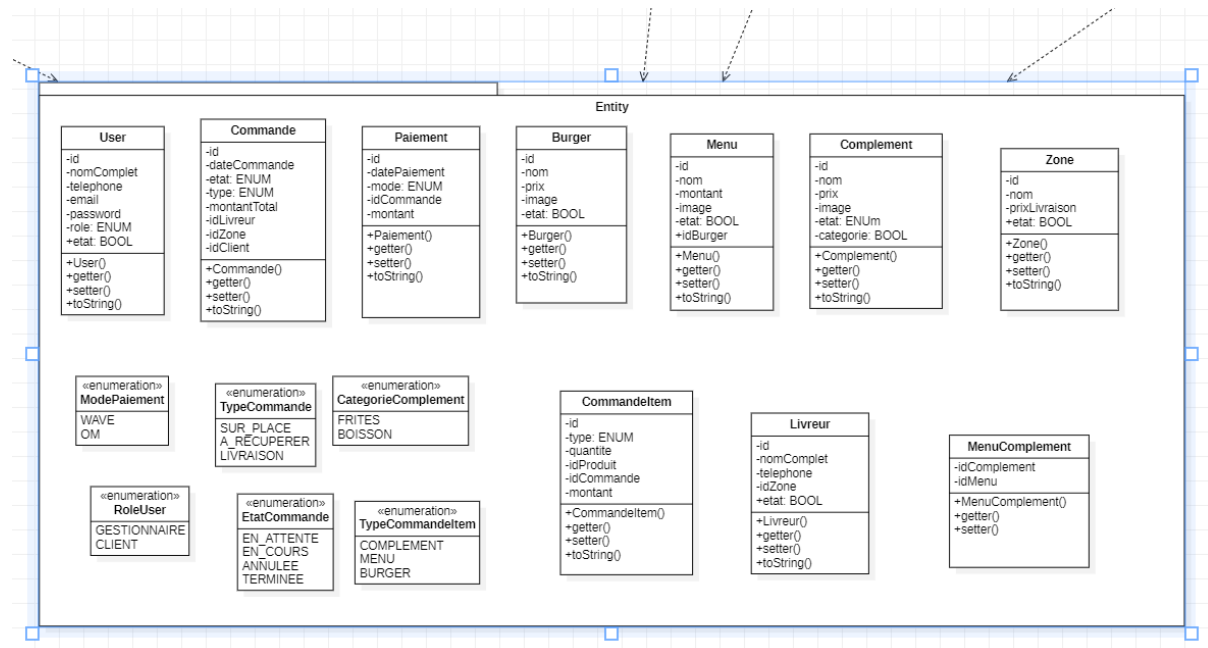


Data

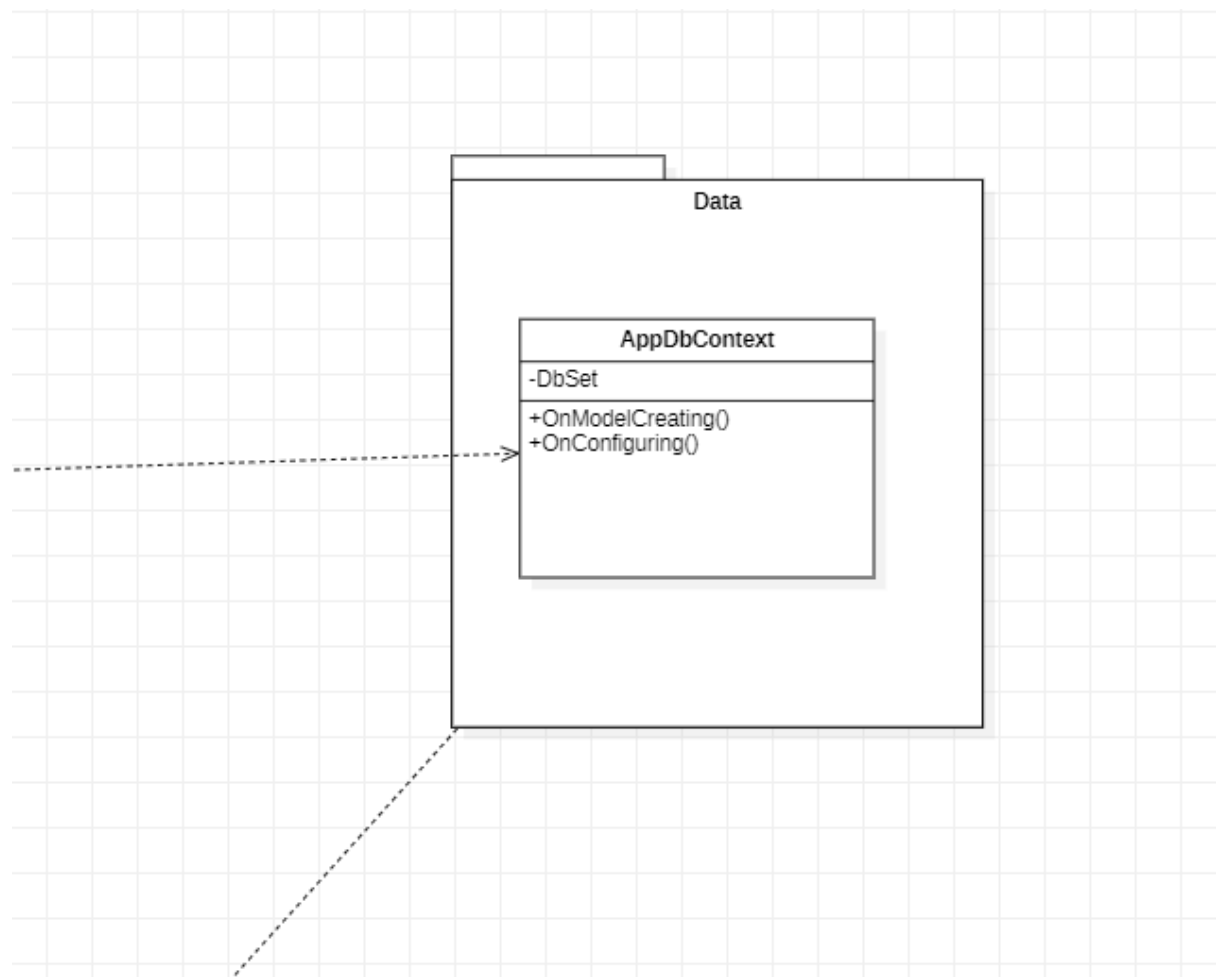


Services

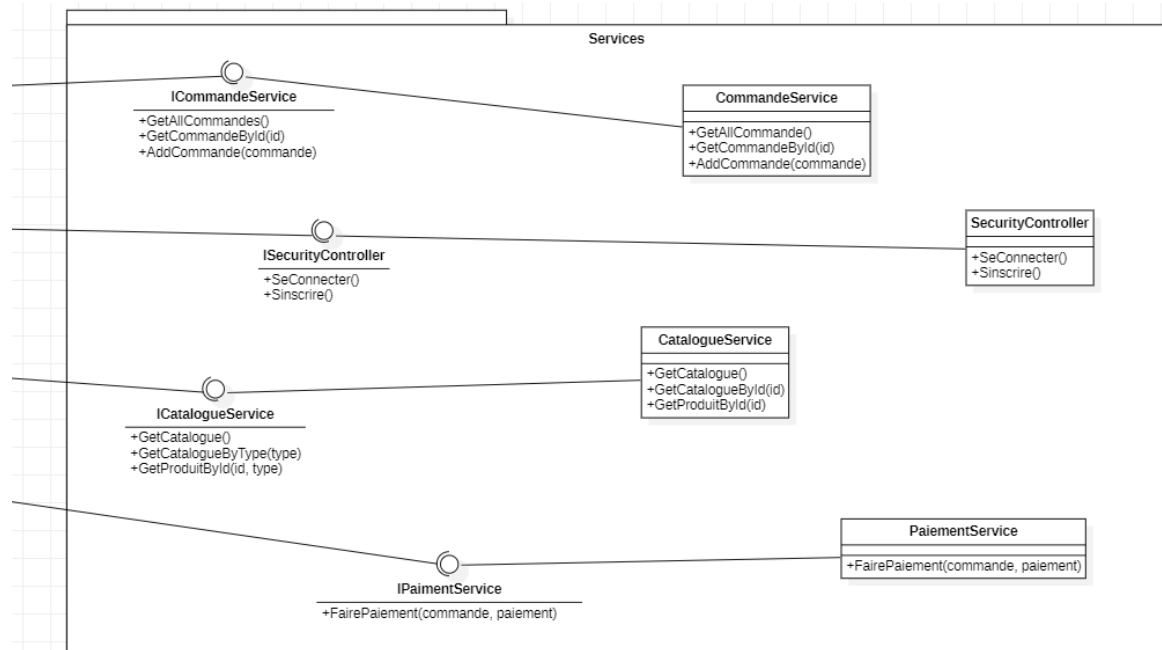


Controllers

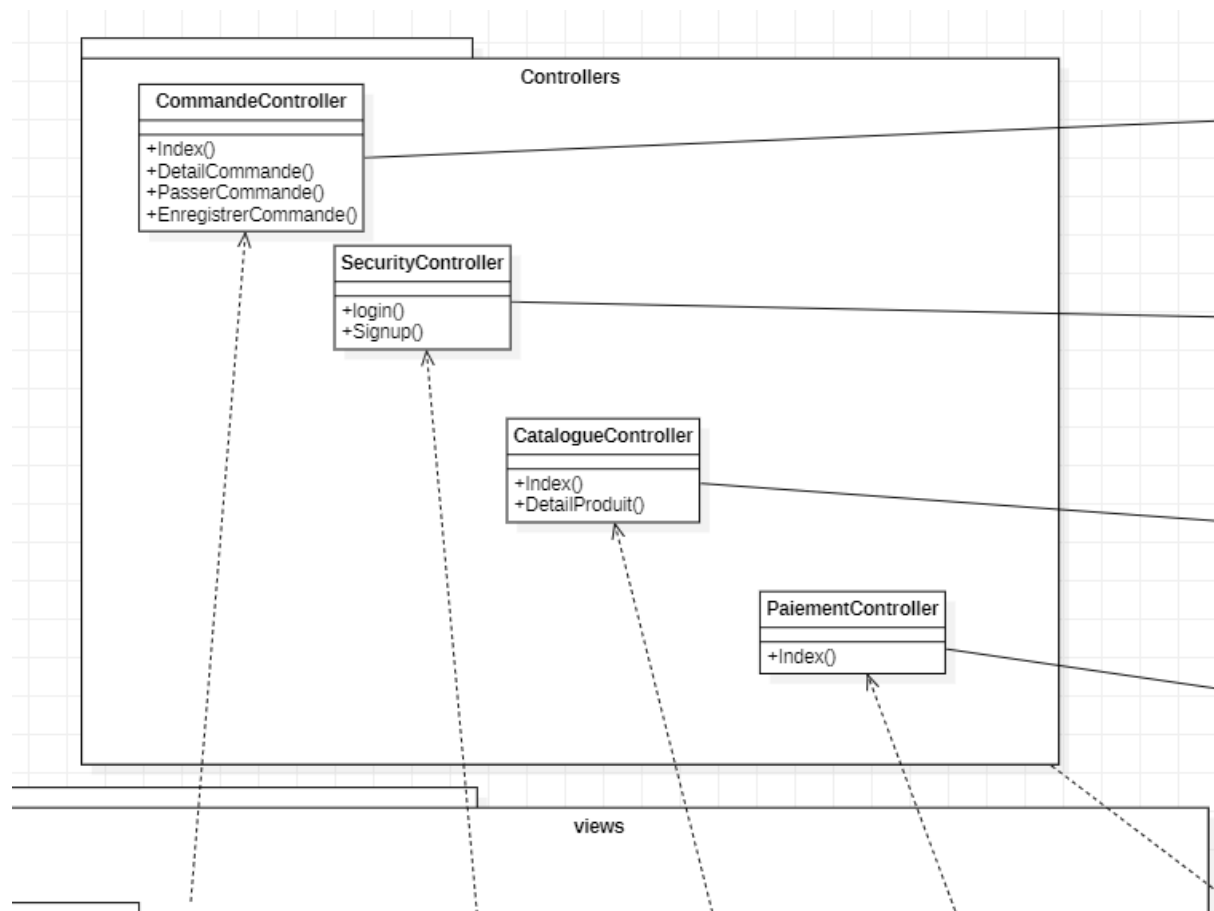


Views

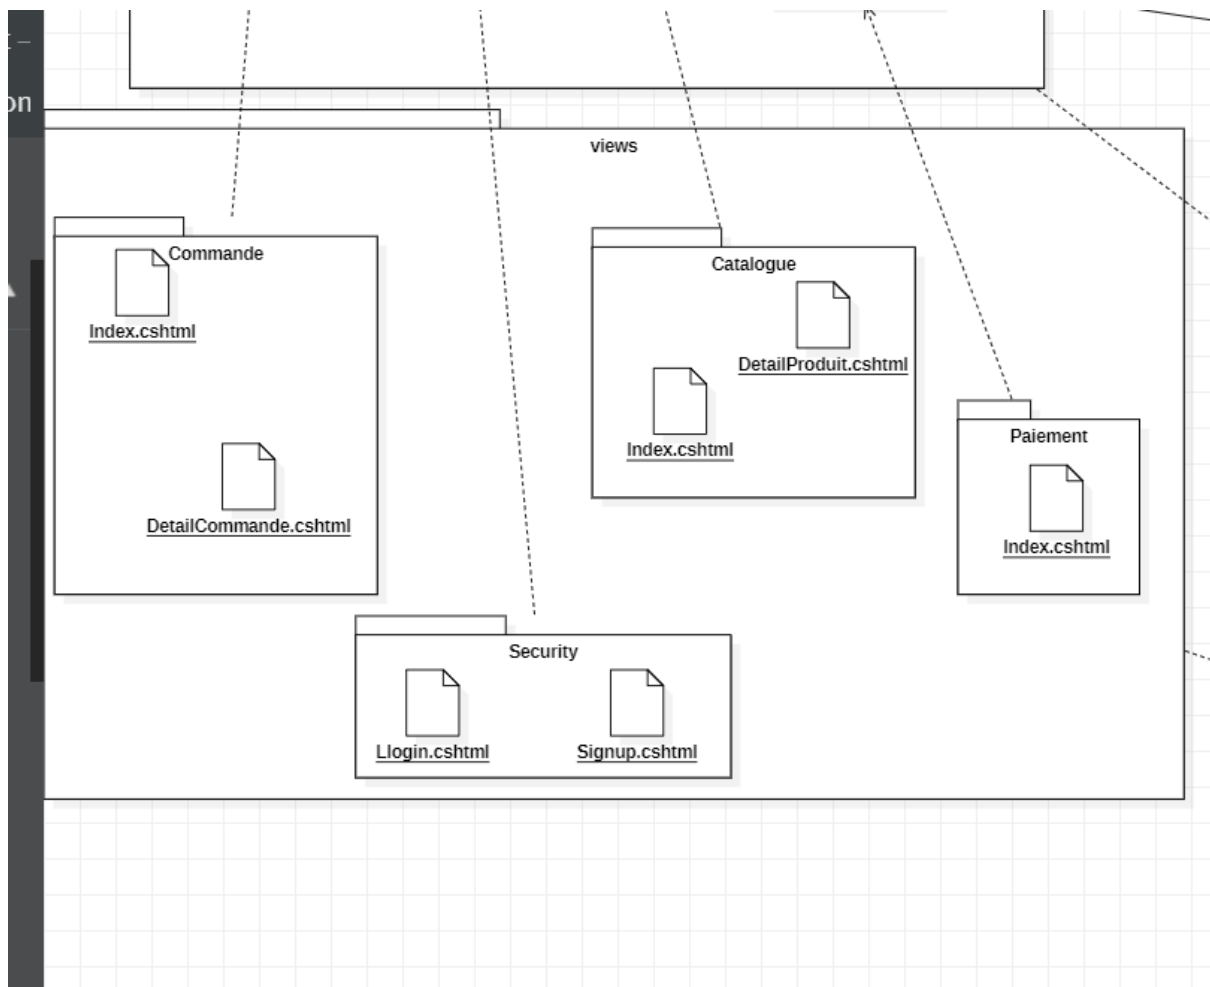


Classe Diagram Symfony Entity

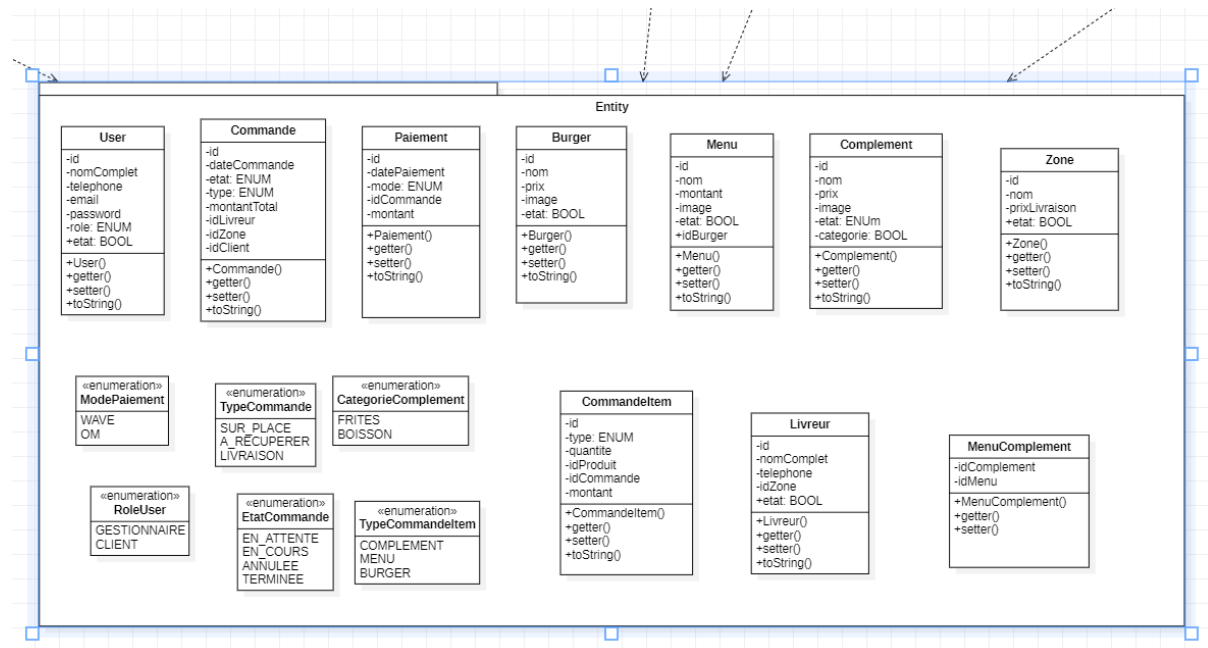


Services

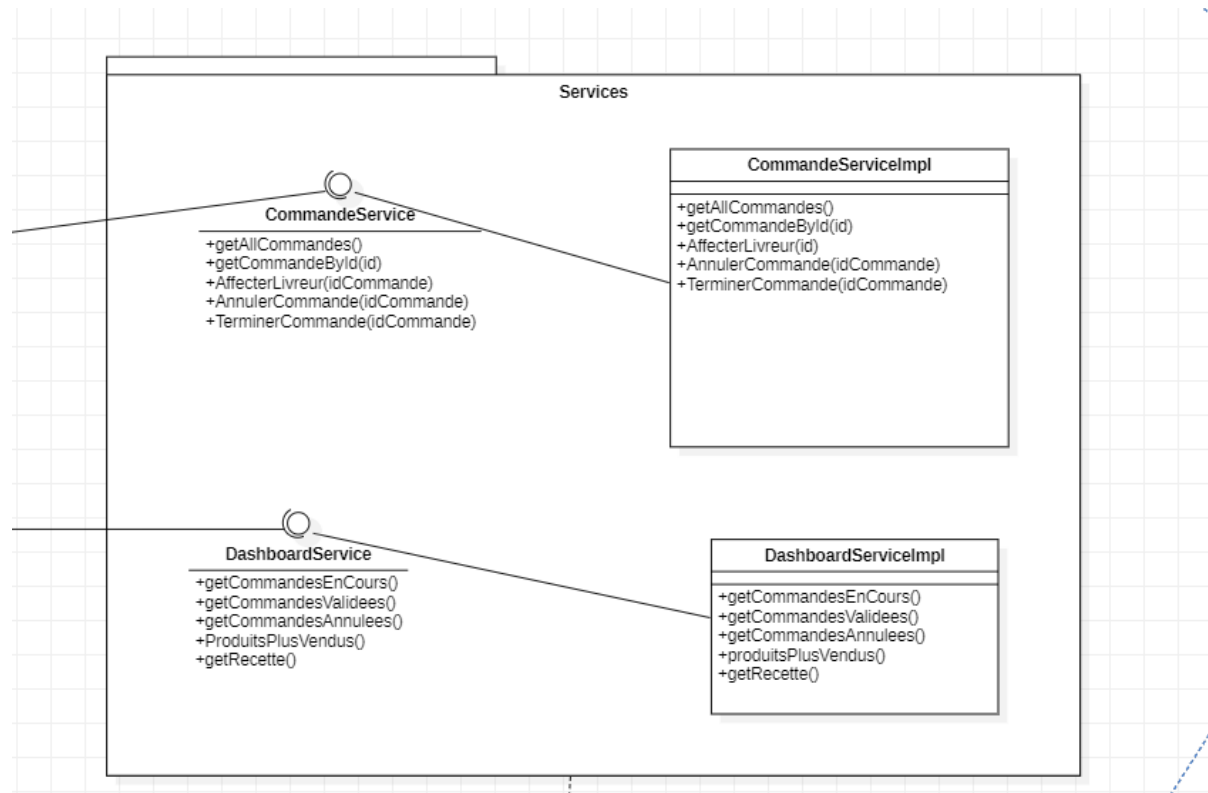


Controller

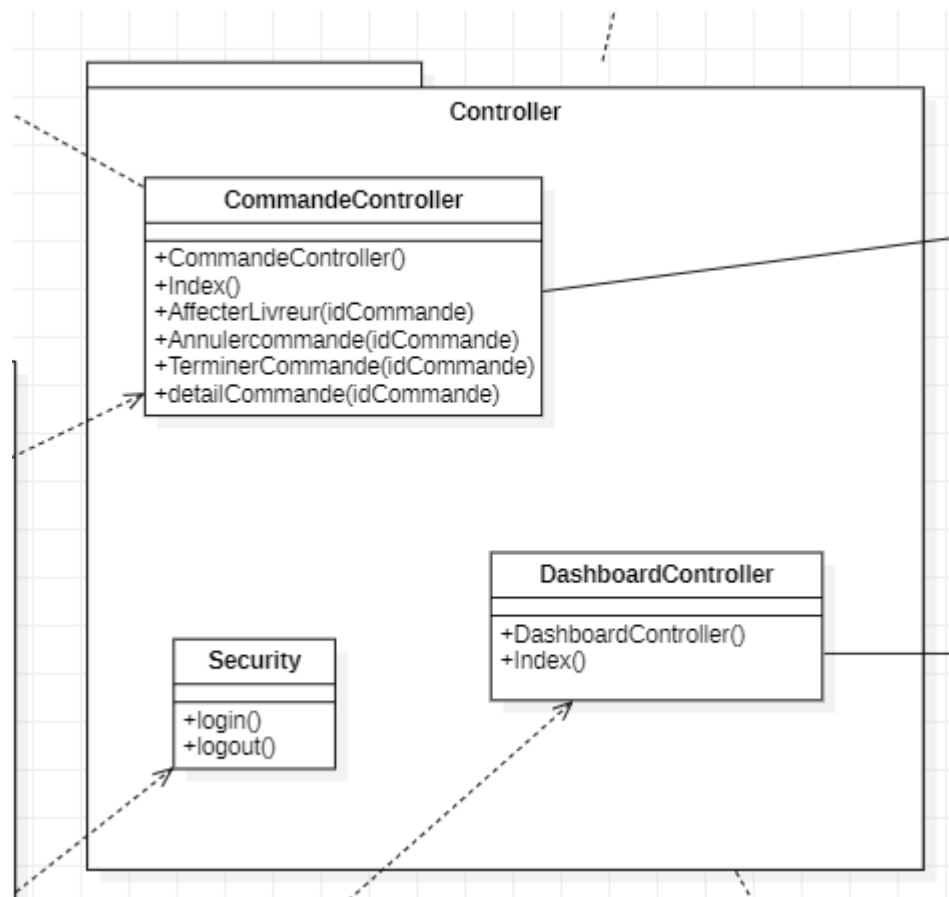


Form

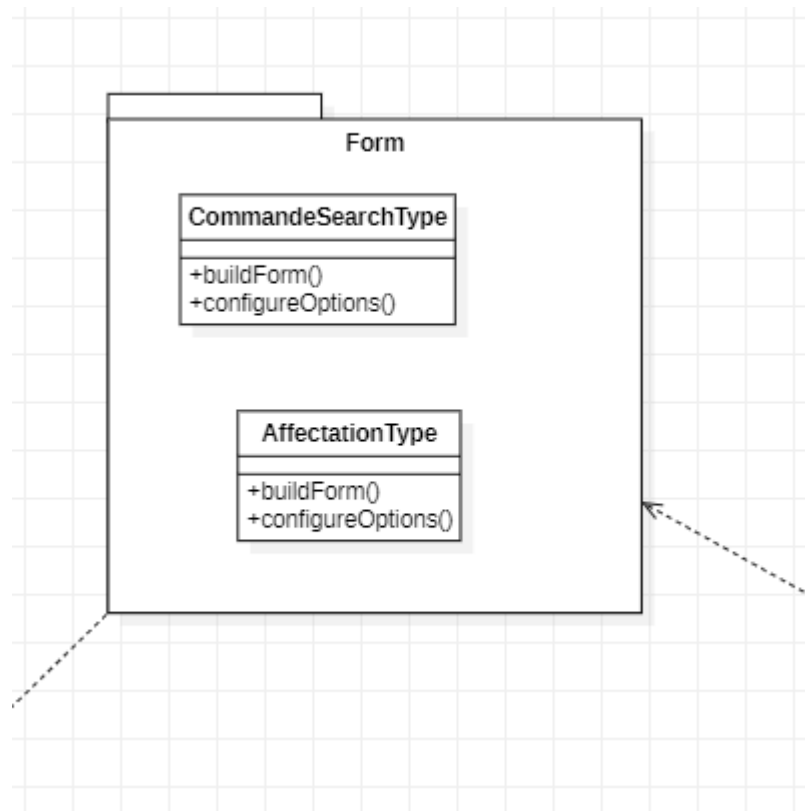


DTO

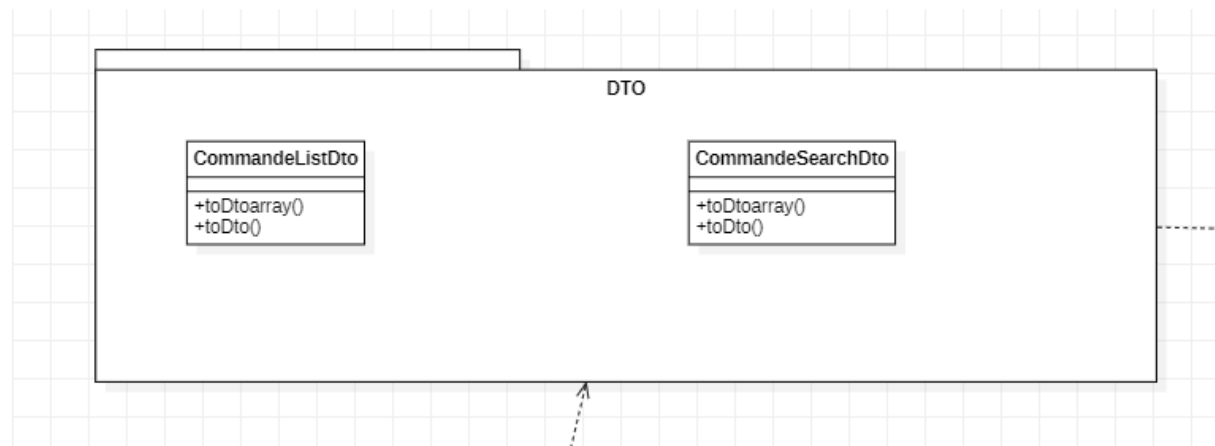


Templates

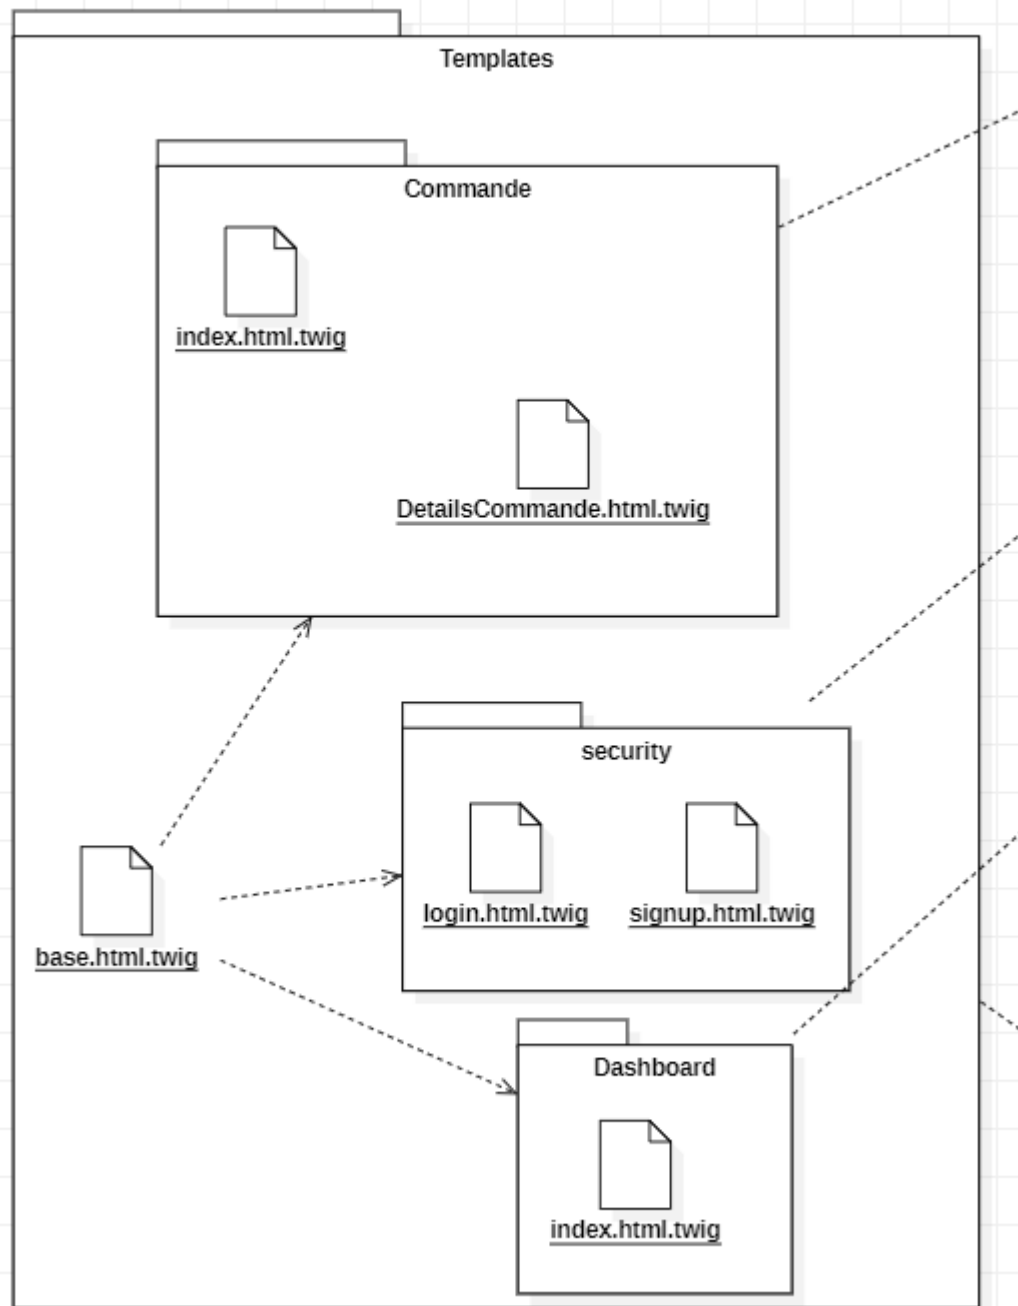

MLD

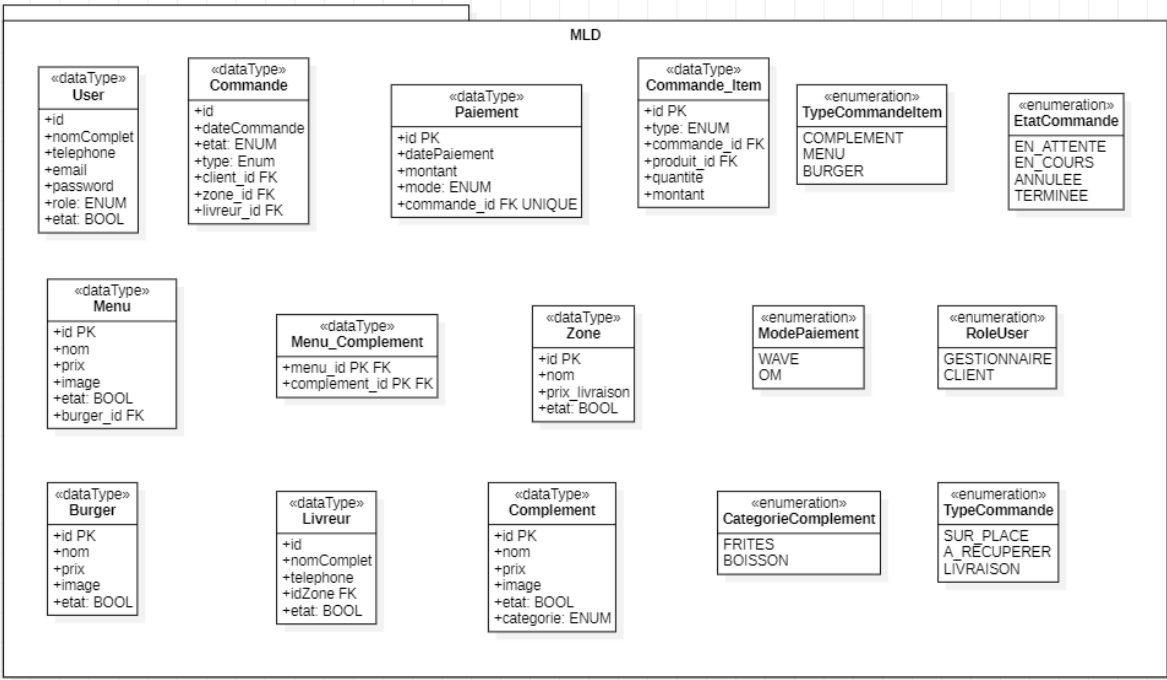

Sequence

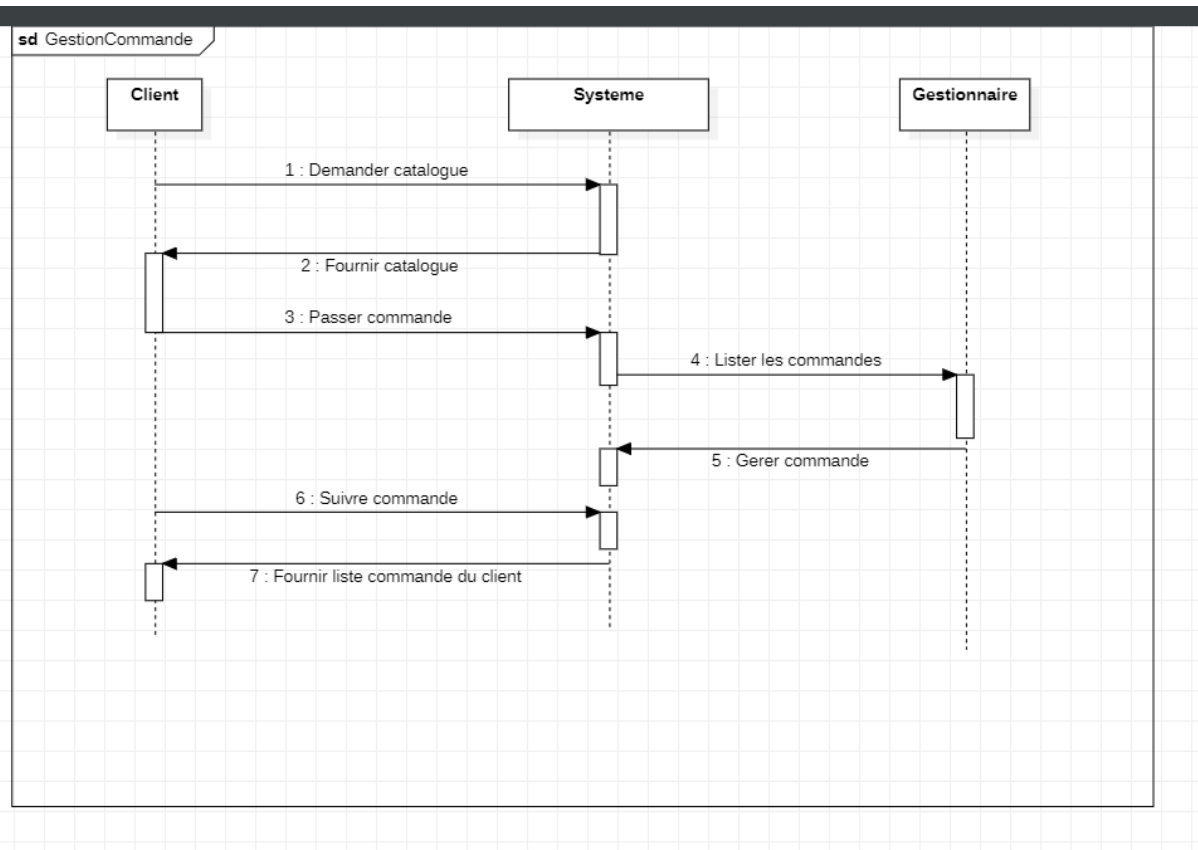

Script SQL

-- DATABASE : BRASIL BURGER

-- SGBD : PostgreSQL

DROP DATABASE IF EXISTS brasilBurger;

CREATE DATABASE brasilBurger;

\c brasilBurger;

-- ENUMS

CREATE TYPE mode_paiement AS ENUM ('OM', 'WAVE');

CREATE TYPE role_user AS ENUM ('GESTIONNAIRE', 'CLIENT');

CREATE TYPE type_commande AS ENUM ('SUR_PLACE', 'A_RECUPERER',
'LIVRAISON');

CREATE TYPE etat_commande AS ENUM ('EN_ATTENTE', 'EN_COURS', 'TERMINEE',
'ANNULEE');

CREATE TYPE categorie_complement AS ENUM ('FRITES', 'BOISSON');

CREATE TYPE type_commande_item AS ENUM ('BURGER', 'MENU', 'COMPLEMENT');

-- TABLES

-- User

```
CREATE TABLE "user" (  
    id SERIAL PRIMARY KEY,  
    nom_complet VARCHAR(150) NOT NULL,  
    telephone VARCHAR(20) UNIQUE NOT NULL CHECK (telephone <> ''),  
    email VARCHAR(150) UNIQUE NOT NULL CHECK (email <> ''),  
    password VARCHAR(255) NOT NULL,  
    role role_user NOT NULL,  
    etat BOOLEAN NOT NULL DEFAULT TRUE  
);
```

-- Zone

```
CREATE TABLE zone (  
    id SERIAL PRIMARY KEY,  
    nom VARCHAR(100) NOT NULL,  
    prix_livraison NUMERIC(10,2) NOT NULL CHECK (prix_livraison >= 0),  
    etat BOOLEAN NOT NULL DEFAULT TRUE  
);
```

-- Livreur

```
CREATE TABLE livreur (  
    id SERIAL PRIMARY KEY,  
    nom_complet VARCHAR(150) NOT NULL,  
    telephone VARCHAR(20) UNIQUE NOT NULL CHECK (telephone <> ''),  
    zone_id INT NOT NULL REFERENCES zone(id) ON DELETE CASCADE,  
    etat BOOLEAN NOT NULL DEFAULT TRUE  
);
```

```
);
```

```
-- Burger
```

```
CREATE TABLE burger (  
  id SERIAL PRIMARY KEY,  
  nom VARCHAR(150) NOT NULL,  
  prix NUMERIC(10,2) NOT NULL CHECK (prix >= 0),  
  image TEXT,  
  etat BOOLEAN NOT NULL DEFAULT TRUE  
);
```

```
-- Menu
```

```
CREATE TABLE menu (  
  id SERIAL PRIMARY KEY,  
  nom VARCHAR(150) NOT NULL,  
  image TEXT,  
  etat BOOLEAN NOT NULL DEFAULT TRUE,  
  montant NUMERIC(10,2) NOT NULL CHECK (montant >= 0),  
  burger_id INT NOT NULL REFERENCES burger(id) ON DELETE CASCADE  
);
```

```
-- Complement
```

```
CREATE TABLE complement (  
  id SERIAL PRIMARY KEY,  
  nom VARCHAR(150) NOT NULL,  
  prix NUMERIC(10,2) NOT NULL CHECK (prix >= 0),  
  image TEXT,  
  etat BOOLEAN NOT NULL DEFAULT TRUE,  
  categorie categorie_complement NOT NULL  
);
```

```
-- MenuComplement (ManyToMany)
```

```
CREATE TABLE menu_complement (  
  menu_id INT NOT NULL REFERENCES menu(id) ON DELETE CASCADE,  
  complement_id INT NOT NULL REFERENCES complement(id) ON DELETE CASCADE,  
  PRIMARY KEY(menu_id, complement_id)  
);
```

```
-- Commande
```

```
CREATE TABLE commande (  
  id SERIAL PRIMARY KEY,  
  dateCommande TIMESTAMP NOT NULL DEFAULT CURRENT_TIMESTAMP,  
  etat etat_commande NOT NULL DEFAULT 'EN_ATTENTE',  
  type type_commande NOT NULL,  
  montant_total NUMERIC(10,2) NOT NULL CHECK (montant_total >= 0),  
  client_id INT NOT NULL REFERENCES "user"(id),  
  zone_id INT REFERENCES zone(id),  
  livreur_id INT REFERENCES livreur(id)
```

```

);

-- CommandeItem
CREATE TABLE commande_item (
  id SERIAL PRIMARY KEY,
  commande_id INT NOT NULL REFERENCES commande(id) ON DELETE CASCADE,
  type type_commande_item NOT NULL,
  produit_id INT NOT NULL,
  quantite INT NOT NULL CHECK (quantite > 0),
  prix_unitaire NUMERIC(10,2) NOT NULL CHECK (prix_unitaire >= 0)
);

-- Paiement
CREATE TABLE paiement (
  id SERIAL PRIMARY KEY,
  date_paiement TIMESTAMP NOT NULL DEFAULT CURRENT_TIMESTAMP,
  montant NUMERIC(10,2) NOT NULL CHECK (montant >= 0),
  mode mode_paiement NOT NULL,
  commande_id INT NOT NULL UNIQUE REFERENCES commande(id) ON DELETE
CASCADE
);

-- INDEXES
CREATE INDEX idx_commande_client ON commande(client_id);
CREATE INDEX idx_commande_etat ON commande(etat);
CREATE INDEX idx_commande_date ON commande(dateCommande);
CREATE INDEX idx_commande_type ON commande(type);
CREATE INDEX idx_commande_zone ON commande(zone_id);
CREATE INDEX idx_item_commande ON commande_item(commande_id);
CREATE INDEX idx_item_type ON commande_item(type);

```

Maquette Figma

Lien de maquette: <https://www.figma.com/design/XNQLPBfOKQTGRJNWIJvBRv/Brasil-Burger?node-id=5-1403&t=FlkwLD4AvoDVqVkg-1>