

# MY MOVIE PLANE CAPSTONE PROJECT

AWS Management Console

Search for services, features, marketplace products, and docs [Alt+S]

Services

Stay connected to your AWS resources on-the-go

Explore AWS

Modernize Your APIs with GraphQL

AWS AppSync is a fully-managed GraphQL service that improves app performance and developer productivity. [Learn more](#)

AWS Backup

Centrally manage and automate backups across AWS services. [Learn more](#)

AWS Certification

Discover the top 7 reasons to get AWS Certified. [Learn more](#)

Announcing Incident Manager from AWS Systems Manager

Respond faster to application issues using new incident response and analysis capabilities. [Learn more](#)

Have feedback?

**AWS services**

Recently visited services

EC2

All services

**Build a solution**

Get started with simple wizards and automated workflows.

**Launch a virtual machine**

With EC2  
2-3 minutes

**Build a web app**

With Elastic Beanstalk  
6 minutes

**Build using virtual servers**

With Lightsail  
1-2 minutes

**Register a domain**

With Route 53  
3 minutes

**Connect an IoT device**

With AWS IoT  
5 minutes

**Start migrating to AWS**

With AWS MGN  
1-2 minutes

**Start a development project**

With CodeStar  
5 minutes

**Deploy a serverless microservice**

With Lambda, API Gateway  
2 minutes

See more

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

## Step 1: Choose an Amazon Machine Image (AMI)

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. You can select an AMI provided by AWS, our user community, or the AWS Marketplace; or you can select one of your own AMIs.

Search for an AMI by entering a search term e.g. "Windows"

Search by Systems Manager parameter

Quick Start

My AMIs

AWS Marketplace

Community AMIs

☐ Free tier only

Amazon Linux 2 AMI (HVM), SSD Volume Type - ami-0d5e0b9b40b45e9 (64-bit x86) / ami-09d19e919d5745398 (64-bit Arm)

Free tier eligible

Amazon Linux 2 comes with five years support. It provides Linux kernel 4.14 tuned for optimal performance on Amazon EC2, systemd 219, GCC 7.3, Glibc 2.26, Binutils 2.29.1, and the latest software packages through extras. This AMI is the successor of the Amazon Linux AMI that is approaching end of life on December 31, 2020 and has been removed from this wizard.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Big Sur 11.4 - ami-0459d9b36df3c5ba5

The macOS Big Sur AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for Xcode, Amazon SSM Agent, and Homebrew. The AWS Homebrew Tap includes the latest versions of multiple AWS packages included in the AMI.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Catalina 10.15.7 - ami-04c57b416ca98499

The macOS Catalina AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for Xcode, Amazon SSM Agent, and Homebrew. The AWS Homebrew Tap includes the latest versions of multiple AWS packages included in the AMI.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Mojave 10.14.6 - ami-075723d78ced20b6

The macOS Mojave AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for Xcode, Amazon SSM Agent, and Homebrew. The AWS Homebrew Tap includes the latest versions of multiple AWS packages included in the AMI.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

Red Hat Enterprise Linux 8 (HVM), SSD Volume Type - ami-0b0af3577e5e3532 (64-bit x86) / ami-01fc429821bf1f4b4 (64-bit Arm)

Free tier eligible

Red Hat Enterprise Linux version 8 (HVM), EBS General Purpose (SSD) Volume Type

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

Explore AWS

1 to 14 of 14 AMIs

Select

64-bit (x86)

64-bit (Arm)

1. Choose AMI
2. Choose Instance Type
3. Configure Instance
4. Add Storage
5. Add Tags
6. Configure Security Groups
7. Review

### Step 6: Configure Security Group

A security group is a set of firewall rules that control the traffic to your instance. On this page, you can add rules to allow specific traffic to reach your instance. For example, if you want to set up a web server and allow Internet traffic to reach your instance, add rules that allow unrestricted access to the HTTP and HTTPS ports. You can create a new security group or select from an existing one below. [Learn more](#) about Amazon EC2 security groups.

Assign a security group: ☒ Create a new security group  
☐ Select an existing security group

Security group name:

Description:

Type	Protocol	Port Range	Source	Description
SSH	TCP	22	Custom 0.0.0.0/0	e.g. SSH for Admin Desktop
All traffic	All	0 - 65535	Anywhere 0.0.0.0/0	e.g. SSH for Admin Desktop

Add Rule

**Warning**  
Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

[Cancel](#)
[Previous](#)
[Review and Launch](#)

1. Choose AMI
2. Choose Instance Type
3. Configure Instance
4. Add Storage
5. Add Tags
6. Configure Security Groups
7. Review

### Step 7: Review Instance Launch

**Improve your instances' security.** Your security group, launch-wizard-2, is open to the world.  
Your instances may be accessible from any IP address. We recommend that you update your security group rules to allow access from known IP addresses only. You can also open additional ports in your security group to facilitate access to the application or service you're running, e.g., HTTP (80) for web servers. [Edit security groups](#)

#### AMI Details

Amazon Linux 2 AMI (HVM), SSD Volume Type - ami-0d5eff06f840b456

Free tier eligible

Root Device Type: ebs Virtualization type: hvm

#### Instance Type

Instance Type	ECUs	vCPUs	Memory (GiB)	Instance Store
t2.micro	-	1	1	EBS only

#### Security Groups

Security group name: launch-wizard-2  
Description: launch-wizard-2 created 2021-06-07T11:30:07.135+05:30

Type	Protocol	Port Range
SSH	TCP	22
All traffic	All	All
All traffic	All	All

#### Instance Details

#### Storage

#### Tags

[Edit AMI](#)  
[Edit instance type](#)  
[Edit security groups](#)  
[Edit instance details](#)  
[Edit storage](#)  
[Edit tags](#)

Cancel Previous **Launch**

Select an existing key pair or create a new key pair

A key pair consists of a **public key** that AWS stores, and a **private key file** that you store. Together, they allow you to connect to your instance securely. For Windows AMIs, the private key file is required to obtain the password used to log into your instance. For Linux AMIs, the private key file allows you to securely SSH into your instance.

Note: The selected key pair will be added to the set of keys authorized for this instance. Learn more about [removing existing key pairs](#) from a public AMI.



Create a new key pair

Key-pair name:

[Download Key Pair](#)

You have to download the **private key file** (\*.pem file) before you can continue. **Store it in a secure and accessible location.** You will not be able to download the file again after it's created.

[Cancel](#)
[Launch instances](#)

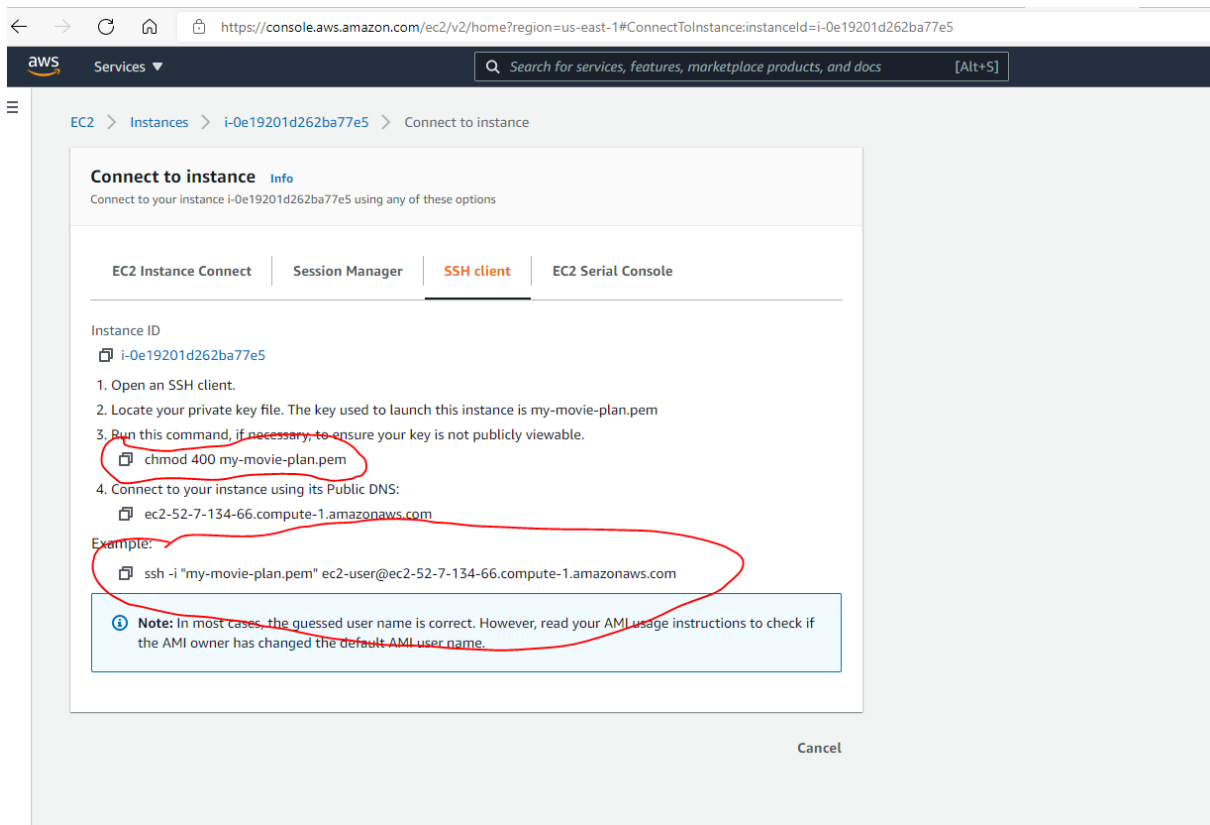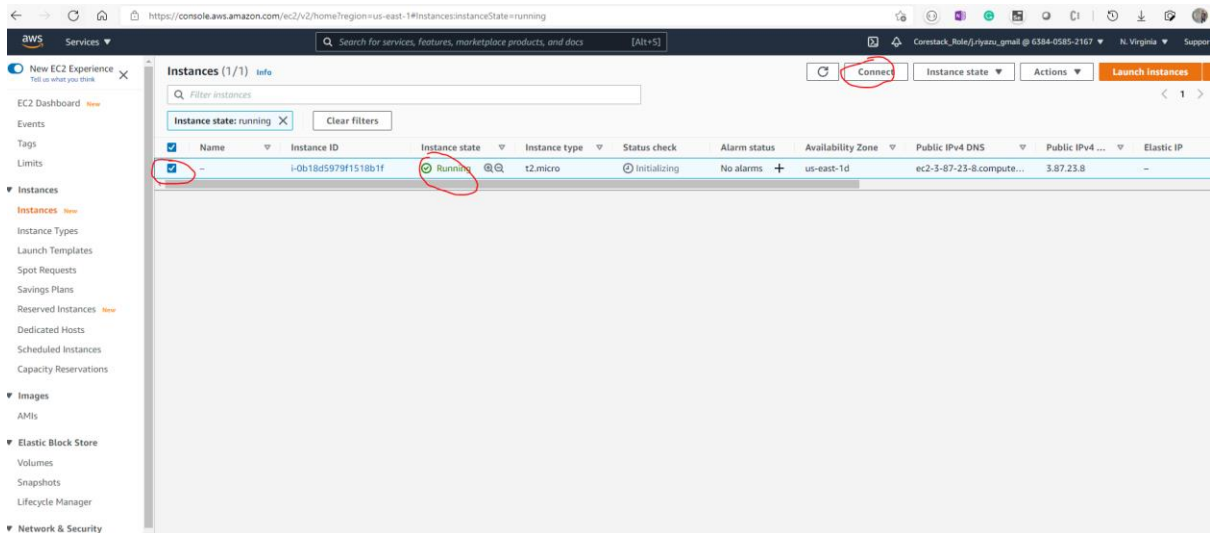

```

jriya@Riyaz ~/Downloads
$ chmod 400 my-movie-plan.pem

jriya@Riyaz ~/Downloads
$ ssh -i "my-movie-plan.pem" ec2-user@ec2-52-7-134-66.compute-1.amazonaws.com
The authenticity of host 'ec2-52-7-134-66.compute-1.amazonaws.com (52.7.134.66)' can't be established.
ECDSA key fingerprint is SHA256:W2ndOKDsigxx6WpnWePv9ya8umIsUNYw/ntPzLfvtXE.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-52-7-134-66.compute-1.amazonaws.com,52.7.134.66' (ECDSA) to the list of known hosts.

    __|  __|_  )
    _| (  _/   Amazon Linux 2 AMI
    ---|\\_---|

https://aws.amazon.com/amazon-linux-2/
6 package(s) needed for security, out of 17 available
Run "sudo yum update" to apply all updates.
[ec2-user@ip-172-31-86-0 ~]$

```

```

$ ssh -i "my-movie-plan.pem" ec2-user@ec2-52-7-134-66.compute-1.amazonaws.com
The authenticity of host 'ec2-52-7-134-66.compute-1.amazonaws.com (52.7.134.66)' can't be established.
ECDSA key fingerprint is SHA256:W2ndOKDsigxx6WpnWePv9ya8umIsUNYw/ntPzLfvtXE.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-52-7-134-66.compute-1.amazonaws.com,52.7.134.66' (ECDSA) to the list of known hosts.

```

```

    __|  __|_  )
    _| (  _/   Amazon Linux 2 AMI
    ---|\\_---|

https://aws.amazon.com/amazon-linux-2/
6 package(s) needed for security, out of 17 available
Run "sudo yum update" to apply all updates.
[ec2-user@ip-172-31-86-0 ~]$ sudo yum update -y
loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Resolving Dependencies
--> Running transaction check
--> Package chrony.x86_64 0:3.5.1-1.amzn2.0.1 will be updated
--> Package chrony.x86_64 0:4.0-3.amzn2.0.1 will be an update
--> Package ec2-utils.noarch 0:1.2-43.amzn2 will be updated
--> Package ec2-utils.noarch 0:1.2-44.amzn2 will be an update
--> Package glibc.x86_64 0:2.26-44.amzn2 will be updated
--> Package glibc.x86_64 0:2.26-45.amzn2 will be an update
--> Package glibc-all-langpacks.x86_64 0:2.26-44.amzn2 will be updated
--> Package glibc-all-langpacks.x86_64 0:2.26-45.amzn2 will be an update
--> Package glibc-common.x86_64 0:2.26-44.amzn2 will be updated
--> Package glibc-common.x86_64 0:2.26-45.amzn2 will be an update
--> Package glibc-locale-source.x86_64 0:2.26-44.amzn2 will be updated
--> Package glibc-locale-source.x86_64 0:2.26-45.amzn2 will be an update
--> Package glibc-minimal-langpack.x86_64 0:2.26-44.amzn2 will be updated
--> Package glibc-minimal-langpack.x86_64 0:2.26-45.amzn2 will be an update

```

```

complete!
root@ip-172-31-29-148 ~]# java -version
penjdk version "1.8.0_282"
penJDK Runtime Environment (build 1.8.0_282-b08)
penJDK 64-Bit Server VM (build 25.282-b08, mixed mode)
root@ip-172-31-29-148 ~]# sudo yum install java-1.8.0-openjdk
loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Package 1:java-1.8.0-openjdk-1.8.0.282.b08-1.amzn2.0.1.x86_64 already installed and latest version
Nothing to do
root@ip-172-31-29-148 ~]#
root@ip-172-31-29-148 ~]# java -version
penjdk version "1.8.0_282"
penJDK Runtime Environment (build 1.8.0_282-b08)
penJDK 64-Bit Server VM (build 25.282-b08, mixed mode)
root@ip-172-31-29-148 ~]#

```

```

xml-commons-resolver.noarch 0:1.2-15.amzn2

Complete!
[ec2-user@ip-172-31-29-148 ~]$ sudo yum install git
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Package git-2.23.4-1.amzn2.0.1.x86_64 already installed and latest version
Nothing to do
[ec2-user@ip-172-31-29-148 ~]$ git --version
git version 2.23.4
[ec2-user@ip-172-31-29-148 ~]$ sudo yum install maven
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Package maven-3.0.5-17.amzn2.noarch already installed and latest version
Nothing to do
[ec2-user@ip-172-31-29-148 ~]$ mvn -v
Apache Maven 3.0.5 (Red Hat 3.0.5-17)
Maven home: /usr/share/maven
Java version: 1.8.0_282, vendor: Red Hat, Inc.
Java home: /usr/lib/jvm/java-1.8.0-openjdk-1.8.0.282.b08-1.amzn2.0.1.x86_64/jre
Default locale: en_US, platform encoding: UTF-8
OS name: "linux", version: "4.14.231-173.360.amzn2.x86_64", arch: "amd64", family: "unix"
[ec2-user@ip-172-31-29-148 ~]$

```

```

  __|  __|_  )
 _| (  /    Amazon Linux 2 AMI
---|\\___|___|

https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-172-31-29-148 ~]$ sudo wget -O /etc/yum.repos.d/jenkins.repo https://pkg.jenkins.io/redhat-stable/jenkins.repo
--2021-04-29 05:12:56-- https://pkg.jenkins.io/redhat-stable/jenkins.repo
Resolving pkg.jenkins.io (pkg.jenkins.io)... 151.101.250.133, 2a04:4e42:2f::645
Connecting to pkg.jenkins.io (pkg.jenkins.io)|151.101.250.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 85
Saving to: '/etc/yum.repos.d/jenkins.repo'

100%[=====] 85 --.-K/s in 0s

2021-04-29 05:12:56 (6.00 MB/s) - '/etc/yum.repos.d/jenkins.repo' saved [85/85]



[ec2-user@ip-172-31-29-148 ~]$ sudo rpm --import https://pkg.jenkins.io/redhat-stable/jenkins.io.key
[ec2-user@ip-172-31-29-148 ~]$ sudo yum install jenkins
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
You need to be root to perform this command.
[ec2-user@ip-172-31-29-148 ~]$ sudo -i
[root@ip-172-31-29-148 ~]# yum install jenkins
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core | 3.7 kB 00:00:00
jenkins | 2.9 kB 00:00:00
jenkins/primary_db | 37 kB 00:00:00
Resolving Dependencies
--> Running transaction check

```

```

[root@ip-172-31-29-148 ~]# sudo systemctl start jenkins
[root@ip-172-31-29-148 ~]# sudo cat /var/lib/jenkins/secrets/initialAdminPassword
0811c483fdc84df7906bf37a2906754c
[root@ip-172-31-29-148 ~]#

```

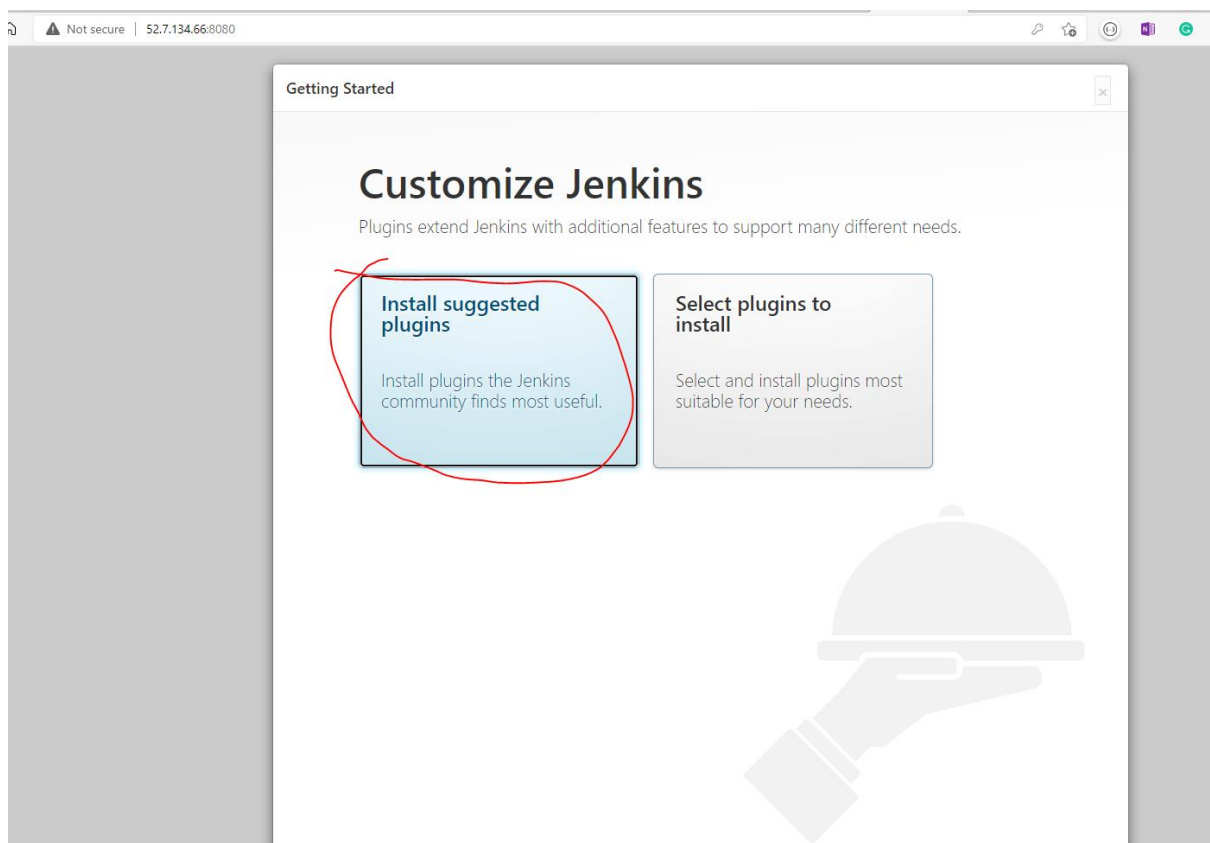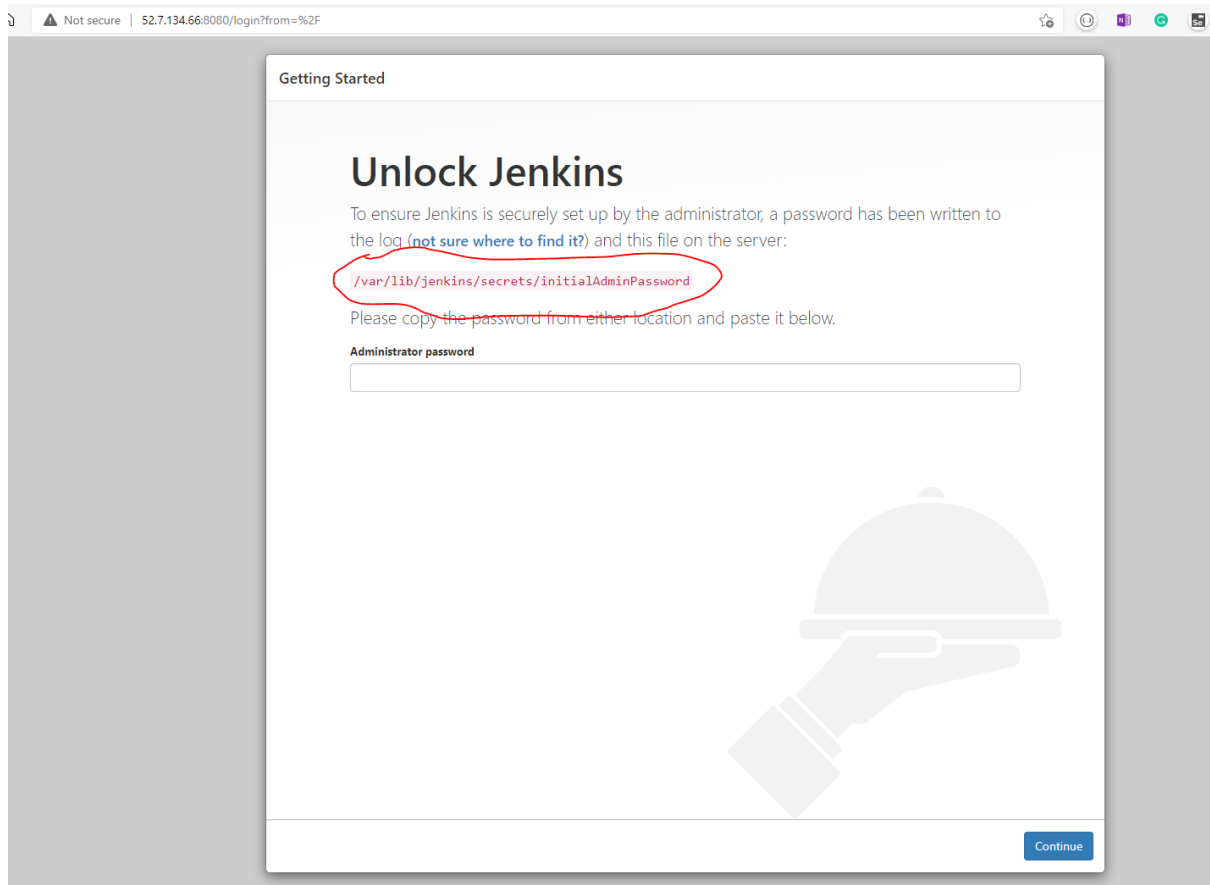

search

DashboardAll

Enter an item name

mysql-my-movie-plan

Required field

**Freestyle project**

This is the central feature of Jenkins. Jenkins will build your project, combining any SCM with any build system, and this can be even used for something other than software build.

**Pipeline**

Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

**Multi-configuration project**

Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

**Folder**

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

**GitHub Organization**

Scans a GitHub organization (or user account) for all repositories matching some defined markers.

**GitHub Organization**

Scans a GitHub organization (or user account) for all repositories matching some defined markers.

**Multibranch Pipeline**

Creates a set of Pipeline projects according to detected branches in one SCM repository.

OK

```

45  haproxy2          available [ =stable ]
46  collectd          available [ =stable ]
47  aws-nitro-enclaves-cli available [ =stable ]
48  R4                available [ =stable ]
49  kernel-5.4        available [ =stable ]
50  selinux-ng        available [ =stable ]
51  php8.0            available [ =stable ]
52  tomcat9           available [ =stable ]
53  unbound1.13       available [ =stable ]
54  mariadb10.5       available [ =stable ]
55  kernel-5.10       available [ =stable ]
56  redis6            available [ =stable ]
ec2-user@ip-172-31-86-0 ~]$ sudo systemctl start docker
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$ sudo usermod -a -G docker ec2-user
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$ docker images
ec2-user@ip-172-31-86-0 ~]$
REPOSITORY TAG IMAGE ID CREATED SIZE
ec2-user@ip-172-31-86-0 ~]$

```

```

46 collected
47 aws-nitro-enclaves-cli    available [ =stable ]
48 R4                        available [ =stable ]
49 kernel-5.4               available [ =stable ]
50 selinux-ng                available [ =stable ]
51 php8.0                   available [ =stable ]
52 tomcat9                   available [ =stable ]
53 unbound1.13              available [ =stable ]
54 mariadb10.5              available [ =stable ]
55 kernel-5.10              available [ =stable ]
56 redis6                    available [ =stable ]
ec2-user@ip-172-31-86-0 ~]$ sudo systemctl start docker
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$ sudo usermod -a -G docker ec2-user
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$ docker images
EPOSITORY TAG IMAGE ID CREATED SIZE
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$
ec2-user@ip-172-31-86-0 ~]$ sudo usermod -a -G docker jenkins
ec2-user@ip-172-31-86-0 ~]$

```

→ ↺ 🔍 Not secure | 52.7.134.66:8080/view/all/newJob

## Jenkins

board → All →

Enter an item name

my-movie-plan-backend

Required field

- Freestyle project**  
This is the central feature of Jenkins. Jenkins will build your project, combining any SCM with any build system, and this can be even used for something other than software build.
- Pipeline**  
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**  
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**  
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- GitHub Organization**  
Scans a GitHub organization (or user account) for all repositories matching some defined markers.
- Multibranch Pipeline**  
Creates a set of Pipeline projects according to detected branches in one SCM repository.

If you want to create a new item from other existing, you can use this option:

Copy from  Type to autocomplete

OK



hboard > my-movie-plan-backend >

General Build Triggers Advanced Project Options **Pipeline**

Definition

Pipeline script from SCM

SCM

Git

Repositories

Repository URL

https://github.com/Riyaz/my-movie-plan-backend.git

Credentials

- none - Add

Advanced... Add Repository

Branches to build

Branch Specifier (blank for 'any')

/main

Add Branch

Repository browser

(Auto)

Additional Behaviours

Add

Script Path

Save Apply

Dashboard > **Global Tool Configuration**

Add Git

Gradle

Gradle installations

Add Gradle

List of Gradle installations on this system

Ant

Ant installations

Add Ant

List of Ant installations on this system

**Maven**

Maven installations

Add Maven

Maven

Name

maven

**MAVEN\_HOME**

/usr/share/maven

☐ Install automatically

Delete Maven

Add Maven

List of Maven installations on this system

Save Apply

→ ↺ 🏠 ⚠ Not secure | 54.172.237.186:8080/view/all/newJob

Jenkins


🔍 search

sshboard > All >


Enter an item name

my-movie-plan-backend


» Required field

 **Freestyle project**


This is the central feature of Jenkins. Jenkins will build your project, combining any SCM with any build system, and this can be even used for something other than software build.

 **Pipeline**


Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

 **Multi-configuration project**


Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

 **Folder**

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.


 **GitHub Organization**

Scans a GitHub organization (or user account) for all repositories matching some defined markers.

 **Multibranch Pipeline**

Creates a set of Pipeline projects according to detected branches in one SCM repository.

If you want to create a new item from other existing, you can use this option:

 Copy from

Type to autocomplete

OK

Dashboard > my-movie-plan-backend >

General

Build Triggers

Advanced Project Options

Pipeline

☐ Pipeline speed/durability override

☐ Preserve stashes from completed builds

☐ This project is parameterized

☐ Throttle builds

Build Triggers

☒ Build after other projects are built

Projects to watch

mysql-movie-plan.

☒ Trigger only if build is stable

☐ Trigger even if the build is unstable

☐ Trigger even if the build fails

☐ Build periodically

☐ GitHub hook trigger for GITScm polling

☐ Poll SCM

☐ Disable this project

☐ Quiet period

☐ Trigger builds remotely (e.g., from scripts)

Advanced Project Options

Advanced...

Pipeline

Definition

Pipeline script from SCM




SCM



Git


Repositories

Save

Apply

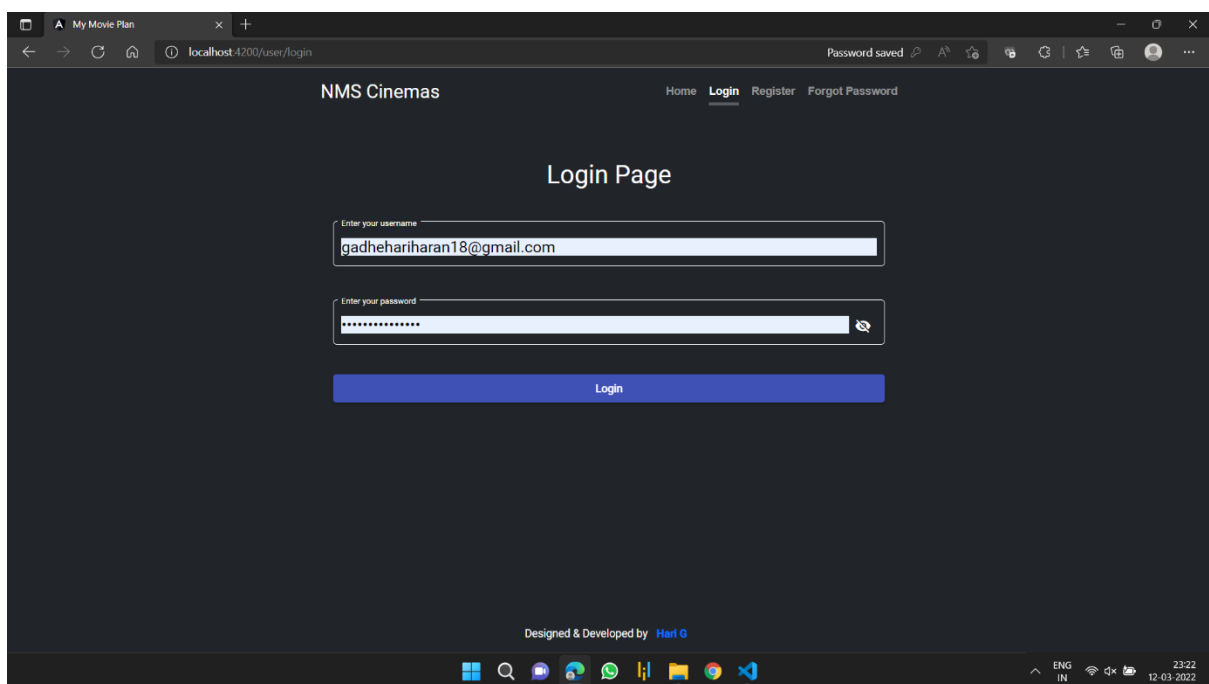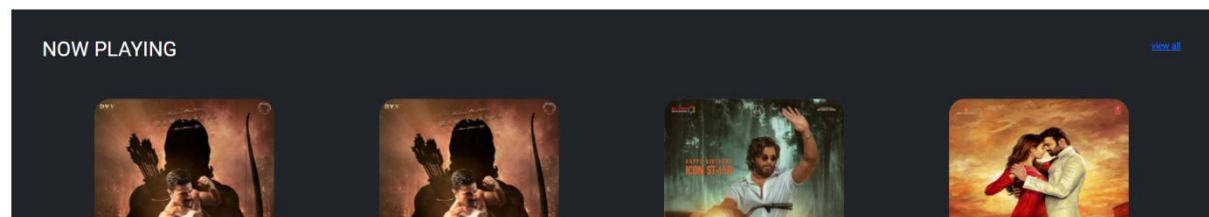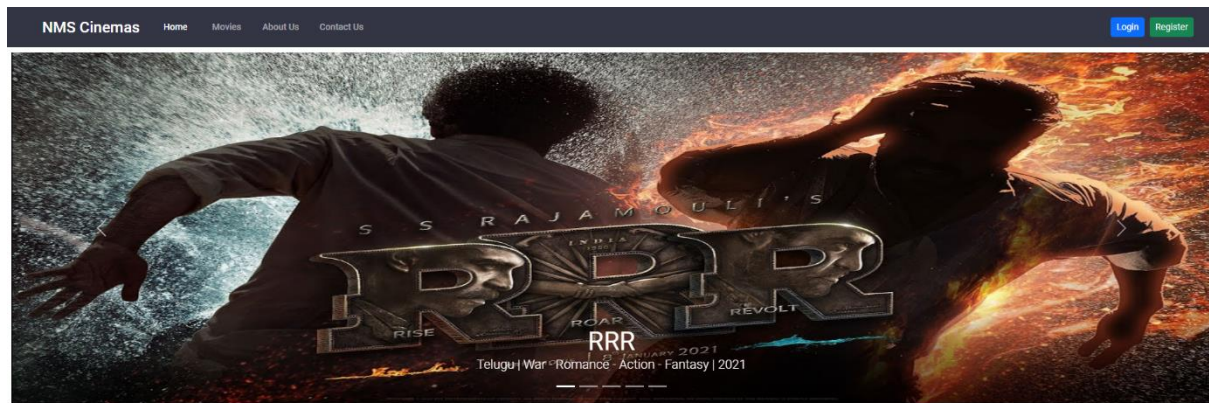

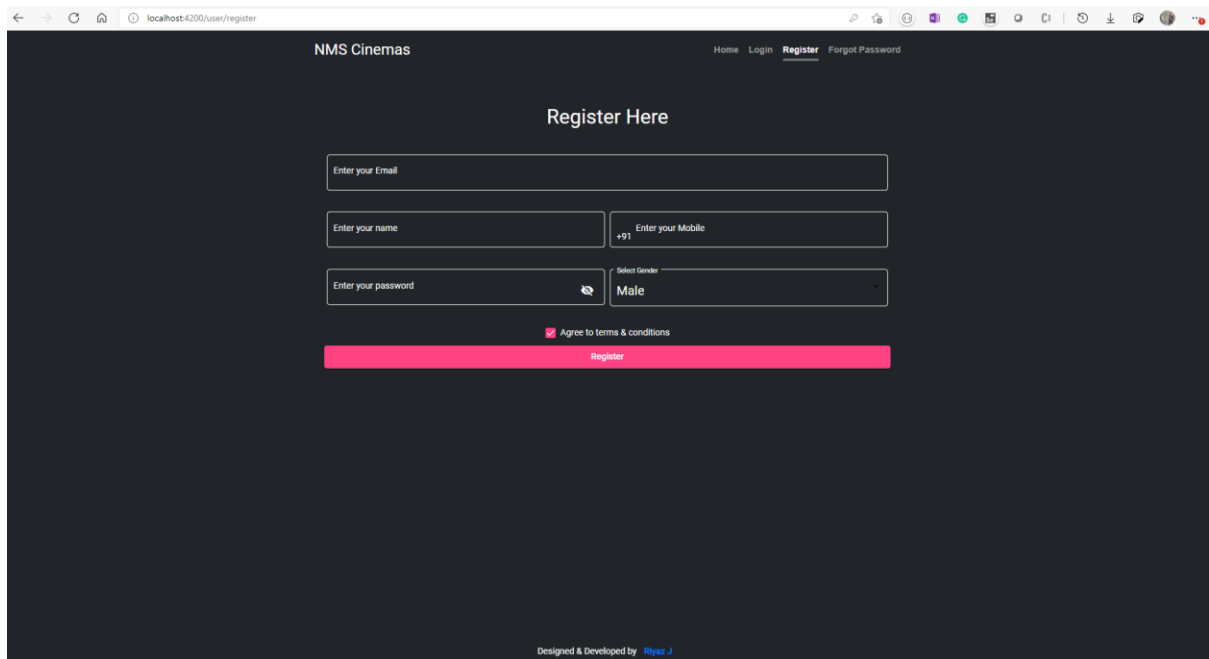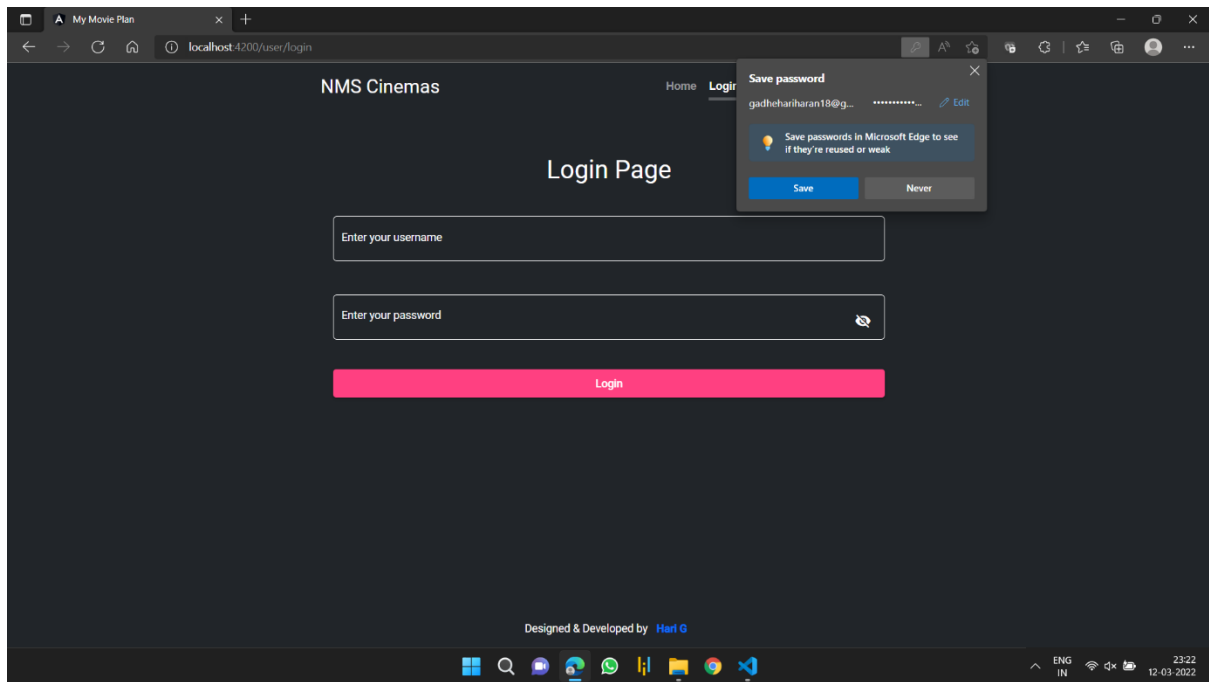

Cinema Halls	Shows	Movies
<div>INOX</div> <div>PVR</div> <div>GOPALAN GRAND MALL</div>	<div> <div>Morning Show</div> <div>  Time: 11:00 AM</div> </div> <div> <div>Matinee</div> <div>  Time: 02:00 PM</div> </div> <div> <div>First Show</div> <div>  Time: 06:00 PM</div> </div> <div> <div>Second Show</div> <div>  Time: 09:00 PM</div> </div>	<div>  <div>Rrr   lang: Telugu   start: June 2, 2021   end: June 10, 2021</div> </div>
Add Cinema Hall	Add Show	<div>Add New Movie</div> <div>Add Movie To The Show</div>

SHOW

Show

Now Playing

FILTERS

Language


Clear

Genre

Clear


Now Playing

Search for movie, genre or language




Now Playing

RRR



Now Playing

RRR



Now Playing

PUSHPA



## PUSHPA : Pushpa

4D Telugu


2H 30M . Crime, Action, Romance

Book Tickets

LOADING IN  
THEATRES FROM  
**13**  
AUGUST 2021

### About the Movie

Pushpa is an upcoming Indian Telugu language action thriller film written and directed by Sukumar. Produced by Naveen Vemani and Y. Ravi

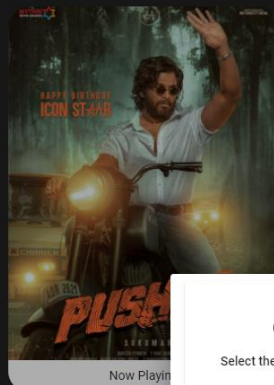

## PUSHPA : Pushpa

4D Telugu

2H 30M . Crime, Action, Romance

Book Tickets

LOADING IN  
THEATRES FROM  
**13**  
AUGUST 2021

### About the Movie

Pushpa is an upcoming Indian Telugu language action thriller film written and directed by Sukumar. Produced by Naveen Vemani and Y. Ravi

1

2

3


4

5

Select the Cinema HallSelect the Show TimingSelect the DateSelect No. of seatsReview

Cinema Hall Name

Next

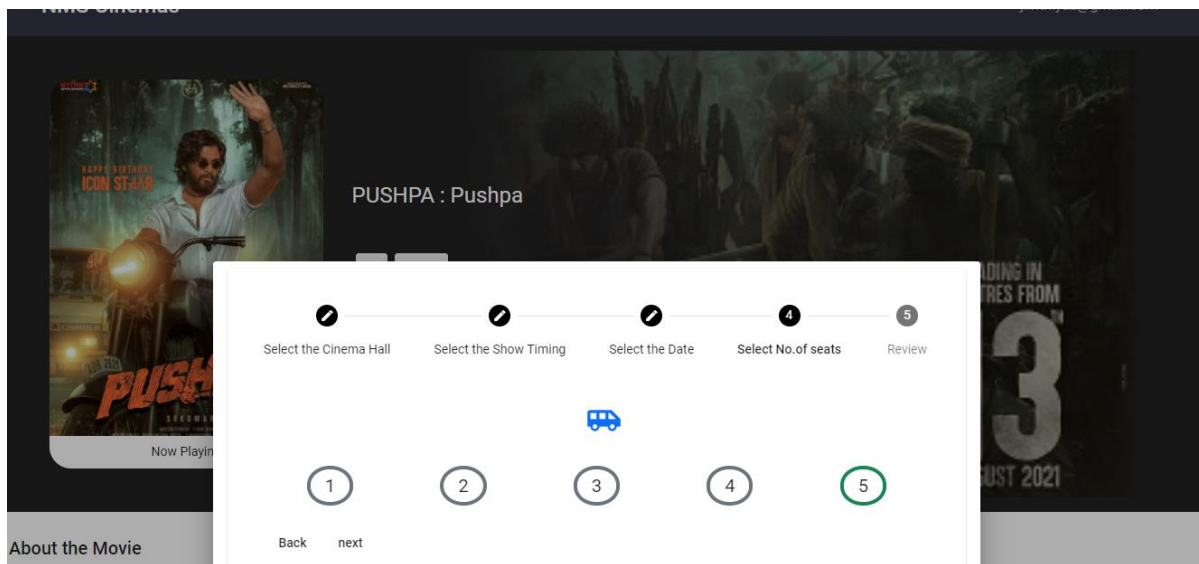

Payment Gateway (do not refresh the page)

Booking Details

Auditorium	INOX
Show	First Show
Show Timing	06:00 PM
Movie Name	PUSHPA
Movie Lang	Telugu
Date	Jun 15, 2021

Card Number

16 digit card number

Month

Year

CVV

Select card expiry month

Select card expiry year

Pay ₹2,200.00

REGISTER NEW AUDITORIUM HERE

1 Auditorium Details

<div>Name</div>	<div>Image URL</div>
<div>Seating Capacity</div> <div>100</div>	<div>Email Id</div>
<div>Customer Care Number</div>	<div>Address</div>

Next

Add Safeties


ADD NEW MOVIE

1 Movie Details 2 Add Language 3 Add Language 4 Add Cast Details 5 Add Crew Details 6 Review

<div>Name</div>	<div>Release Date</div>
<div>Image URL</div>	<div>Background Image URL</div>
<div>Duration</div>	<div>Movie Caption</div>
<div>Story</div>	





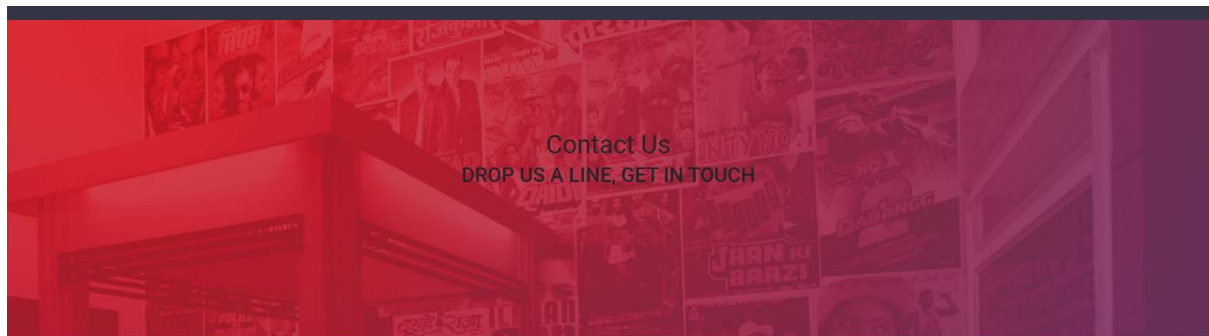

Write to us by filling in the form below

Your Name

Email Id

Message

[Contact Us](#)

## Contact Us

Big Tree Entertainment Private Limited Ground Floor, Wajeda House,  
Gulmohar Cross Road No. 7, Juhu Scheme, Mumbai, Maharashtra -  
400049

[nms@cinemas.com](mailto:nms@cinemas.com)

1800-894-4059

```
6 public static ALL_GENRES: string[] = ['Comedy', 'Romance', 'Action', 'Drama', 'Fantasy', 'Horror', 'Mystery', 'Thriller', 'Crime',  
7  
8 public static ALL_LANGUAGES: string[] = ['English', 'Hindi', 'Telugu', 'Kanada', 'Tamil', 'Malayalam', 'Urdu', 'Marathi', 'Punjabi',  
9  
10  
11 public static HALL_SAFETIES: string[] = ['Thermal Scanning', 'Contactless Security Check', 'Hand Sanitizers Available',  
12 'Sanitization Before Every Show', 'In-Cinema Social Distancing',  
13 'Contactless Food Service', 'Packaged Food and Beverage', 'Daily Temperature Checks for Staff',  
14 'Deep Cleaning of Restrooms', 'Limited Occupancy In Restrooms', 'Sanitized / Sterilized 3D Glasses'];  
15  
16 public static HALL_FACILITIES: string[] = ['Wicket', 'Wheel Chair Facility', 'Recliner Seats', 'Parking Facility', 'Food Court',  
17  
18 public static ROOT_URL = 'http://34.204.2.214:5555/my-movie-plan';  
19  
20 public static REGISTER_URL = `${GlobalConstants.ROOT_URL}/user/sign-up`;  
21  
22 public static CHECK_UNIQUENESS_URL = `${GlobalConstants.ROOT_URL}/user/check`;  
23  
24 public static UPDATE_USER_URL = `${GlobalConstants.ROOT_URL}/user/update`;  
25  
26 public static GET_LOGGED_IN_USER_URL = `${GlobalConstants.ROOT_URL}/user/get-user`;  
27  
28 public static AUTHENTICATE_URL = `${GlobalConstants.ROOT_URL}/user/authenticate`;  
29  
30 public static UNIQUE_USER_URL = `${GlobalConstants.ROOT_URL}/user/check`;  
31  
32 public static FORGOT_PASSWORD_URL = `${GlobalConstants.ROOT_URL}/user/forgot-password`;  
33  
34 public static AUDITORIUM_URL = `${GlobalConstants.ROOT_URL}/auditorium`;  
35  
36 public static GET_ALL_AUDITORIUMS_URL = `${GlobalConstants.ROOT_URL}/auditorium/all`;  
37  
38 public static ADD_AUDITORIUM_URL = `${GlobalConstants.ROOT_URL}/auditorium/add`;  
39  
40 public static UPDATE_AUDITORIUM_URL = `${GlobalConstants.ROOT_URL}/auditorium/update`;  
41  
42 public static DELETE_AUDITORIUM_URL = `${GlobalConstants.ROOT_URL}/auditorium/delete`;  
43  
44 public static MOVIE_URL = `${GlobalConstants.ROOT_URL}/movie`;  
45  
46 public static NOW_PLAYING_AND_UP_COMING_MOVIES_URL = `${GlobalConstants.MOVIE_URL}/now-playing-up-coming`;  
47  
48 public static NOW_PLAYING_MOVIES_URL = `${GlobalConstants.MOVIE_URL}/now-playing`;  
49
```

