



Mechanisms for handling the first post-interface BDF2 step

Raw crossing, restart, and interface-aware correction act at different stages of the update

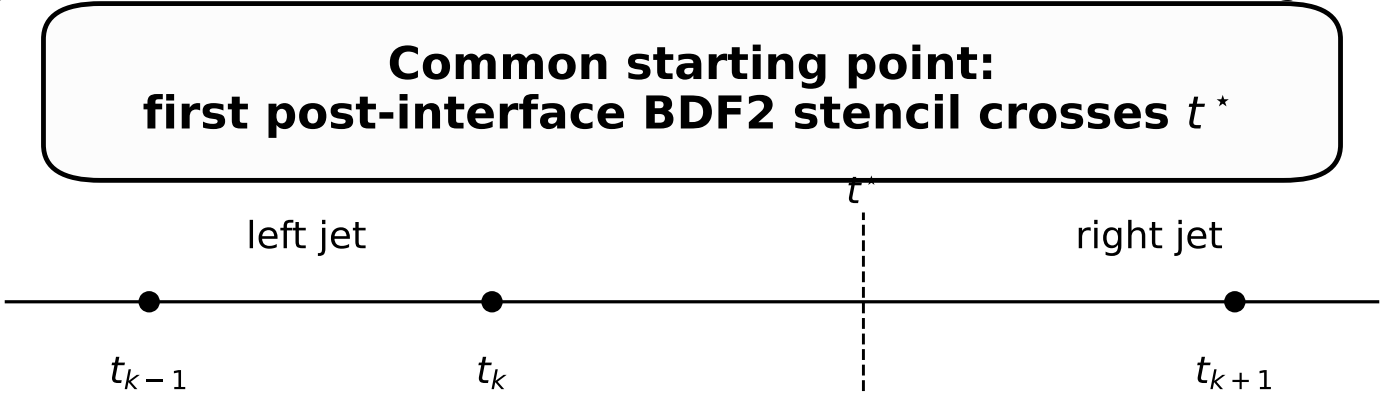


Same crossing configuration in all cases; the leading defect depends on J_1 , J_2 , and θ .


STANDARD BDF2

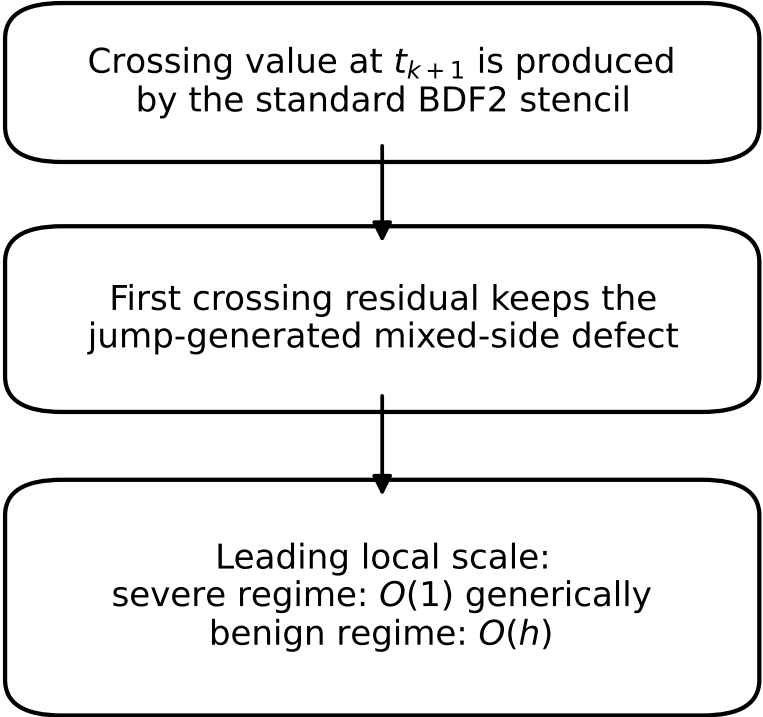

RESTART

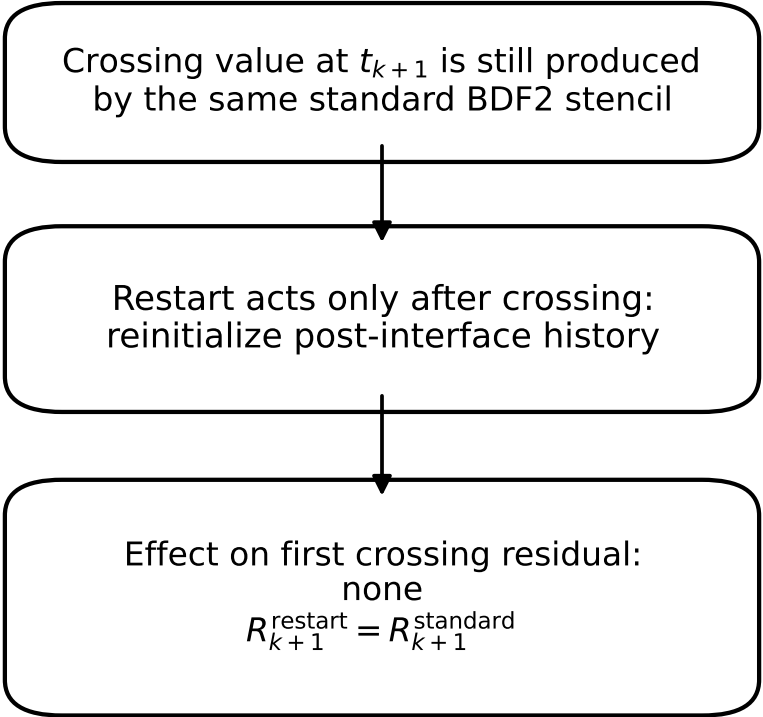

DIRECT CORRECTION

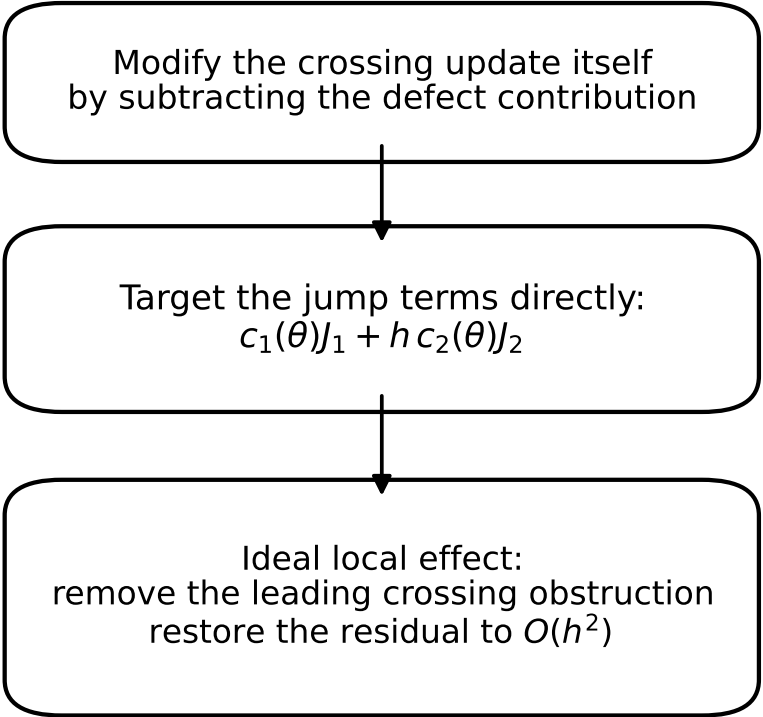

Key message: restart is a history-management mechanism, whereas correction is a crossing-defect cancellation mechanism.