

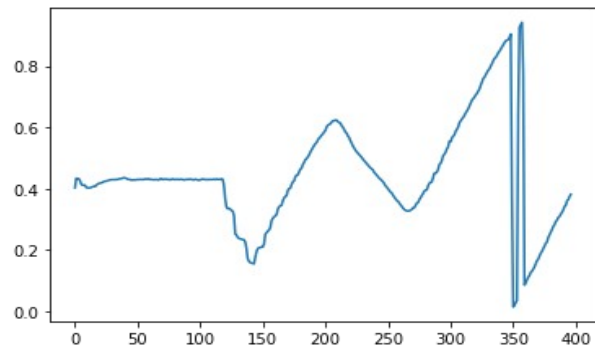
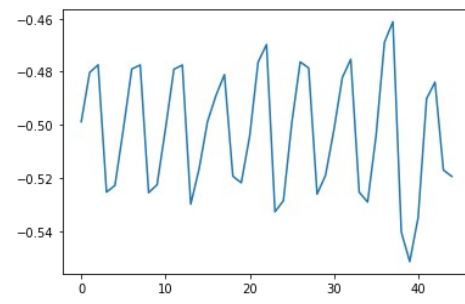


This document shows




- Training over generated dataset.
- Evaluation of real dataset
- Adam + 10 epochs + seq_len = 10 RLD.
- batch size of 1, 4, 8 respectively.

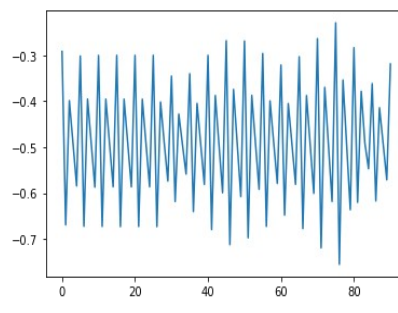




NLL

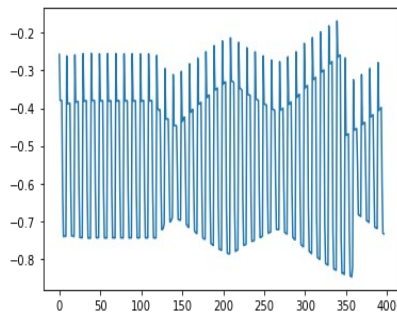

MSE

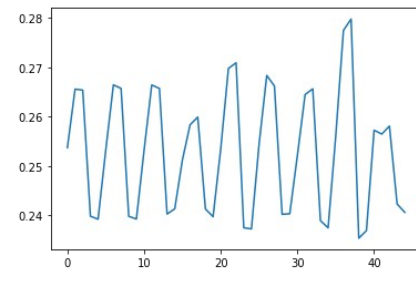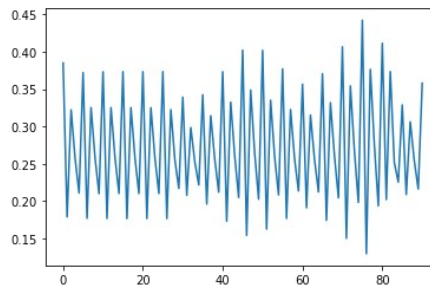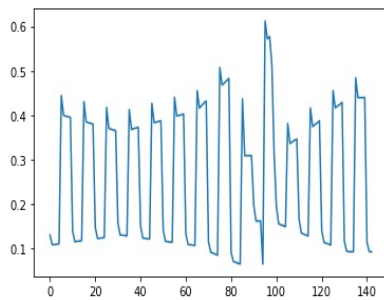

BCE

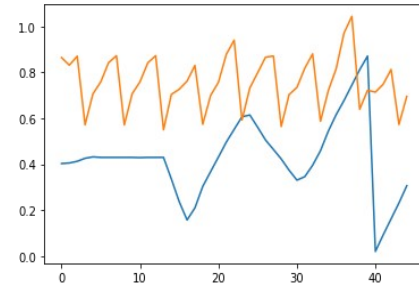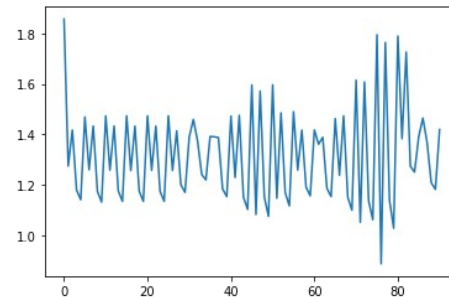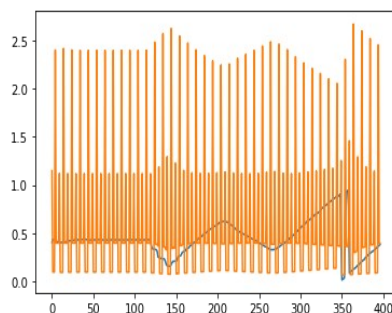

Gaussian Likelihood

I am still facing problems with this method.

From where should I obtain the μ and σ ?

From the target data for each batch?

x_i is the output of the model?

$$\ln \mathbf{L}(\mu, \sigma^2 | \mathbf{x}) = -\frac{n}{2} \ln 2\pi\sigma^2 - \frac{1}{2\sigma^2} \sum_{i=1}^n (x_i - \mu)^2.$$