


Network of machines

Configuring a network for VirtualBox virtual machines

- Some labs will require you to simulate creating a connection to a remote server
- Set the virtual machine's network adapter to Bridged Adapter mode
 - 1. Shut down any virtual machines that you've already created.
 - 2. On the VirtualBox Manager screen, open **the Settings** dialog for a virtual machine.
 - 3. Click the Network menu item. Change **the Attached** to setting from NAT to **Bridged Adapter**,
 - and change the **Promiscuous Mode** setting to **Allow All**, as shown in this screenshot:
- Restart the virtual machine and set it to use a static IP address (Define your net).

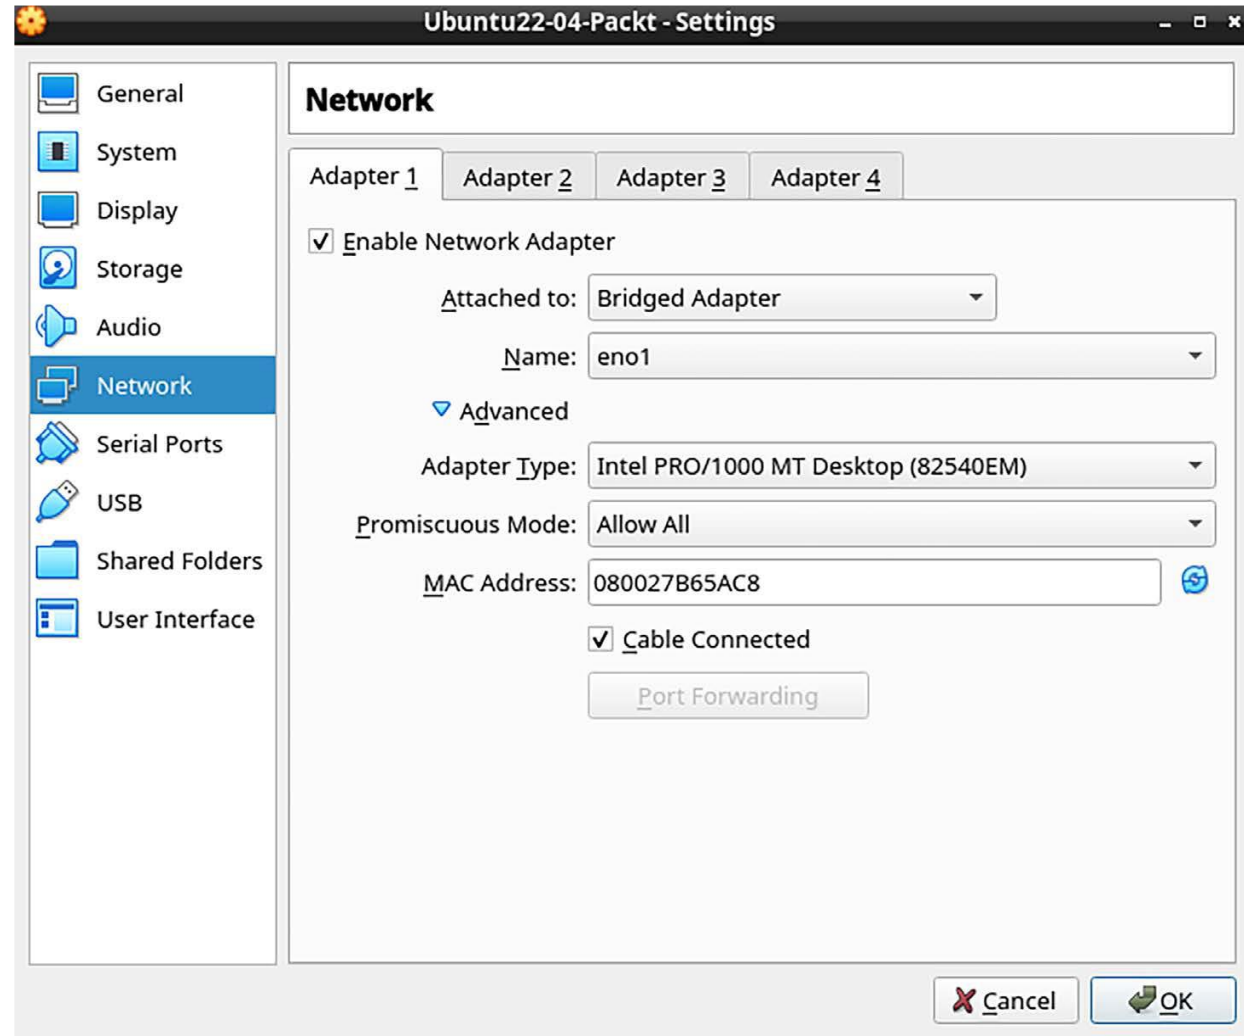

Using Cygwin to connect to your virtual machines

- If your host machine is either a Linux or Mac machine, you will simply open the host's terminal and use the tools that are already there to connect to the virtual machine
- **Installing Cygwin on your Windows host**
 - Download the appropriate setup*.exe file for your version of Windows from <http://www.cygwin.com/>
 - Just accept the defaults until you get to the package selection screen.
 - At the top of the package selection screen, select **Category** from the **View** menu.
 - Select the services like openssh

Net Default

Skip

n/a n/a

1.071k

aria2: Download utility for HTTP/HTTPS. FTP. Bit Torrent and Metalink

Skip

n/a n/a

24k

autossh: Automatically restart SSH sessions and tunnels

Using Cygwin to connect to your virtual machines

- PowerShell

