
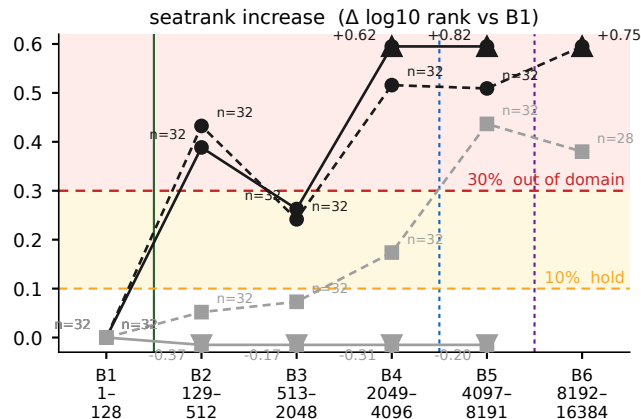


C-lens-pos — lens fidelity against absolute position

green = fit domain edge (128) · blue = sliding_window (4096) · purple = YaRN native context (8192)

decision = worst-of {rankcorr, seatrank}, group G, ratio to the B1 median

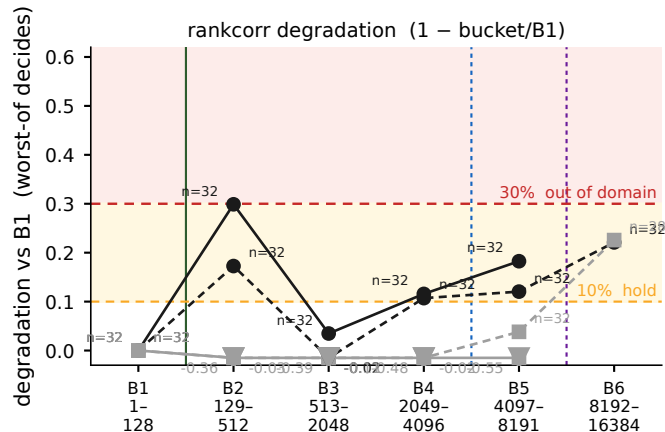

solid = eager (B1-B5) · dashed = sdpa (B1-B6) · triangles = beyond the frozen axis (value printed; axis NOT widened)

● G geometry traces (decision group) · eager
 ● G geometry traces (decision group) · sdpa
 ■ W wikitext (attribution diagnostic) · eager
 ■ W wikitext (attribution diagnostic) · sdpa

L1 only — measured values; the reading belongs to the judgement layer.

Frame frozen before measurement; thresholds frozen in DESIGN_c_lens_pos_v2 \$4 and applied mechanically. Triangles = points beyond the frozen y-limit, value printed; the axis was NOT widened.

FLAG-lens-pos-domain is now a standing clause: C-lens-pos found the deep-position seat readout has no verifiable anchor (B6 out of domain; B4/B5 beyond 0.30 digits). Three confounds stand with the verdict: W group does not degrade with position, the G buckets straddle the prompt/generation boundary, and the bridge term varied attention implementation and sequence length together.

data: c_lens_pos.json@f0a7787 · figure at ef220985 · 2026-08-02 · lens c73a32d1...