



0 Bootstrap A_0 and optional X with Leiden


level 0 $\rightarrow$ level L-1 | initially nested; adjacent levels may coincide




1 Update and localize



2 Freeze all masks before writes

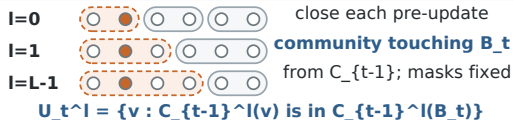

3 Prepare labels L-1 to 0

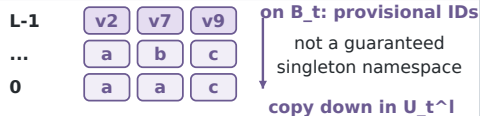

4 Local backend calls run in the opposite direction: $l=0$ to L-1

$A_{work} = A_t[U_t^0, U_t^0]$ once | boundary omitted



5 Return C_t^0

+ outside every U_t^l : labels unchanged

! post-update nesting not enforced