

Enviroment setup

Tuesday, 25 November 2025 11.45

I Conda prompt opsæt miljø:

```
(base) C:\Users\mpede>conda create --name langchain_env python=3.10.10
```

Derefter skal det aktiveres:

```
(base) C:\Users\mpede>conda activate langchain_env
```

Nu skal der installeres packages:

```
(langchain_env) C:\Users\mpede>pip install openai python-dotenv ipykernel jupyterlab notebook
```


	openai	Allows us to make calls to OpenAI's API.
	python-dotenv	Allows us to set OpenAI's API key as an environment variable.
	ipykernel	
	jupyterlab	Necessary for adding langchain_env as a kernel in Jupyter Notebook.
	notebook	

Opsæt miljø til at det kan bruges

```
(langchain_env) C:\Users\mpede>python -m ipykernel install --user --name langchain_env  
Installed kernelspec langchain_env in C:\Users\mpede\AppData\Roaming\jupyter\kernels\langchain_env
```

Tilføj miljø til projekt i PyCharm:

Tryk på interpreterer i bunden og vælg 'Add new interpreter' derefter 'Add local interpreter'

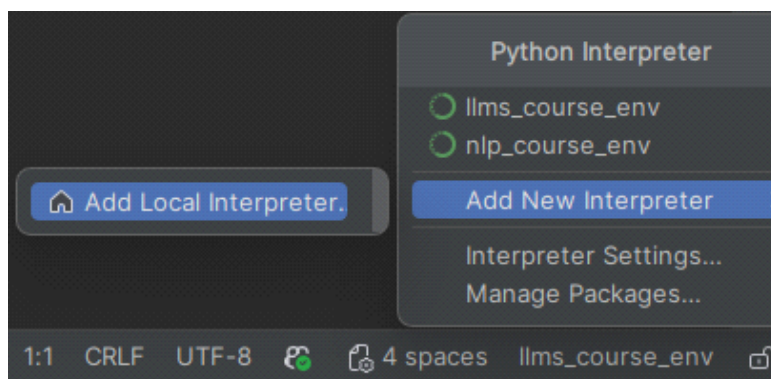

Skift til Langchain_env og tryk OK

PC

Add Python Interpreter

✕

Environment:

☐ Generate new

☒ Select existing

Type:

Conda

▼

Path to conda:

C:\Users\mpede\Anaconda3\condabin\conda.bat

📁

Environment:

langchain_env

▼

[Reload environments](#)

OK

Cancel