

D R A F T

Document for a Standard Message-Passing Interface

Message Passing Interface Forum

October 21, 2020

This work was supported in part by NSF and ARPA under NSF contract CDA-9115428 and Esprit under project HPC Standards (21111).

This is the result of a LaTeX run of a draft of a single chapter of the MPIF Final Report document.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48

Chapter 7

Process Topologies

7.1 Introduction

This chapter discusses the MPI topology mechanism. A topology is an extra, optional attribute that one can give to an intra-communicator; topologies cannot be added to inter-communicators. A topology can provide a convenient naming mechanism for the processes of a group (within a communicator), and additionally, may assist the runtime system in mapping the processes onto hardware.

As stated in Chapter 7, a process group in MPI is a collection of n processes. Each process in the group is assigned a rank between 0 and $n-1$. In many parallel applications a linear ranking of processes does not adequately reflect the logical communication pattern of the processes (which is usually determined by the underlying problem geometry and the numerical algorithm used). Often the processes are arranged in topological patterns such as two- or three-dimensional grids. More generally, the logical process arrangement is described by a graph. In this chapter we will refer to this logical process arrangement as the “virtual topology.”

A clear distinction must be made between the virtual process topology and the topology of the underlying, physical hardware. The virtual topology can be exploited by the system in the assignment of processes to physical processors, if this helps to improve the communication performance on a given machine. How this mapping is done, however, is outside the scope of MPI. The description of the virtual topology, on the other hand, depends only on the application, and is machine-independent. The functions that are described in this chapter deal with machine-independent mapping and communication on virtual process topologies.

Rationale. Though physical mapping is not discussed, the existence of the virtual topology information may be used as advice by the runtime system. There are well-known techniques for mapping grid/torus structures to hardware topologies such as hypercubes or grids. For more complicated graph structures good heuristics often yield nearly optimal results [5]. On the other hand, if there is no way for the user to specify the logical process arrangement as a “virtual topology,” a random mapping is most likely to result. On some machines, this will lead to unnecessary contention in the interconnection network. Some details about predicted and measured performance improvements that result from good process-to-processor mapping on modern wormhole-routing architectures can be found in [1, 2].

Besides possible performance benefits, the virtual topology can function as a convenient, process-naming structure, with significant benefits for program readability and notational power in message-passing programming. (*End of rationale.*)

7.2 Virtual Topologies

The communication pattern of a set of processes can be represented by a graph. The nodes represent processes, and the edges connect processes that communicate with each other. MPI provides message-passing between any pair of processes in a group. There is no requirement for opening a channel explicitly. Therefore, a “missing link” in the user-defined process graph does not prevent the corresponding processes from exchanging messages. It means rather that this connection is neglected in the virtual topology. This strategy implies that the topology gives no convenient way of naming this pathway of communication. Another possible consequence is that an automatic mapping tool (if one exists for the runtime environment) will not take account of this edge when mapping.

Specifying the virtual topology in terms of a graph is sufficient for all applications. However, in many applications the graph structure is regular, and the detailed set-up of the graph would be inconvenient for the user and might be less efficient at run time. A large fraction of all parallel applications use process topologies like rings, two- or higher-dimensional grids, or tori. These structures are completely defined by the number of dimensions and the numbers of processes in each coordinate direction. Also, the mapping of grids and tori is generally an easier problem than that of general graphs. Thus, it is desirable to address these cases explicitly.

Process coordinates in a Cartesian structure begin their numbering at 0. Row-major numbering is always used for the processes in a Cartesian structure. This means that, for example, the relation between group rank and coordinates for four processes in a (2×2) grid is as follows.

```

coord (0,0):  rank 0
coord (0,1):  rank 1
coord (1,0):  rank 2
coord (1,1):  rank 3

```

7.3 Embedding in MPI

The support for virtual topologies as defined in this chapter is consistent with other parts of MPI, and, whenever possible, makes use of functions that are defined elsewhere. Topology information is associated with communicators. It is added to communicators using the caching mechanism described in Chapter 7.

7.4 Overview of the Functions

MPI supports three topology types: **Cartesian**, **graph**, and **distributed graph**. The function `MPI_CART_CREATE` is used to create Cartesian topologies, the function `MPI_GRAPH_CREATE` is used to create graph topologies, and the functions `MPI_DIST_GRAPH_CREATE_ADJACENT` and `MPI_DIST_GRAPH_CREATE` are used to create distributed graph topologies. These topology creation functions are collective. As with

other collective calls, the program must be written to work correctly, whether the call synchronizes or not.

The topology creation functions take as input an existing communicator `comm_old`, which defines the set of processes on which the topology is to be mapped. For `MPI_GRAPH_CREATE` and `MPI_CART_CREATE`, all input arguments must have identical values on all processes of the group of `comm_old`. When calling `MPI_GRAPH_CREATE`, each process specifies all nodes and edges in the graph. In contrast, the functions `MPI_DIST_GRAPH_CREATE_ADJACENT` or `MPI_DIST_GRAPH_CREATE` are used to specify the graph in a distributed fashion, whereby each process only specifies a subset of the edges in the graph such that the entire graph structure is defined collectively across the set of processes. Therefore the processes provide different values for the arguments specifying the graph. However, all processes must give the same value for `reorder` and the `info` argument. In all cases, a new communicator `comm_topol` is created that carries the topological structure as cached information (see Chapter 7). In analogy to function `MPI_COMM_CREATE`, no cached information propagates from `comm_old` to `comm_topol`.

`MPI_CART_CREATE` can be used to describe Cartesian structures of arbitrary dimension. For each coordinate direction one specifies whether the process structure is periodic or not. Note that an n -dimensional hypercube is an n -dimensional torus with 2 processes per coordinate direction. Thus, special support for hypercube structures is not necessary. The local auxiliary function `MPI_DIMS_CREATE` can be used to compute a balanced distribution of processes among a given number of dimensions.

MPI defines functions to query a communicator for topology information. The function `MPI_TOPO_TEST` is used to query for the type of topology associated with a communicator. Depending on the topology type, different information can be extracted. For a graph topology, the functions `MPI_GRAPHDIMS_GET` and `MPI_GRAPH_GET` return the values that were specified in the call to `MPI_GRAPH_CREATE`. Additionally, the functions `MPI_GRAPH_NEIGHBORS_COUNT` and `MPI_GRAPH_NEIGHBORS` can be used to obtain the neighbors of an arbitrary node in the graph. For a distributed graph topology, the functions `MPI_DIST_GRAPH_NEIGHBORS_COUNT` and `MPI_DIST_GRAPH_NEIGHBORS` can be used to obtain the neighbors of the calling process. For a Cartesian topology, the functions `MPI_CARTDIM_GET` and `MPI_CART_GET` return the values that were specified in the call to `MPI_CART_CREATE`. Additionally, the functions `MPI_CART_RANK` and `MPI_CART_COORDS` translate Cartesian coordinates into a group rank, and vice-versa. The function `MPI_CART_SHIFT` provides the information needed to communicate with neighbors along a Cartesian dimension. All of these query functions are local.

For Cartesian topologies, the function `MPI_CART_SUB` can be used to extract a Cartesian subspace (analogous to `MPI_COMM_SPLIT`). This function is collective over the input communicator's group.

The two additional functions, `MPI_GRAPH_MAP` and `MPI_CART_MAP`, are, in general, not called by the user directly. However, together with the communicator manipulation functions presented in Chapter 7, they are sufficient to implement all other topology functions. Section 7.5.8 outlines such an implementation.

The neighborhood collective communication routines `MPI_NEIGHBOR_ALLGATHER`, `MPI_NEIGHBOR_ALLGATHERV`, `MPI_NEIGHBOR_ALLTOALL`, `MPI_NEIGHBOR_ALLTOALLV`, and `MPI_NEIGHBOR_ALLTOALLW` communicate with the nearest neighbors on the topology associated with the communicator. The nonblocking variants are `MPI_INEIGHBOR_ALLGATHER`, `MPI_INEIGHBOR_ALLGATHERV`, `MPI_INEIGHBOR_ALLTOALL`, `MPI_INEIGHBOR_ALLTOALLV`, and

1 MPI_INEIGHBOR_ALLTOALLW.

3 7.5 Topology Constructors

5 7.5.1 Cartesian Constructor

8 MPI_CART_CREATE(comm_old, ndims, dims, periods, reorder, comm_cart)

10	IN	comm_old	input communicator (handle)
11	IN	ndims	number of dimensions of Cartesian grid (integer)
12	IN	dims	integer array of size ndims specifying the number of
13			processes in each dimension
14			
15	IN	periods	logical array of size ndims specifying whether the grid
16			is periodic (<code>true</code>) or not (<code>false</code>) in each dimension
17	IN	reorder	ranking may be reordered (<code>true</code>) or not (<code>false</code>)
18			(logical)
19	OUT	comm_cart	communicator with new Cartesian topology (handle)

21
22 `int MPI_Cart_create(MPI_Comm comm_old, int ndims, const int dims[],`
23 `const int periods[], int reorder, MPI_Comm *comm_cart)`

24 `MPI_Cart_create(comm_old, ndims, dims, periods, reorder, comm_cart, ierror)`
25 `TYPE(MPI_Comm), INTENT(IN) :: comm_old`
26 `INTEGER, INTENT(IN) :: ndims, dims(ndims)`
27 `LOGICAL, INTENT(IN) :: periods(ndims), reorder`
28 `TYPE(MPI_Comm), INTENT(OUT) :: comm_cart`
29 `INTEGER, OPTIONAL, INTENT(OUT) :: ierror`

30
31 `MPI_CART_CREATE(COMM_OLD, NDIMS, DIMS, PERIODS, REORDER, COMM_CART, IERROR)`
32 `INTEGER COMM_OLD, NDIMS, DIMS(*), COMM_CART, IERROR`
33 `LOGICAL PERIODS(*), REORDER`

34 MPI_CART_CREATE returns a handle to a new communicator to which the Cartesian
35 topology information is attached. If `reorder = false` then the rank of each process in the
36 new group is identical to its rank in the old group. Otherwise, the function may reorder
37 the processes (possibly so as to choose a good embedding of the virtual topology onto
38 the physical machine). If the total size of the Cartesian grid is smaller than the size of
39 the group of `comm_old`, then some processes are returned `MPI_COMM_NULL`, in analogy to
40 `MPI_COMM_SPLIT`. If `ndims` is zero then a zero-dimensional Cartesian topology is created.
41 The call is erroneous if it specifies a grid that is larger than the group size or if `ndims`
42 is negative.

44 7.5.2 Cartesian Convenience Function: MPI_DIMS_CREATE

45
46 For Cartesian topologies, the function `MPI_DIMS_CREATE` helps the user select a balanced
47 distribution of processes per coordinate direction, depending on the number of processes
48 in the group to be balanced and optional constraints that can be specified by the user.

One use is to partition all the processes (the size of MPI_COMM_WORLD's group) into an n -dimensional topology.

MPI_DIMS_CREATE(*nnodes*, *ndims*, *dims*)

IN	<i>nnodes</i>	number of nodes in a grid (integer)
IN	<i>ndims</i>	number of Cartesian dimensions (integer)
INOUT	<i>dims</i>	integer array of size <i>ndims</i> specifying the number of nodes in each dimension

int MPI_Dims_create(int *nnodes*, int *ndims*, int *dims*[])

MPI_Dims_create(*nnodes*, *ndims*, *dims*, *ierror*)

INTEGER, INTENT(IN) :: <i>nnodes</i> , <i>ndims</i>
INTEGER, INTENT(INOUT) :: <i>dims</i> (<i>ndims</i>)
INTEGER, OPTIONAL, INTENT(OUT) :: <i>ierror</i>

MPI_DIMS_CREATE(NNODES, NDIMS, DIMS, IERROR)

INTEGER NNODES, NDIMS, DIMS(*), IERROR
--

The entries in the array *dims* are set to describe a Cartesian grid with *ndims* dimensions and a total of *nnodes* nodes. The dimensions are set to be as close to each other as possible, using an appropriate divisibility algorithm. The caller may further constrain the operation of this routine by specifying elements of array *dims*. If *dims*[*i*] is set to a positive number, the routine will not modify the number of nodes in dimension *i*; only those entries where *dims*[*i*] = 0 are modified by the call.

Negative input values of *dims*[*i*] are erroneous. An error will occur if *nnodes* is not a multiple of

$$\prod_{i, \text{dims}[i] \neq 0} \text{dims}[i].$$

For *dims*[*i*] set by the call, *dims*[*i*] will be ordered in non-increasing order. Array *dims* is suitable for use as input to routine MPI_CART_CREATE. MPI_DIMS_CREATE is local. If *ndims* is zero and *nnodes* is one, MPI_DIMS_CREATE returns MPI_SUCCESS.

Example 7.1

<i>dims</i> before call	function call	<i>dims</i> on return
(0,0)	MPI_DIMS_CREATE(6, 2, <i>dims</i>)	(3,2)
(0,0)	MPI_DIMS_CREATE(7, 2, <i>dims</i>)	(7,1)
(0,3,0)	MPI_DIMS_CREATE(6, 3, <i>dims</i>)	(2,3,1)
(0,3,0)	MPI_DIMS_CREATE(7, 3, <i>dims</i>)	erroneous call

7.5.3 Graph Constructor

```

4 MPI_GRAPH_CREATE(comm_old, nnodes, index, edges, reorder, comm_graph)
5     IN      comm_old      input communicator (handle)
6     IN      nnodes       number of nodes in graph (integer)
7     IN      index        array of integers describing node degrees (see below)
8     IN      edges        array of integers describing graph edges (see below)
9     IN      reorder      ranking may be reordered (true) or not (false)
10     IN      reorder      (logical)
11     IN      reorder      (logical)
12     IN      reorder      (logical)
13     OUT     comm_graph   communicator with graph topology added (handle)

```

```

15 int MPI_Graph_create(MPI_Comm comm_old, int nnodes, const int index[],
16                    const int edges[], int reorder, MPI_Comm *comm_graph)

```

```

17 MPI_Graph_create(comm_old, nnodes, index, edges, reorder, comm_graph,
18                ierror)

```

```

19     TYPE(MPI_Comm), INTENT(IN) :: comm_old
20     INTEGER, INTENT(IN) :: nnodes, index(nnodes), edges(*)
21     LOGICAL, INTENT(IN) :: reorder
22     TYPE(MPI_Comm), INTENT(OUT) :: comm_graph
23     INTEGER, OPTIONAL, INTENT(OUT) :: ierror

```

```

24 MPI_GRAPH_CREATE(COMM_OLD, NNODES, INDEX, EDGES, REORDER, COMM_GRAPH,
25                IERROR)

```

```

26     INTEGER COMM_OLD, NNODES, INDEX(*), EDGES(*), COMM_GRAPH, IERROR
27     LOGICAL REORDER

```

MPI_GRAPH_CREATE returns a handle to a new communicator to which the graph topology information is attached. If `reorder = false` then the rank of each process in the new group is identical to its rank in the old group. Otherwise, the function may reorder the processes. If the size, `nnodes`, of the graph is smaller than the size of the group of `comm_old`, then some processes are returned `MPI_COMM_NULL`, in analogy to `MPI_CART_CREATE` and `MPI_COMM_SPLIT`. If the graph is empty, i.e., `nnodes == 0`, then `MPI_COMM_NULL` is returned in all processes. The call is erroneous if it specifies a graph that is larger than the group size of the input communicator.

The three parameters `nnodes`, `index` and `edges` define the graph structure. `nnodes` is the number of nodes of the graph. The nodes are numbered from 0 to `nnodes-1`. The *i*-th entry of array `index` stores the total number of neighbors of the first *i* graph nodes. The lists of neighbors of nodes 0, 1, ..., `nnodes-1` are stored in consecutive locations in array `edges`. The array `edges` is a flattened representation of the edge lists. The total number of entries in `index` is `nnodes` and the total number of entries in `edges` is equal to the number of graph edges.

The definitions of the arguments `nnodes`, `index`, and `edges` are illustrated with the following simple example.

Example 7.2 Assume there are four processes 0, 1, 2, 3 with the following adjacency matrix:

process	neighbors
0	1, 3
1	0
2	3
3	0, 2

Then, the input arguments are:

```
nnodes = 4
index = 2, 3, 4, 6
edges = 1, 3, 0, 3, 0, 2
```

Thus, in C, `index[0]` is the degree of node zero, and `index[i] - index[i-1]` is the degree of node `i`, `i=1, ..., nnodes-1`; the list of neighbors of node zero is stored in `edges[j]`, for $0 \leq j \leq \text{index}[0] - 1$ and the list of neighbors of node `i`, `i > 0`, is stored in `edges[j]`, $\text{index}[i-1] \leq j \leq \text{index}[i] - 1$.

In Fortran, `index(1)` is the degree of node zero, and `index(i+1) - index(i)` is the degree of node `i`, `i=1, ..., nnodes-1`; the list of neighbors of node zero is stored in `edges(j)`, for $1 \leq j \leq \text{index}(1)$ and the list of neighbors of node `i`, `i > 0`, is stored in `edges(j)`, $\text{index}(i)+1 \leq j \leq \text{index}(i+1)$.

A single process is allowed to be defined multiple times in the list of neighbors of a process (i.e., there may be multiple edges between two processes). A process is also allowed to be a neighbor to itself (i.e., a self loop in the graph). The adjacency matrix is allowed to be non-symmetric.

Advice to users. Performance implications of using multiple edges or a non-symmetric adjacency matrix are not defined. The definition of a node-neighbor edge does not imply a direction of the communication. (*End of advice to users.*)

Advice to implementors. The following topology information is likely to be stored with a communicator:

- Type of topology (Cartesian/graph),
- For a Cartesian topology:
 1. `ndims` (number of dimensions),
 2. `dims` (numbers of processes per coordinate direction),
 3. `periods` (periodicity information),
 4. `own_position` (own position in grid, could also be computed from rank and `dims`)
- For a graph topology:
 1. `index`,
 2. `edges`,
 which are the vectors defining the graph structure.

For a graph structure the number of nodes is equal to the number of processes in the group. Therefore, the number of nodes does not have to be stored explicitly. An additional zero entry at the start of array `index` simplifies access to the topology information. (*End of advice to implementors.*)

7.5.4 Distributed Graph Constructor

MPI_GRAPH_CREATE requires that each process passes the full (global) communication graph to the call. This limits the scalability of this constructor. With the distributed graph interface, the communication graph is specified in a fully distributed fashion. Each process specifies only the part of the communication graph of which it is aware. Typically, this could be the set of processes from which the process will eventually receive or get data, or the set of processes to which the process will send or put data, or some combination of such edges. Two different interfaces can be used to create a distributed graph topology. MPI_DIST_GRAPH_CREATE_ADJACENT creates a distributed graph communicator with each process specifying each of its incoming and outgoing (adjacent) edges in the logical communication graph and thus requires minimal communication during creation.

MPI_DIST_GRAPH_CREATE provides full flexibility such that any process can indicate that communication will occur between any pair of processes in the graph.

To provide better possibilities for optimization by the MPI library, the distributed graph constructors permit weighted communication edges and take an `info` argument that can further influence process reordering or other optimizations performed by the MPI library. For example, hints can be provided on how edge weights are to be interpreted, the quality of the reordering, and/or the time permitted for the MPI library to process the graph.

```

MPI_DIST_GRAPH_CREATE_ADJACENT(comm_old, indegree, sources, sourceweights,
                                outdegree, destinations, destweights, info, reorder, comm_dist_graph)

```

IN	comm_old	input communicator (handle)
IN	indegree	size of <code>sources</code> and <code>sourceweights</code> arrays (non-negative integer)
IN	sources	ranks of processes for which the calling process is a destination (array of non-negative integers)
IN	sourceweights	weights of the edges into the calling process (array of non-negative integers)
IN	outdegree	size of <code>destinations</code> and <code>destweights</code> arrays (non-negative integer)
IN	destinations	ranks of processes for which the calling process is a source (array of non-negative integers)
IN	destweights	weights of the edges out of the calling process (array of non-negative integers)
IN	info	hints on optimization and interpretation of weights (handle)
IN	reorder	the ranks may be reordered (<code>true</code>) or not (<code>false</code>) (logical)
OUT	comm_dist_graph	communicator with distributed graph topology (handle)

```

int MPI_Dist_graph_create_adjacent(MPI_Comm comm_old, int indegree,
                                   const int sources[], const int sourceweights[], int outdegree,

```

```

        const int destinations[], const int destweights[],
        MPI_Info info, int reorder, MPI_Comm *comm_dist_graph)
MPI_Dist_graph_create_adjacent(comm_old, indegree, sources, sourceweights,
        outdegree, destinations, destweights, info, reorder,
        comm_dist_graph, ierror)
    TYPE(MPI_Comm), INTENT(IN) :: comm_old
    INTEGER, INTENT(IN) :: indegree, sources(indegree), sourceweights(*),
        outdegree, destinations(outdegree), destweights(*)
    TYPE(MPI_Info), INTENT(IN) :: info
    LOGICAL, INTENT(IN) :: reorder
    TYPE(MPI_Comm), INTENT(OUT) :: comm_dist_graph
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror
MPI_DIST_GRAPH_CREATE_ADJACENT(COMM_OLD, INDEGREE, SOURCES, SOURCEWEIGHTS,
        OUTDEGREE, DESTINATIONS, DESTWEIGHTS, INFO, REORDER,
        COMM_DIST_GRAPH, IERROR)
    INTEGER COMM_OLD, INDEGREE, SOURCES(*), SOURCEWEIGHTS(*), OUTDEGREE,
        DESTINATIONS(*), DESTWEIGHTS(*), INFO, COMM_DIST_GRAPH,
        IERROR
    LOGICAL REORDER

```

MPI_DIST_GRAPH_CREATE_ADJACENT returns a handle to a new communicator to which the distributed graph topology information is attached. Each process passes all information about its incoming and outgoing edges in the virtual distributed graph topology. The calling processes must ensure that each edge of the graph is described in the source and in the destination process with the same weights. If there are multiple edges for a given (source,dest) pair, then the sequence of the weights of these edges does not matter. The complete communication topology is the combination of all edges shown in the sources arrays of all processes in comm_old, which must be identical to the combination of all edges shown in the destinations arrays. Source and destination ranks must be process ranks of comm_old. This allows a fully distributed specification of the communication graph. Isolated processes (i.e., processes with no outgoing or incoming edges, that is, processes that have specified indegree and outdegree as zero and thus do not occur as source or destination rank in the graph specification) are allowed.

The call creates a new communicator comm_dist_graph of distributed graph topology type to which topology information has been attached. The number of processes in comm_dist_graph is identical to the number of processes in comm_old. The call to MPI_DIST_GRAPH_CREATE_ADJACENT is collective.

Weights are specified as non-negative integers and can be used to influence the process remapping strategy and other internal MPI optimizations. For instance, approximate count arguments of later communication calls along specific edges could be used as their edge weights. Multiplicity of edges can likewise indicate more intense communication between pairs of processes. However, the exact meaning of edge weights is not specified by the MPI standard and is left to the implementation. In C or Fortran, an application can supply the special value MPI_UNWEIGHTED for the weight array to indicate that all edges have the same (effectively no) weight. It is erroneous to supply MPI_UNWEIGHTED for some but not all processes of comm_old. If the graph is weighted but indegree or outdegree is zero, then MPI_WEIGHTS_EMPTY or any arbitrary array may be passed to sourceweights

1 or `destweights` respectively. Note that `MPI_UNWEIGHTED` and `MPI_WEIGHTS_EMPTY` are
 2 not special weight values; rather they are special values for the total array argument. In
 3 Fortran, `MPI_UNWEIGHTED` and `MPI_WEIGHTS_EMPTY` are objects like `MPI_BOTTOM` (not
 4 usable for initialization or assignment). See Section 2.5.4.

5
 6 *Advice to users.* In the case of an empty weights array argument passed while
 7 constructing a weighted graph, one should not pass `NULL` because the value of
 8 `MPI_UNWEIGHTED` may be equal to `NULL`. The value of this argument would then
 9 be indistinguishable from `MPI_UNWEIGHTED` to the implementation. In this case
 10 `MPI_WEIGHTS_EMPTY` should be used instead. (*End of advice to users.*)

11
 12 *Advice to implementors.* It is recommended that `MPI_UNWEIGHTED` not be imple-
 13 mented as `NULL`. (*End of advice to implementors.*)

14
 15 *Rationale.* To ensure backward compatibility, `MPI_UNWEIGHTED` may still be imple-
 16 mented as `NULL`. See Annex B.4. (*End of rationale.*)

17
 18 The meaning of the `info` and `reorder` arguments is defined in the description of the
 19 following routine.

```

20
21 MPI_DIST_GRAPH_CREATE(comm_old, n, sources, degrees, destinations, weights, info,
22                       reorder, comm_dist_graph)
23
24 IN      comm_old      input communicator (handle)
25 IN      n             number of source nodes for which this process
26                       specifies edges (non-negative integer)
27 IN      sources       array containing the n source nodes for which this
28                       process specifies edges (array of non-negative
29                       integers)
30 IN      degrees       array specifying the number of destinations for each
31                       source node in the source node array (array of
32                       non-negative integers)
33 IN      destinations  destination nodes for the source nodes in the source
34                       node array (array of non-negative integers)
35 IN      weights       weights for source to destination edges (array of
36                       non-negative integers)
37 IN      info          hints on optimization and interpretation of weights
38                       (handle)
39 IN      reorder       the ranks may be reordered (true) or not (false)
40                       (logical)
41 OUT     comm_dist_graph communicator with distributed graph topology
42                       added (handle)
43
44
45
46 int MPI_Dist_graph_create(MPI_Comm comm_old, int n, const int sources[],
47                          const int degrees[], const int destinations[],
48
```

```

    const int weights[], MPI_Info info, int reorder,
    MPI_Comm *comm_dist_graph)
MPI_Dist_graph_create(comm_old, n, sources, degrees, destinations, weights,
    info, reorder, comm_dist_graph, ierror)
TYPE(MPI_Comm), INTENT(IN) :: comm_old
INTEGER, INTENT(IN) :: n, sources(n), degrees(n), destinations(*),
    weights(*)
TYPE(MPI_Info), INTENT(IN) :: info
LOGICAL, INTENT(IN) :: reorder
TYPE(MPI_Comm), INTENT(OUT) :: comm_dist_graph
INTEGER, OPTIONAL, INTENT(OUT) :: ierror
MPI_DIST_GRAPH_CREATE(COMM_OLD, N, SOURCES, DEGREES, DESTINATIONS, WEIGHTS,
    INFO, REORDER, COMM_DIST_GRAPH, IERROR)
INTEGER COMM_OLD, N, SOURCES(*), DEGREES(*), DESTINATIONS(*),
    WEIGHTS(*), INFO, COMM_DIST_GRAPH, IERROR
LOGICAL REORDER

```

MPI_DIST_GRAPH_CREATE returns a handle to a new communicator to which the distributed graph topology information is attached. Concretely, each process calls the constructor with a set of directed (source,destination) communication edges as described below. Every process passes an array of n source nodes in the `sources` array. For each source node, a non-negative number of destination nodes is specified in the `degrees` array. The destination nodes are stored in the corresponding consecutive segment of the `destinations` array. More precisely, if the i -th node in `sources` is s , this specifies `degrees[i]` edges (s,d) with d of the j -th such edge stored in `destinations[degrees[0]+...+degrees[i-1]+j]`. The weight of this edge is stored in `weights[degrees[0]+...+degrees[i-1]+j]`. Both the `sources` and the `destinations` arrays may contain the same node more than once, and the order in which nodes are listed as destinations or sources is not significant. Similarly, different processes may specify edges with the same source and destination nodes. Source and destination nodes must be process ranks of `comm_old`. Different processes may specify different numbers of source and destination nodes, as well as different source to destination edges. This allows a fully distributed specification of the communication graph. Isolated processes (i.e., processes with no outgoing or incoming edges, that is, processes that do not occur as source or destination node in the graph specification) are allowed.

The call creates a new communicator `comm_dist_graph` of distributed graph topology type to which topology information has been attached. The number of processes in `comm_dist_graph` is identical to the number of processes in `comm_old`. The call to MPI_DIST_GRAPH_CREATE is collective.

If `reorder = false`, all processes will have the same rank in `comm_dist_graph` as in `comm_old`. If `reorder = true` then the MPI library is free to remap to other processes (of `comm_old`) in order to improve communication on the edges of the communication graph. The weight associated with each edge is a hint to the MPI library about the amount or intensity of communication on that edge, and may be used to compute a “best” reordering.

Weights are specified as non-negative integers and can be used to influence the process remapping strategy and other internal MPI optimizations. For instance, approximate count arguments of later communication calls along specific edges could be used as their edge weights. Multiplicity of edges can likewise indicate more intense communication between

1 pairs of processes. However, the exact meaning of edge weights is not specified by the MPI
 2 standard and is left to the implementation. In C or Fortran, an application can supply
 3 the special value `MPI_UNWEIGHTED` for the weight array to indicate that all edges have the
 4 same (effectively no) weight. It is erroneous to supply `MPI_UNWEIGHTED` for some but not
 5 all processes of `comm_old`. If the graph is weighted but `n = 0`, then `MPI_WEIGHTS_EMPTY`
 6 or any arbitrary array may be passed to `weights`. Note that `MPI_UNWEIGHTED` and
 7 `MPI_WEIGHTS_EMPTY` are not special weight values; rather they are special values for the
 8 total array argument. In Fortran, `MPI_UNWEIGHTED` and `MPI_WEIGHTS_EMPTY` are objects
 9 like `MPI_BOTTOM` (not usable for initialization or assignment). See Section 2.5.4.

10
 11 *Advice to users.* In the case of an empty weights array argument passed while
 12 constructing a weighted graph, one should not pass `NULL` because the value of
 13 `MPI_UNWEIGHTED` may be equal to `NULL`. The value of this argument would then
 14 be indistinguishable from `MPI_UNWEIGHTED` to the implementation.
 15 `MPI_WEIGHTS_EMPTY` should be used instead. (*End of advice to users.*)

16
 17 *Advice to implementors.* It is recommended that `MPI_UNWEIGHTED` not be imple-
 18 mented as `NULL`. (*End of advice to implementors.*)

19
 20 *Rationale.* To ensure backward compatibility, `MPI_UNWEIGHTED` may still be imple-
 21 mented as `NULL`. See Annex B.4. (*End of rationale.*)

22 The meaning of the `weights` argument can be influenced by the `info` argument. `Info`
 23 arguments can be used to guide the mapping; possible options include minimizing the
 24 maximum number of edges between processes on different SMP nodes, or minimizing the
 25 sum of all such edges. An MPI implementation is not obliged to follow specific hints, and it
 26 is valid for an MPI implementation not to do any reordering. An MPI implementation may
 27 specify more `info` key-value pairs. All processes must specify the same set of key-value `info`
 28 pairs.

29
 30 *Advice to implementors.* MPI implementations must document any additionally
 31 supported key-value `info` pairs. `MPI_INFO_NULL` is always valid, and may indicate the
 32 default creation of the distributed graph topology to the MPI library.

33 An implementation does not explicitly need to construct the topology from its dis-
 34 tributed parts. However, all processes can construct the full topology from the dis-
 35 tributed specification and use this in a call to `MPI_GRAPH_CREATE` to create the
 36 topology. This may serve as a reference implementation of the functionality, and
 37 may be acceptable for small communicators. However, a scalable high-quality im-
 38 plementation would save the topology graph in a distributed way. (*End of advice to*
 39 *implementors.*)

40
 41 **Example 7.3** As for Example 7.2, assume there are four processes 0, 1, 2, 3 with the
 42 following adjacency matrix and unit edge weights:

process	neighbors
0	1, 3
1	0
2	3
3	0, 2

With `MPI_DIST_GRAPH_CREATE`, this graph could be constructed in many different ways. One way would be that each process specifies its outgoing edges. The arguments per process would be:

process	n	sources	degrees	destinations	weights
0	1	0	2	1,3	1,1
1	1	1	1	0	1
2	1	2	1	3	1
3	1	3	2	0,2	1,1

Another way would be to pass the whole graph on process 0, which could be done with the following arguments per process:

process	n	sources	degrees	destinations	weights
0	4	0,1,2,3	2,1,1,2	1,3,0,3,0,2	1,1,1,1,1,1
1	0	-	-	-	-
2	0	-	-	-	-
3	0	-	-	-	-

In both cases above, the application could supply `MPI_UNWEIGHTED` instead of explicitly providing identical weights.

`MPI_DIST_GRAPH_CREATE_ADJACENT` could be used to specify this graph using the following arguments:

process	indegree	sources	sourceweights	outdegree	destinations	destweights
0	2	1,3	1,1	2	1,3	1,1
1	1	0	1	1	0	1
2	1	3	1	1	3	1
3	2	0,2	1,1	2	0,2	1,1

Example 7.4 A two-dimensional $P \times Q$ torus where all processes communicate along the dimensions and along the diagonal edges. This cannot be modeled with Cartesian topologies, but can easily be captured with `MPI_DIST_GRAPH_CREATE` as shown in the following code. In this example, the communication along the dimensions is twice as heavy as the communication along the diagonals:

```

/*
Input:      dimensions P, Q
Condition:  number of processes equal to P*Q; otherwise only
            ranks smaller than P*Q participate
*/
int rank, x, y;
int sources[1], degrees[1];
int destinations[8], weights[8];
MPI_Comm comm_dist_graph;

MPI_Comm_rank(MPI_COMM_WORLD, &rank);

/* get x and y dimension */
y=rank/P; x=rank%P;

```

```

1
2 /* get my communication partners along x dimension */
3 destinations[0] = P*y+(x+1)%P; weights[0] = 2;
4 destinations[1] = P*y+(P+x-1)%P; weights[1] = 2;
5
6 /* get my communication partners along y dimension */
7 destinations[2] = P*((y+1)%Q)+x; weights[2] = 2;
8 destinations[3] = P*((Q+y-1)%Q)+x; weights[3] = 2;
9
10 /* get my communication partners along diagonals */
11 destinations[4] = P*((y+1)%Q)+(x+1)%P; weights[4] = 1;
12 destinations[5] = P*((Q+y-1)%Q)+(x+1)%P; weights[5] = 1;
13 destinations[6] = P*((y+1)%Q)+(P+x-1)%P; weights[6] = 1;
14 destinations[7] = P*((Q+y-1)%Q)+(P+x-1)%P; weights[7] = 1;
15
16 sources[0] = rank;
17 degrees[0] = 8;
18 MPI_Dist_graph_create(MPI_COMM_WORLD, 1, sources, degrees, destinations,
19                       weights, MPI_INFO_NULL, 1, &comm_dist_graph);
20

```

7.5.5 Topology Inquiry Functions

If a topology has been defined with one of the above functions, then the topology information can be looked up using inquiry functions. They all are local calls.

`MPI_TOPO_TEST(comm, status)`

IN	comm	communicator (handle)
OUT	status	topology type of communicator comm (state)

`int MPI_Topo_test(MPI_Comm comm, int *status)`

```

MPI_Topo_test(comm, status, ierror)
    TYPE(MPI_Comm), INTENT(IN) :: comm
    INTEGER, INTENT(OUT) :: status
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror

```

```

MPI_TOPO_TEST(COMM, STATUS, IERROR)
    INTEGER COMM, STATUS, IERROR

```

The function `MPI_TOPO_TEST` returns the type of topology that is assigned to a communicator.

The output value `status` is one of the following:

<code>MPI_GRAPH</code>	graph topology
<code>MPI_CART</code>	Cartesian topology
<code>MPI_DIST_GRAPH</code>	distributed graph topology
<code>MPI_UNDEFINED</code>	no topology

MPI_GRAPHDIMS_GET(comm, nnodes, nedges)	1
IN comm communicator for group with graph structure	2
(handle)	3
OUT nnodes number of nodes in graph (same as number of	4
processes in the group) (integer)	5
OUT nedges number of edges in graph (integer)	6
	7
	8
int MPI_Graphdims_get(MPI_Comm comm, int *nnodes, int *nedges)	9
	10
MPI_Graphdims_get(comm, nnodes, nedges, ierror)	11
TYPE(MPI_Comm), INTENT(IN) :: comm	12
INTEGER, INTENT(OUT) :: nnodes, nedges	13
INTEGER, OPTIONAL, INTENT(OUT) :: ierror	14
MPI_GRAPHDIMS_GET(COMM, NNODES, NEDGES, IERROR)	15
INTEGER COMM, NNODES, NEDGES, IERROR	16
	17
Functions MPI_GRAPHDIMS_GET and MPI_GRAPH_GET retrieve the graph-topology	18
information that was associated with a communicator by MPI_GRAPH_CREATE.	19
The information provided by MPI_GRAPHDIMS_GET can be used to dimension the	20
vectors index and edges correctly for the following call to MPI_GRAPH_GET.	21
	22
	23
MPI_GRAPH_GET(comm, maxindex, maxedges, index, edges)	24
IN comm communicator with graph structure (handle)	25
IN maxindex length of vector index in the calling program (integer)	26
IN maxedges length of vector edges in the calling program (integer)	27
OUT index array of integers containing the graph structure (for	28
details see the definition of MPI_GRAPH_CREATE)	29
OUT edges array of integers containing the graph structure	30
	31
	32
int MPI_Graph_get(MPI_Comm comm, int maxindex, int maxedges, int index[],	33
int edges[])	34
	35
MPI_Graph_get(comm, maxindex, maxedges, index, edges, ierror)	36
TYPE(MPI_Comm), INTENT(IN) :: comm	37
INTEGER, INTENT(IN) :: maxindex, maxedges	38
INTEGER, INTENT(OUT) :: index(maxindex), edges(maxedges)	39
INTEGER, OPTIONAL, INTENT(OUT) :: ierror	40
MPI_GRAPH_GET(COMM, MAXINDEX, MAXEDGES, INDEX, EDGES, IERROR)	41
INTEGER COMM, MAXINDEX, MAXEDGES, INDEX(*), EDGES(*), IERROR	42
	43
	44
	45
	46
	47
	48

```

1 MPI_CARTDIM_GET(comm, ndims)
2   IN      comm      communicator with Cartesian structure (handle)
3
4   OUT     ndims     number of dimensions of the Cartesian structure
5                      (integer)

```

```

6
7 int MPI_Cartdim_get(MPI_Comm comm, int *ndims)

```

```

8 MPI_Cartdim_get(comm, ndims, ierror)
9   TYPE(MPI_Comm), INTENT(IN) :: comm
10  INTEGER, INTENT(OUT) :: ndims
11  INTEGER, OPTIONAL, INTENT(OUT) :: ierror

```

```

12
13 MPI_CARTDIM_GET(COMM, NDIMS, IERROR)
14   INTEGER COMM, NDIMS, IERROR

```

15 The functions `MPI_CARTDIM_GET` and `MPI_CART_GET` return the Cartesian topol-
16 ogy information that was associated with a communicator by `MPI_CART_CREATE`. If `comm`
17 is associated with a zero-dimensional Cartesian topology, `MPI_CARTDIM_GET` returns
18 `ndims = 0` and `MPI_CART_GET` will keep all output arguments unchanged.

```

19
20
21 MPI_CART_GET(comm, maxdims, dims, periods, coords)
22
23   IN      comm      communicator with Cartesian structure (handle)
24
25   IN      maxdims   length of vectors dims, periods, and coords in the
26                      calling program (integer)
27
28   OUT     dims      number of processes for each Cartesian dimension
29                      (array of integers)
30
31   OUT     periods   periodicity (true/false) for each Cartesian dimension
32                      (array of logicals)
33
34   OUT     coords    coordinates of calling process in Cartesian structure
35                      (array of integers)

```

```

36
37 int MPI_Cart_get(MPI_Comm comm, int maxdims, int dims[], int periods[],
38                int coords[])

```

```

39 MPI_Cart_get(comm, maxdims, dims, periods, coords, ierror)
40   TYPE(MPI_Comm), INTENT(IN) :: comm
41   INTEGER, INTENT(IN) :: maxdims
42   INTEGER, INTENT(OUT) :: dims(maxdims), coords(maxdims)
43   LOGICAL, INTENT(OUT) :: periods(maxdims)
44   INTEGER, OPTIONAL, INTENT(OUT) :: ierror

```

```

45 MPI_CART_GET(COMM, MAXDIMS, DIMS, PERIODS, COORDS, IERROR)
46   INTEGER COMM, MAXDIMS, DIMS(*), COORDS(*), IERROR
47   LOGICAL PERIODS(*)

```

```

48

```

MPI_CART_RANK(comm, coords, rank)	1	
IN comm	communicator with Cartesian structure (handle)	2
IN coords	integer array (of size ndims) specifying the Cartesian coordinates of a process	3 4 5
OUT rank	rank of specified process (integer)	6 7
int MPI_Cart_rank(MPI_Comm comm, const int coords[], int *rank)	8	
MPI_Cart_rank(comm, coords, rank, ierror)	9	
TYPE(MPI_Comm), INTENT(IN) :: comm	10	
INTEGER, INTENT(IN) :: coords(*)	11	
INTEGER, INTENT(OUT) :: rank	12	
INTEGER, OPTIONAL, INTENT(OUT) :: ierror	13 14	
MPI_CART_RANK(COMM, COORDS, RANK, IERROR)	15	
INTEGER COMM, COORDS(*), RANK, IERROR	16 17	
For a process group with Cartesian structure, the function MPI_CART_RANK translates the logical process coordinates to process ranks as they are used by the point-to-point routines.	18 19 20	
For dimension i with <code>periods(i) = true</code> , if the coordinate, <code>coords(i)</code> , is out of range, that is, <code>coords(i) < 0</code> or <code>coords(i) ≥ dims(i)</code> , it is shifted back to the interval $0 ≤ \text{coords}(i) < \text{dims}(i)$ automatically. Out-of-range coordinates are erroneous for non-periodic dimensions.	21 22 23 24	
If <code>comm</code> is associated with a zero-dimensional Cartesian topology, <code>coords</code> is not significant and 0 is returned in <code>rank</code> .	25 26 27	
MPI_CART_COORDS(comm, rank, maxdims, coords)	28	
IN comm	communicator with Cartesian structure (handle)	29 30
IN rank	rank of a process within group of <code>comm</code> (integer)	31
IN maxdims	length of vector <code>coords</code> in the calling program (integer)	32 33 34
OUT coords	integer array (of size <code>maxdims</code>) containing the Cartesian coordinates of specified process (array of integers)	35 36 37 38
int MPI_Cart_coords(MPI_Comm comm, int rank, int maxdims, int coords[])	39	
MPI_Cart_coords(comm, rank, maxdims, coords, ierror)	40	
TYPE(MPI_Comm), INTENT(IN) :: comm	41	
INTEGER, INTENT(IN) :: rank, maxdims	42	
INTEGER, INTENT(OUT) :: coords(maxdims)	43	
INTEGER, OPTIONAL, INTENT(OUT) :: ierror	44 45	
MPI_CART_COORDS(COMM, RANK, MAXDIMS, COORDS, IERROR)	46	
INTEGER COMM, RANK, MAXDIMS, COORDS(*), IERROR	47 48	

1 The inverse mapping, rank-to-coordinates translation is provided by
2 MPI_CART_COORDS.

3 If `comm` is associated with a zero-dimensional Cartesian topology,
4 `coords` will be unchanged.

5
6
7 MPI_GRAPH_NEIGHBORS_COUNT(`comm`, `rank`, `nneighbors`)

8 IN `comm` communicator with graph topology (handle)
9 IN `rank` rank of process in group of `comm` (integer)
10 OUT `nneighbors` number of neighbors of specified process (integer)

11
12
13 `int MPI_Graph_neighbors_count(MPI_Comm comm, int rank, int *nneighbors)`

14 `MPI_Graph_neighbors_count(comm, rank, nneighbors, ierror)`

15 TYPE(MPI_Comm), INTENT(IN) :: `comm`
16 INTEGER, INTENT(IN) :: `rank`
17 INTEGER, INTENT(OUT) :: `nneighbors`
18 INTEGER, OPTIONAL, INTENT(OUT) :: `ierror`

19
20 MPI_GRAPH_NEIGHBORS_COUNT(COMM, RANK, NNEIGHBORS, IERROR)

21 INTEGER COMM, RANK, NNEIGHBORS, IERROR

22
23
24 MPI_GRAPH_NEIGHBORS(`comm`, `rank`, `maxneighbors`, `neighbors`)

25 IN `comm` communicator with graph topology (handle)
26 IN `rank` rank of process in group of `comm` (integer)
27 IN `maxneighbors` size of array `neighbors` (integer)
28 OUT `neighbors` ranks of processes that are neighbors to specified
29 process (array of integers)

30
31
32
33 `int MPI_Graph_neighbors(MPI_Comm comm, int rank, int maxneighbors,`
34 `int neighbors[])`

35 `MPI_Graph_neighbors(comm, rank, maxneighbors, neighbors, ierror)`

36 TYPE(MPI_Comm), INTENT(IN) :: `comm`
37 INTEGER, INTENT(IN) :: `rank`, `maxneighbors`
38 INTEGER, INTENT(OUT) :: `neighbors(maxneighbors)`
39 INTEGER, OPTIONAL, INTENT(OUT) :: `ierror`

40
41 MPI_GRAPH_NEIGHBORS(COMM, RANK, MAXNEIGHBORS, NEIGHBORS, IERROR)

42 INTEGER COMM, RANK, MAXNEIGHBORS, NEIGHBORS(*), IERROR

43 MPI_GRAPH_NEIGHBORS_COUNT and MPI_GRAPH_NEIGHBORS provide adjacency
44 information for a graph topology. The returned count and array of neighbors for the queried
45 rank will both include *all* neighbors and reflect the same edge ordering as was specified by
46 the original call to MPI_GRAPH_CREATE. Specifically, MPI_GRAPH_NEIGHBORS_COUNT
47 and MPI_GRAPH_NEIGHBORS will return values based on the original index and `edges` array

passed to `MPI_GRAPH_CREATE` (for the purpose of this example, we assume that `index[-1]` is zero):

- The number of neighbors (`nneighbors`) returned from `MPI_GRAPH_NEIGHBORS_COUNT` will be $(\text{index}[\text{rank}] - \text{index}[\text{rank}-1])$.
- The `neighbors` array returned from `MPI_GRAPH_NEIGHBORS` will be `edges[index[rank-1]]` through `edges[index[rank]-1]`.

Example 7.5 Assume there are four processes 0, 1, 2, 3 with the following adjacency matrix (note that some neighbors are listed multiple times):

process	neighbors
0	1, 1, 3
1	0, 0
2	3
3	0, 2, 2

Thus, the input arguments to `MPI_GRAPH_CREATE` are:

```
nnodes = 4
index = 3, 5, 6, 9
edges = 1, 1, 3, 0, 0, 3, 0, 2, 2
```

Therefore, calling `MPI_GRAPH_NEIGHBORS_COUNT` and `MPI_GRAPH_NEIGHBORS` for each of the 4 processes will return:

Input rank	Count	Neighbors
0	3	1, 1, 3
1	2	0, 0
2	1	3
3	3	0, 2, 2

Example 7.6 Suppose that `comm` is a communicator with a shuffle-exchange topology. The group has 2^n members. Each process is labeled by a_1, \dots, a_n with $a_i \in \{0, 1\}$, and has three neighbors: $\text{exchange}(a_1, \dots, a_n) = a_1, \dots, a_{n-1}, \bar{a}_n$ ($\bar{a} = 1 - a$), $\text{shuffle}(a_1, \dots, a_n) = a_2, \dots, a_n, a_1$, and $\text{unshuffle}(a_1, \dots, a_n) = a_n, a_1, \dots, a_{n-1}$. The graph adjacency list is illustrated below for $n = 3$.

node	exchange neighbors(1)	shuffle neighbors(2)	unshuffle neighbors(3)
0 (000)	1	0	0
1 (001)	0	2	4
2 (010)	3	4	1
3 (011)	2	6	5
4 (100)	5	1	2
5 (101)	4	3	6
6 (110)	7	5	3
7 (111)	6	7	7

1 Suppose that the communicator `comm` has this topology associated with it. The follow-
 2 ing code fragment cycles through the three types of neighbors and performs an appropriate
 3 permutation for each.

```

  4
  5       ! assume: each process has stored a real number A.
  6       ! extract neighborhood information
  7       CALL MPI_COMM_RANK(comm, myrank, ierr)
  8       CALL MPI_GRAPH_NEIGHBORS(comm, myrank, 3, neighbors, ierr)
  9       ! perform exchange permutation
 10       CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(1), 0, &
 11                                neighbors(1), 0, comm, status, ierr)
 12       ! perform shuffle permutation
 13       CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(2), 0, &
 14                                neighbors(3), 0, comm, status, ierr)
 15       ! perform unshuffle permutation
 16       CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(3), 0, &
 17                                neighbors(2), 0, comm, status, ierr)
  
```

18
 19 MPI_DIST_GRAPH_NEIGHBORS_COUNT and MPI_DIST_GRAPH_NEIGHBORS pro-
 20 vide adjacency information for a distributed graph topology.

```

 21
 22       MPI_DIST_GRAPH_NEIGHBORS_COUNT(comm, indegree, outdegree, weighted)
 23
 24       IN        comm                       communicator with distributed graph topology
 25                                               (handle)
 26       OUT       indegree                 number of edges into this process (non-negative
 27                                               integer)
 28       OUT       outdegree                number of edges out of this process (non-negative
 29                                               integer)
 30       OUT       weighted                 false if MPI_UNWEIGHTED was supplied during
 31                                               creation, true otherwise (logical)
 32
 33
 34       int MPI_Dist_graph_neighbors_count(MPI_Comm comm, int *indegree,
 35                                        int *outdegree, int *weighted)
 36
 37       MPI_Dist_graph_neighbors_count(comm, indegree, outdegree, weighted, ierror)
 38            TYPE(MPI_Comm), INTENT(IN) :: comm
 39            INTEGER, INTENT(OUT) :: indegree, outdegree
 40            LOGICAL, INTENT(OUT) :: weighted
 41            INTEGER, OPTIONAL, INTENT(OUT) :: ierror
 42
 43       MPI_DIST_GRAPH_NEIGHBORS_COUNT(COMM, INDEGREE, OUTDEGREE, WEIGHTED, IERROR)
 44            INTEGER COMM, INDEGREE, OUTDEGREE, IERROR
 45            LOGICAL WEIGHTED
 46
 47
 48
  
```

	MPI_DIST_GRAPH_NEIGHBORS(comm, maxindegree, sources, sourceweights,		1
	maxoutdegree, destinations, destweights)		2
IN	comm	communicator with distributed graph topology (handle)	3 4
IN	maxindegree	size of sources and sourceweights arrays (non-negative integer)	5 6 7
OUT	sources	processes for which the calling process is a destination (array of non-negative integers)	8 9
OUT	sourceweights	weights of the edges into the calling process (array of non-negative integers)	10 11
IN	maxoutdegree	size of destinations and destweights arrays (non-negative integer)	12 13 14
OUT	destinations	processes for which the calling process is a source (array of non-negative integers)	15 16
OUT	destweights	weights of the edges out of the calling process (array of non-negative integers)	17 18 19
	int MPI_Dist_graph_neighbors(MPI_Comm comm, int maxindegree, int sources[],		20
	int sourceweights[], int maxoutdegree, int destinations[],		21
	int destweights[])		22 23
	MPI_Dist_graph_neighbors(comm, maxindegree, sources, sourceweights,		24
	maxoutdegree, destinations, destweights, ierror)		25
	TYPE(MPI_Comm), INTENT(IN) :: comm		26
	INTEGER, INTENT(IN) :: maxindegree, maxoutdegree		27
	INTEGER, INTENT(OUT) :: sources(maxindegree),		28
	destinations(maxoutdegree)		29
	INTEGER :: sourceweights(*), destweights(*)		30
	INTEGER, OPTIONAL, INTENT(OUT) :: ierror		31
	MPI_DIST_GRAPH_NEIGHBORS(COMM, MAXINDEGREE, SOURCES, SOURCEWEIGHTS,		32
	MAXOUTDEGREE, DESTINATIONS, DESTWEIGHTS, IERROR)		33
	INTEGER COMM, MAXINDEGREE, SOURCES(*), SOURCEWEIGHTS(*), MAXOUTDEGREE,		34
	DESTINATIONS(*), DESTWEIGHTS(*), IERROR		35 36

These calls are local. The number of edges into and out of the process returned by MPI_DIST_GRAPH_NEIGHBORS_COUNT are the total number of such edges given in the call to MPI_DIST_GRAPH_CREATE_ADJACENT or MPI_DIST_GRAPH_CREATE (potentially by processes other than the calling process in the case of MPI_DIST_GRAPH_CREATE). Multiply defined edges are all counted and returned by MPI_DIST_GRAPH_NEIGHBORS in some order. If MPI_UNWEIGHTED is supplied for sourceweights or destweights or both, or if MPI_UNWEIGHTED was supplied during the construction of the graph then no weight information is returned in that array or those arrays. If the communicator was created with MPI_DIST_GRAPH_CREATE_ADJACENT then for each rank in comm, the order of the values in sources and destinations is identical to the input that was used by the process with the same rank in comm_old in the creation call. If the communicator was created with MPI_DIST_GRAPH_CREATE then the only requirement on

the order of values in `sources` and `destinations` is that two calls to the routine with same input argument `comm` will return the same sequence of edges. If `maxindegree` or `maxoutdegree` is smaller than the numbers returned by `MPI_DIST_GRAPH_NEIGHBORS_COUNT`, then only the first part of the full list is returned.

Advice to implementors. Since the query calls are defined to be local, each process needs to store the list of its neighbors with incoming and outgoing edges. Communication is required at the collective `MPI_DIST_GRAPH_CREATE` call in order to compute the neighbor lists for each process from the distributed graph specification. (*End of advice to implementors.*)

7.5.6 Cartesian Shift Coordinates

If the process topology is a Cartesian structure, an `MPI_SENDRECV` operation may be used along a coordinate direction to perform a shift of data. As input, `MPI_SENDRECV` takes the rank of a source process for the receive, and the rank of a destination process for the send. If the function `MPI_CART_SHIFT` is called for a Cartesian process group, it provides the calling process with the above identifiers, which then can be passed to `MPI_SENDRECV`. The user specifies the coordinate direction and the size of the step (positive or negative). The function is local.

`MPI_CART_SHIFT(comm, direction, disp, rank_source, rank_dest)`

IN	<code>comm</code>	communicator with Cartesian structure (handle)
IN	<code>direction</code>	coordinate dimension of shift (integer)
IN	<code>disp</code>	displacement (> 0: upwards shift, < 0: downwards shift) (integer)
OUT	<code>rank_source</code>	rank of source process (integer)
OUT	<code>rank_dest</code>	rank of destination process (integer)

```
int MPI_Cart_shift(MPI_Comm comm, int direction, int disp,
                  int *rank_source, int *rank_dest)
```

```
MPI_Cart_shift(comm, direction, disp, rank_source, rank_dest, ierror)
```

```
TYPE(MPI_Comm), INTENT(IN) :: comm
INTEGER, INTENT(IN) :: direction, disp
INTEGER, INTENT(OUT) :: rank_source, rank_dest
INTEGER, OPTIONAL, INTENT(OUT) :: ierror
```

```
MPI_CART_SHIFT(COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR)
INTEGER COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR
```

The `direction` argument indicates the coordinate dimension to be traversed by the shift. The dimensions are numbered from 0 to `ndims-1`, where `ndims` is the number of dimensions.

Depending on the periodicity of the Cartesian group in the specified coordinate direction, `MPI_CART_SHIFT` provides the identifiers for a circular or an end-off shift. In the case of an end-off shift, the value `MPI_PROC_NULL` may be returned in `rank_source` or `rank_dest`, indicating that the source or the destination for the shift is out of range.

It is erroneous to call `MPI_CART_SHIFT` with a direction that is either negative or greater than or equal to the number of dimensions in the Cartesian communicator. This implies that it is erroneous to call `MPI_CART_SHIFT` with a `comm` that is associated with a zero-dimensional Cartesian topology.

Example 7.7 The communicator, `comm`, has a two-dimensional, periodic, Cartesian topology associated with it. A two-dimensional array of `REALs` is stored one element per process, in variable `A`. One wishes to skew this array, by shifting column `i` (vertically, i.e., along the column) by `i` steps.

```
...
! find process rank
CALL MPI_COMM_RANK(comm, rank, ierr)
! find Cartesian coordinates
CALL MPI_CART_COORDS(comm, rank, maxdims, coords, ierr)
! compute shift source and destination
CALL MPI_CART_SHIFT(comm, 0, coords(2), source, dest, ierr)
! skew array
CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, dest, 0, source, 0, comm, &
                        status, ierr)
```

Advice to users. In Fortran, the dimension indicated by `DIRECTION = i` has `DIMS(i+1)` nodes, where `DIMS` is the array that was used to create the grid. In C, the dimension indicated by `direction = i` is the dimension specified by `dims[i]`. (*End of advice to users.*)

7.5.7 Partitioning of Cartesian Structures

`MPI_CART_SUB(comm, remain_dims, newcomm)`

IN	<code>comm</code>	communicator with Cartesian structure (handle)
IN	<code>remain_dims</code>	the <code>i</code> -th entry of <code>remain_dims</code> specifies whether the <code>i</code> -th dimension is kept in the subgrid (<code>true</code>) or is dropped (<code>false</code>) (array of logicals)
OUT	<code>newcomm</code>	communicator containing the subgrid that includes the calling process (handle)

```
int MPI_Cart_sub(MPI_Comm comm, const int remain_dims[], MPI_Comm *newcomm)
```

```
MPI_Cart_sub(comm, remain_dims, newcomm, ierror)
```

```
TYPE(MPI_Comm), INTENT(IN) :: comm
LOGICAL, INTENT(IN) :: remain_dims(*)
TYPE(MPI_Comm), INTENT(OUT) :: newcomm
INTEGER, OPTIONAL, INTENT(OUT) :: ierror
```

```
MPI_CART_SUB(COMM, REMAIN_DIMS, NEWCOMM, IERROR)
```

```
INTEGER COMM, NEWCOMM, IERROR
LOGICAL REMAIN_DIMS(*)
```

1 If a Cartesian topology has been created with `MPI_CART_CREATE`, the function
 2 `MPI_CART_SUB` can be used to partition the communicator group into subgroups that
 3 form lower-dimensional Cartesian subgrids, and to build for each subgroup a communicator
 4 with the associated subgrid Cartesian topology. **The topologies of the new communicators**
 5 **describe the subgrids. The dimensionality of the subgrids is the number of remaining**
 6 **dimensions, i.e., the number of true values in `remain_dims`. The dimensions of the subgrids**
 7 **are the remaining dimensions of the grid associated with the original communicator, i.e.,**
 8 **the values of the original grid dimensions for which the corresponding entry in `remain_dims`**
 9 **is true. The periodicity for the remaining dimensions in the new communicator is preserved**
 10 **from the original communicator.** If all entries in `remain_dims` are false or
 11 `comm` is already associated with a zero-dimensional Cartesian topology then `newcomm` is
 12 associated with a zero-dimensional Cartesian topology. (This function is closely related to
 13 `MPI_COMM_SPLIT`.)

14 **Example 7.8** Assume that `MPI_CART_CREATE(..., comm)` has defined a $(2 \times 3 \times 4)$ grid.
 15 Let `remain_dims = (true, false, true)`. Then a call to

```
17 MPI_CART_SUB(comm, remain_dims, comm_new);
```

18 will create three communicators each with eight processes in a 2×4 Cartesian topology.
 19 If `remain_dims = (false, false, true)` then the call to `MPI_CART_SUB(comm, remain_dims,`
 20 `comm_new)` will create six non-overlapping communicators, each with four processes, in a
 21 one-dimensional Cartesian topology.
 22

23 7.5.8 Low-Level Topology Functions

24 The two additional functions introduced in this section can be used to implement all other
 25 topology functions. In general they will not be called by the user directly, unless he or she
 26 is creating additional virtual topology capability other than that provided by MPI. The two
 27 calls are both local.
 28

```
29 MPI_CART_MAP(comm, ndims, dims, periods, newrank)
```

30	IN	<code>comm</code>	input communicator (handle)
31	IN	<code>ndims</code>	number of dimensions of Cartesian structure (integer)
32	IN	<code>dims</code>	integer array of size <code>ndims</code> specifying the number of processes in each coordinate direction
33	IN	<code>periods</code>	logical array of size <code>ndims</code> specifying the periodicity specification in each coordinate direction
34	OUT	<code>newrank</code>	reordered rank of the calling process; <code>MPI_UNDEFINED</code> if calling process does not belong to grid (integer)

```
35 int MPI_Cart_map(MPI_Comm comm, int ndims, const int dims[],  
36                 const int periods[], int *newrank)
```

```
37 MPI_Cart_map(comm, ndims, dims, periods, newrank, ierror)  
38 TYPE(MPI_Comm), INTENT(IN) :: comm
```

```

INTEGER, INTENT(IN) :: ndims, dims(ndims)           1
LOGICAL, INTENT(IN) :: periods(ndims)              2
INTEGER, INTENT(OUT) :: newrank                    3
INTEGER, OPTIONAL, INTENT(OUT) :: ierror           4
MPI_CART_MAP(COMM, NDIMS, DIMS, PERIODS, NEWRANK, IERROR) 5
INTEGER COMM, NDIMS, DIMS(*), NEWRANK, IERROR      6
LOGICAL PERIODS(*)                                 7

```

MPI_CART_MAP computes an “optimal” placement for the calling process on the physical machine. A possible implementation of this function is to always return the rank of the calling process, that is, not to perform any reordering.

Advice to implementors. The function MPI_CART_CREATE(comm, ndims, dims, periods, reorder, comm_cart), with reorder = true can be implemented by calling MPI_CART_MAP(comm, ndims, dims, periods, newrank), then calling MPI_COMM_SPLIT(comm, color, key, comm_cart), with color = 0 if newrank \neq MPI_UNDEFINED, color = MPI_UNDEFINED otherwise, and key = newrank. If ndims is zero then a zero-dimensional Cartesian topology is created.

The function MPI_CART_SUB(comm, remain_dims, comm_new) can be implemented by a call to MPI_COMM_SPLIT(comm, color, key, comm_new), using a single number encoding of the lost dimensions as color and a single number encoding of the preserved dimensions as key.

All other Cartesian topology functions can be implemented locally, using the topology information that is cached with the communicator. (*End of advice to implementors.*)

The corresponding function for graph structures is as follows.

```

MPI_GRAPH_MAP(comm, nnodes, index, edges, newrank)      29
IN      comm      input communicator (handle)          30
IN      nnodes    number of graph nodes (integer)      31
IN      index     integer array specifying the graph structure, see 32
                        MPI_GRAPH_CREATE                33
IN      edges     integer array specifying the graph structure 34
OUT     newrank   reordered rank of the calling process; 35
                        MPI_UNDEFINED if the calling process does not 36
                        belong to graph (integer)        37
int MPI_Graph_map(MPI_Comm comm, int nnodes, const int index[], 38
                  const int edges[], int *newrank)        39
MPI_Graph_map(comm, nnodes, index, edges, newrank, ierror) 40
TYPE(MPI_Comm), INTENT(IN) :: comm                      41
INTEGER, INTENT(IN) :: nnodes, index(nnodes), edges(*) 42
INTEGER, INTENT(OUT) :: newrank                         43
INTEGER, OPTIONAL, INTENT(OUT) :: ierror                44

```

```

1 MPI_GRAPH_MAP(COMM, NNODES, INDEX, EDGES, NEWRANK, IERROR)
2   INTEGER COMM, NNODES, INDEX(*), EDGES(*), NEWRANK, IERROR
3

```

4 *Advice to implementors.* The function `MPI_GRAPH_CREATE(comm, nnodes, index,`
5 `edges, reorder, comm_graph)`, with `reorder = true` can be implemented by calling
6 `MPI_GRAPH_MAP(comm, nnodes, index, edges, newrank)`, then calling
7 `MPI_COMM_SPLIT(comm, color, key, comm_graph)`, with `color = 0` if `newrank \neq`
8 `MPI_UNDEFINED`, `color = MPI_UNDEFINED` otherwise, and `key = newrank`.

9 All other graph topology functions can be implemented locally, using the topology
10 information that is cached with the communicator. (*End of advice to implementors.*)
11

12 7.6 Neighborhood Collective Communication on Process Topologies

13 MPI process topologies specify a communication graph, but they implement no commu-
14 nication function themselves. Many applications require sparse nearest neighbor commu-
15 nications that can be expressed as graph topologies. We now describe several collective
16 operations that perform communication along the edges of a process topology. All of these
17 functions are collective; i.e., they must be called by all processes in the specified commu-
18 nicator. See Section 6 for an overview of other dense (global) collective communication
19 operations and the semantics of collective operations.
20

21 If the graph was created with `MPI_DIST_GRAPH_CREATE_ADJACENT` with `sources`
22 and `destinations` containing `0, ..., n-1`, where `n` is the number of processes in the group
23 of `comm_old` (i.e., the graph is fully connected and also includes an edge from each node
24 to itself), then the sparse neighborhood communication routine performs the same data
25 exchange as the corresponding dense (fully-connected) collective operation. In the case of a
26 Cartesian communicator, only nearest neighbor communication is provided, corresponding
27 to `rank_source` and `rank_dest` in `MPI_CART_SHIFT` with input `disp = 1`.
28

29 *Rationale.* Neighborhood collective communications enable communication on a
30 process topology. This high-level specification of data exchange among neighboring
31 processes enables optimizations in the MPI library because the communication pattern
32 is known statically (the topology). Thus, the implementation can compute optimized
33 message schedules during creation of the topology [4]. This functionality can signifi-
34 cantly simplify the implementation of neighbor exchanges [3]. (*End of rationale.*)
35

36 For a distributed graph topology, created with `MPI_DIST_GRAPH_CREATE`, the se-
37 quence of neighbors in the send and receive buffers at each process is defined as the sequence
38 returned by `MPI_DIST_GRAPH_NEIGHBORS` for destinations and sources, respectively. For
39 a general graph topology, created with `MPI_GRAPH_CREATE`, the use of neighborhood col-
40 lective communication is restricted to adjacency matrices, where the number of edges be-
41 tween any two processes is defined to be the same for both processes (i.e., with a symmetric
42 adjacency matrix). In this case, the order of neighbors in the send and receive buffers is
43 defined as the sequence of neighbors as returned by `MPI_GRAPH_NEIGHBORS`. Note that
44 general graph topologies should generally be replaced by the distributed graph topologies.

45 For a Cartesian topology, created with `MPI_CART_CREATE`, the sequence of neigh-
46 bors in the send and receive buffers at each process is defined by order of the dimensions,
47 first the neighbor in the negative direction and then in the positive direction with dis-
48 placement 1. The numbers of sources and destinations in the communication routines are

2*ndims with ndims defined in MPI_CART_CREATE. If a neighbor does not exist, i.e., at the border of a Cartesian topology in the case of a non-periodic virtual grid dimension (i.e., periods[...]==false), then this neighbor is defined to be MPI_PROC_NULL.

If a neighbor in any of the functions is MPI_PROC_NULL, then the neighborhood collective communication behaves like a point-to-point communication with MPI_PROC_NULL in this direction. That is, the buffer is still part of the sequence of neighbors but it is neither communicated nor updated.

7.6.1 Neighborhood Gather

In this function, each process i gathers data items from each process j if an edge (j, i) exists in the topology graph, and each process i sends the same data items to all processes j where an edge (i, j) exists. The send buffer is sent to each neighboring process and the l -th block in the receive buffer is received from the l -th neighbor.

MPI_NEIGHBOR_ALLGATHER(sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, comm)

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements sent to each neighbor (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	starting address of receive buffer (choice)
IN	recvcount	number of elements received from each neighbor (non-negative integer)
IN	recvtype	data type of receive buffer elements (handle)
IN	comm	communicator with topology structure (handle)

```
int MPI_Neighbor_allgather(const void *sendbuf, int sendcount,
    MPI_Datatype sendtype, void *recvbuf, int recvcount,
    MPI_Datatype recvtype, MPI_Comm comm)
```

```
MPI_Neighbor_allgather(sendbuf, sendcount, sendtype, recvbuf, recvcount,
    recvtype, comm, ierror)
    TYPE(*), DIMENSION(..), INTENT(IN) :: sendbuf
    INTEGER, INTENT(IN) :: sendcount, recvcount
    TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
    TYPE(*), DIMENSION(..) :: recvbuf
    TYPE(MPI_Comm), INTENT(IN) :: comm
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror
```

```
MPI_NEIGHBOR_ALLGATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT,
    RECVTYPE, COMM, IERROR)
    <type> SENDBUF(*), RECVBUF(*)
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, IERROR
```

This function supports Cartesian communicators, graph communicators, and distributed graph communicators as described in Section 7.6. If `comm` is a distributed graph communicator, the outcome is as if each process executed sends to each of its outgoing neighbors and receives from each of its incoming neighbors:

```

1  MPI_Dist_graph_neighbors_count(comm, &indegree, &outdegree, &weighted);
2
3  int *srcs=(int*)malloc(indegree*sizeof(int));
4  int *dsts=(int*)malloc(outdegree*sizeof(int));
5  MPI_Dist_graph_neighbors(comm, indegree, srcs, MPI_UNWEIGHTED,
6                          outdegree, dsts, MPI_UNWEIGHTED);
7
8  int k,l;
9
10 /* assume sendbuf and recvbuf are of type (char*) */
11 for(k=0; k<outdegree; ++k)
12     MPI_Isend(sendbuf, sendcount, sendtype,dsts[k],...);
13
14 for(l=0; l<indegree; ++l)
15     MPI_Irecv(recvbuf+l*recvcount*extent(recvtype), recvcount, recvtype,
16             srcs[l],...);
17
18 MPI_Waitall(...);
19
20
21

```

Figure 7.1 shows the neighborhood gather communication of one process with outgoing neighbors $d_0 \dots d_3$ and incoming neighbors $s_0 \dots s_5$. The process will send its `sendbuf` to all four destinations (outgoing neighbors) and it will receive the contribution from all six sources (incoming neighbors) into separate locations of its receive buffer.

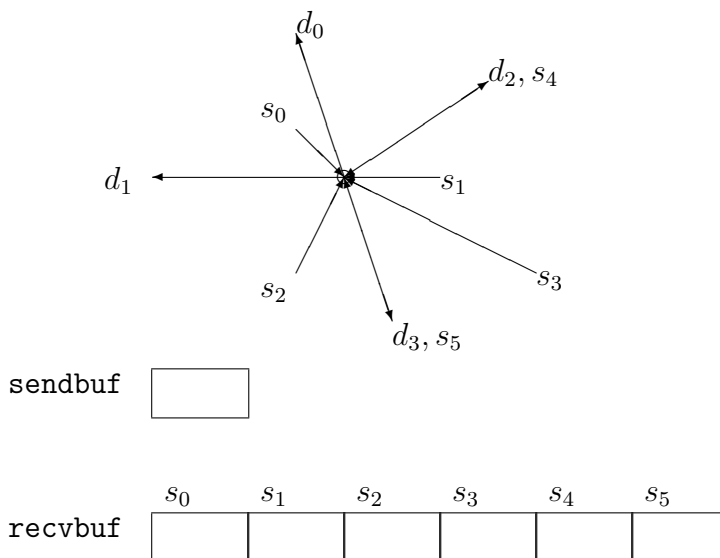


Figure 7.1: Neighborhood gather communication example.

All arguments are significant on all processes and the argument `comm` must have identical values on all processes.


The type signature associated with `sendcount`, `sendtype`, at a process must be equal to the type signature associated with `recvcount`, `recvtype` at all other processes. This implies

that the amount of data sent must be equal to the amount of data received, pairwise between every pair of communicating processes. Distinct type maps between sender and receiver are still allowed.

Rationale. For optimization reasons, the same type signature is required independently of whether the topology graph is connected or not. (*End of rationale.*)

The “in place” option is not meaningful for this operation.

Example 7.9 On a Cartesian virtual grid, the buffer usage in a given direction d with $\text{dims}[d]=3$ and 1, respectively during creation of the communicator is described in the following figure.

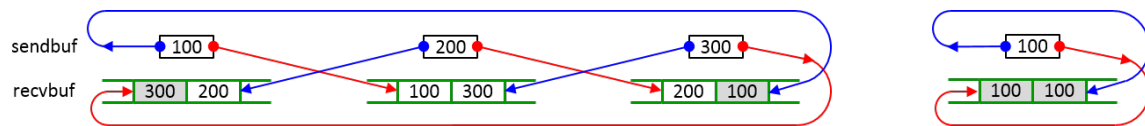

The figure may apply to any (or multiple) directions in the Cartesian topology. The grey buffers are required in all cases but are only accessed if during creation of the communicator, $\text{periods}[d]$ was defined as 1 (in C) or `.TRUE.` (in Fortran).

The vector variant of `MPI_NEIGHBOR_ALLGATHER` allows one to gather different numbers of elements from each neighbor.

```
MPI_NEIGHBOR_ALLGATHERV(sendbuf, sendcount, sendtype, rcvbuf, rcvcounts, displs,
                        rcvtype, comm)
```

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements sent to each neighbor (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	rcvbuf	starting address of receive buffer (choice)
IN	rcvcounts	non-negative integer array (of length indegree) containing the number of elements that are received from each neighbor
IN	displs	integer array (of length indegree). Entry i specifies the displacement (relative to <code>rcvbuf</code>) at which to place the incoming data from neighbor i
IN	rcvtype	data type of receive buffer elements (handle)
IN	comm	communicator with topology structure (handle)

```
int MPI_Neighbor_allgatherv(const void *sendbuf, int sendcount,
                            MPI_Datatype sendtype, void *rcvbuf, const int rcvcounts[],
                            const int displs[], MPI_Datatype rcvtype, MPI_Comm comm)
MPI_Neighbor_allgatherv(sendbuf, sendcount, sendtype, rcvbuf, rcvcounts,
                        displs, rcvtype, comm, ierror)
TYPE(*), DIMENSION(..), INTENT(IN) :: sendbuf
```

```

1     INTEGER, INTENT(IN) :: sendcount, recvcnts(*), displs(*)
2     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
3     TYPE(*), DIMENSION(..) :: recvbuf
4     TYPE(MPI_Comm), INTENT(IN) :: comm
5     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
6
7     MPI_NEIGHBOR_ALLGATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNTS,
8         DISPLS, RECVTYPE, COMM, IERROR)
9     <type> SENDBUF(*), RECVBUF(*)
10    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(*), DISPLS(*), RECVTYPE, COMM,
11        IERROR

```

This function supports Cartesian communicators, graph communicators, and distributed graph communicators as described in Section 7.6. If `comm` is a distributed graph communicator, the outcome is as if each process executed sends to each of its outgoing neighbors and receives from each of its incoming neighbors:

```

16
17 MPI_Dist_graph_neighbors_count(comm, &indegree, &outdegree, &weighted);
18 int *srcs=(int*)malloc(indegree*sizeof(int));
19 int *dsts=(int*)malloc(outdegree*sizeof(int));
20 MPI_Dist_graph_neighbors(comm, indegree, srcs, MPI_UNWEIGHTED,
21     outdegree, dsts, MPI_UNWEIGHTED);
22 int k,l;
23
24 /* assume sendbuf and recvbuf are of type (char*) */
25 for(k=0; k<outdegree; ++k)
26     MPI_Isend(sendbuf, sendcount, sendtype, dsts[k],...);
27
28 for(l=0; l<indegree; ++l)
29     MPI_Irecv(recvbuf+displs[l]*extent(recvtype), recvcnts[l], recvtype,
30     srcs[l],...);
31
32 MPI_Waitall(...);
33

```

The type signature associated with `sendcount`, `sendtype`, at process j must be equal to the type signature associated with `recvcnts[l]`, `recvtype` at any other process with `srcs[l]==j`. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of communicating processes. Distinct type maps between sender and receiver are still allowed. The data received from the l -th neighbor is placed into `recvbuf` beginning at offset `displs[l]` elements (in terms of the `recvtype`).

The “in place” option is not meaningful for this operation.

All arguments are significant on all processes and the argument `comm` must have identical values on all processes.

7.6.2 Neighbor Alltoall

In this function, each process i receives data items from each process j if an edge (j, i) exists in the topology graph or Cartesian topology. Similarly, each process i sends data items to all processes j where an edge (i, j) exists. This call is more general than

MPI_NEIGHBOR_ALLGATHER in that different data items can be sent to each neighbor. The k -th block in send buffer is sent to the k -th neighboring process and the l -th block in the receive buffer is received from the l -th neighbor.

MPI_NEIGHBOR_ALLTOALL(sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, comm)

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements sent to each neighbor (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	starting address of receive buffer (choice)
IN	recvcount	number of elements received from each neighbor (non-negative integer)
IN	recvtype	data type of receive buffer elements (handle)
IN	comm	communicator with topology structure (handle)

```
int MPI_Neighbor_alltoall(const void *sendbuf, int sendcount,
    MPI_Datatype sendtype, void *recvbuf, int recvcount,
    MPI_Datatype recvtype, MPI_Comm comm)
MPI_Neighbor_alltoall(sendbuf, sendcount, sendtype, recvbuf, recvcount,
    recvtype, comm, ierror)
    TYPE(*), DIMENSION(..), INTENT(IN) :: sendbuf
    INTEGER, INTENT(IN) :: sendcount, recvcount
    TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
    TYPE(*), DIMENSION(..) :: recvbuf
    TYPE(MPI_Comm), INTENT(IN) :: comm
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror
MPI_NEIGHBOR_ALLTOALL(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT,
    RECVTYPE, COMM, IERROR)
    <type> SENDBUF(*), RECVBUF(*)
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, IERROR
```

This function supports Cartesian communicators, graph communicators, and distributed graph communicators as described in Section 7.6. If comm is a distributed graph communicator, the outcome is as if each process executed sends to each of its outgoing neighbors and receives from each of its incoming neighbors:

```
MPI_Dist_graph_neighbors_count(comm, &indegree, &outdegree, &weighted);
int *srcs=(int*)malloc(indegree*sizeof(int));
int *dsts=(int*)malloc(outdegree*sizeof(int));
MPI_Dist_graph_neighbors(comm, indegree, srcs, MPI_UNWEIGHTED,
    outdegree, dsts, MPI_UNWEIGHTED);
int k,l;
```

```

1  /* assume sendbuf and recvbuf are of type (char*) */
2  for(k=0; k<outdegree; ++k)
3      MPI_Isend(sendbuf+k*sendcount*extent(sendtype), sendcount, sendtype,
4              dsts[k],...);
5
6  for(l=0; l<indegree; ++l)
7      MPI_Irecv(recvbuf+l*recvcount*extent(recvtype), recvcount, recvtype,
8              srcs[l],...);
9
10 MPI_Waitall(...);


```

The type signature associated with `sendcount`, `sendtype`, at a process must be equal to the type signature associated with `recvcount`, `recvtype` at any other process. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of communicating processes. Distinct type maps between sender and receiver are still allowed.

The “in place” option is not meaningful for this operation.

All arguments are significant on all processes and the argument `comm` must have identical values on all processes.

Example 7.10 For a halo communication on a Cartesian grid, the buffer usage in a given direction `d` with `dims[d]==3` and `1`, respectively during creation of the communicator is described in the following figure.

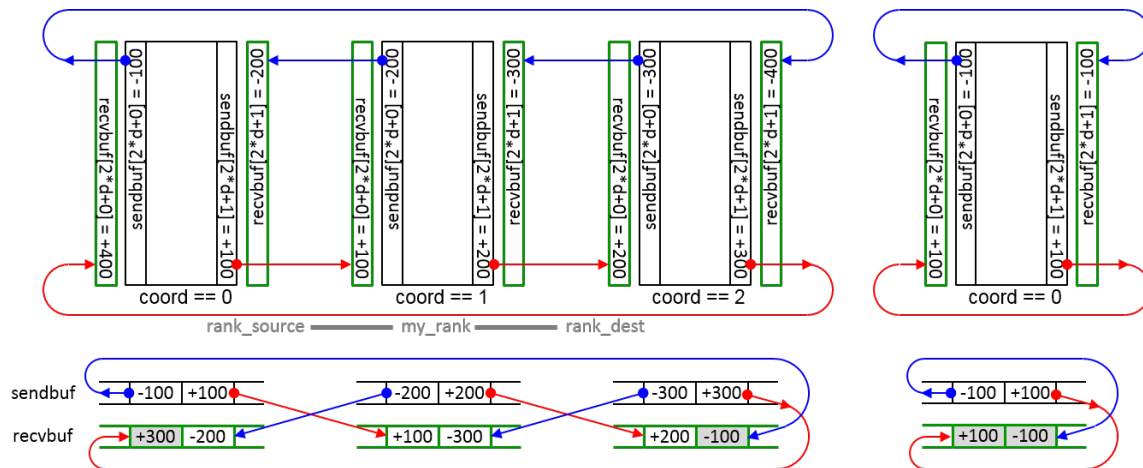

The figure may apply to any (or multiple) directions in the Cartesian topology. The grey buffers are required in all cases but are only accessed if during creation of the communicator, `periods[d]` was defined as `1` (in C) or `.TRUE.` (in Fortran).

If each array element of `sendbuf` and `recvbuf` are described by `sendcount`, `sendtype` and `recvbuf`, `recvtype`, then after `MPI_NEIGHBOR_ALLTOALL` on a Cartesian communicator returned, the content of the `recvbuf` is as if the following code is executed:

```

43 MPI_Cartdim_get(comm, &ndims);
44 for( /*direction*/ d=0; d < ndims; d++) {
45     MPI_Cart_shift(comm, /*direction*/ d, /*disp*/ 1, &rank_source, &rank_dest);
46     MPI_Sendrecv(sendbuf [d*2+0], sendcount, sendtype, rank_source, /*sendtag*/ d*2,
47                 recvbuf [d*2+1], recvcount, recvtype, rank_dest, /*recvtag*/ d*2,
48

```

```

        comm,&status);/*communication in direction of displacment -1*/ 1
MPI_Sendrecv(sendbuf[d*2+1],sendcount,sendtype,rank_dest, /*sendtag*/ d*2+1, 2
            recvbuf[d*2+0],recvcount,recvtype,rank_source,/*recvtag*/d*2+1, 3
            comm,&status);/*communication in direction of displacment +1*/ 4
    } 5

```

Advice to implementors. For a Cartesian topology, if the virtual grid in a direction `d` is periodic and `dims[d]` is equal to 0 or 1, then `rank_source` and `rank_dest` are identical, but still all `ndims` send and `ndims` receive operations use different buffers. If in this case, the two send and receive operations per direction or of all directions are internally parallelized, then the several send and receive operations for the same sender-receiver process pair must be initiated in the same sequence on sender and receiver side or they shall be distinguished by different tags. The code above shows a valid sequence of operations and tags. (*End of advice to implementors.*)

The vector variant of `MPI_NEIGHBOR_ALLTOALL` allows sending/receiving different numbers of elements to and from each neighbor.

```

MPI_NEIGHBOR_ALLTOALLV(sendbuf, sendcounts, sdispls, sendtype, recvbuf, recvcounts, 19
                        rdispls, recvtype, comm) 20

```

IN	sendbuf	starting address of send buffer (choice)	21
IN	sendcounts	non-negative integer array (of length outdegree) specifying the number of elements to send to each neighbor	22 23 24 25
IN	sdispls	integer array (of length outdegree). Entry <code>j</code> specifies the displacement (relative to <code>sendbuf</code>) from which to send the outgoing data to neighbor <code>j</code>	26 27 28
IN	sendtype	data type of send buffer elements (handle)	29
OUT	recvbuf	starting address of receive buffer (choice)	30
IN	recvcounts	non-negative integer array (of length indegree) specifying the number of elements that are received from each neighbor	31 32 33 34
IN	rdispls	integer array (of length indegree). Entry <code>i</code> specifies the displacement (relative to <code>recvbuf</code>) at which to place the incoming data from neighbor <code>i</code>	35 36 37 38
IN	recvtype	data type of receive buffer elements (handle)	39
IN	comm	communicator with topology structure (handle)	40

```

int MPI_Neighbor_alltoallv(const void *sendbuf, const int sendcounts[], 42
                          const int sdispls[], MPI_Datatype sendtype, void *recvbuf, 43
                          const int recvcounts[], const int rdispls[], 44
                          MPI_Datatype recvtype, MPI_Comm comm) 45
MPI_Neighbor_alltoallv(sendbuf, sendcounts, sdispls, sendtype, recvbuf, 46
                        recvcounts, rdispls, recvtype, comm, ierror) 47

```

```

1     TYPE(*), DIMENSION(..), INTENT(IN) :: sendbuf
2     INTEGER, INTENT(IN) :: sendcounts(*), sdispls(*), recvcounths(*),
3         rdispls(*)
4     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
5     TYPE(*), DIMENSION(..) :: recvbuf
6     TYPE(MPI_Comm), INTENT(IN) :: comm
7     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
8
9 MPI_NEIGHBOR_ALLTOALLV(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPE, RECVBUF,
10     RECVCOUNTS, RDISPLS, RECVTYPE, COMM, IERROR)
11     <type> SENDBUF(*), RECVBUF(*)
12     INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPE, RECVCOUNTS(*), RDISPLS(*),
13     RECVTYPE, COMM, IERROR

```

This function supports Cartesian communicators, graph communicators, and distributed graph communicators as described in Section 7.6. If `comm` is a distributed graph communicator, the outcome is as if each process executed sends to each of its outgoing neighbors and receives from each of its incoming neighbors:

```

18 MPI_Dist_graph_neighbors_count(comm, &indegree, &outdegree, &weighted);
19 int *srcs=(int*)malloc(indegree*sizeof(int));
20 int *dsts=(int*)malloc(outdegree*sizeof(int));
21 MPI_Dist_graph_neighbors(comm, indegree, srcs, MPI_UNWEIGHTED,
22     outdegree, dsts, MPI_UNWEIGHTED);
23
24 int k,l;
25
26 /* assume sendbuf and recvbuf are of type (char*) */
27 for(k=0; k<outdegree; ++k)
28     MPI_Isend(sendbuf+sdispls[k]*extent(sendtype), sendcounts[k], sendtype,
29     dsts[k],...);
30
31 for(l=0; l<indegree; ++l)
32     MPI_Irecv(recvbuf+rdispls[l]*extent(recvtype), recvcounths[l], recvtype,
33     srcs[l],...);
34
35 MPI_Waitall(...);

```

The type signature associated with `sendcounts[k]`, `sendtype` with `dsts[k]==j` at process `i` must be equal to the type signature associated with `recvcounths[l]`, `recvtype` with `srcs[l]==i` at process `j`. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of communicating processes. Distinct type maps between sender and receiver are still allowed. The data in the `sendbuf` beginning at offset `sdispls[k]` elements (in terms of the `sendtype`) is sent to the `k`-th outgoing neighbor. The data received from the `l`-th incoming neighbor is placed into `recvbuf` beginning at offset `rdispls[l]` elements (in terms of the `recvtype`).

The “in place” option is not meaningful for this operation.

All arguments are significant on all processes and the argument `comm` must have identical values on all processes.

`MPI_NEIGHBOR_ALLTOALLW` allows one to send and receive with different datatypes to and from each neighbor.


```

1     INTEGER SENDCOUNTS(*), SENDTYPES(*), RECVCOUNTS(*), RECVTYPES(*), COMM,
2         IERROR
3     INTEGER(KIND=MPI_ADDRESS_KIND) SDISPLS(*), RDISPLS(*)

```

This function supports Cartesian communicators, graph communicators, and distributed graph communicators as described in Section 7.6. If `comm` is a distributed graph communicator, the outcome is as if each process executed sends to each of its outgoing neighbors and receives from each of its incoming neighbors:

```

9     MPI_Dist_graph_neighbors_count(comm, &indegree, &outdegree, &weighted);
10    int *srcs=(int*)malloc(indegree*sizeof(int));
11    int *dsts=(int*)malloc(outdegree*sizeof(int));
12    MPI_Dist_graph_neighbors(comm, indegree, srcs, MPI_UNWEIGHTED,
13                            outdegree, dsts, MPI_UNWEIGHTED);
14    int k,l;
15
16    /* assume sendbuf and recvbuf are of type (char*) */
17    for(k=0; k<outdegree; ++k)
18        MPI_Isend(sendbuf+sdispls[k], sendcounts[k], sendtypes[k], dsts[k],...);
19
20    for(l=0; l<indegree; ++l)
21        MPI_Irecv(recvbuf+rdispls[l], recvcounts[l], recvtypes[l], srcs[l],...);
22
23    MPI_Waitall(...);
24

```

The type signature associated with `sendcounts[k]`, `sendtypes[k]` with `dsts[k]==j` at process `i` must be equal to the type signature associated with `recvcounts[l]`, `recvtypes[l]` with `srcs[l]==i` at process `j`. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of communicating processes. Distinct type maps between sender and receiver are still allowed.

The “in place” option is not meaningful for this operation.

All arguments are significant on all processes and the argument `comm` must have identical values on all processes.

7.7 Nonblocking Neighborhood Communication on Process Topologies

Nonblocking variants of the neighborhood collective operations allow relaxed synchronization and overlapping of computation and communication. The semantics are similar to nonblocking collective operations as described in Section 6.12.

7.7.1 Nonblocking Neighborhood Gather

```
MPI_INEIGHBOR_ALLGATHER(sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype,
                        comm, request)
```

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements sent to each neighbor (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	starting address of receive buffer (choice)
IN	recvcount	number of elements received from each neighbor (non-negative integer)
IN	recvtype	data type of receive buffer elements (handle)
IN	comm	communicator with topology structure (handle)
OUT	request	communication request (handle)

```
int MPI_Ineighbor_allgather(const void *sendbuf, int sendcount,
                          MPI_Datatype sendtype, void *recvbuf, int recvcount,
                          MPI_Datatype recvtype, MPI_Comm comm, MPI_Request *request)
```

```
MPI_Ineighbor_allgather(sendbuf, sendcount, sendtype, recvbuf, recvcount,
                        recvtype, comm, request, ierror)
    TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
    INTEGER, INTENT(IN) :: sendcount, recvcount
    TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
    TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
    TYPE(MPI_Comm), INTENT(IN) :: comm
    TYPE(MPI_Request), INTENT(OUT) :: request
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror
```

```
MPI_INEIGHBOR_ALLGATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT,
                        RECVTYPE, COMM, REQUEST, IERROR)
    <type> SENDBUF(*), RECVBUF(*)
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, REQUEST, IERROR
```

This call starts a nonblocking variant of MPI_NEIGHBOR_ALLGATHER.

```

1 MPI_INEIGHBOR_ALLGATHERV(sendbuf, sendcount, sendtype, recvbuf, recvcnts, displs,
2     recvtype, comm, request)
3     IN     sendbuf     starting address of send buffer (choice)
4     IN     sendcount   number of elements sent to each neighbor
5                     (non-negative integer)
6
7     IN     sendtype    data type of send buffer elements (handle)
8     OUT    recvbuf     starting address of receive buffer (choice)
9
10    IN     recvcnts     non-negative integer array (of length indegree)
11                     containing the number of elements that are received
12                     from each neighbor
13
14    IN     displs      integer array (of length indegree). Entry i specifies
15                     the displacement (relative to recvbuf) at which to
16                     place the incoming data from neighbor i
17
18    IN     recvtype    data type of receive buffer elements (handle)
19    IN     comm        communicator with topology structure (handle)
20
21    OUT    request     communication request (handle)

```

```

21 int MPI_Ineighbor_allgatherv(const void *sendbuf, int sendcount,
22     MPI_Datatype sendtype, void *recvbuf, const int recvcnts[],
23     const int displs[], MPI_Datatype recvtype, MPI_Comm comm,
24     MPI_Request *request)

```

```

25 MPI_Ineighbor_allgatherv(sendbuf, sendcount, sendtype, recvbuf, recvcnts,
26     displs, recvtype, comm, request, ierror)
27     TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
28     INTEGER, INTENT(IN) :: sendcount
29     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
30     TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
31     INTEGER, INTENT(IN), ASYNCHRONOUS :: recvcnts(*), displs(*)
32     TYPE(MPI_Comm), INTENT(IN) :: comm
33     TYPE(MPI_Request), INTENT(OUT) :: request
34     INTEGER, OPTIONAL, INTENT(OUT) :: ierror

```

```

36 MPI_INEIGHBOR_ALLGATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNTS,
37     DISPLS, RECVTYP, COMM, REQUEST, IERROR)
38 <type> SENDBUF(*), RECVBUF(*)
39 INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(*), DISPLS(*), RECVTYP, COMM,
40     REQUEST, IERROR

```

41 This call starts a nonblocking variant of MPI_NEIGHBOR_ALLGATHERV.

42
43
44
45
46
47
48

7.7.2 Nonblocking Neighborhood Alltoall

```

MPI_INEIGHBOR_ALLTOALL(sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype,
                        comm, request)
IN      sendbuf      starting address of send buffer (choice)
IN      sendcount    number of elements sent to each neighbor
                        (non-negative integer)
IN      sendtype     data type of send buffer elements (handle)
OUT     recvbuf      starting address of receive buffer (choice)
IN      recvcount    number of elements received from each neighbor
                        (non-negative integer)
IN      recvtype     data type of receive buffer elements (handle)
IN      comm         communicator with topology structure (handle)
OUT     request      communication request (handle)

int MPI_Ineighbor_alltoall(const void *sendbuf, int sendcount,
                          MPI_Datatype sendtype, void *recvbuf, int recvcount,
                          MPI_Datatype recvtype, MPI_Comm comm, MPI_Request *request)

MPI_Ineighbor_alltoall(sendbuf, sendcount, sendtype, recvbuf, recvcount,
                       recvtype, comm, request, ierror)
TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
INTEGER, INTENT(IN) :: sendcount, recvcount
TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
TYPE(MPI_Comm), INTENT(IN) :: comm
TYPE(MPI_Request), INTENT(OUT) :: request
INTEGER, OPTIONAL, INTENT(OUT) :: ierror

MPI_INEIGHBOR_ALLTOALL(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT,
                       RECVTYPE, COMM, REQUEST, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, REQUEST, IERROR

This call starts a nonblocking variant of MPI_NEIGHBOR_ALLTOALL.

```

```

1 MPI_NEIGHBOR_ALLTOALLV(sendbuf, sendcounts, sdispls, sendtype, recvbuf, recvcoun
2     rdispls, recvtype, comm, request)
3     IN     sendbuf     starting address of send buffer (choice)
4     IN     sendcounts  non-negative integer array (of length outdegree)
5     specifying the number of elements to send to each
6     neighbor
7
8     IN     sdispls     integer array (of length outdegree). Entry j specifies
9     the displacement (relative to sendbuf) from which
10    send the outgoing data to neighbor j
11
12    IN     sendtype    data type of send buffer elements (handle)
13
14    OUT    recvbuf     starting address of receive buffer (choice)
15
16    IN     recvcoun
17    ts              non-negative integer array (of length indegree)
18    specifying the number of elements that are received
19    from each neighbor
20
21    IN     rdispls     integer array (of length indegree). Entry i specifies
22    the displacement (relative to recvbuf) at which to
23    place the incoming data from neighbor i
24
25    IN     recvtype    data type of receive buffer elements (handle)
26
27    IN     comm        communicator with topology structure (handle)
28
29    OUT    request     communication request (handle)
30
31
32 int MPI_Ineighbor_alltoallv(const void *sendbuf, const int sendcounts[],
33     const int sdispls[], MPI_Datatype sendtype, void *recvbuf,
34     const int recvcoun
35     ts[], const int rdispls[],
36     MPI_Datatype recvtype, MPI_Comm comm, MPI_Request *request)
37
38 MPI_Ineighbor_alltoallv(sendbuf, sendcounts, sdispls, sendtype, recvbuf,
39     recvcoun
40     ts, rdispls, recvtype, comm, request, ierror)
41     TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
42     INTEGER, INTENT(IN), ASYNCHRONOUS :: sendcounts(*), sdispls(*),
43     recvcoun
44     ts(*), rdispls(*)
45     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
46     TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
47     TYPE(MPI_Comm), INTENT(IN) :: comm
48     TYPE(MPI_Request), INTENT(OUT) :: request
49     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
50
51 MPI_NEIGHBOR_ALLTOALLV(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPE, RECVBUF,
52     RECVCOUNTS, RDISPLS, RECVTYPE, COMM, REQUEST, IERROR)
53     <type> SENDBUF(*), RECVBUF(*)
54     INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPE, RECVCOUNTS(*), RDISPLS(*),
55     RECVTYPE, COMM, REQUEST, IERROR

```

This call starts a nonblocking variant of MPI_NEIGHBOR_ALLTOALLV.

MPI_INEIGHBOR_ALLTOALLW(sendbuf, sendcounts, sdispls, sendtypes, recvbuf, recvcoun-		1	
ts, rdispls, recvtypes, comm, request)		2	
IN	sendbuf	starting address of send buffer (choice)	3
			4
IN	sendcounts	non-negative integer array (of length outdegree)	5
		specifying the number of elements to send to each	6
		neighbor	7
IN	sdispls	integer array (of length outdegree). Entry j specifies	8
		the displacement in bytes (relative to sendbuf) from	9
		which to take the outgoing data destined for	10
		neighbor j (array of integers)	11
IN	sendtypes	array of datatypes (of length outdegree). Entry j	12
		specifies the type of data to send to neighbor j (array	13
		of handles)	14
			15
OUT	recvbuf	starting address of receive buffer (choice)	16
IN	recvcoun-	non-negative integer array (of length indegree)	17
	ts	specifying the number of elements that are received	18
		from each neighbor	19
IN	rdispls	integer array (of length indegree). Entry i specifies	20
		the displacement in bytes (relative to recvbuf) at	21
		which to place the incoming data from neighbor i	22
		(array of integers)	23
			24
IN	recvtypes	array of datatypes (of length indegree). Entry i	25
		specifies the type of data received from neighbor i	26
		(array of handles)	27
			28
IN	comm	communicator with topology structure (handle)	29
OUT	request	communication request (handle)	30
			31
int MPI_Ineighbor_alltoallw(const void *sendbuf, const int sendcounts[],		32	
	const MPI_Aint sdispls[], const MPI_Datatype sendtypes[],	33	
	void *recvbuf, const int recvcoun-	34	
	ts, const MPI_Aint rdispls[], const MPI_Datatype recvtypes[],	35	
	MPI_Comm comm, MPI_Request *request)	36	
MPI_Ineighbor_alltoallw(sendbuf, sendcounts, sdispls, sendtypes, recvbuf,		37	
	recvcoun-	38	
	ts, rdispls, recvtypes, comm, request, ierror)	39	
	TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf	40	
	INTEGER, INTENT(IN), ASYNCHRONOUS :: sendcounts(*), recvcoun-	41	
	ts(*),	42	
	INTEGER(KIND=MPI_ADDRESS_KIND), INTENT(IN), ASYNCHRONOUS :: sdispls(*),	43	
	rdispls(*)	44	
	TYPE(MPI_Datatype), INTENT(IN), ASYNCHRONOUS :: sendtypes(*),	45	
	recvtypes(*)	46	
	TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf	47	
	TYPE(MPI_Comm), INTENT(IN) :: comm	48	
	TYPE(MPI_Request), INTENT(OUT) :: request		
	INTEGER, OPTIONAL, INTENT(OUT) :: ierror		

```

1 MPI_INEIGHBOR_ALLTOALLW(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPES, RECVBUF,
2     RECVCOUNTS, RDISPLS, RECVTYPES, COMM, REQUEST, IERROR)
3     <type> SENDBUF(*), RECVBUF(*)
4     INTEGER SENDCOUNTS(*), SENDTYPES(*), RECVCOUNTS(*), RECVTYPES(*), COMM,
5     REQUEST, IERROR
6     INTEGER(KIND=MPI_ADDRESS_KIND) SDISPLS(*), RDISPLS(*)

```

This call starts a nonblocking variant of MPI_NEIGHBOR_ALLTOALLW.

7.8 Persistent Neighborhood Communication on Process Topologies

Persistent variants of the neighborhood collective operations can offer significant performance benefits for programs with repetitive communication patterns. The semantics are similar to persistent collective operations as described in Section 6.13.

7.8.1 Persistent Neighborhood Gather

```

19 MPI_NEIGHBOR_ALLGATHER_INIT(sendbuf, sendcount, sendtype, recvbuf, recvcount,
20     recvtype, comm, info, request)

```

21	IN	sendbuf	starting address of send buffer (choice)
22			
23	IN	sendcount	number of elements sent to each neighbor (non-negative integer)
24			
25	IN	sendtype	data type of send buffer elements (handle)
26	OUT	recvbuf	starting address of receive buffer (choice)
27			
28	IN	recvcount	number of elements received from each neighbor (non-negative integer)
29			
30	IN	recvtype	data type of receive buffer elements (handle)
31	IN	comm	communicator with topology structure (handle)
32			
33	IN	info	info argument (handle)
34	OUT	request	communication request (handle)

```

36 int MPI_Neighbor_allgather_init(const void *sendbuf, int sendcount,
37     MPI_Datatype sendtype, void *recvbuf, int recvcount,
38     MPI_Datatype recvtype, MPI_Comm comm, MPI_Info info,
39     MPI_Request *request)
40

```

```

41 MPI_Neighbor_allgather_init(sendbuf, sendcount, sendtype, recvbuf,
42     recvcount, recvtype, comm, info, request, ierror)
43     TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
44     INTEGER, INTENT(IN) :: sendcount, recvcount
45     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
46     TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
47     TYPE(MPI_Comm), INTENT(IN) :: comm
48     TYPE(MPI_Info), INTENT(IN) :: info

```

```

    TYPE(MPI_Request), INTENT(OUT) :: request
    INTEGER, OPTIONAL, INTENT(OUT) :: ierror
MPI_NEIGHBOR_ALLGATHER_INIT(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF,
    RECVCOUNT, RECVTYPE, COMM, INFO, REQUEST, IERROR)
<type> SENDBUF(*), RECVBUF(*)
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, INFO, REQUEST,
    IERROR
    Creates a persistent collective communication request for the neighborhood allgather
    operation.
MPI_NEIGHBOR_ALLGATHERV_INIT(sendbuf, sendcount, sendtype, recvbuf, recvcoun,
    displ, recvtype, comm, info, request)
IN    sendbuf          starting address of send buffer (choice)
IN    sendcount        number of elements sent to each neighbor
                          (non-negative integer)
IN    sendtype         data type of send buffer elements (handle)
OUT   recvbuf         starting address of receive buffer (choice)
IN    recvcoun         non-negative integer array (of length indegree)
                          containing the number of elements that are received
                          from each neighbor
IN    displ            integer array (of length indegree). Entry i specifies
                          the displacement (relative to recvbuf) at which to
                          place the incoming data from neighbor i
IN    recvtype         data type of receive buffer elements (handle)
IN    comm             communicator with topology structure (handle)
IN    info             info argument (handle)
OUT   request         communication request (handle)
int MPI_Neighbor_allgatherv_init(const void *sendbuf, int sendcount,
    MPI_Datatype sendtype, void *recvbuf, const int recvcoun[],
    const int displ[], MPI_Datatype recvtype, MPI_Comm comm,
    MPI_Info info, MPI_Request *request)
MPI_Neighbor_allgatherv_init(sendbuf, sendcount, sendtype, recvbuf,
    recvcoun, displ, recvtype, comm, info, request, ierror)
TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
INTEGER, INTENT(IN) :: sendcount, displ(*)
TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
INTEGER, INTENT(IN), ASYNCHRONOUS :: recvcoun(*)
TYPE(MPI_Comm), INTENT(IN) :: comm
TYPE(MPI_Info), INTENT(IN) :: info
TYPE(MPI_Request), INTENT(OUT) :: request

```

```

1     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
2 MPI_NEIGHBOR_ALLGATHERV_INIT(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF,
3     RECVCOUNTS, DISPLS, RECVTYPE, COMM, INFO, REQUEST, IERROR)
4     <type> SENDBUF(*), RECVBUF(*)
5     INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(*), DISPLS(*), RECVTYPE, COMM,
6     INFO, REQUEST, IERROR
7
8     Creates a persistent collective communication request for the neighborhood allgatherv
9     operation.

```

7.8.2 Persistent Neighborhood Alltoall

```

14 MPI_NEIGHBOR_ALLTOALL_INIT(sendbuf, sendcount, sendtype, recvbuf, recvcount,
15     recvtype, comm, info, request)
16
17     IN     sendbuf           starting address of send buffer (choice)
18     IN     sendcount        number of elements sent to each neighbor
19                               (non-negative integer)
20     IN     sendtype         data type of send buffer elements (handle)
21     OUT    recvbuf          starting address of receive buffer (choice)
22     IN     recvcount        number of elements received from each neighbor
23                               (non-negative integer)
24     IN     recvtype         data type of receive buffer elements (handle)
25     IN     comm             communicator with topology structure (handle)
26     IN     info             info argument (handle)
27     IN     info             info argument (handle)
28     OUT    request          communication request (handle)
29
30

```

```

31 int MPI_Neighbor_alltoall_init(const void *sendbuf, int sendcount,
32     MPI_Datatype sendtype, void *recvbuf, int recvcount,
33     MPI_Datatype recvtype, MPI_Comm comm, MPI_Info info,
34     MPI_Request *request)
35

```

```

36 MPI_Neighbor_alltoall_init(sendbuf, sendcount, sendtype, recvbuf,
37     recvcount, recvtype, comm, info, request, ierror)
38     TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
39     INTEGER, INTENT(IN) :: sendcount, recvcount
40     TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
41     TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
42     TYPE(MPI_Comm), INTENT(IN) :: comm
43     TYPE(MPI_Info), INTENT(IN) :: info
44     TYPE(MPI_Request), INTENT(OUT) :: request
45     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
46

```

```

47 MPI_NEIGHBOR_ALLTOALL_INIT(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF,
48     RECVCOUNT, RECVTYPE, COMM, INFO, REQUEST, IERROR)

```

```

<type> SENDBUF(*), RECVBUF(*) 1
INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, COMM, INFO, REQUEST, 2
      IERROR 3
Creates a persistent collective communication request for the neighborhood alltoall 4
operation. 5
6
7
MPI_NEIGHBOR_ALLTOALLV_INIT(sendbuf, sendcounts, sdispls, sendtype, recvbuf, 8
      recvcounts, rdispls, recvtype, comm, info, request) 9
IN      sendbuf 10      starting address of send buffer (choice) 11
IN      sendcounts 12      non-negative integer array (of length outdegree) 13
      specifying the number of elements to send to each 14
      neighbor
IN      sdispls 15      integer array (of length outdegree). Entry j specifies 16
      the displacement (relative to sendbuf) from which 17
      send the outgoing data to neighbor j
IN      sendtype 18      data type of send buffer elements (handle) 19
OUT     recvbuf 20      starting address of receive buffer (choice)
IN      recvcounts 21      non-negative integer array (of length indegree) 22
      specifying the number of elements that are received 23
      from each neighbor
IN      rdispls 24      integer array (of length indegree). Entry i specifies 25
      the displacement (relative to recvbuf) at which to 26
      place the incoming data from neighbor i
IN      recvtype 28      data type of receive buffer elements (handle)
IN      comm 29      communicator with topology structure (handle)
IN      info 30      info argument (handle)
OUT     request 31      communication request (handle)
32
33
int MPI_Neighbor_alltoallv_init(const void *sendbuf, 34
      const int sendcounts[], const int sdispls[], 35
      MPI_Datatype sendtype, void *recvbuf, const int recvcounts[], 36
      const int rdispls[], MPI_Datatype recvtype, MPI_Comm comm, 37
      MPI_Info info, MPI_Request *request) 38
39
MPI_Neighbor_alltoallv_init(sendbuf, sendcounts, sdispls, sendtype, 40
      recvbuf, recvcounts, rdispls, recvtype, comm, info, request, 41
      ierror) 42
TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf 43
INTEGER, INTENT(IN), ASYNCHRONOUS :: sendcounts(*), sdispls(*), 44
      recvcounts(*), rdispls(*)
45
TYPE(MPI_Datatype), INTENT(IN) :: sendtype, recvtype
46
TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
47
TYPE(MPI_Comm), INTENT(IN) :: comm
48

```

```

1     TYPE(MPI_Info), INTENT(IN) :: info
2     TYPE(MPI_Request), INTENT(OUT) :: request
3     INTEGER, OPTIONAL, INTENT(OUT) :: ierror
4
5 MPI_NEIGHBOR_ALLTOALLV_INIT(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPE,
6                             RECVBUF, RECVCOUNTS, RDISPLS, RECVTYPE, COMM, INFO, REQUEST,
7                             IERROR)
8     <type> SENDBUF(*), RECVBUF(*)
9     INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPE, RECVCOUNTS(*), RDISPLS(*),
10    RECVTYPE, COMM, INFO, REQUEST, IERROR
11
12     Creates a persistent collective communication request for the neighborhood alltoallv
13     operation.
14
15 MPI_NEIGHBOR_ALLTOALLW_INIT(sendbuf, sendcounts, sdispls, sendtypes, recvbuf,
16                             recvcounts, rdispls, recvtypes, comm, info, request)
17
18     IN     sendbuf           starting address of send buffer (choice)
19
20     IN     sendcounts        non-negative integer array (of length outdegree)
21                                     specifying the number of elements to send to each
22                                     neighbor
23
24     IN     sdispls           integer array (of length outdegree). Entry j specifies
25                                     the displacement in bytes (relative to sendbuf) from
26                                     which to take the outgoing data destined for
27                                     neighbor j (array of integers)
28
29     IN     sendtypes         array of datatypes (of length outdegree). Entry j
30                                     specifies the type of data to send to neighbor j (array
31                                     of handles)
32
33     OUT    recvbuf           starting address of receive buffer (choice)
34
35     IN     recvcounts        non-negative integer array (of length indegree)
36                                     specifying the number of elements that are received
37                                     from each neighbor
38
39     IN     rdispls           integer array (of length indegree). Entry i specifies
40                                     the displacement in bytes (relative to recvbuf) at
41                                     which to place the incoming data from neighbor i
42                                     (array of integers)
43
44     IN     recvtypes         array of datatypes (of length indegree). Entry i
45                                     specifies the type of data received from neighbor i
46                                     (array of handles)
47
48     IN     comm              communicator with topology structure (handle)
49
50     IN     info              info argument (handle)
51
52     OUT    request           communication request (handle)
53
54 int MPI_Neighbor_alltoallw_init(const void *sendbuf,
55                                 const int sendcounts[], const MPI_Aint sdispls[],

```



```

const MPI_Datatype sendtypes[], void *recvbuf,
const int recvcounts[], const MPI_Aint rdispls[],
const MPI_Datatype recvtypes[], MPI_Comm comm, MPI_Info info,
MPI_Request *request)
MPI_Neighbor_alltoallw_init(sendbuf, sendcounts, sdispls, sendtypes,
recvbuf, recvcounts, rdispls, recvtypes, comm, info, request,
ierror)
TYPE(*), DIMENSION(..), INTENT(IN), ASYNCHRONOUS :: sendbuf
INTEGER, INTENT(IN), ASYNCHRONOUS :: sendcounts(*), recvcounts(*)
INTEGER(KIND=MPI_ADDRESS_KIND), INTENT(IN), ASYNCHRONOUS :: sdispls(*),
rdispls(*)
TYPE(MPI_Datatype), INTENT(IN), ASYNCHRONOUS :: sendtypes(*),
recvtypes(*)
TYPE(*), DIMENSION(..), ASYNCHRONOUS :: recvbuf
TYPE(MPI_Comm), INTENT(IN) :: comm
TYPE(MPI_Info), INTENT(IN) :: info
TYPE(MPI_Request), INTENT(OUT) :: request
INTEGER, OPTIONAL, INTENT(OUT) :: ierror
MPI_NEIGHBOR_ALLTOALLW_INIT(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPES,
RECVBUF, RECVCOUNTS, RDISPLS, RECVTYPES, COMM, INFO, REQUEST,
IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNTS(*), SENDTYPES(*), RECVCOUNTS(*), RECVTYPES(*), COMM,
INFO, REQUEST, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) SDISPLS(*), RDISPLS(*)

```

Creates a persistent collective communication request for the neighborhood alltoallw operation.

7.9 An Application Example

Example 7.11 The example in Figures 7.2-7.5 shows how the grid definition and inquiry functions can be used in an application program. A partial differential equation, for instance the Poisson equation, is to be solved on a rectangular domain. First, the processes organize themselves in a two-dimensional structure. Each process then inquires about the ranks of its neighbors in the four directions (up, down, right, left). The numerical problem is solved by an iterative method, the details of which are hidden in the subroutine `relax`.

In each relaxation step each process computes new values for the solution grid function at the points `u(1:100,1:100)` owned by the process. Then the values at inter-process boundaries have to be exchanged with neighboring processes. For example, the newly calculated values in `u(1,1:100)` must be sent into the halo cells `u(101,1:100)` of the left-hand neighbor with coordinates `(own_coord(1)-1,own_coord(2))`.

```

1  INTEGER ndims, num_neigh
2  LOGICAL reorder
3  PARAMETER (ndims=2, num_neigh=4, reorder=.true.)
4  INTEGER comm, comm_size, comm_cart, dims(ndims), ierr
5  INTEGER neigh_rank(num_neigh), own_coords(ndims), i, j, it
6  LOGICAL periods(ndims)
7  REAL u(0:101,0:101), f(0:101,0:101)
8  DATA dims / ndims * 0 /
9  comm = MPI_COMM_WORLD
10 CALL MPI_COMM_SIZE(comm, comm_size, ierr)
11 ! Set process grid size and periodicity
12 CALL MPI_DIMS_CREATE(comm_size, ndims, dims, ierr)
13 periods(1) = .TRUE.
14 periods(2) = .TRUE.
15 ! Create a grid structure in WORLD group and inquire about own position
16 CALL MPI_CART_CREATE(comm, ndims, dims, periods, reorder, &
17                      comm_cart, ierr)
18 CALL MPI_CART_GET(comm_cart, ndims, dims, periods, own_coords, ierr)
19 i = own_coords(1)
20 j = own_coords(2)
21 ! Look up the ranks for the neighbors. Own process coordinates are (i,j).
22 ! Neighbors are (i-1,j), (i+1,j), (i,j-1), (i,j+1) modulo (dims(1),dims(2))
23 CALL MPI_CART_SHIFT(comm_cart, 0,1, neigh_rank(1), neigh_rank(2), ierr)
24 CALL MPI_CART_SHIFT(comm_cart, 1,1, neigh_rank(3), neigh_rank(4), ierr)
25 ! Initialize the grid functions and start the iteration
26 CALL init(u, f)
27 DO it=1,100
28     CALL relax(u, f)
29     ! Exchange data with neighbor processes
30     CALL exchange(u, comm_cart, neigh_rank, num_neigh)
31 END DO
32 CALL output(u)
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48

```

Figure 7.2: Set-up of process structure for two-dimensional parallel Poisson solver.

```

SUBROUTINE exchange(u, comm_cart, neigh_rank, num_neigh) 1
REAL u(0:101,0:101) 2
INTEGER comm_cart, num_neigh, neigh_rank(num_neigh) 3
REAL sndbuf(100,num_neigh), rcvbuf(100,num_neigh) 4
INTEGER ierr 5
sndbuf(1:100,1) = u( 1,1:100) 6
sndbuf(1:100,2) = u(100,1:100) 7
sndbuf(1:100,3) = u(1:100, 1) 8
sndbuf(1:100,4) = u(1:100,100) 9
CALL MPI_NEIGHBOR_ALLTOALL(sndbuf, 100, MPI_REAL, rcvbuf, 100, MPI_REAL, & 10
                           comm_cart, ierr) 11
! instead of 12
! CALL MPI_IRECV(rcvbuf(1,1),100,MPI_REAL, neigh_rank(1),..., rq(1), ierr) 13
! CALL MPI_ISEND(sndbuf(1,2),100,MPI_REAL, neigh_rank(2),..., rq(2), ierr) 14
! Always pairing a receive from rank_source with a send to rank_dest 15
! of the same direction in MPI_CART_SHIFT! 16
! CALL MPI_IRECV(rcvbuf(1,2),100,MPI_REAL, neigh_rank(2),..., rq(3), ierr) 17
! CALL MPI_ISEND(sndbuf(1,1),100,MPI_REAL, neigh_rank(1),..., rq(4), ierr) 18
! CALL MPI_IRECV(rcvbuf(1,3),100,MPI_REAL, neigh_rank(3),..., rq(5), ierr) 19
! CALL MPI_ISEND(sndbuf(1,4),100,MPI_REAL, neigh_rank(4),..., rq(6), ierr) 20
! CALL MPI_IRECV(rcvbuf(1,4),100,MPI_REAL, neigh_rank(4),..., rq(7), ierr) 21
! CALL MPI_ISEND(sndbuf(1,3),100,MPI_REAL, neigh_rank(3),..., rq(8), ierr) 22
! Of course, one can first start all four IRECV and then all four ISEND, 23
! Or vice versa, but both in the sequence shown above. Otherwise, the 24
! matching would be wrong for 2 or only 1 processes in a direction. 25
! CALL MPI_WAITALL(2*num_neigh, rq, statuses, ierr) 26
u( 0,1:100) = rcvbuf(1:100,1) 27
u(101,1:100) = rcvbuf(1:100,2) 28
u(1:100, 0) = rcvbuf(1:100,3) 29
u(1:100,101) = rcvbuf(1:100,4) 30
END 31

```

Figure 7.3: Communication routine with local data copying and sparse neighborhood all-to-all.

```

1  SUBROUTINE exchange(u, comm_cart, neigh_rank, num_neigh)
2  IMPLICIT NONE
3  USE MPI
4  REAL u(0:101,0:101)
5  INTEGER comm_cart, num_neigh, neigh_rank(num_neigh)
6  INTEGER sndcounts(num_neigh), sndtypes(num_neigh)
7  INTEGER rcvcounts(num_neigh), rcvtypes(num_neigh)
8  INTEGER (KIND=MPI_ADDRESS_KIND) lb, sizeofreal
9  INTEGER (KIND=MPI_ADDRESS_KIND) sdispls(num_neigh), rdispls(num_neigh)
10 INTEGER type_vec, ierr
11 ! The following initialization need to be done only once
12 ! before the first call of exchange.
13 CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lb, sizeofreal, ierr)
14 CALL MPI_TYPE_VECTOR(100, 1, 102, MPI_REAL, type_vec, ierr)
15 CALL MPI_TYPE_COMMIT(type_vec, ierr)
16 sndtypes(1:2) = type_vec
17 sndcounts(1:2) = 1
18 sndtypes(3:4) = MPI_REAL
19 sndcounts(3:4) = 100
20 rcvtypes = sndtypes
21 rcvcounts = sndcounts
22 sdispls(1) = ( 1 + 1*102) * sizeofreal ! first element of u( 1, 1:100)
23 sdispls(2) = (100 + 1*102) * sizeofreal ! first element of u(100, 1:100)
24 sdispls(3) = ( 1 + 1*102) * sizeofreal ! first element of u( 1:100, 1 )
25 sdispls(4) = ( 1 + 100*102) * sizeofreal ! first element of u( 1:100,100 )
26 rdispls(1) = ( 0 + 1*102) * sizeofreal ! first element of u( 0, 1:100)
27 rdispls(2) = (101 + 1*102) * sizeofreal ! first element of u(101, 1:100)
28 rdispls(3) = ( 1 + 0*102) * sizeofreal ! first element of u( 1:100, 0 )
29 rdispls(4) = ( 1 + 101*102) * sizeofreal ! first element of u( 1:100,101 )
30 ! the following communication has to be done in each call of exchange
31 CALL MPI_NEIGHBOR_ALLTOALLW(u, sndcounts, sdispls, sndtypes, &
32                               u, rcvcounts, rdispls, rcvtypes, &
33                               comm_cart, ierr)
34 ! The following finalizing need to be done only once
35 ! after the last call of exchange.
36 CALL MPI_TYPE_FREE(type_vec, ierr)
37 END

```

Figure 7.4: Communication routine with sparse neighborhood all-to-all-w and without local data copying.

```

INTEGER ndims, num_neigh                                1
LOGICAL reorder                                        2
PARAMETER (ndims=2, num_neigh=4, reorder=.true.)      3
INTEGER comm, comm_size, comm_cart, dims(ndims), it, ierr 4
LOGICAL periods(ndims)                                5
REAL u(0:101,0:101), f(0:101,0:101)                  6
DATA dims / ndims * 0 /                                7
INTEGER sndcounts(num_neigh), sndtypes(num_neigh)     8
INTEGER rcvcounts(num_neigh), rcvtypes(num_neigh)     9
INTEGER (KIND=MPI_ADDRESS_KIND) lb, sizeofreal        10
INTEGER (KIND=MPI_ADDRESS_KIND) sdispls(num_neigh), rdispls(num_neigh) 11
INTEGER type_vec, request, status                     12
comm = MPI_COMM_WORLD                                 13
CALL MPI_COMM_SIZE(comm, comm_size, ierr)             14
! Set process grid size and periodicity                15
CALL MPI_DIMS_CREATE(comm_size, ndims, dims, ierr)    16
periods(1) = .TRUE.                                   17
periods(2) = .TRUE.                                   18
! Create a grid structure in WORLD group               19
CALL MPI_CART_CREATE(comm, ndims, dims, periods, reorder, & 20
                    comm_cart, ierr)                  21
! Create datatypes for the neighborhood communication  22
!                                                       23
! Insert code from example in Figure 7.4 to create and initialize  24
! sndcounts, sdispls, sndtypes, rcvcounts, rdispls, and rcvtypes  25
!                                                       26
! Initialize the neighborhood all-to-all-w operation  27
CALL MPI_NEIGHBOR_ALLTOALLW_INIT(u, sndcounts, sdispls, sndtypes, & 28
                                u, rcvcounts, rdispls, rcvtypes, & 29
                                comm_cart, info, request, ierr) 30
! Initialize the grid functions and start the iteration  31
CALL init(u, f)                                        32
DO it=1,100                                           33
! Start data exchange with neighbor processes          34
CALL MPI_START(request, ierr)                          35
! Compute inner cells                                  36
CALL relax_inner (u, f)                                37
! Check on completion of neighbor exchange            38
CALL MPI_WAIT(request, status, ierr)                   39
! Compute edge cells                                  40
CALL relax_edges(u, f)                                 41
END DO                                                 42
CALL output(u)                                         43
CALL MPI_REQUEST_FREE(request, ierr)                   44
CALL MPI_TYPE_FREE(type_vec, ierr)                    45

```

Figure 7.5: Two-dimensional parallel Poisson solver with persistent sparse neighborhood all-to-all-w and without local data copying. 47

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48

Bibliography

- [1] S. Chittor and R. J. Enbody. Performance evaluation of mesh-connected wormhole-routed networks for interprocessor communication in multicomputers. In *Proceedings of the 1990 Supercomputing Conference*, pages 647–656, 1990. [7.1](#)
- [2] S. Chittor and R. J. Enbody. Predicting the effect of mapping on the communication performance of large multicomputers. In *Proceedings of the 1991 International Conference on Parallel Processing, vol. II (Software)*, pages II-1–II-4, 1991. [7.1](#)
- [3] T. Hoefler, F. Lorenzen, and A. Lumsdaine. Sparse non-blocking collectives in quantum mechanical calculations. In *Recent Advances in Parallel Virtual Machine and Message Passing Interface, 15th European PVM/MPI Users' Group Meeting*, volume LNCS 5205, pages 55–63. Springer, Sep. 2008. [7.6](#)
- [4] T. Hoefler and J. L. Träff. Sparse collective operations for MPI. In *Proceedings of the 23rd IEEE International Parallel & Distributed Processing Symposium, HIPS'09 Workshop*, May 2009. [7.6](#)
- [5] O. Krämer and H. Mühlenbein. Mapping strategies in message-based multiprocessor systems. *Parallel Computing*, 9:213–225, 1989. [7.1](#)

Index

- CONST:MPI_BOTTOM, [10](#), [12](#)
- CONST:MPI_CART, [14](#)
- CONST:MPI_COMM_NULL, [4](#), [6](#)
- CONST:MPI_COMM_WORLD, [5](#)
- CONST:MPI_DIST_GRAPH, [14](#)
- CONST:MPI_GRAPH, [14](#)
- CONST:MPI_INFO_NULL, [12](#)
- CONST:MPI_PROC_NULL, [22](#), [27](#)
- CONST:MPI_SUCCESS, [5](#)
- CONST:MPI_UNDEFINED, [14](#), [24](#), [25](#)
- CONST:MPI_UNWEIGHTED, [9](#), [10](#), [12](#), [13](#), [20](#), [21](#)
- CONST:MPI_WEIGHTS_EMPTY, [9](#), [10](#), [12](#)

- EXAMPLES:Cartesian virtual topologies, [47](#)
- EXAMPLES:MPI_CART_COORDS, [23](#)
- EXAMPLES:MPI_CART_GET, [47](#)
- EXAMPLES:MPI_CART_RANK, [23](#)
- EXAMPLES:MPI_CART_SHIFT, [23](#), [47](#)
- EXAMPLES:MPI_CART_SUB, [24](#)
- EXAMPLES:MPI_DIMS_CREATE, [5](#), [47](#)
- EXAMPLES:MPI_DIST_GRAPH_CREATE, [12](#)
- EXAMPLES:MPI_Dist_graph_create, [13](#)
- EXAMPLES:MPI_DIST_GRAPH_CREATE_ADJACENT, [12](#)
- EXAMPLES:MPI_GRAPH_CREATE, [7](#), [19](#)
- EXAMPLES:MPI_GRAPH_NEIGHBORS, [19](#)
- EXAMPLES:MPI_GRAPH_NEIGHBORS_COUNT, [19](#)
- EXAMPLES:MPI_NEIGHBOR_ALLGATHER, [29](#)
- EXAMPLES:MPI_NEIGHBOR_ALLTOALL, [32](#)
- EXAMPLES:MPI_SENDRECV_REPLACE, [23](#)
- EXAMPLES:Neighborhood collective communication, [47](#)
- EXAMPLES:Topologies, [47](#)
- EXAMPLES:Virtual topologies, [47](#)

- MPI_CART_COORDS, [3](#), [18](#)
- MPI_CART_COORDS(comm, rank, maxdims, coords), [17](#)
- MPI_CART_CREATE, [2–6](#), [16](#), [24](#), [26](#), [27](#)
- MPI_CART_CREATE(comm_old, ndims, dims, periods, reorder, comm_cart), [4](#)
- MPI_CART_CREATE(comm, ndims, dims, periods, reorder, comm_cart), [25](#)
- MPI_CART_GET, [3](#), [16](#)
- MPI_CART_GET(comm, maxdims, dims, periods, coords), [16](#)
- MPI_CART_MAP, [3](#), [25](#)
- MPI_CART_MAP(comm, ndims, dims, periods, newrank), [24](#)
- MPI_CART_MAP(comm, ndims, dims, periods, newrank), [25](#)
- MPI_CART_RANK, [3](#), [17](#)
- MPI_CART_RANK(comm, coords, rank), [17](#)
- MPI_CART_SHIFT, [3](#), [22](#), [23](#), [26](#)
- MPI_CART_SHIFT(comm, direction, disp, rank_source, rank_dest), [22](#)
- MPI_CART_SUB, [3](#), [24](#)
- MPI_CART_SUB(comm, remain_dims, newcomm), [23](#)
- MPI_CART_SUB(comm, remain_dims, comm_new), [24](#), [25](#)
- MPI_CARTDIM_GET, [3](#), [16](#)
- MPI_CARTDIM_GET(comm, ndims), [16](#)
- MPI_COMM_CREATE, [3](#)
- MPI_COMM_SPLIT, [3](#), [4](#), [6](#), [24](#)
- MPI_COMM_SPLIT(comm, color, key, comm_cart), [25](#)
- MPI_COMM_SPLIT(comm, color, key, comm_graph), [26](#)
- MPI_COMM_SPLIT(comm, color, key, comm_new), [25](#)
- MPI_DIMS_CREATE, [3–5](#)
- MPI_DIMS_CREATE(6, 2, dims), [5](#)
- MPI_DIMS_CREATE(6, 3, dims), [5](#)
- MPI_DIMS_CREATE(7, 2, dims), [5](#)

- 1 MPI_DIMS_CREATE(7, 3, dims), [5](#)
- 2 MPI_DIMS_CREATE(nnodes, ndims, dims), [5](#)
- 3 MPI_DIST_GRAPH_CREATE, [2, 3, 8, 11,](#)
- 4 [13, 21, 22, 26](#)
- 5 MPI_DIST_GRAPH_CREATE(comm_old, n, MPI_INEIGHBOR_ALLGATHERV, [3](#)
- 6 sources, degrees, destinations, weights, MPI_INEIGHBOR_ALLGATHERV(sendbuf,
- 7 info, reorder, comm_dist_graph), [10](#) sendcount, sendtype, recvbuf, recvcoun-
- 8 MPI_DIST_GRAPH_CREATE_ADJACENT, displs, recvtype, comm, request), [37](#)
- 9 [2, 3, 8, 9, 13, 21, 26](#) MPI_INEIGHBOR_ALLTOALL, [3](#)
- 10 MPI_DIST_GRAPH_CREATE_ADJACENT(comm_old, MPI_INEIGHBOR_ALLTOALL(sendbuf, sendcount,
- 11 indegree, sources, sourceweights, outdegree, sendtype, recvbuf, recvcount, recvtype,
- 12 destinations, destweights, info, reorder, comm, request), [39](#)
- 13 comm_dist_graph), [8](#) MPI_INEIGHBOR_ALLTOALLV, [3](#)
- 14 MPI_DIST_GRAPH_NEIGHBORS, [3, 20, 21,](#) MPI_INEIGHBOR_ALLTOALLV(sendbuf, sendcounts,
- 15 [26](#) sdispls, sendtype, recvbuf, recvcoun-
- 16 MPI_DIST_GRAPH_NEIGHBORS(comm, maxindegree, displs, recvtype, comm, request), [40](#)
- 17 sources, sourceweights, maxoutdegree, MPI_INEIGHBOR_ALLTOALLW, [4](#)
- 18 destinations, destweights), [21](#) MPI_INEIGHBOR_ALLTOALLW(sendbuf, sendcounts,
- 19 MPI_DIST_GRAPH_NEIGHBORS_COUNT, sdispls, sendtypes, recvbuf, recvcoun-
- 20 [3, 20–22](#) rdispls, recvtypes, comm, request),
- 21 MPI_DIST_GRAPH_NEIGHBORS_COUNT(comm, [41](#)
- 22 indegree, outdegree, weighted), [20](#) MPI_NEIGHBOR_ALLGATHER, [3, 29, 31,](#)
- 23 MPI_GRAPH_CREATE, [2, 3, 6, 8, 12, 15,](#) [37](#)
- 24 [18, 19, 25, 26](#) MPI_NEIGHBOR_ALLGATHER(sendbuf, sendcount,
- 25 MPI_GRAPH_CREATE(comm_old, nnodes, sendtype, recvbuf, recvcount, recvtype,
- 26 index, edges, reorder, comm_graph), comm), [27](#)
- 27 [6](#) MPI_NEIGHBOR_ALLGATHER_INIT(sendbuf,
- 28 MPI_GRAPH_CREATE(comm, nnodes, in- sendcount, sendtype, recvbuf, recvcount,
- 29 dex, edges, reorder, comm_graph), recvtype, comm, info, request), [42](#)
- 30 [26](#) MPI_NEIGHBOR_ALLGATHERV, [3, 38](#)
- 31 MPI_GRAPH_GET, [3, 15](#) MPI_NEIGHBOR_ALLGATHERV(sendbuf,
- 32 MPI_GRAPH_GET(comm, maxindex, maxedges, sendcount, sendtype, recvbuf, recvcoun-
- 33 index, edges), [15](#) displs, recvtype, comm), [29](#)
- 34 MPI_GRAPH_MAP, [3](#) MPI_NEIGHBOR_ALLGATHERV_INIT(sendbuf,
- 35 MPI_GRAPH_MAP(comm, nnodes, index, sendcount, sendtype, recvbuf, recvcoun-
- 36 edges, newrank), [25](#) displs, recvtype, comm, info, request),
- 37 MPI_GRAPH_MAP(comm, nnodes, index, [43](#)
- 38 edges, newrank), [26](#) MPI_NEIGHBOR_ALLTOALL, [3, 32, 33, 39](#)
- 39 MPI_GRAPH_NEIGHBORS, [3, 18, 19, 26](#) MPI_NEIGHBOR_ALLTOALL(sendbuf, sendcount,
- 40 MPI_GRAPH_NEIGHBORS(comm, rank, maxneighbors, sendtype, recvbuf, recvcount, recvtype,
- 41 neighbors), [18](#) comm), [31](#)
- 42 MPI_GRAPH_NEIGHBORS_COUNT, [3, 18,](#) MPI_NEIGHBOR_ALLTOALL_INIT(sendbuf,
- 43 [19](#) sendcount, sendtype, recvbuf, recvcount,
- 44 MPI_GRAPH_NEIGHBORS_COUNT(comm, recvtype, comm, info, request), [44](#)
- 45 rank, nneighbors), [18](#) MPI_NEIGHBOR_ALLTOALLV, [3, 40](#)
- 46 MPI_GRAPHDIMS_GET, [3, 15](#) MPI_NEIGHBOR_ALLTOALLV(sendbuf, sendcounts,
- 47 MPI_GRAPHDIMS_GET(comm, nnodes, nedges), sdispls, sendtype, recvbuf, recvcoun-
- 48

rdispls, recvtype, comm), 33	1
MPI_NEIGHBOR_ALLTOALLV_INIT(sendbuf,	2
sendcounts, sdispls, sendtype, recvbuf,	3
recvcounts, rdispls, recvtype, comm,	4
info, request), 45	5
MPI_NEIGHBOR_ALLTOALLW, 3 , 34 , 42	6
MPI_NEIGHBOR_ALLTOALLW(sendbuf, sendcounts,	7
sdispls, sendtypes, recvbuf, recvcounts,	8
rdispls, recvtypes, comm), 35	9
MPI_NEIGHBOR_ALLTOALLW_INIT(sendbuf,	10
sendcounts, sdispls, sendtypes, recvbuf,	11
recvcounts, rdispls, recvtypes, comm,	12
info, request), 46	13
MPI_SENDRECV, 22	14
MPI_TOPO_TEST, 3 , 14	15
MPI_TOPO_TEST(comm, status), 14	16
TERM:Cartesian	17
topology, 2 , 4	18
TERM:collective communication	19
neighborhood, 26	20
TERM:distributed graph	21
topology, 2 , 8	22
TERM:graph	23
topology, 2 , 6	24
TERM:neighborhood collective communica-	25
tion, 26	26
nonblocking, 37	27
TERM:persistent communication requests	28
collective persistent, 42	29
TERM:topologies, 1	30
TERM:topology	31
Cartesian, 2 , 4	32
distributed graph, 2 , 8	33
graph, 2 , 6	34
virtual, 2	35
TERM:virtual topology, 2	36
	37
	38
	39
	40
	41
	42
	43
	44
	45
	46
	47
	48