Building a Reactive Form

Deborah Kurata

CONSULTANT | SPEAKER | AUTHOR | MVP | GDE

@deborahkurata | blogs.msmvps.com/deborahk/

GIVE
ME
MORE

Module Overview

The Component Class

The Angular Module

The Template

Using `setValue` **and** `patchValue`

Simplifying with FormBuilder

Template-driven vs. Reactive Forms


```
▼controls: Object
  ▶email: FormControl
  ▶firstName: FormControl
  ▶lastName: FormControl
  ▶sendCatalog: FormControl
  ▶__proto__: Object
  dirty: true
  disabled: false
  enabled: true
  errors: null
  invalid: false
  pending: false
  pristine: false
```

```
▼controls: Object
  ▶email: FormControl
  ▶firstName: FormControl
  ▶lastName: FormControl
  ▶sendCatalog: FormControl
  ▶__proto__: Object
  dirty: true
  disabled: false
  enabled: true
  errors: null
  invalid: false
  pending: false
  pristine: false
```

```
▼ controls: Object
  ▶ email: FormControl
  ▶ firstName: FormControl
  ▶ lastName: FormControl
  ▶ sendCatalog: FormControl
  ▶ __proto__: Object
  dirty: true
  disabled: false
  enabled: true
  errors: null
  invalid: false
  pending: false
  pristine: false
  root: (...)
  status: (...)
  statusChanges: (...)
  touched: true
  untouched: false
  valid: true
  validator: null
▼ value: Object
    email: "jack@torchwood.com"
    firstName: "Jack"
    lastName: "Harkness"
    sendCatalog: false
  ▶ __proto__: Object
  valueChanges: (...)
```

Form Model

- Root FormGroup

- FormControl for each input element

- Nested FormGroups as desired

- FormArrays

Creating a FormGroup

```typescript
...
import { FormGroup } from '@angular/forms';

...
export class CustomerComponent implements OnInit {
  customerForm: FormGroup;
  customer: Customer = new Customer();

  ngOnInit(): void {
    this.customerForm = new FormGroup({ });
  }
}
```
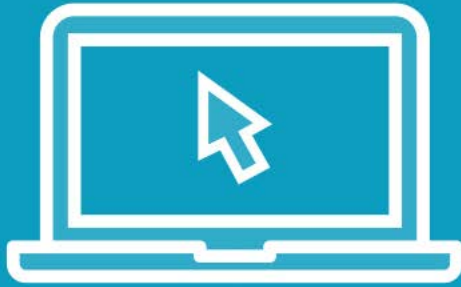
Creating FormControls

```typescript
...
import { FormGroup, FormControl } from '@angular/forms';

...
export class CustomerComponent implements OnInit {
  ...
  ngOnInit(): void {
    this.customerForm = new FormGroup({
        firstName: new FormControl(),
        lastName: new FormControl(),
        email: new FormControl(),
        sendCatalog: new FormControl(true)});
  }
}
```

Demo

Building the Form Model

Binding to the Form Model


```
▼controls: Object
  ▶email: FormControl
  ▶firstName: FormControl
  ▶lastName: FormControl
  ▶sendCatalog: FormControl
  ▶__proto__: Object
dirty: true
disabled: false
enabled: true
errors: null
invalid: false
pending: false
pristine: false
```

Reactive Forms Directives

Reactive Forms
• **formGroup** • **formControl** • **formControlName** • **formGroupName** • **formArrayName**

formGroup

```
<form (ngSubmit)="save()" [formGroup]="customerForm">
    ...
</form>
```

formControlName

```html
<form (ngSubmit)="save()" [formGroup]="customerForm">
  <fieldset>
    <div ... >
      <label for="firstNameId">First Name</label>
      <input id="firstNameId" type="text"
             placeholder="First Name (required)"
             formControlName="firstName" />
      <span ... >
         ...
      </span>
    </div>
    ...
 </fieldset>
</form>
```

Accessing the Form Model Properties

```
customerForm.controls.firstName.valid

customerForm.get('firstName').valid
```

```
firstName = new FormControl();

ngOnInit(): void {
   this.customerForm = new FormGroup({
      firstName: this.firstName,
      ...
   });
}
```

```
firstName.valid
```

Using **setValue** and **patchValue**

```
this.customerForm.setValue({
    firstName: 'Jack',
    lastName: 'Harkness',
    email: 'jack@torchwood.com'
});
```

```
this.customerForm.patchValue({
    firstName: 'Jack',
    lastName: 'Harkness'
});
```

FormBuilder

Creates a form model from a configuration

Shortens boilerplate code

Provided as a service

FormBuilder Steps

Import FormBuilder

```
import { FormBuilder } from '@angular/forms';
```
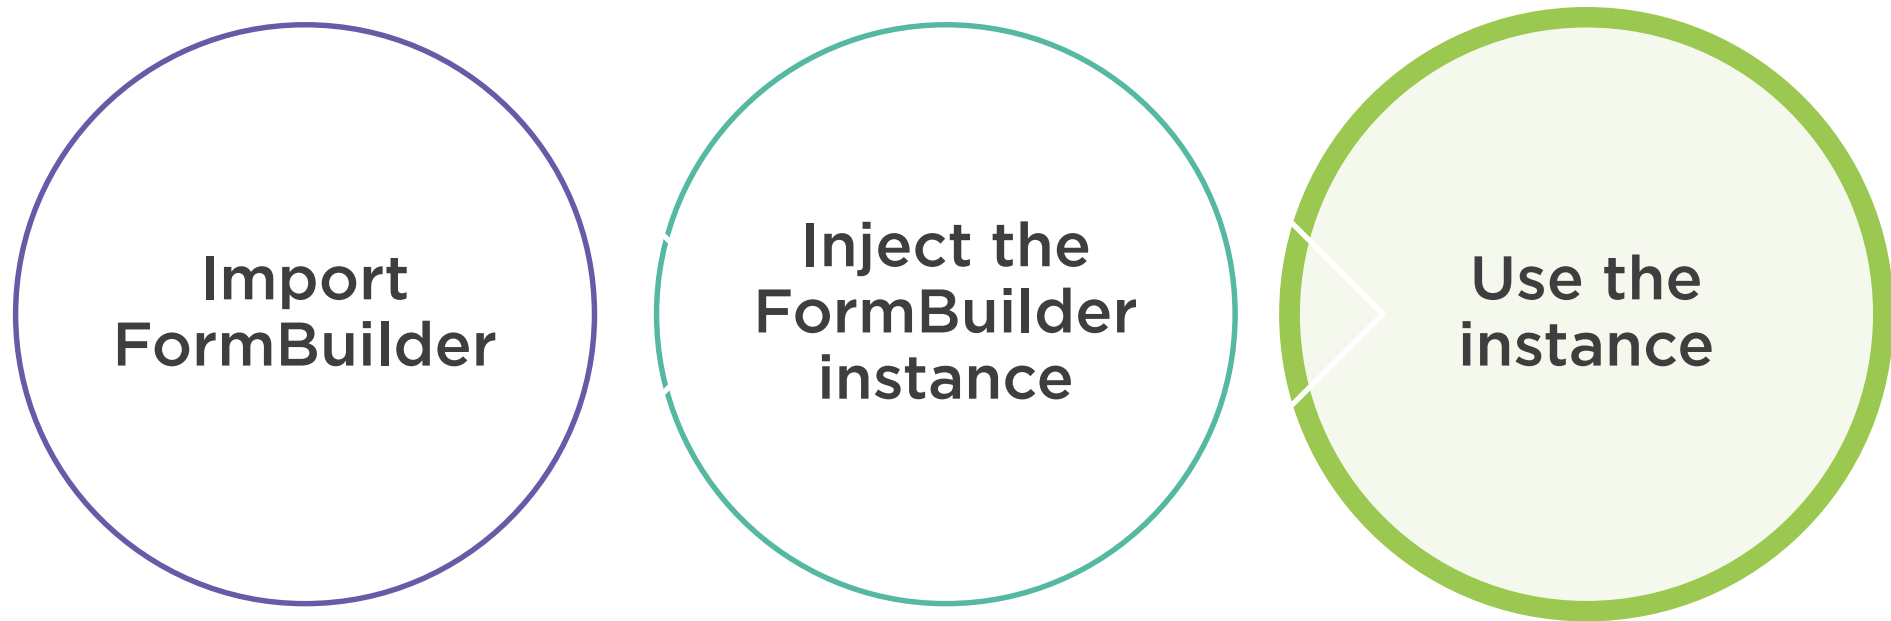
FormBuilder Steps

Import FormBuilder

Inject the FormBuilder instance

```
constructor(private fb: FormBuilder) { }
```

FormBuilder Steps

Import FormBuilder

Inject the FormBuilder instance

Use the instance

```
this.customerForm = this.fb.group({
        firstName: null,
        lastName: null,
        email: null,
        sendCatalog: true
});
```

FormBuilder's FormControl Syntax

```
this.customerForm = this.fb.group({
        firstName: '',
        sendCatalog: true

});
```

```
this.customerForm = this.fb.group({
        firstName: {value: 'n/a', disabled: true},
        sendCatalog: {value: true, disabled: false}
  });
```

```
this.customerForm = this.fb.group({
        firstName: [''],
        sendCatalog: [{value: true, disabled: false}]
  });
```

Checklist: Component Class

☑ ———————

☑ ———————

☑ ———————

Create a property for the root FormGroup

Create the FormGroup instance

Pass in each FormControl instance

```
ngOnInit(): void {
    this.customerForm = new FormGroup({
        firstName: new FormControl(),
        lastName: new FormControl(),
        email: new FormControl(),
        sendCatalog: new FormControl(true)
    });
}
```

Checklist: FormBuilder

Import FormBuilder

Inject the FormBuilder instance

Use that instance

```
ngOnInit(): void {
    this.customerForm = this.fb.group({
                firstName: '',
                lastName: '',
                email: '',
                sendCatalog: true
    });
}
```

Checklist: Angular Module

Import ReactiveFormsModule

Add ReactiveFormsModule to the imports array

```
@NgModule({
  imports: [
    BrowserModule,
    ReactiveFormsModule
  ],
  declarations: [
    AppComponent,
    CustomerComponent
  ],
  bootstrap: [AppComponent]
})
export class AppModule { }
```

Checklist: Template

Bind the form element to the FormGroup property

```
<form class="form-horizontal"
      (ngSubmit)="save()"
      [formGroup]="customerForm">
```

Bind each input element to its associated FormControl

```
<input class="form-control"
       id="firstNameId"
       type="text"
       placeholder="First Name (required)"
       formControlName="firstName" />
```

Summary

The Component Class

The Angular Module

The Template

Using `setValue` and `patchValue`

Simplifying with FormBuilder