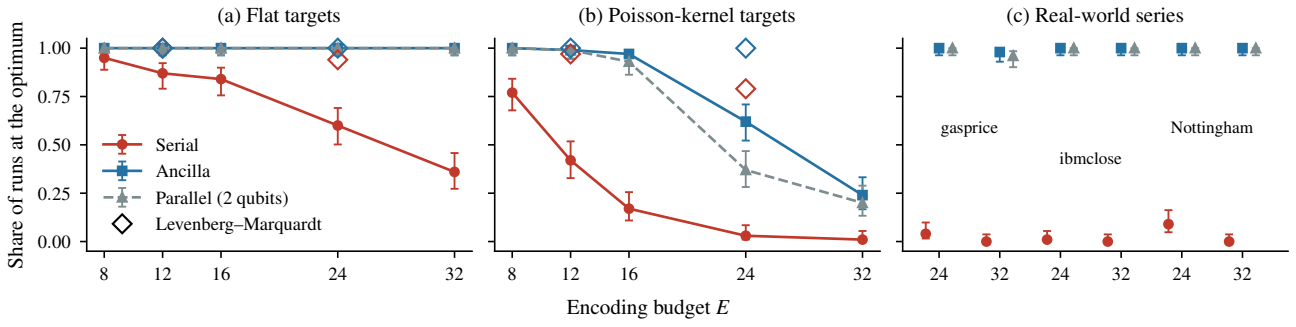

(a) Flat targets
(b) Poisson-kernel targets
(c) Real-world series
Share of runs at the optimum
1.00
0.75
0.50
0.25
0.00
Serial
Ancilla
Parallel (2 qubits)
Levenberg–Marquardt
gasprice
Nottingham
ibmclose
8
12
16
24
32
Encoding budget E