



SALPROP: SALIENT OBJECT PROPOSALS VIA AGGREGATED EDGE CUES

Prerana Mukherjee^{*1}, Brejesh Lall¹, Sarvaswa Tandon²

^{*}e-mail: eez138300@ee.iitd.ac.in

¹Department of Electrical Engineering, Indian Institute of Technology, Delhi, India; ²National Institute of Technology Goa, India
at IEEE International Conference on Image Processing (ICIP 2017), Beijing China



Problem Statement

We propose a novel object proposal generation scheme by formulating a graph-based salient edge classification framework that utilizes the edge context.

Key Features:

- Use fewer number of bounding boxes for good coverage of the prominent objects contained in the image.
- Maintain order of saliency in the object proposals

INTRODUCTION

- Object localization with high degree of precision is a challenging task
- It is usually solved by
 - Using feature statistics
 - Generic object region proposals
 - Deep learning (requires too much training data)
 - **Exploit Edges**
- Edges capture most of the shape information thus preserving important structural properties contained in the image.

REFERENCES

- [1] C. L. Zitnick, and Piotr Dollár. "Edge boxes: Locating object proposals from edges." In *European Conference on Computer Vision*, pp. 391-405. Springer, Cham, 2014.
- [2] Y. Qi, Yi-Zhe Song, Tao Xiang, Honggang Zhang, Timothy Hospedales, Yi Li, and Jun Guo. "Making better use of edges via perceptual grouping." In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 1856-1865. 2015.
- [3] J. Pont-Tuset, Pablo Arbelaez, Jonathan T. Barron, Ferran Marques, and Jitendra Malik. "Multiscale combinatorial grouping for image segmentation and object proposal generation." *IEEE transactions on pattern analysis and machine intelligence* 39, no. 1 (2017): 128-140.

RESULTS

Table 1. Comparison of top 1000 proposals with state-of-the-art techniques on AUC% (higher the better), number of proposals (N) at 75% recall (lower the better) and recall% (higher the better). '-' indicates that the particular recall rate is not reached.

| Method | IoU=0.5 | | | IoU=0.6 | | | IoU=0.7 | | | Time(in s) |
|-------------------|---------|-------|--------|---------|-------|--------|---------|-------|--------|------------|
| | AUC | N@75% | Recall | AUC | N@75% | Recall | AUC | N@75% | Recall | |
| EdgeBoxes70 | 65.82 | 86 | 93.45 | 60.52 | 141 | 90.73 | 53.03 | 294 | 84.15 | 0.25 |
| Perceptual Edge | 1.8 | - | 10.4 | 0.08 | - | 4.7 | 0.02 | - | 1.2 | 7.2 |
| MCG | 71 | 37 | 94.6 | 62.8 | 95 | 90.2 | 62.5 | 366 | 83 | 34 |
| Objectness | 62 | 145 | 89 | 52 | 504 | 78 | 30 | - | 41 | 3 |
| Rahtu | 57 | 278 | 84 | 50 | 551 | 79 | 43.5 | - | 73.5 | 3 |
| Randomized Prim's | 59.3 | 129 | 89 | 50 | 315 | 83 | 40.7 | 1000 | 75 | 1 |
| Rantalankila | 25.14 | 511 | 86.38 | 21.63 | 718 | 79.77 | 17.76 | - | 70.75 | 10 |
| Selective Search | 62.3 | 105 | 93 | 54 | 207 | 88 | 45.3 | 544 | 80 | 10 |
| Rigor | 40.39 | - | 67.43 | 32.05 | - | 54.5 | 23.44 | - | 40.73 | 6.84 |
| GOP | 47.8 | 155 | 93 | 41 | 272 | 87 | 33.4 | 705 | 76 | 0.9 |
| SalProp | 67.5 | 74 | 91 | 58.1 | 244 | 84 | 44 | - | 71.3 | 7 |

- SalProp is the best technique at lower number of proposals achieving over 25% and 19% recall with only 1 window at IoU=0.5 and 0.6 respectively.
- At IoU=0.7, SalProp outperforms Rahtu [5] by 3.46%, Selective Search [4] by 5.16%, Objectness [3] by 7.32%, Randomized Prim's [6] by 8.71%, GOP [17] by 22.36%, Rigor [11] by 23.46%, Rantalankila [7] by 30.05% and Perceptual Edge [9] by 30.35% at top-10 proposals.
- Outperforms objectness by 2%, 6% and 30% at IoU thresholds 0.5, 0.6 and 0.7 respectively.
- Comparable performance to EdgeBoxes while having a computational speedup of 5x over MCG.

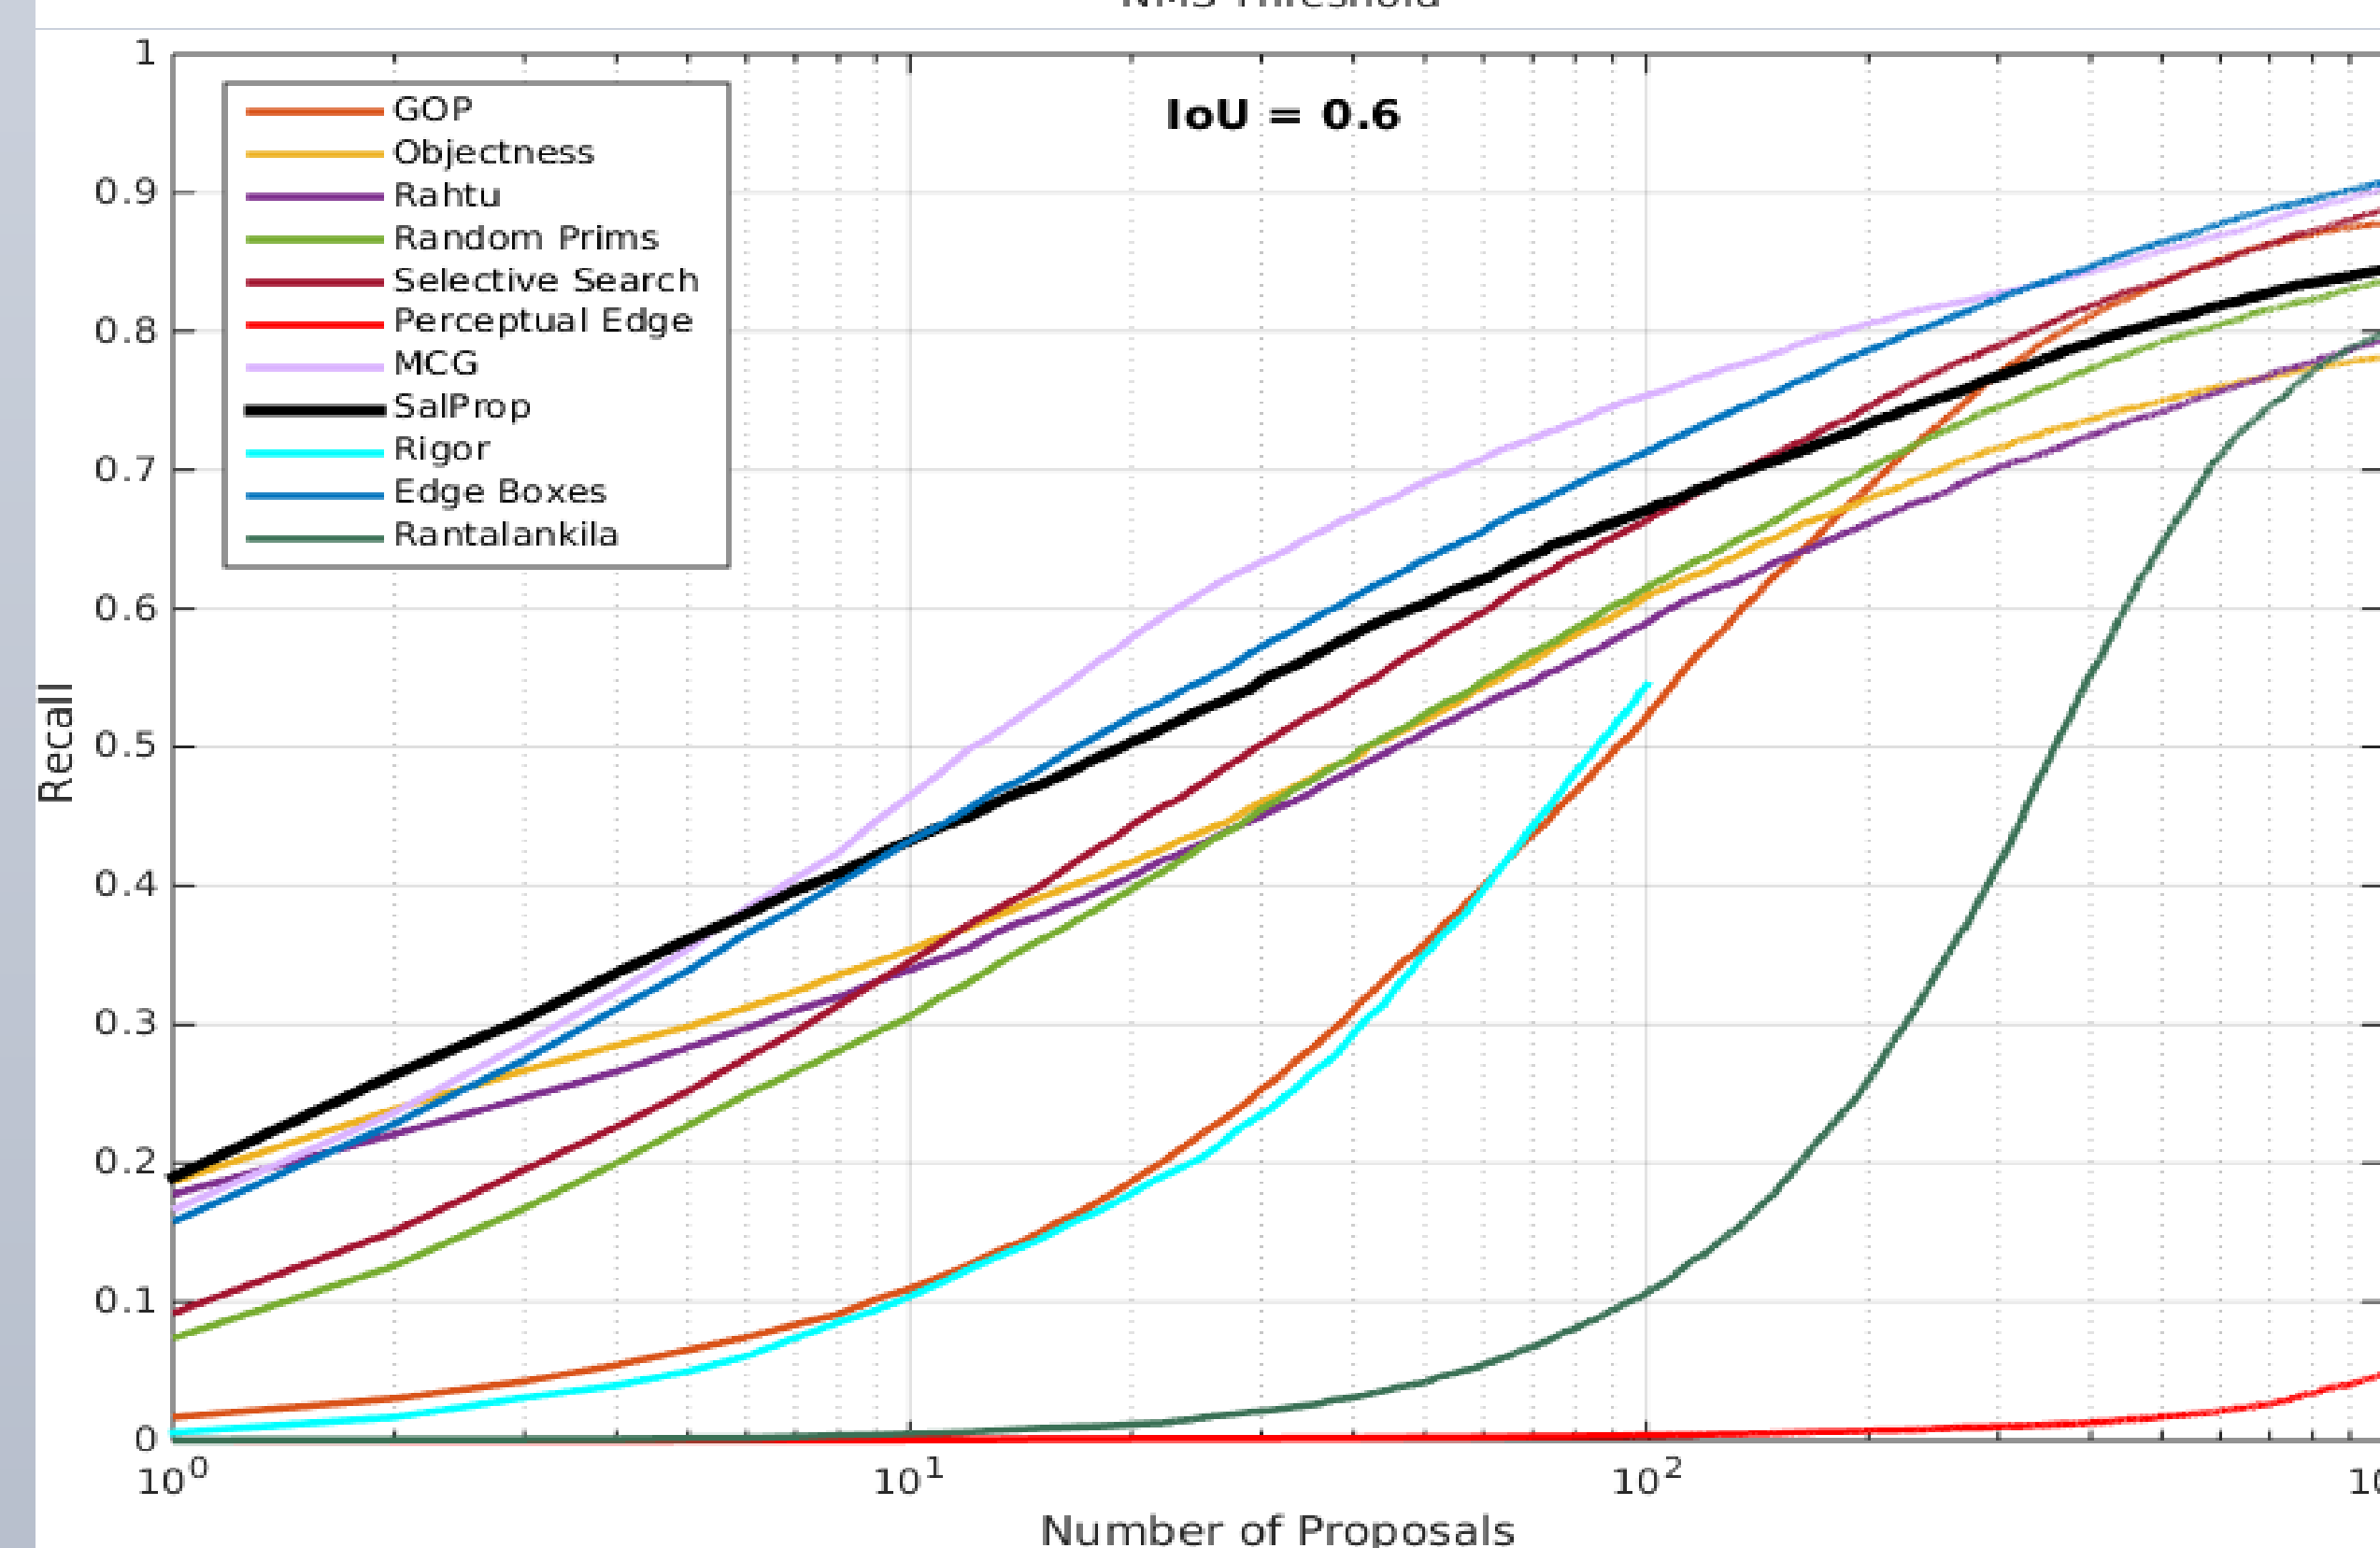
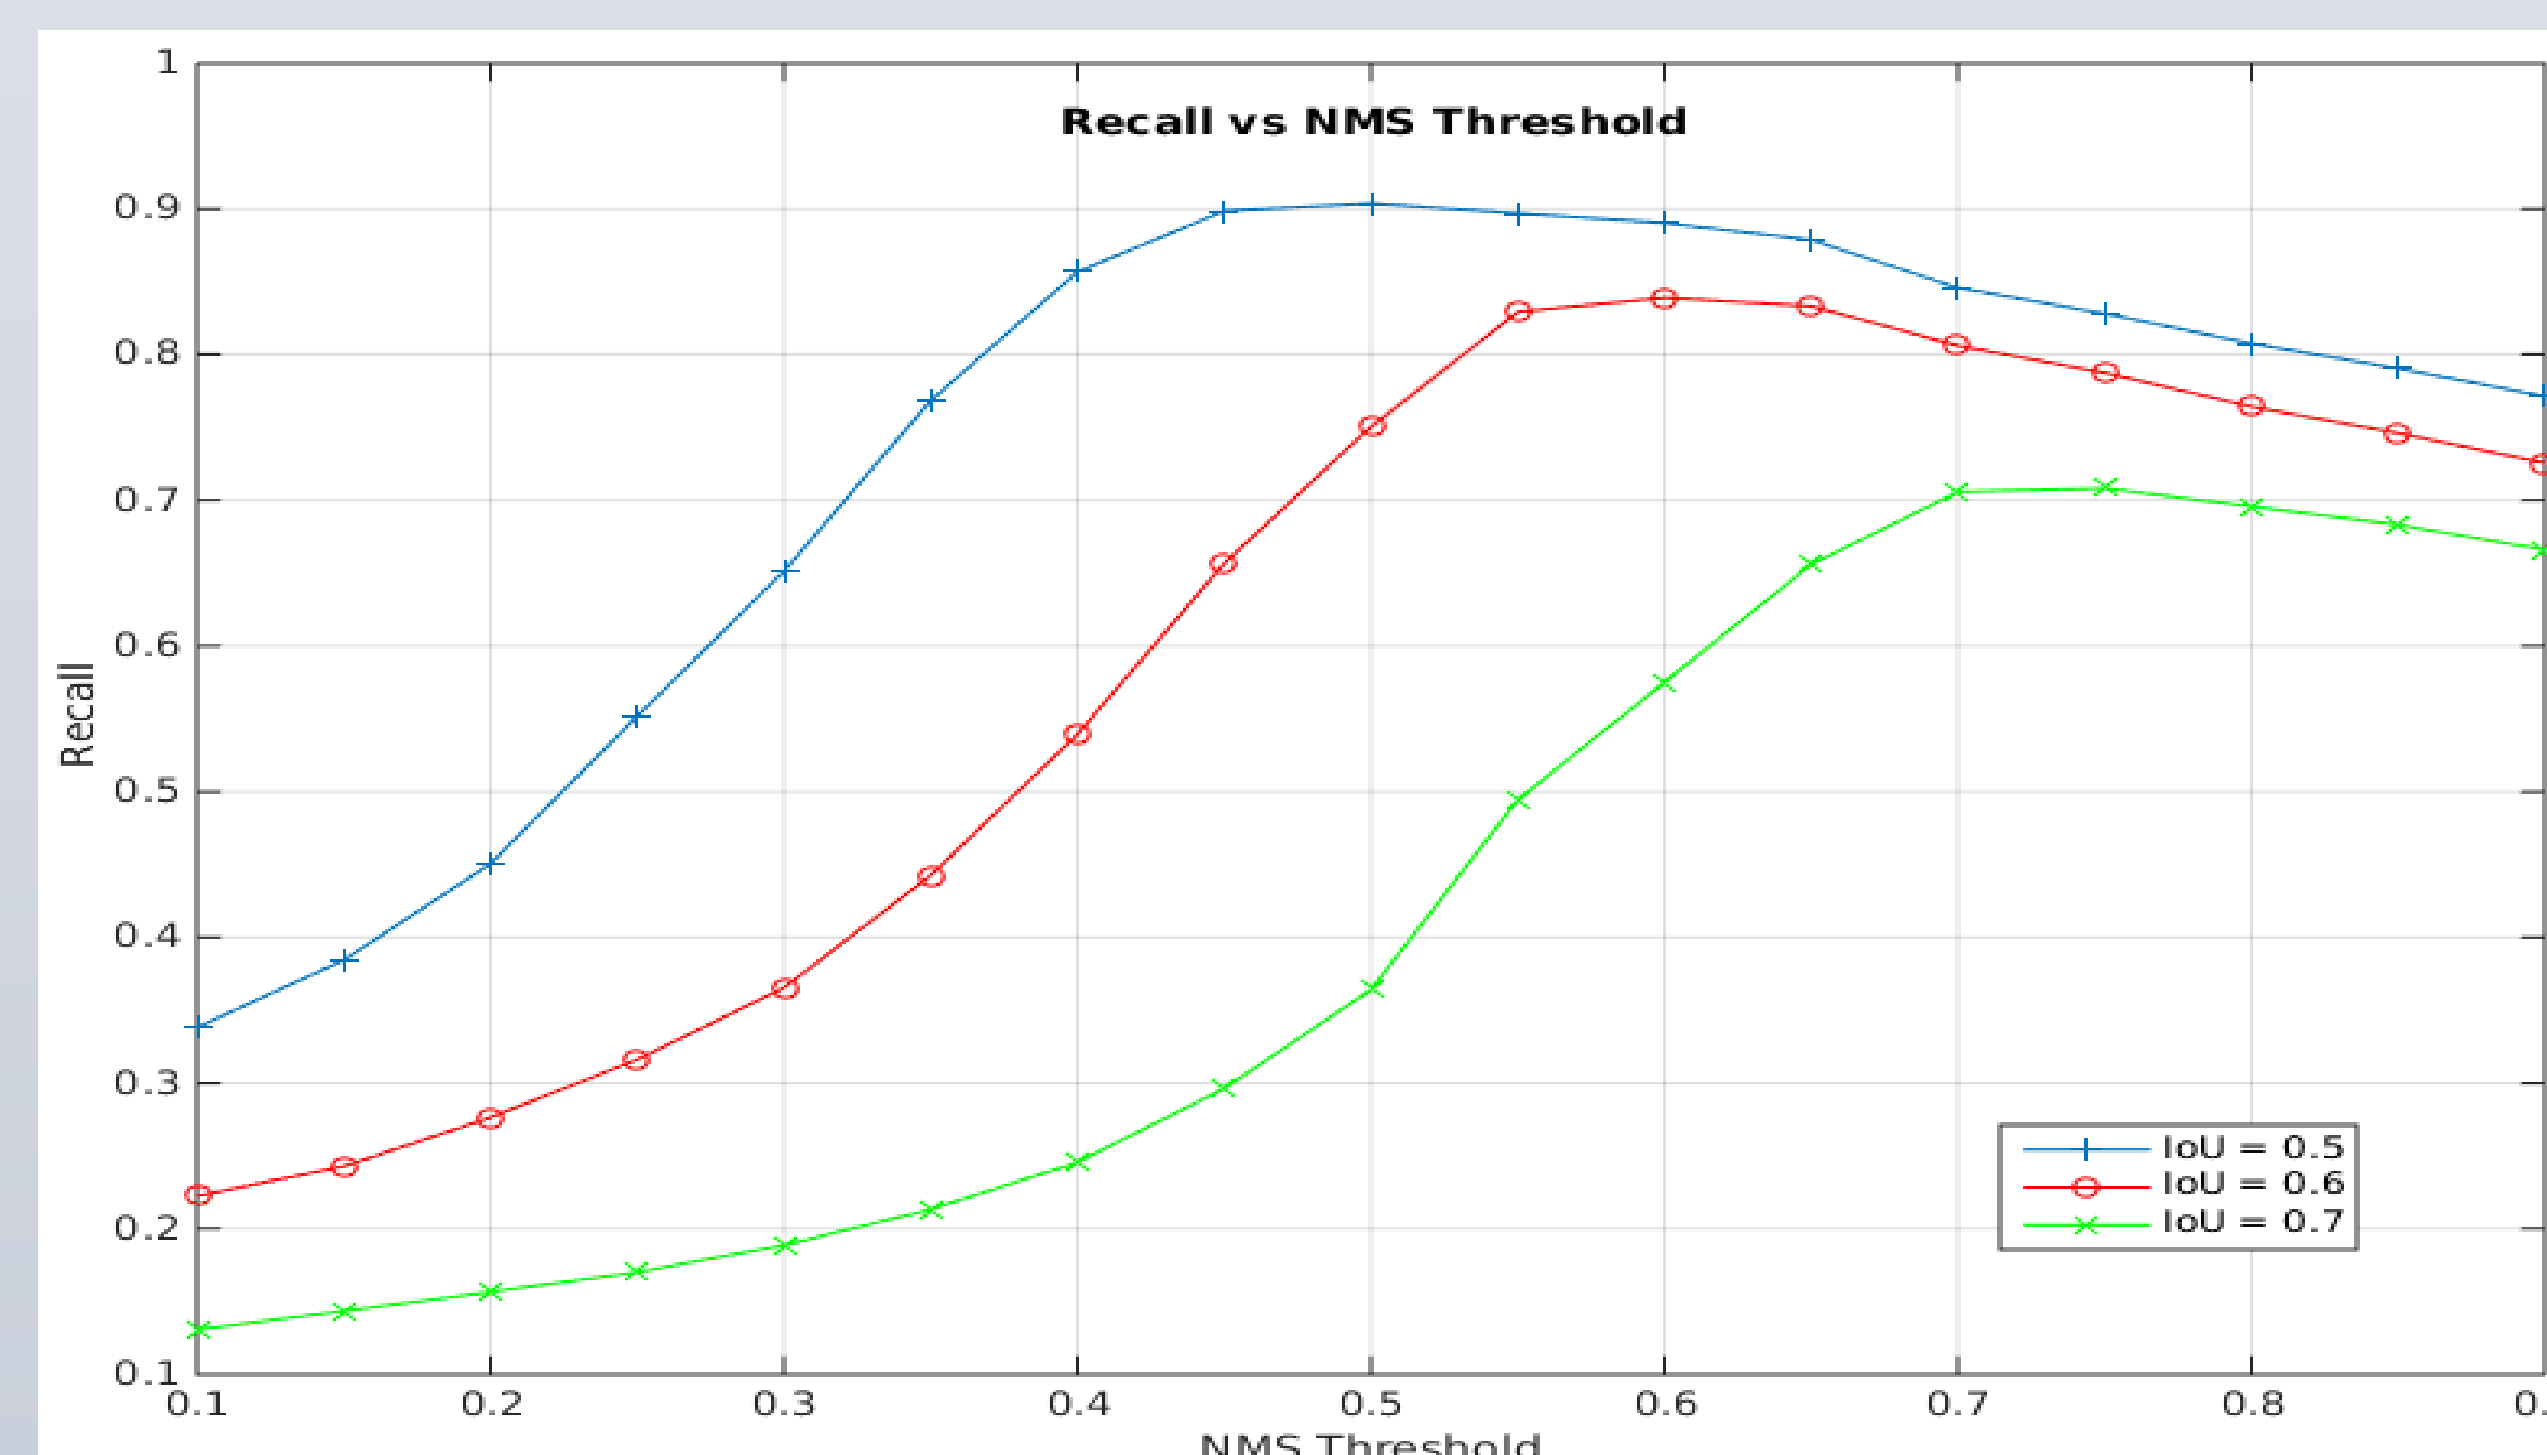


Fig. 3. (a) NMS cut-off threshold for highest recall value at varying IoU on validation set images. (b)-(d) The detection rate vs. the number of bounding box proposals for varying IoU = 0.5, 0.6 and 0.7 on test set images.


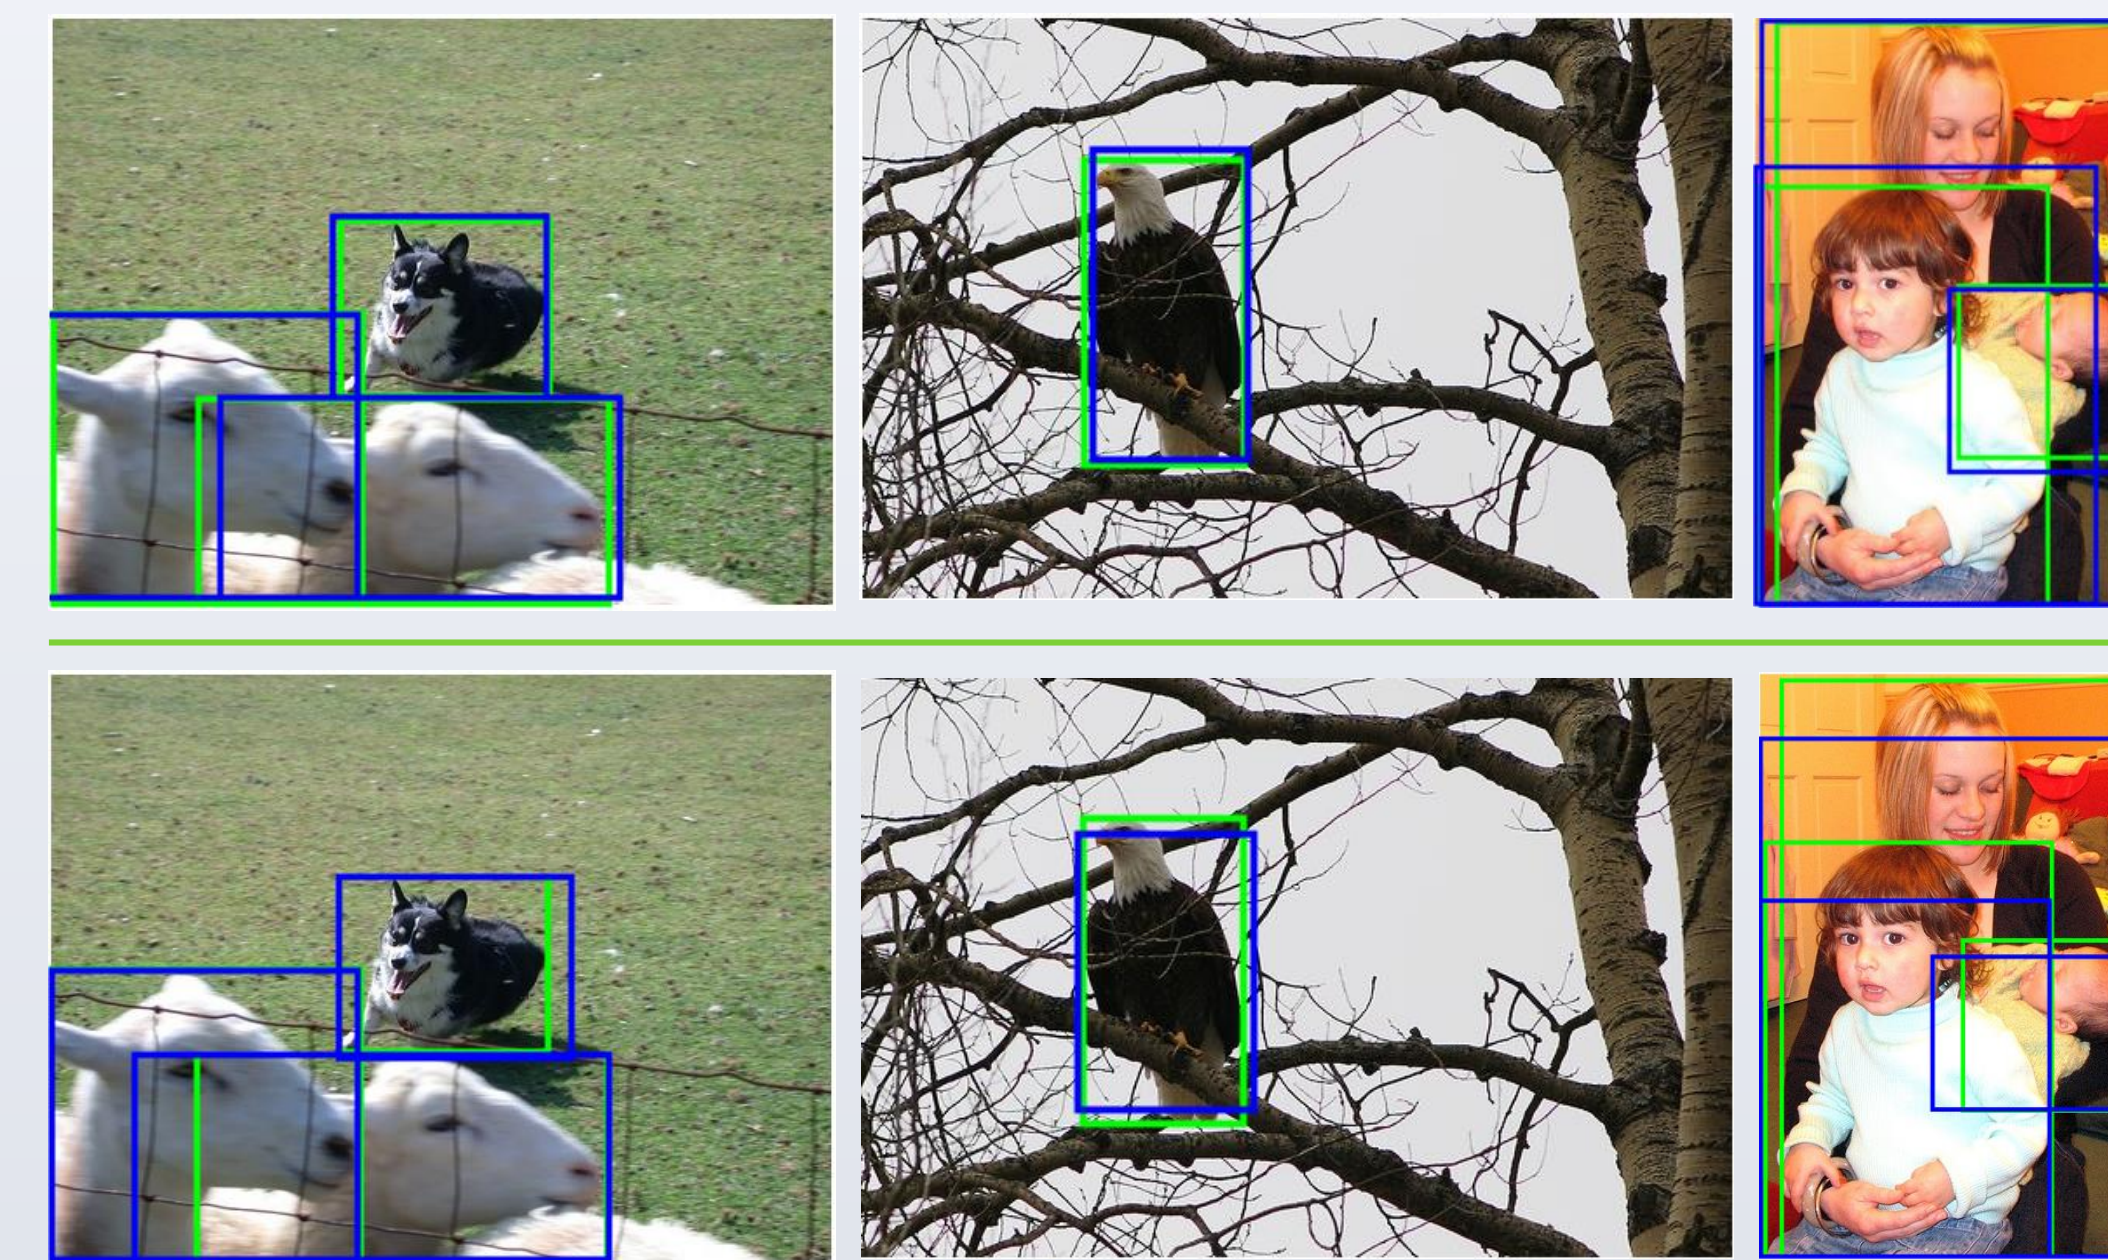


Fig. 4. Top Row: SalProp, Bottom Row: EdgeBoxes. Closest bounding boxes (blue) having maximum overlap with the ground truth boxes (green).

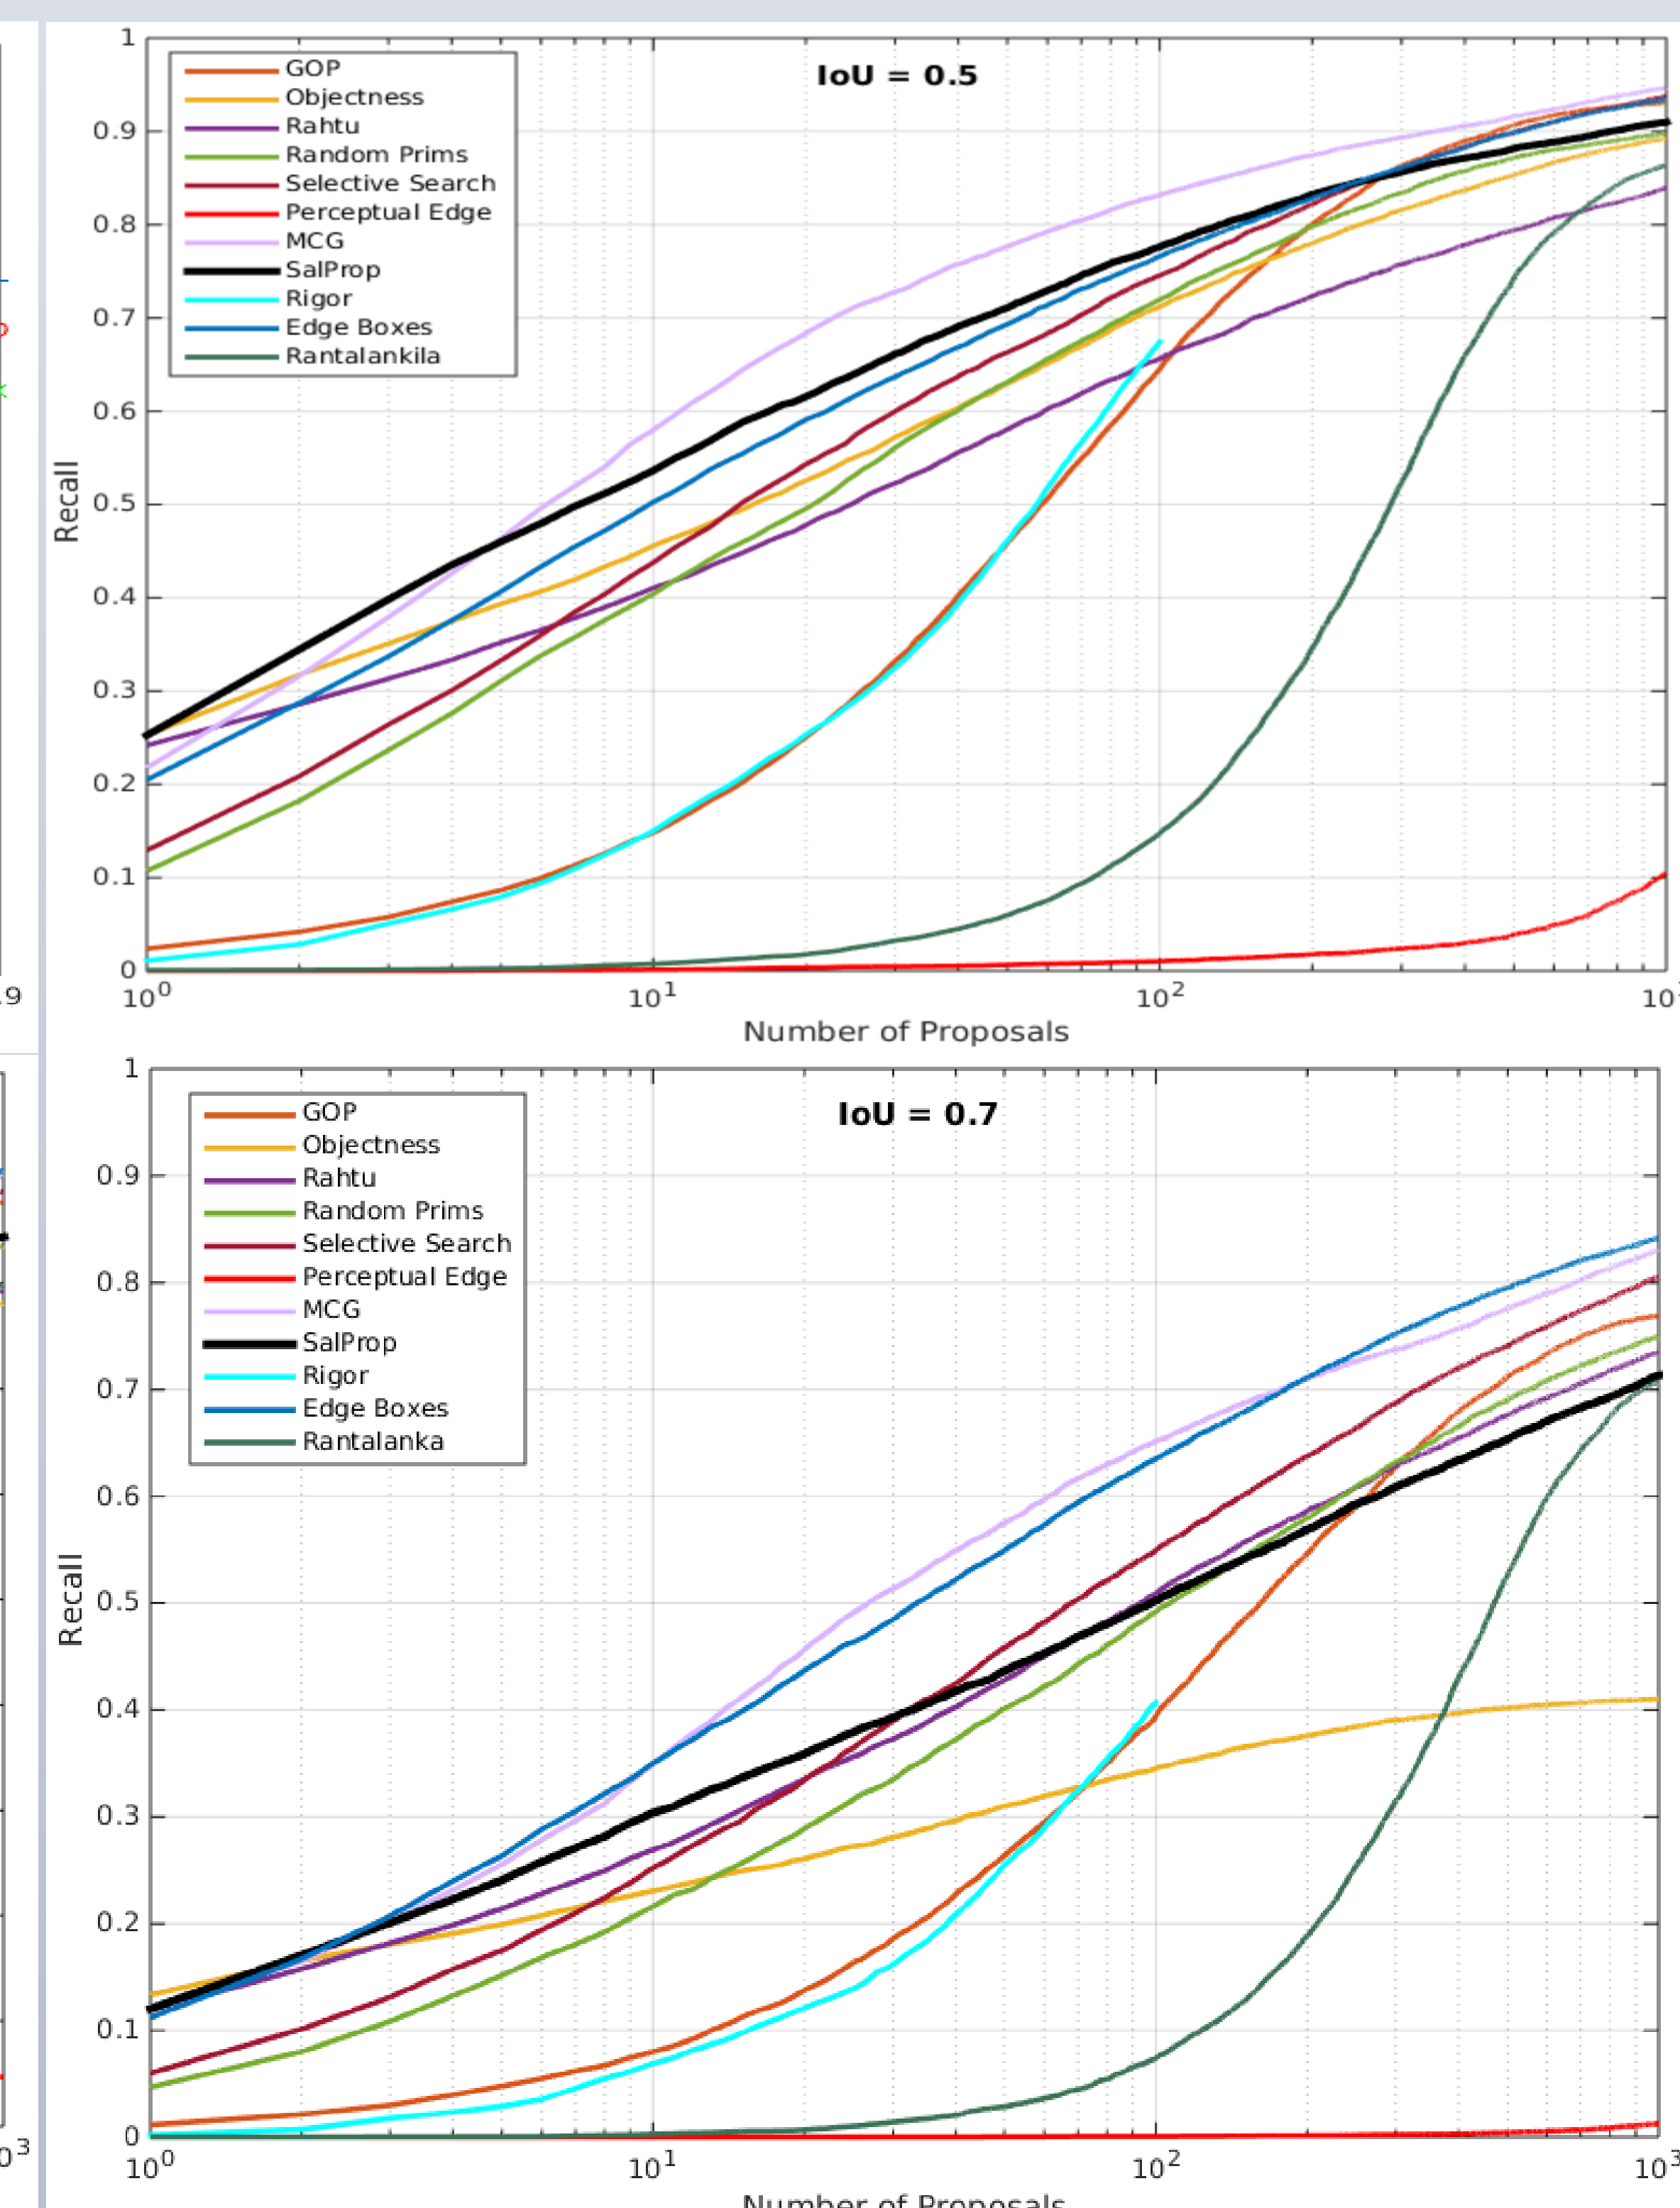

PROPOSED APPROACH

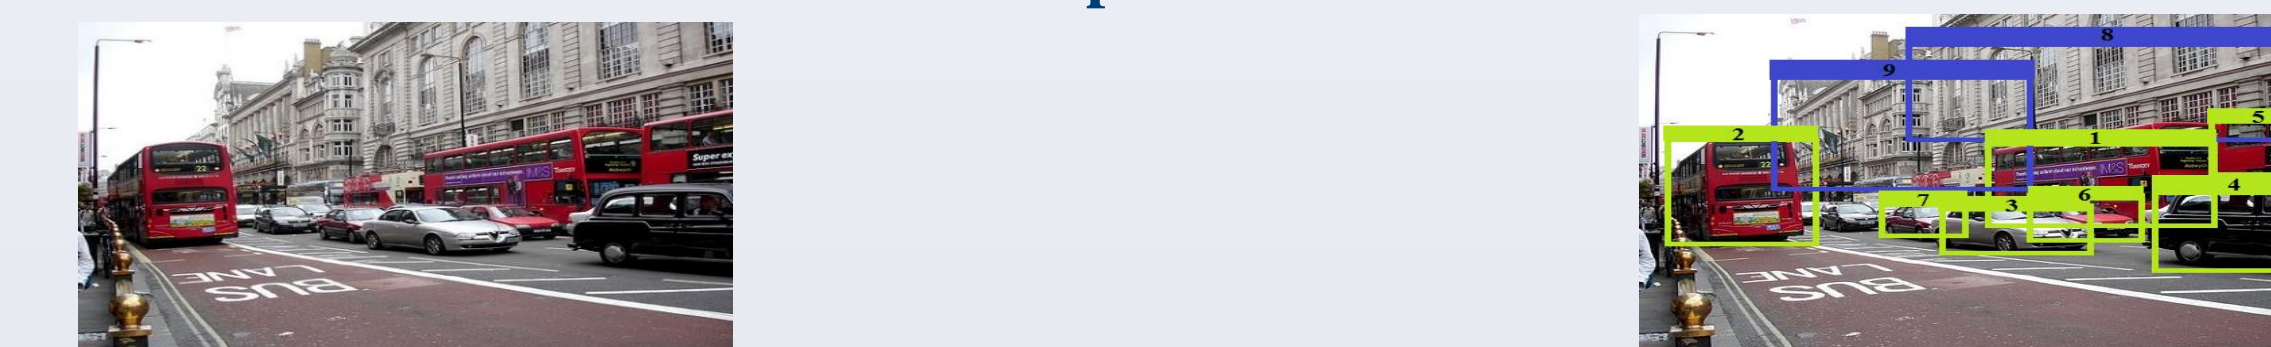
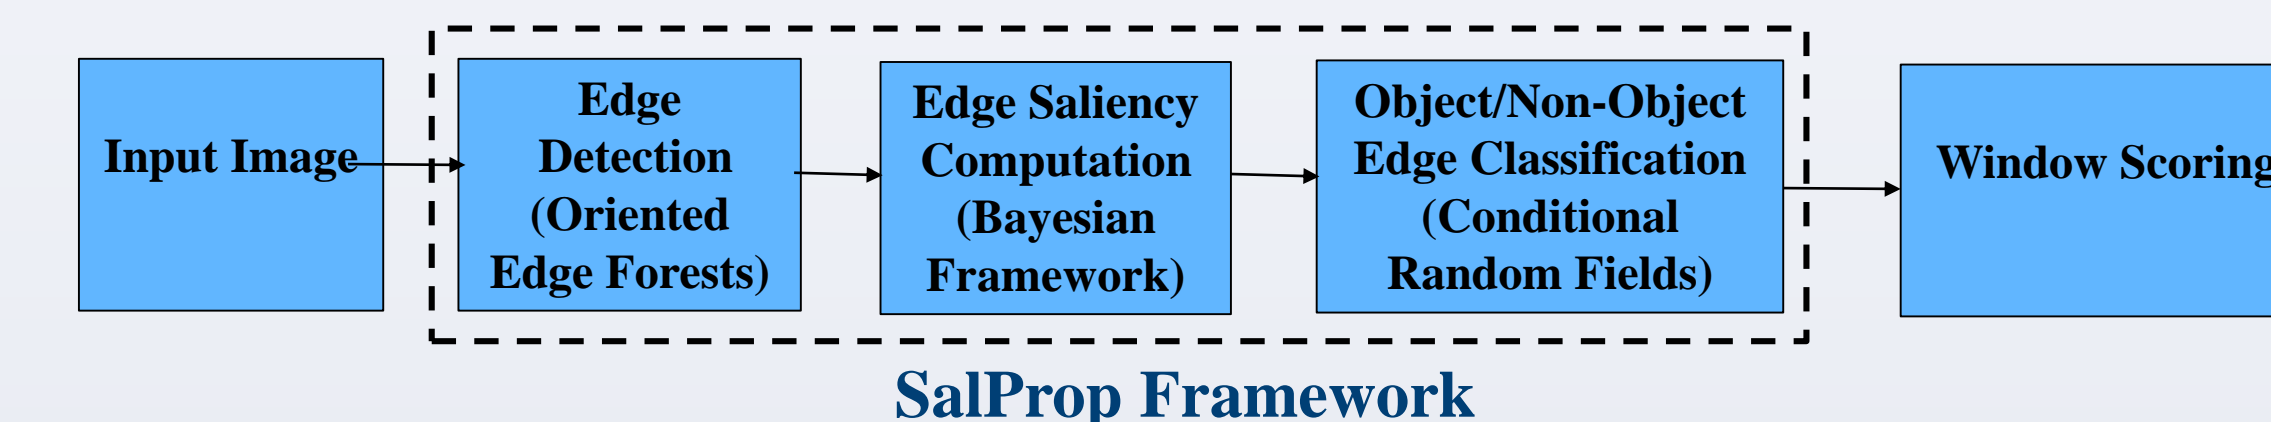


Fig. 1. The SalProp Framework. Given any RGB image, we generate proposals ranked in the order of saliency. Green boxes contain the most salient objects having higher rank and blue boxes contain less salient objects and are ranked lower in the proposal set. The number assigned to each box indicates its saliency ranking in the proposal pool.

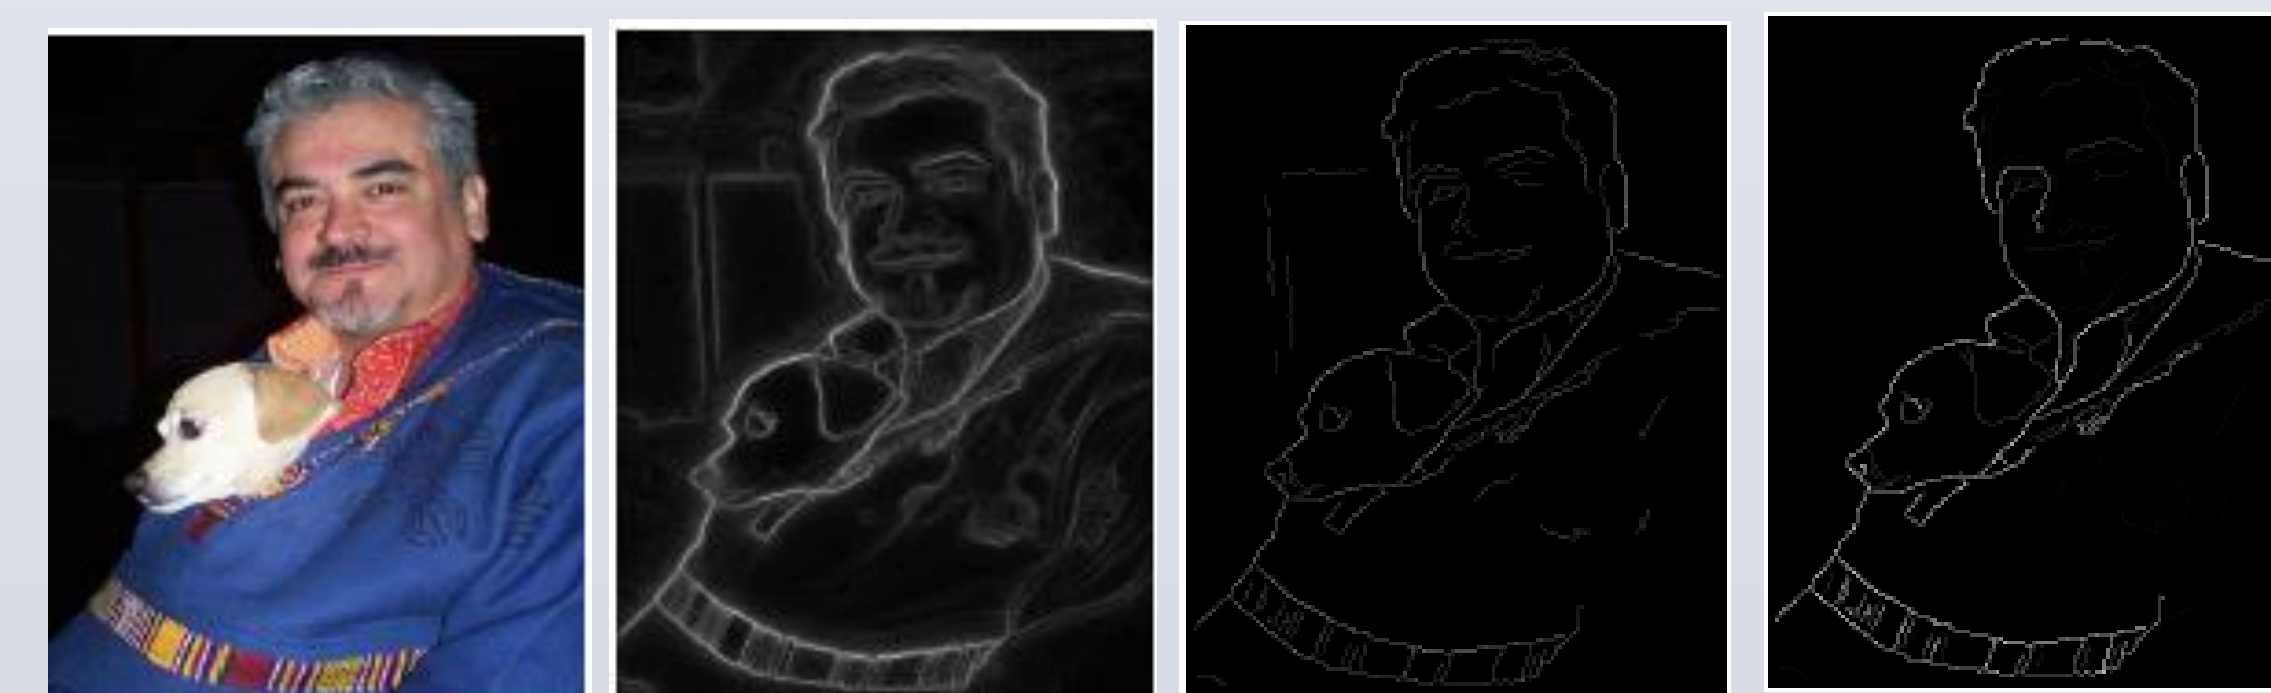


Fig. 2. (a) Original image (b) Edge map using OEF (c) After NMS and thresholding (d) Bayesian Probabilistic edge map (indicating saliency of edge segments)

Algorithm 1 Algorithm for CRF learning and Prediction

- 1: **procedure** CRF-STRUCTURED PREDICTION
- 2: **Input:** \mathcal{V} : set of edge segments with 7-D feature vector, \mathcal{E} : set of edge links with 4-D feature vector
- 3: **Output:** Labels L for each node (edge segment)
- 4: Optimize an objective function (energy) with respect to parameter vector $\mathbf{W} = [\mathbf{W}_1 \ \mathbf{W}_2]$
- 5: $E(L|X) = \sum_{i \in \mathcal{V}} \phi(l_i, X; \mathbf{W}_1) + \sum_{(i,j) \in \mathcal{E}} \psi(l_i, l_j, X; \mathbf{W}_2)$
- 6: where L is the structured label, X is the structured input features, l_i is the label of the node, \mathbf{W}_1 are the node parameters, \mathbf{W}_2 are the link parameters, $\phi(l_i, X; \mathbf{W}_1)$ are unary potentials given as the inner product of the node features with node weights and $\psi(l_i, l_j, X; \mathbf{W}_2)$ indicates pairwise potentials given as a linear function of link features and weights (shared over all links). The objective function is optimized using Block-coordinate Frank Wolfe Structured SVM to compute parameter \mathbf{W} .
- 7: Encode the structure of the problem in a joint feature function $\hat{\psi}(x, y)$ as in prediction using,
- 8: $\hat{y} = \arg \max_{y \in \mathcal{Y}} \mathbf{W}^T \hat{\psi}(x, y)$
- 9: where y is the structured label, x is the feature vector of a data point (node), \mathcal{Y} denotes set of all possible labels $\{0, 1\}$ and \hat{y} is the prediction of the data point. Solve for \hat{y} . Once the weights are learnt using the training data, predictions are made using AD3 inference algorithm.
- 10: **end procedure**

CONCLUSION

- Novel object proposal generation algorithm operating in a computationally efficient learning based setting where the salient object edge density inside the bounding box is analyzed to score the proposal set.
- High recall rates with lesser number of proposals with varying IoU thresholds and subsequently making it more reliable in context of competing methods.
- Ranked the key objects according to their saliency