

AVL Trees

June 11, 2020

Description

Insertion


The first part of insertion is the same as inserting into a regular BST. However, inserting may cause one or more nodes in the tree to become imbalanced. Note that when we insert a value, the only nodes whose heights change are the ancestors of the node that we inserted. So, if inserting a node causes imbalance, the inserted value must have at least two ancestors (otherwise the length of the path from the root to the inserted node has increased to at most 1, which cannot cause an imbalance since this would require a height of -1 in the other subtree).

Now, suppose that inserting a node v caused an imbalance. Let z be the first node on the path from v to the root that was imbalanced. Let y be the child of z on that path and x be the grandchild of z on that path. Since z became imbalanced, we know the $h(y)$ increased and therefore the $h(x)$ increased as well. Suppose originally $h(x) = m$. There are 4 cases:

1. LL: y is the left child of z and x is the left child of y .

Since $h(x)$ was m , that means $h(y_R)$ be $m-1, m$, or $m+1$, since y was balanced. After the insertion $h(x) = m+1$. Now, y is still balanced, so $h(y_R) \neq m-1$. Since $h(y)$ increased, $h(y_R) \neq m+1$. Therefore, $h(y_R) = m$. Thus, $h(y)$ increased from $m+1$ to $m+2$.

Now, since the $h(y)$ was $m+1$, $h(z_R)$ could be $m, m+1$, or $m+2$. Since z is now imbalanced, we know $h(z_R) = m$. Therefore, $h(z)$ increased from $m+2$ to $m+3$. After the rotation, we can see that all the nodes are balanced. Also note that the height of the subtree is $m+2$ both before the insertion and after the

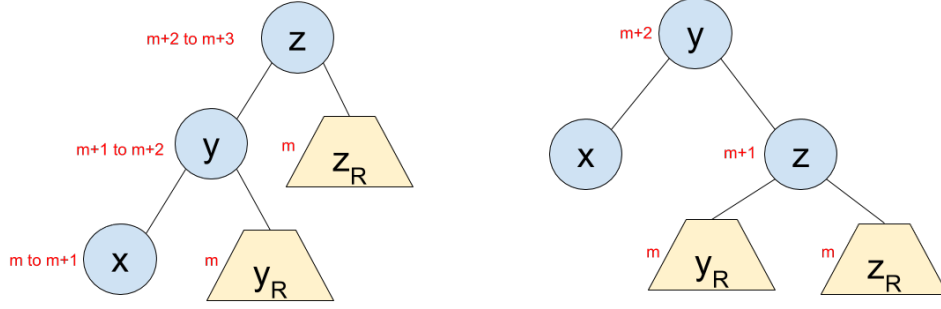

rotation. This means that since all ancestors of this node were balanced before the insertion, they will all be balanced again after the rotation. Therefore, when inserting, we do not need to check any ancestor nodes after the initial rotation.


2. RR: y is the right child of z and x is the right child of y . This is analogous to the previous case.
3. LR: y is the left child of z and x is the right child of y .

Since $h(x)$ was m , that means $h(y_L)$ can be $m - 1$, m , or $m + 1$, since y was balanced. After the insertion $h(x) = m + 1$. Now, y is still balanced, so $h(y_L) \neq m - 1$. Since $h(y)$ increased, $h(y_L) \neq m + 1$. Therefore, $h(y_L) = m$. Thus, $h(y)$ increased from $m + 1$ to $m + 2$.

Now, since the $h(y)$ was $m + 1$, $h(z_R)$ could be m , $m + 1$, or $m + 2$. Since z is now imbalanced, we know $h(z_R) = m$. Therefore, $h(z)$ increased from $m + 2$ to $m + 3$.

Since $h(x)$ was m , that means one of $h(x_L)$ and $h(x_R)$ was $m - 1$ before the insertion and the other was $m - 1$ or $m - 2$. After the insertion, x is still balanced, so one of them is m and the other is m or $m - 1$. (We can actually show that they must both be $m - 1$ before, but it is not important for this proof.)

After the double rotation, we can see that all the nodes are balanced. Also note that the height of the subtree is $m + 2$ both before the insertion and after the rotation, which implies the same as before.

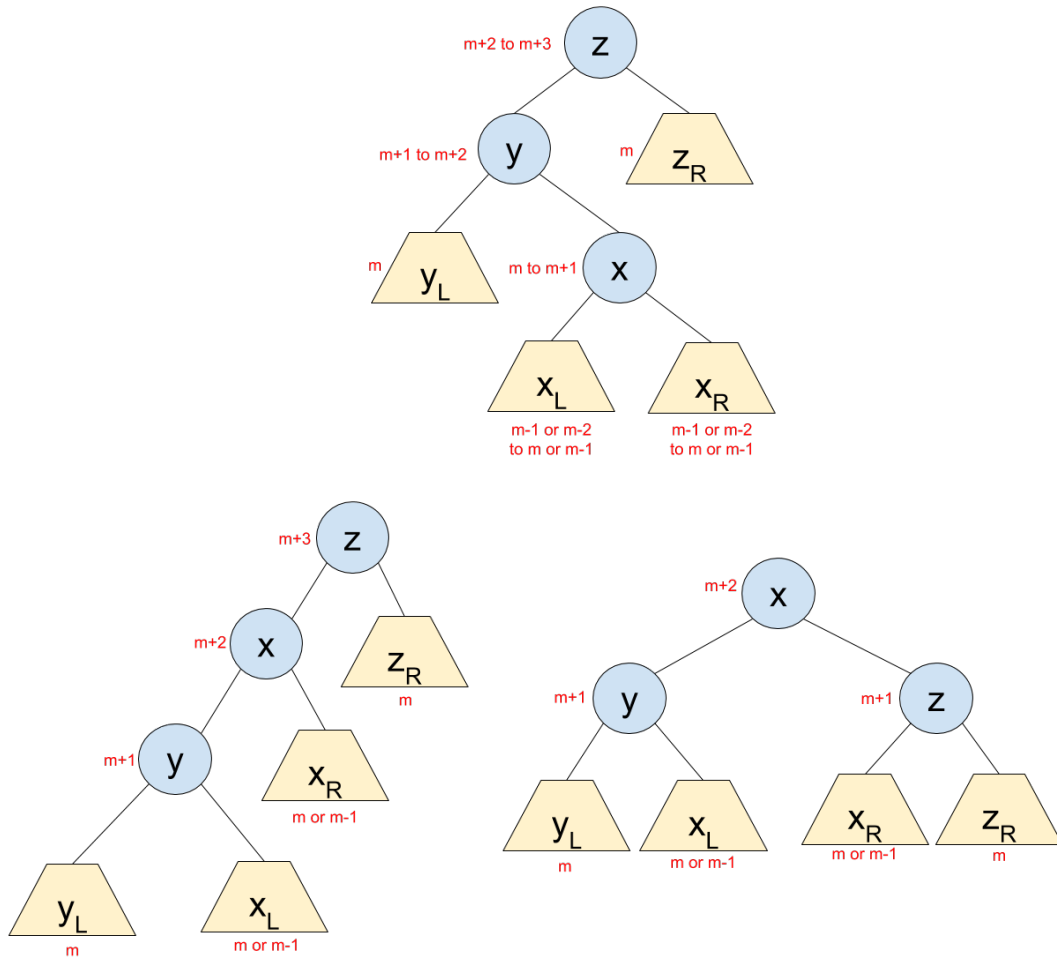


4. RL: y is the right child of z and x is the left child of y . This is analogous to the previous case.

Deletion

The first part of deletion is the same as deleting from a regular BST. However, deletion may cause one or more nodes in the tree to become imbalanced. Let z be the first imbalanced ancestor of the deleted node. Again, z must have a height of at least 2 to have an imbalance. Let y be the child of z of greater height and x be the child of y with greater height (the left one if they are equal). Note that since z became imbalanced, y cannot be in the subtree we just deleted from. There are 4 cases:

1. LL: y is the left child of z and x is the left child of y .

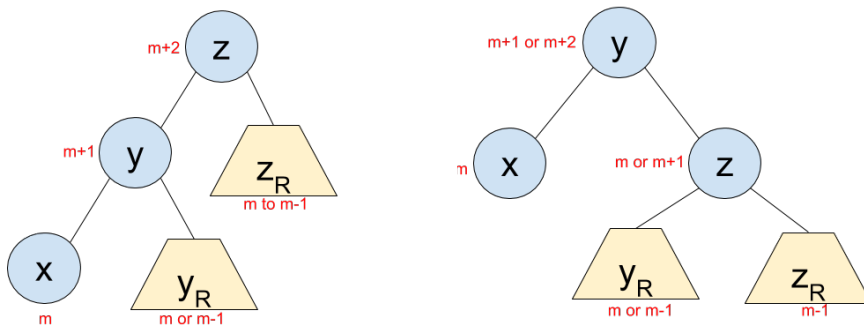


Suppose $h(z_R) = m$ before the deletion. Since z became imbalanced, $h(z_R)$ must have decreased as a result of the deletion, so $h(z_R) = m - 1$ after. Also since z became imbalanced, $h(y) = m + 1$. We know $h(x) \geq h(y_R)$, so since y is balanced, $h(x) = m$ and $h(y_R) = m$ or $m - 1$.

After the rotation, we can see that all the nodes are balanced. However, note that the height of the subtree may have changed from $m + 2$ to $m + 1$ from before the deletion to after the rotation. This means one of z 's ancestors may have become imbalanced. Unlike insertion, we must check all the ancestors and balance them if necessary.

2. RR: y is the right child of z and x is the right child of y . This is analogous to the previous case.
3. LR: y is the left child of z and x is the right child of y .

Suppose $h(z_R) = m$ before the deletion. By the same logic as in the first case, we have $h(z_R) = m - 1$ after the deletion and $h(y) = m + 1$. We know $h(x) > h(y_L)$, so since y is balanced, $h(x) = m$ and $h(y_L) = m - 1$. Since x is balanced, $h(x_L)$ and $h(x_R)$ are $m - 1$ or $m - 2$.

After the rotation, we can see that all the nodes are balanced, but again, the height of the subtree has changed, so we must check all the ancestors.

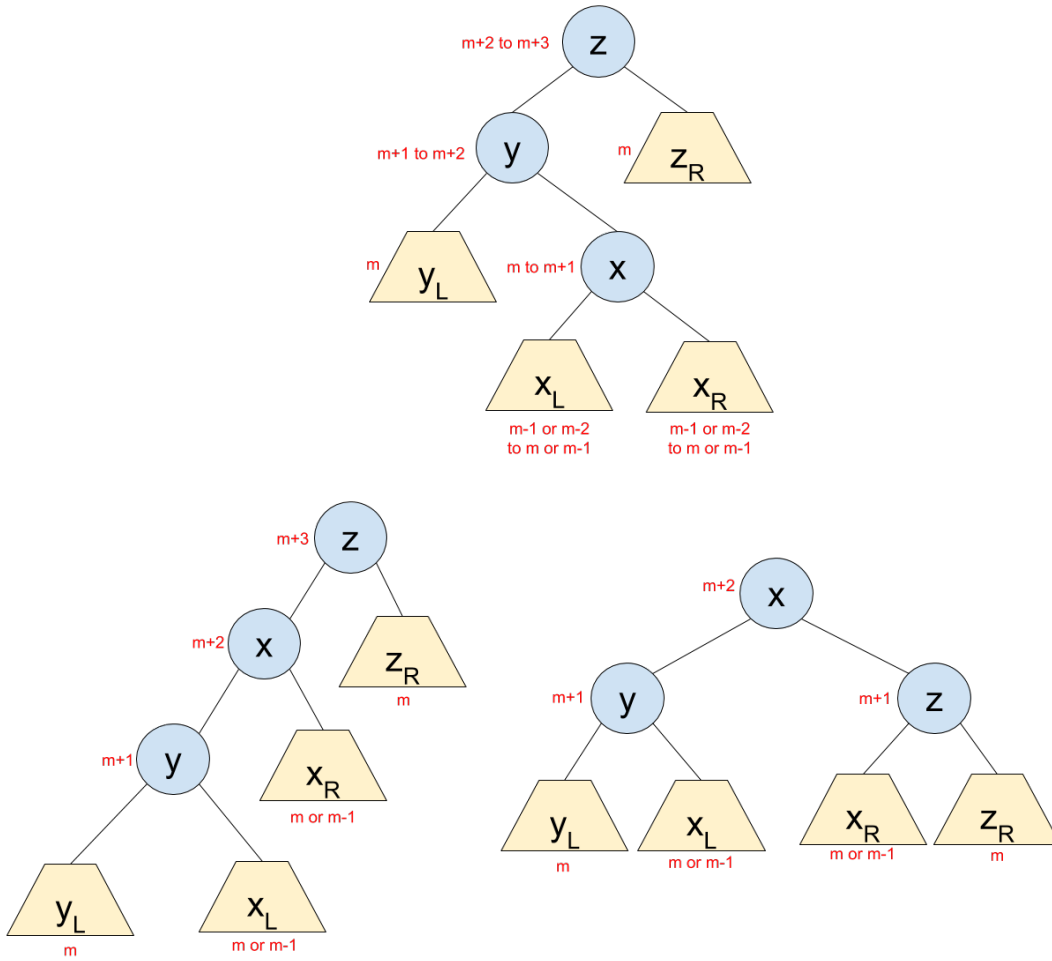

4. RL: y is the right child of z and x is the left child of y . This is analogous to the previous case.

Time Complexity