# Measurement-Induced Role Differentiation in Agent Populations

Maximilian Puelma Touzel[1, *]

[1] *Mila–Quebec AI Institute, 6666 St. Urbain Ave., Montreal, Quebec, Canada*

(Dated: November 3, 2026)

In informational active matter, particles that measure their neighbors and act on the result produce large-scale order, such as a gas whose pressure differs by direction. So far that order has been agreement: the particles align. We ask whether the same mechanism can produce the opposite kind of order, in which agents differ by taking complementary roles. In a two-player game where the pair does best by acting differently, a shared signal that assigns the roles raises the payoff. How much the signal reveals about the roles limits the gain. What is necessary for this signal and differentiation to emerge in agent populations? We consider persistent identities built from its past actions. Partners read each other's identities to decide who takes which role, and each action reinforces the identity it was read from. Roles emerge once the gain of this loop exceeds one. The resulting order is a social pressure that spreads identities apart along directions set by the game contexts. With many contexts, roles appear one direction at a time, in sequences that range from gradual and predictable to sudden. Agents reinforce the contexts that pay them such that the loop gives quantitative form to Structuration, the sociological idea that social structure and individual action produce each other. For populations of AI agents, it gives a mechanism and an early warning for gains in capability driven by coordination.

## INTRODUCTION

An information engine converts measurement into work through feedback [1, 2]. Szilard's engine is the simplest case: one bit of information about a particle's position yields at most $k_B T \ln 2$ of work [3], and the feedback second law extends this limit to any measurement [4]. Informational active matter places such a feedback rule (*i.e.* a Maxwell's demon) in every particle of a many-body system [5, 6]. VanSaders, Fruchart, and Vitelli describe a *demon gas* of hard disks in which each measures its neighbors and sets its collision diameter by how well its velocity aligns with theirs [5]. Above a threshold in measurement quality the gas orders, and the local rule shapes a macroscopic observable: the pressure tensor becomes anisotropic and stretches a flexible container along the alignment axis. The order in these systems is consensus, a magnetization-like alignment, and the demon that produces it acts on a symmetry-breaking order parameter [7]. The same consensus order appears in populations of language-model agents [8, 9]. How much order arises is limited by how much information the measurements contain about the underlying state.

In a recent event [10], a large decentralized group of AI agents deployed on a complex task spontaneously ordered into specialized roles, coordinated via feedback from a self-organized communication channel. This coordination phenomenon demands a description. Motivated to describe this role-taking in the terms of informational active matter, here we ask what local measurement and feedback properties are necessary to shape a macroscopic tensor, analogous to that of the demon gas, but through *differentiation*, in which agents take complementary rather than identical states.

A minimal setting for role differentiation among task-solving agents is a two-player anti-coordination game (Sec. I). Each player chooses Go or Defer, with payoffs

| | Go | Defer |
|---|---|---|
| Go | $V_{\mathrm{GG}}$, $V_{\mathrm{GG}}$ | $V_{\mathrm{GD}}$, $V_{\mathrm{DG}}$ |
| Defer | $V_{\mathrm{DG}}$, $V_{\mathrm{GD}}$ | $V_{\mathrm{DD}}$, $V_{\mathrm{DD}}$ |

to the row and column player. The game is an anti-coordination game when each action is the best reply to the other, $V_{\mathrm{GD}} > V_{\mathrm{DD}}$ and $V_{\mathrm{DG}} > V_{\mathrm{GG}}$. We use $(V_{\mathrm{GG}}, V_{\mathrm{GD}}, V_{\mathrm{DG}}, V_{\mathrm{DD}}) = (-1, 6, 2, 3)$ throughout, so the two roles pay differently and the two best-reply gains are equal, $6 - 3 = 2 - (-1)$. Players who cannot tell which of them should Go are limited to the symmetric equilibrium, in which each mixes the two actions equally, and paying out 2.5 per player. A shared signal that tells one player to Go and the other to Defer is a correlating device [11, 12]. It supports a correlated equilibrium, an even mixture of the two pure equilibria (Go, Defer) and (Defer, Go), that pays 4 per player on average. Coordination therefore yields at most $w_0 = 4 - 2.5 = 1.5$ over the symmetric equilibrium. If each player infers its role from a noisy signal with error rate $P_e$, the gain falls to $W = w_0(1 - 2P_e)^2$. This simple form arises from the equal best-reply gains, which make a signal without role information pay exactly the symmetric-equilibrium payoff ([13, Sec. S1 B]). Pinsker's inequality then gives $W \leq 2w_0 I$, with $I$ the information in nats that the signal carries about roles ([13, Sec. S1 A]). The inequality has the form of Szilard's bound with $2w_0$ in place of $k_B T$: coordination yields no gain without role information, and the gain per nat is limited. We have not formalized a thermodynamics, but by this analogy we treat role-taking in this game as an information engine, with $W$ as its work and the role signal as its fuel.

There is no separate mediator to supply that signal; the feedback channel that delivers it must be endogenously

* puelmatm@mila.quebec

generated by the population itself. What is the social technology required for this? One way is a persistent identity $\boldsymbol{\omega}_i$, for each agent formed from a leaky memory of its past context-dependent actions. Two partners read the difference of their *statuses*, a score of each identity in the context of the encounter, as the role signal, and each learns to take the role prescribed by the signal. The action is written back into the identity, reinforcing the role information. Consider a small difference between two identities. The noisy reading turns it into a slight bias toward complementary actions, and writing those actions back enlarges the difference, while the decay of the identities shrinks it. The *loop gain* $\Lambda$ is the rate at which the read–act–write loop enlarges a small difference, divided by the rate at which the decay shrinks it. For $\Lambda < 1$ differences die out, and the population stays symmetric, with no role signal. For $\Lambda > 1$ they grow until the reads become reliable, and roles form (Sec. II A). We will show that the loop gain factors into identity persistence, the agents' inference capacity, the fidelity of the channel through which they read each other, and the strength of the context in which they meet.

We formulate a *social* pressure tensor whose anisotropy is the macroscopic order of the role-based collective state. The decay of the identities pulls every agent back toward the origin, while two sources contribute spread. Random influences on the identities spread them equally in every direction, like the thermal motion of gas particles. Encounters push agents who already differ further apart, like the collisions in the demon gas. In steady state the decay balances the two. For this overdamped Langevin dynamics the balance is the virial theorem, which for the covariance of the identities reads

$$\gamma\,\mathbf{C} = \tfrac{1}{2}\sigma_\omega^2\,\mathbf{I} + \boldsymbol{\Pi},$$

with $\gamma$ the decay rate, $\sigma_\omega$ the identity noise, and $\boldsymbol{\Pi}$ the social pressure, the average over agents of the push from encounters times the displacement it acts on (Eq. (A5)).

We formulate the multi-agent system from two considerations. First, agents encounter each other in multiple contexts across which they can take distinct roles. Second, similar contexts should lead to similar roles. Identities are then formulated as vectors that live in a context embedding such that each context $m$ is represented as a vector $\mathbf{g}_m$, and together with the identity determine the latter's *score* in that context. We call $\mathbf{g}_m$ schema vectors since they organize roles in a context. The score is the projection $\boldsymbol{\omega}_i \cdot \mathbf{g}_m$ passed through a saturating function, $\tanh(\boldsymbol{\omega}_i \cdot \mathbf{g}_m)$, which keeps the roles discrete (Sec. I). This score is the status that partners read.

An action taken in context $m$ is written into the identity along $\mathbf{g}_m$. Reading and writing along the same direction closes the loop of each context on itself. Schemas at right angles then support independent roles, overlapping schemas couple the roles of their contexts, and the dimension of the space limits how many independent roles exist. The loop gain therefore differs from one direction to another. Below threshold the social force is linear in the identity, and along a direction with loop gain $\Lambda_k$ the social pressure is $\Pi_k = \frac{1}{2}\sigma_\omega^2\Lambda_k/(1-\Lambda_k)$ (Eq. (13)). The pressure is largest along the directions with the largest loop gain, so the shape of the cloud of identities reveals the loop gains, and with them the order in which roles will form (Sec. V). It diverges as $\Lambda_k \to 1$, where the symmetric state loses stability. Each time the loop gain crosses one along a schema direction, $\boldsymbol{\Pi}$ grows along that schema's direction, and the population divides there into complementary roles. As the feedback strength rises, the directions cross in the order set by the spectrum of the repertoire, so roles appear one direction at a time in a *cascade* of bifurcations (Fig. 1b). Each active schema adds one direction to the anisotropy of the social pressure.

The repertoire of schemas sets that anisotropy, and the dynamics set the repertoire. Resources are an essential part of that dynamics. Agents accumulate the coordination payoff as resources, and a schema is reinforced by the resource-weighted identity variance it produces. This loop is a quantitative form of Sewell's duality of schemas and resources [14], a proposed resolution of the structure–agency debate in social science [15] that has had no quantitative formalization. Existing agent models accumulate resources under fixed rules, or represent schemas as scalar state or payoff terms [16–18]. Populations of language-model agents now make such loops directly measurable [19].

Our results follow the loop. Section I builds the model from the game, the identities, the resources, and the schemas. Section II A derives the ignition condition, an eigenvalue of the loop-gain matrix $\boldsymbol{\Lambda}$ exceeding one, and Sec. II B closes the loop into a self-consistent state. For a repertoire of schemas the eigenvalues of $\boldsymbol{\Lambda}$ cross one in sequence, and Sec. III shows that their spectrum fixes the form of the cascade, from logarithmic sequences to avalanches. Section IV shows that a replicator dynamics on schema strengths selects the spectrum, and with it the cascade type. Section V recovers the spectrum from the identity covariance before the cascade begins. The Discussion applies the theory to distributional AGI [20], the hypothesis that general capability emerges from coordination among many limited AI agents, and sets out what differentiation adds to informational active matter.

## I. A MINIMAL ENGINE OF SOCIAL STRUCTURE

Figure 1a schematizes the model described in this section to illustrate the closed loop: three slower varying state variables coupled through a fast per-encounter chain of status, action and reward. We build it in four steps: the game that makes roles worthwhile, the $\omega$-identities that realize them, the resources that accumulate, and the schemas that survive.

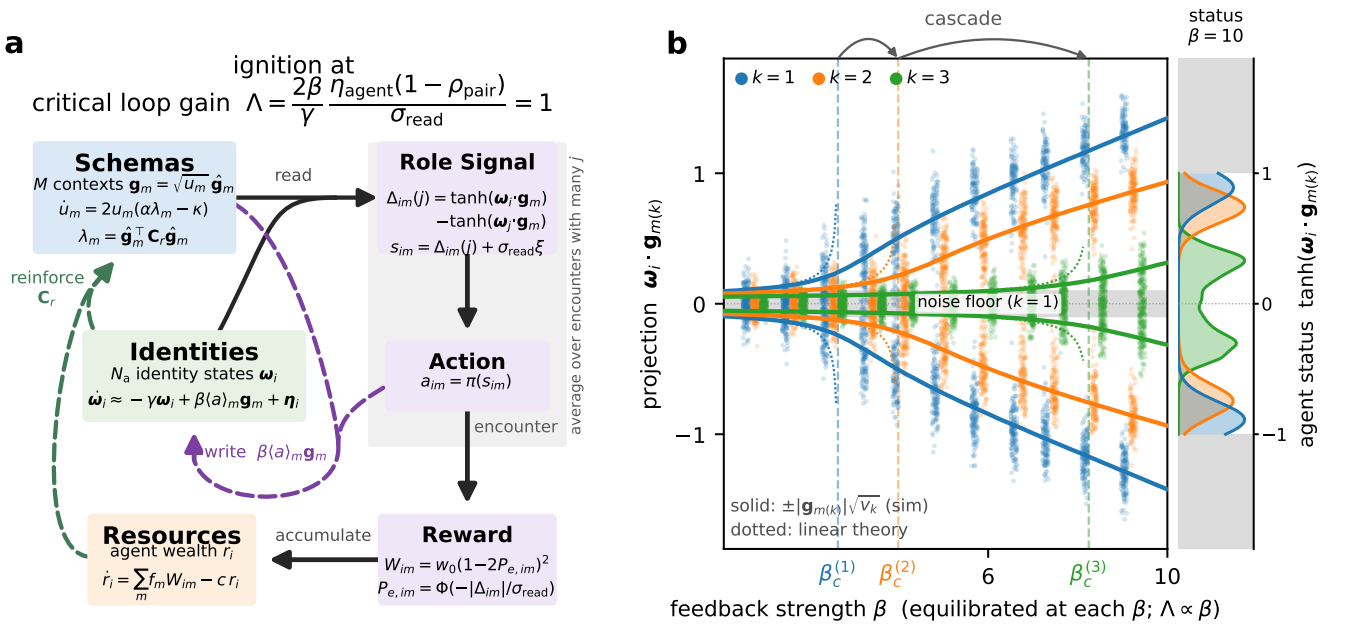



FIG. 1. **The self-consistent schema–role–resource loop and its ignition. (a)** Model schematic, separating the three persistent state variables (schemas $\mathbf{g}_m = \sqrt{u_m}\,\hat{\mathbf{g}}_m$, of which only $u_m$ evolves; $\omega$-identities $\boldsymbol{\omega}_i$; resources $r_i$) from the fast per-encounter chain (status, action, reward). *Solid* arrows are the feed-forward read-out: schema and $\omega$-identity form the status difference, the policy thresholds its noisy reading into an action, and the coordination reward accumulates as resources. The shaded band is one encounter, averaged over the many partners $j$ drawn across encounters, after which the status difference enters only through $\Delta_{im}$. *Dashed* arrows are the slow state updates that close the loop: resources reweight $\omega$-identities to reinforce schemas through the resource-weighted covariance $\mathbf{C}_r$, and actions are inscribed back into $\omega$-identities along the same axis (the write $\beta\langle a\rangle_m\mathbf{g}_m$). The single direction $\mathbf{g}_m$ is thus both read and write axis, which makes Sewell's schema–role duality a fixed-point loop, and the engine ignites when the loop gain $\Lambda$ of Sec. II A exceeds one (top). **(b)** Three sequential bifurcations (differentiation order parameter vs. feedback strength) over the $\beta$ sweep ($N_a = 2500$, $d = M = 3$, fixed orthogonal schema repertoire with hierarchical strengths, random pairing; [13, Sec. S10]). Points are individual agent projections $\boldsymbol{\omega}_i\cdot\mathbf{g}_{m(k)}$ on the three schemas, with $m(k)$ the schema whose strength gives the $k$-th eigenvalue. Solid curves are the order parameter $\pm|\mathbf{g}_{m(k)}|\sqrt{v_k}$, the two branches of a pitchfork on each axis, with $v_k$ the $k$-th eigenvalue of the population covariance $\mathbf{C}$. Below its critical feedback strength an axis is unimodal within the noise band $\pm|\mathbf{g}_{m(k)}|\sqrt{\sigma_\omega^2/2\gamma}$, shown for $k = 1$; above it (dashed) it splits into the complementary leader/follower role modes of the anti-coordination game, which separate further with $\beta$. Arrows on the top spine mark the cascade, the successive crossings of the critical feedback strengths $\beta_c^{(1)}, \beta_c^{(2)}, \beta_c^{(3)}$ labelled on the axis. Dotted curves are the linear mean-field theory, which diverges at $\Lambda_k = 1$ (Eq. (6)). Above threshold the role modes sit at $\pm\beta u_{m(k)}/2\gamma$, linear in $\beta$ ([13, Sec. S6]). The right strip shows the distribution of the status $\tanh(\boldsymbol{\omega}_i\cdot\mathbf{g}_{m(k)})$ at $\beta = 10$ on the same scale. The status follows the projection near zero and is confined to $(-1, 1)$ (gray), so a larger projection no longer changes the status difference to a partner. This saturation keeps the roles discrete.

### A. The game

The game is the anti-coordination game of the Introduction, with $(V_{GG}, V_{GD}, V_{DG}, V_{DD}) = (-1, 6, 2, 3)$, and the status channel defined below is its correlating device. Role-following is not a dominant strategy, since it is the best reply only when the partner also follows. Its incentive constraint is nonetheless strict once roles differentiate ([13, Sec. S1 C]). Payoff learning moves agents off the mixed equilibrium toward a sharp policy on the role signal, and a weak dependence of the collision cost on status selects following the signal over reversing it ([13, Sec. S1 D]). The payoffs enter the theory only through the coordination gain $w_0 = 1.5$ per encounter, which sets the scale of wealth. This holds for any anti-coordination game whose two best-reply gains are equal, and $w_0$ is then half that gain.

### B. Agents, game contexts, and $\omega$-identities

$N_a$ agents play the game against each other, selecting actions $a \in \{-1(\text{Defer}), +1(\text{Go})\}$ in pairwise encounters across a repertoire of $M$ distinct game contexts. We emphasize the importance of variable context in capturing both the *transposability* of schemas and the context-dependent nature of roles. We represent $\omega$-identities as points $\boldsymbol{\omega}_i \in \mathbb{R}^d$, with embedding dimension $d$, and schemas as linear forms on that space. The schema $\mathbf{g}_m$ scores agent $i$ through the projection $\boldsymbol{\omega}_i\cdot\mathbf{g}_m$, and the

score $\tanh(\boldsymbol{\omega}_i \cdot \mathbf{g}_m)$ is the agent's *status* in context $m$. Each context carries one schema: the context is the situation an encounter draws, and the schema is the rule it invokes (Sec. I D). A schema reads $\omega$-identities and is not one of them. The Euclidean inner product identifies each form with a direction in the same space, and that direction is the one along which actions are written back. Read axis and write axis are thus the same axis. Sewell's duality enters the model at this identification.

Each agent stores and presents its own $\omega$-identity in each encounter. A platform-maintained *status ledger* and a *platform estimate* reconstructed from the encounter log give the same encounter model, and differ only in which parameters an operator holds ([13, Sec. S4], Appendix B). When paired with $j$ in an encounter, agent $i$ makes a noisy observation of the *status difference* $\Delta_{im}(j) = \tanh(\boldsymbol{\omega}_i \cdot \mathbf{g}_m) - \tanh(\boldsymbol{\omega}_j \cdot \mathbf{g}_m)$, the difference of the two agents' statuses in context $m$, through the signal $s_{im} = \Delta_{im}(j) + \sigma_{\text{read}}\xi$ with $\xi$ a standard Gaussian noise source. We call this collective self-sensing process the *status channel*. The channel communicates $\omega$-identity relative to the other agents in the context, which makes it a correlating device for a correlated equilibrium: it prescribes Go ($a = +1$; payoff 6) where $\Delta_{im}(j)$ is positive and Defer ($a = -1$; payoff 2) where negative.

The agent takes an action $a$ according to its action *policy*, $\pi = p(a|\{s_{im,t}\}_{t=1}^{T})$ after making a set of $T$ noisy observations $\{s_{im,t}\}$ of the status difference. The deterministic mapping $a = \text{sign}(\frac{1}{T}\sum_t s_t)$ makes the Bayes-optimal, prescription-following decision under the uncertainty remaining after integrating these $T$ samples of evidence, with error rate depending on the magnitude of $\Delta_{im}(j)$ relative to $\sigma_{\text{read}}$. The term *status* reflects the reward asymmetry of the actions and the resulting $\omega$-identities. That asymmetry is immaterial for the theory, so the term should be seen generally as a mere label for the score.

Roles require persistent $\omega$-identities. We realize this persistence simply by having each $\omega$-identity low-pass filter its agent's action history, here a context-dependent signed action input. This evolves under a restoring force and $\omega$-identity noise,

$$\dot{\boldsymbol{\omega}}_i = -\gamma\,\boldsymbol{\omega}_i + b_0 \sum_{e\in E_i} a_e\,\mathbf{g}_{m_e}\,\delta(t-t_e) + \sigma_\omega \boldsymbol{\eta}_i, \qquad (1)$$

where $E_i$ is the set of encounters involving agent $i$, $a_e$ and $m_e$ the decision and context of encounter $e$, $b_0$ the per-encounter kick, $\gamma$ the decay rate of $\omega$-identity, and $\boldsymbol{\eta}_i$ a vector of standard Gaussian noise sources. This noise represents influences on the $\omega$-identity outside the modeled encounters, and supplies the individual variation the loop amplifies into roles. Equation (1) is an overdamped Langevin equation in a harmonic potential, driven by encounter events. Its drift is linear in $\boldsymbol{\omega}_i$, so an $\omega$-identity is a leaky sum of past actions, each written along the schema of the context in which it was taken. Encounters are Poisson at rate $\nu$ per agent, a fixed interaction budget independent of system size $N_{\text{a}}$, drawn across contexts with normalized frequencies $\sum_m f_m = 1$ and over partners with pairing probabilities $p_{ij}^{(m)}$ normalized over the partner, $\sum_j p_{ij}^{(m)} = 1$. Pairing is annealed: partners are redrawn at each encounter rather than fixed in a persistent network. A persistent network instead enters through $p_{ij}^{(m)}$ as a graph Laplacian (see Appendix A for this extension).

The loop needs one nonlinearity beyond the policy, and we place it in the score, $\tanh(\boldsymbol{\omega}_i \cdot \mathbf{g}_m)$. With a linear score, the status differences between members of the same role remain proportional to their $\omega$-identities. The loop then amplifies within-role variation as it amplified the initial variation, and each role splits again into a continuous ranking ([13, Sec. S6]). The saturating score flattens those differences, which prevents the amplification and stabilizes the emerging roles. A restoring force that stiffens with $|\boldsymbol{\omega}_i|$ would have the same effect, but it couples the axes, since one active axis then stiffens the restoring force on all the others. The score saturates in a single projection, so it acts on each axis separately, and its unit slope at the origin leaves the thresholds derived below unchanged.

We derive a tractable version of Eq. (1) through three approximations. The first coarse-grains the encounter stream over a window long compared with the average inter-encounter interval $1/\nu$ and short compared with the $\omega$-identity decay time $1/\gamma$. Such a window holds many encounters at a nearly fixed $\omega$-identity, each drawing its context, its partner, and its observation noise independently. Their empirical average therefore approaches the ensemble average over all three in the dense-encounter limit: $\nu \to \infty$, $b_0 \to 0$ at fixed $\beta \equiv b_0\nu$. Taking the limit discards shot noise, negligible where a single encounter moves an $\omega$-identity by much less than $\sigma_\omega^2/\beta$ (Appendix A). The window also contains the partner sum, so the drift no longer depends on which partners were drawn, only on the realized $\omega$-identities $\{\boldsymbol{\omega}_j\}$, through the status differences $\Delta_{im}(j)$. The second, the mean-field limit ($N_{\text{a}} \to \infty$), replaces those realized values by the population distribution, for two reasons: the sum over $j$ concentrates on its mean, and the partner's $\omega$-identity loses the $O(1/N_{\text{a}})$ imprint of its past encounters with agent $i$. The third is weak $\omega$-identity noise. The steps so far leave the action averaged over the spread of partner statuses, and Eq. (2) collapses that spread to its mean. Subcritically the spread is $O(\sigma_\omega^2)$, so the collapse holds where it is small against $\sigma_{\text{read}}^2$. Retaining it instead softens the gain by a factor known in closed form and shifts onset by $O(\sigma_\omega^2)$ (Sec. II A, [13, Sec. S6], [13, Sec. S8]). The reduction has replaced $N_{\text{a}}$ $\omega$-identity dynamics coupled through their encounters by one partner-independent dynamics, which each agent obeys separately. The dynamics becomes

$$\dot{\boldsymbol{\omega}}_i = -\gamma\,\boldsymbol{\omega}_i + \beta \sum_m f_m\,\langle a\rangle_m(\boldsymbol{\omega}_i)\,\mathbf{g}_m + \sigma_\omega \boldsymbol{\eta}_i, \qquad (2)$$

where $\langle a\rangle_m(\boldsymbol{\omega}_i) = 2\bar{\pi}(\Delta_{im}) - 1$ with $\Delta_{im} =$

$\mathbb{E}_{\boldsymbol{\omega}_j}[\tanh(\boldsymbol{\omega}_i \cdot \mathbf{g}_m) - \tanh(\boldsymbol{\omega}_j \cdot \mathbf{g}_m)]$. Its slope at zero difference defines the *read gain* $g \equiv 2\bar{\pi}'(0)$, which sets how strongly actions are written into memory: thresholding the mean of $T$ Gaussian samples gives $g = \sqrt{2T/\pi}/\sigma_{\text{read}}$. At $T = 1$ this threshold is the limit of a learnable family of policies whose slope sets $g$, so learning the policy raises the loop gain as raising $\beta$ does, up to the ceiling set by the sign rule ([13, Sec. S1 D]). The rate $\beta$ sets how strongly the social signal drives the $\omega$-identity, and is referred to below as the *feedback strength*.

We assume the pairing probabilities $p_{ij}^{(m)}$ are set by a *matching rule* that has access to $\omega$-identity information. The matching rule is unrestricted, and enters the linearized dynamics through one number, the correlation $\rho_{\text{pair}} \in [-1, 1]$ between a partner's projection and one's own at fixed context $m$ (Sec. II A). Near the symmetric fixed point the pair is jointly Gaussian, so $\Delta_{im} = (1 - \rho_{\text{pair}})\, \boldsymbol{\omega}_i \cdot \mathbf{g}_m$. Uniform matching draws the partner independently of agent $i$, so $\rho_{\text{pair}} = 0$ and the partner projection sits at its population mean, which vanishes in the role-free population. The coefficient is then one, and the partner contributes nothing. Rank-ordered (status-mirrored) matching drives $\rho_{\text{pair}} \to -1$ and assortative (homophilic) matching drives it to 1, the two ends of the range ([13, Sec. S2 B]). Both act on whatever status spread exists, so neither needs role structure to be defined.

### C. Resources

Coordination income accumulates as agent wealth,

$$\dot{r}_i = \sum_m f_m W_{im} - c\, r_i, \quad \text{with} \quad W_{im} = w_0(1 - 2P_{e,im})^2 \tag{3}$$

the encounter-averaged payoff above Nash in context $m$ ([13, Eq. (S2)]), at role-inference error rate $P_{e,im} = \Phi(-|\Delta_{im}|/\sigma_{\text{read}})$ with $\Phi$ the standard Gaussian distribution function, and $c$ the resource-decay rate, so $1/c$ is the horizon over which past income still counts. This payoff obeys a bound of Szilard's form, Pinsker's inequality $W \le 2 \ln 2\, w_0\, I$, with $I = 1 - H_{\text{bin}}(P_e)$ the role information supplied by the measurement ([13, Sec. S1]). This is the differentiation counterpart of the information bound on consensus order in Ref. [5]. This symmetric form of $I$ is the equiprobable two-role idealization. Heterogeneous status differences and pairwise error rates enter through $W_{im}$, the partner average of the pairwise payoff $W_{ijm} = w_0(1 - 2P_{e,ijm})^2$. The average runs over the same pairing statistics $p_{ij}^{(m)}$ that enter Eq. (1), with $W_{ijm}$ set by the magnitude of the status difference to the partner (extensions treated in [13, Sec. S2]). In any case, $I$ bounds the coordination payoff, in information units. What a thermodynamic accounting would involve is set out in [13, Sec. S9].

### D. Schemas

Agents who profit from taking differentiated roles along a schema reinforce it. A schema is a vector, on whose two parts reinforcement acts separately: its direction $\hat{\mathbf{g}}_m$ fixes what the schema is *about*, while its magnitude fixes how strongly that prescription is *institutionalized*. Writing $\mathbf{g}_m = \sqrt{u_m}\, \hat{\mathbf{g}}_m$ with $u_m = |\mathbf{g}_m|^2$ splits any such dynamics exactly into a *strength sector* governing $u_m$—the reinforcement of a schema already in the repertoire—and a *transformation sector* rotating $\hat{\mathbf{g}}_m$, the $\omega$-identity space direction along which anti-correlation in the paired agents' actions confers coordination benefit.

We develop the strength sector here, which suffices for schema-resource duality: it determines which of an available repertoire become institutionalized, in what order, and which agents are enriched. The schemas available to be played form the repertoire, and the environment fixes its schema axes $\{\hat{\mathbf{g}}_m\}$. The environment also fixes where the schemas start: $u_m(0) = u_0 e^{\sigma_u z_m}$, with $u_0$ the seed scale, $\sigma_u$ the log-dispersion across schemas, and $z_m$ standard Gaussian. For a deployed system $\sigma_u$ is set by the platform (Appendix B). Restricting a dynamics to magnitudes along a fixed frame is standard practice—amplitude equations for a fixed set of critical modes [21], replicator and Lotka–Volterra dynamics on a fixed set of types [22], the overlap coordinates of associative memories with quenched patterns [23], and the decoupled mode dynamics of deep linear networks under whitened inputs [24] all take this form. Here the restriction is exact rather than approximate: Eq. (4) is one half of a polar split of the vector dynamics. The other directional half, dynamics of the transformation sector, is analyzed in Appendix C where we show the dynamics and resulting solutions depend strongly on what additional assumptions are made about how schema directions interact, a question we consider separately.

A schema's strength $u_m$ acts at both stages of an encounter in its context. It scales the status difference read, $\Delta_{im} \propto \sqrt{u_m}$ while the scores are linear, which lowers the role-inference error rate $P_{e,im}$ against fixed noise $\sigma_{\text{read}}$. It scales the kick written back into $\omega$-identity by the same factor, since that kick lies along $\mathbf{g}_m = \sqrt{u_m}\hat{\mathbf{g}}_m$. The two multiply, so the axis enters the loop gain of Sec. II A as $g u_m$. This fixes the feedback strength at which the status distribution in context $m$ bifurcates into Go and Defer role modes. Schemas therefore activate one at a time as the feedback strength rises, in the order of their strengths $u_m$. This sequence of bifurcations, the *cascade* (Sec. III), is the focus of much of the rest of the paper.

The strengths also draw on one finite collective capacity: all $M$ schemas are read through the one status channel. Because the status difference read on axis $m$ scales as $\sqrt{u_m}$, the strength $u_m$ is the power that axis puts on the channel, and $U = \sum_m u_m$ is the total power the population uses for status signaling. A channel of finite power limits that total to $U_{\text{cap}}$. We impose the limit softly, as a pressure $\varphi(U)$ common to every schema, negligible while

the channel is slack and diverging as $U \to U_{\rm cap}$. Fixing $U$ instead would force the capacity to be exhausted and remove the slack regime in which schemas coexist below it (Sec. IV A). Once the total reaches $U_{\rm cap}$, raising one strength lowers the rest: institutionalization is then the allocation of that capacity across the available games. In addition and independently, we impose that the channel has finite range: the status differences it can represent are bounded, and $\Delta_{im}$ grows as $\sqrt{u_m}$, so any single axis is capped, $u_m \le u_{\rm cap}$. Where power capacity $U_{\rm cap}$ is not saturated, schemas may reach their own range ceiling $u_{\rm cap}$ without displacing one another (Sec. IV B).

Each strength then grows in proportion to how much resource-weighted structure lies along its own axis, and decays at a rate common to every schema:

$$\begin{gathered}\dot{u}_m/u_m = 2\big(\alpha\lambda_m - \kappa - \varphi(U)\big), \ \text{ with} \\ \lambda_m = \hat{\mathbf{g}}_m^\top \mathbf{C}_r\, \hat{\mathbf{g}}_m, \ \ \mathbf{g}_m = \sqrt{u_m}\,\hat{\mathbf{g}}_m, \ \ \mathbf{C}_r = \frac{\sum_i r_i\, \boldsymbol{\omega}_i \boldsymbol{\omega}_i^\top}{\sum_i r_i} \\ \text{subject to } \ u_m \le u_{\rm cap}\end{gathered} \tag{4}$$

where $\mathbf{C}_r$ is the resource-weighted population covariance, $\lambda_m$ the resource-weighted variance along the schema axis $\hat{\mathbf{g}}_m$, $\kappa$ the schema decay rate, $\alpha$ the schema reinforcement rate, and $\varphi$ the budget pressure of the shared channel. Equivalently $d\ln u_m/dt = 2(\alpha\lambda_m - \kappa - \varphi)$, the factor of two because $u_m = |\mathbf{g}_m|^2$ grows at twice the rate of $\mathbf{g}_m$.

The two properties of $\lambda_m$ encode Sewell's duality. It is *covariance*-driven because a schema can organize only the variation that exists: only the differentiation already present along axis $m$ can be divided into complementary roles, so a schema is reinforced along the axes of differentiation the roles themselves produced. A schema aligned with no variance prescribes nothing and decays at rate $\kappa$. It is *resource*-weighted because a schema is validated by the payoff its adherents accrue rather than by raw differentiation: weighting by wealth $r_i$ makes reinforcement contingent on success—the operational form of Sewell's claim that resources, accumulated by enacting a schema, sustain the schema that produced them. With reinforcement proportional to $u_m$, Eq. (4) selects among existing schemas rather than creating new ones, at a per-unit rate set by $\lambda_m$. Because the decay is common to all schemas, the shares $u_m/U$ obey a replicator equation with fitness $\alpha\lambda_m$ exactly. The finite capacity regulates the total (Sec. IV A). Transposability enters as the coherence of the repertoire, the overlaps $\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n$, through which differentiation along one axis raises the resource-weighted variance along another (Sec. IV A).

Equations (1), (3) and (4) together form the minimal social technology needed to close the perception-action-reward loop (Fig. 1a) in a way sufficient for social roles to emerge. The resulting multi-agent system dynamics formalizes Sewell's vision and generates duality as a self-consistent fixed-point equation: schemas shape the role structure, roles generate resources, and resource-weighted structure ($\mathbf{C}_r$) selects schemas. The resource weighting makes survival contingent on success: a schema whose axis differentiates agents who profit by it will grow, while one whose adherents gain nothing decays at rate $\kappa$ however much $\omega$-identity varies along that axis (Sec. II B). The generality of the dynamics suggests roles are not a generic feature of the possible solutions. Next, we establish the transition across which they emerge.

## II. IGNITION AND THE SELF-CONSISTENT STATE

Here we solve the model in two subsections corresponding to two stages applied to a reduced state. The full state is made from the $\omega$-identities $\{\boldsymbol{\omega}_i\}$ and resources $\{r_i\}$ over agents together with the strengths $\{u_m\}$ over contexts, evolving under Eqs. (2)–(4). The $\boldsymbol{\omega}$-dynamics (Eq. (2)) is stochastic, so its stationary states are distributions, which we summarize by their moments. The $r$-dynamics (Eq. (3)) has no noise, but inherits random variation from the $\omega$-identities through the status differences. The $u$-dynamics (Eq. (4)) is deterministic, since its resource-weighted variance $\lambda_m$ is a population average. The three dynamics run on separated timescales, $\gamma \gg c \gg \kappa$. $c \gg \kappa$ means the strengths see the resources at the stationary value $r^*$ set by the $\omega$-identities ($\boldsymbol{\omega}$-dynamics has no explicit dependence on $r_i$). The reduced state is then $(\boldsymbol{\omega}, \{u_m\})$, the $\omega$-identity coordinate of Eq. (2) together with the strengths.

We identify *ignition* with the onset of instability around $\boldsymbol{\omega} = 0$ that pushes each $\omega$-identity off the origin. This onset can be determined by linearizing the dynamics of the reduced state. The $\boldsymbol{\omega}$-drift is odd, $\langle a\rangle_m$ being odd in $\Delta_{im}$, so the role-free density is symmetric under $\boldsymbol{\omega} \to -\boldsymbol{\omega}$ and its mean vanishes, $\langle\boldsymbol{\omega}\rangle = 0$, at any values for the strengths. The $\omega$-identity noise spreads the population into a unimodal cloud about the origin (Eq. (13)), whose status differences leave resources at the role-free mean $\bar{r}_{\rm rf} = O(\sigma_\omega^2)$ ([13, Sec. S2 B]). Stationarity of the $u$-dynamics is easy to see from Eq. (4): either $u_m = 0$ or $\alpha\lambda_m = \kappa + \varphi$, the *invasion threshold* (*i.e.* strength grows for $\alpha\lambda_m > \kappa + \varphi$). In the role-free phase $\varphi \approx 0$ and that threshold is $\alpha\lambda_m = \kappa$. Section IV A treats the case where the budget is at capacity. The Jacobian in $(\boldsymbol{\omega}, \{u_m\})$ around $\boldsymbol{\omega} = 0$ and at instantaneous strengths,

$$\boldsymbol{J} = \begin{pmatrix} -\gamma(\mathbf{I}_{d\times d} - \boldsymbol{\Lambda}) & 0 \\ 0 & 2\big[\alpha\,\mathrm{diag}(\boldsymbol{\lambda}) - \kappa\,\mathbf{I}_{M\times M}\big] \end{pmatrix},$$

is block-diagonal: the $d \times d$ $\omega$-identity block is the decay $-\gamma\mathbf{I}_{d\times d}$ plus the linearized feedback matrix $\gamma\boldsymbol{\Lambda}$ of Eq. (10), where $\boldsymbol{\Lambda}$ is the *social loop gain* (presented below); the $M \times M$ strength block has $\boldsymbol{\lambda}$ that stacks the $\lambda_m$ of Eq. (4) and is evaluated at the seed scale, where the cross-coupling term $2u_m\,\alpha\,\partial\lambda_m/\partial u_n$ is negligible against the diagonal. The elements of the two off-diagonal blocks are exactly zero. $\partial\dot{\boldsymbol{\omega}}/\partial u_m = 0$ because the $\boldsymbol{\omega}$-dynamics depends on the strengths only through $\boldsymbol{\Lambda\omega}$, which vanishes at $\boldsymbol{\omega} = 0$. $\partial\dot{u}_m/\partial\boldsymbol{\omega} = 0$ because $\mathbf{C}_r$ is even in

$\boldsymbol{\omega}$, since $r^*$ and $\boldsymbol{\omega}\boldsymbol{\omega}^\top$ are both quadratic in it, so the strengths see the $\omega$-identity sector through the covariance alone and never through the population mean. The $\omega$-identity block depends on the schema strengths only through $\boldsymbol{\Lambda}$, so the threshold criterion holds whether or not the strengths are stationary. We solve that block for given, fixed strengths in Sec. II A. Then, in Section II B, we restore the schemas' own dynamics and solve Eqs. (3) and (4) for their stationary state. We state and summarize these results here before their derivation in subsequent subsections.

Being block diagonal, $\boldsymbol{J}$'s spectrum is the union of the spectra of the two blocks. Each provides a threshold expression for the onset of instability where one of its eigenvalues crosses zero: $-\gamma(1-\Lambda_k)$ at $\Lambda_k = 1$ where the symmetric fixed point destabilizes along an eigenvector (the set of these crossings is the cascade Eq. (6)), and $2(\alpha\lambda_m - \kappa)$ at the invasion threshold, where the dynamics begins to reinforce a schema (Sec. IV A). Since the split into roles is symmetric, the population mean stays zero. We thus track the first threshold using the population covariance $\mathbf{C} = N_\mathrm{a}^{-1}\sum_i \boldsymbol{\omega}_i\boldsymbol{\omega}_i^\top$ set by $\boldsymbol{J}$ through the Lyapunov balance (Eq. (13)). We express $\mathbf{C}_r$ in terms of $\boldsymbol{\Lambda}$ and $\mathbf{C}$, and substitute for $\mathbf{C}$ the subcritical expression Eq. (13) of Sec. II A, valid for $\Lambda_1 < 1$, so the loop closes below the first bifurcation.

The linearization gives the social loop gain

$$\boldsymbol{\Lambda} \equiv \underbrace{\frac{2\beta}{\gamma}}_{\substack{\text{identity}\\ \text{persistence}}} \cdot \underbrace{\eta_\mathrm{agent}}_{\substack{\text{cognitive}\\ \text{capacity}}} \cdot \underbrace{\frac{1-\rho_\mathrm{pair}}{\sigma_\mathrm{read}}}_{\substack{\text{channel}\\ \text{fidelity}}} \underbrace{\boldsymbol{H}^\top\boldsymbol{H}}_{\text{repertoire}}, \qquad (5)$$

where $\boldsymbol{H}$ stacks the schema vectors $\mathbf{g}_m$, $\eta_\mathrm{agent} \equiv \sigma_\mathrm{read} g/2$ is the agent's dimensionless inference efficiency, and $(1-\rho_\mathrm{pair})$ is the pairing gain factor set by the matching rule's partner correlation of Sec. I. The first three factors are scalars, so they scale every eigenvalue of $\boldsymbol{\Lambda}$ alike and set the overall gain without distinguishing axes. Only the repertoire factor $\boldsymbol{H}^\top\boldsymbol{H}$ separates them: the symmetric fixed point destabilizes along eigenvector $k$ of $\boldsymbol{\Lambda}$ when the corresponding eigenvalue reaches one,

$$\Lambda_k > 1, \qquad \Lambda_1 \geq \Lambda_2 \geq \cdots \geq \Lambda_R, \qquad (6)$$

with $R = \mathrm{rank}(\boldsymbol{H}) \leq \min(M, d)$, short of $M$ when $M > d$ or the schema axes are linearly dependent. Writing $\mu_1 \geq \cdots \geq \mu_R > 0$ for the eigenvalues of $\boldsymbol{H}^\top\boldsymbol{H}$, which are the schema strengths $u_k$ themselves when the repertoire is orthogonal, $\Lambda_k$ is the leading gain $\Lambda_1$ scaled by $\mu_k/\mu_1$, so the ordered $\{\mu_k\}$ set the spacing of the thresholds, and $\Lambda_1$ sets how many have been crossed. The axes ignite one at a time where the eigenvalues are distinct, and together where the spectrum is degenerate. Here and in Sec. III the strengths are at their initial values, the environment's seeding of Sec. I, held fixed while $\beta$ sweeps. Section IV makes them dynamical, so the spectrum then rises at fixed $\beta$ and crosses the same condition $\Lambda\mu_k = 1$ from below, with $\Lambda$ the loop gain of a unit-strength axis (Sec. II A). $\Lambda_1 = \Lambda\mu_1$ is the control parameter, a single dimensionless group collecting the write path $\beta/\gamma$, the read path $\eta_\mathrm{agent}$, the channel factor $(1-\rho_\mathrm{pair})/\sigma_\mathrm{read}$, and the leading repertoire eigenvalue $\mu_1$. The sweeps below vary $\beta$ as the parameter that controls that group. The read path gives a second route. A policy slope learned from payoffs raises $\eta_\mathrm{agent}$ only up to its sign-rule value, so learning carries the population through the thresholds that $\beta$ has placed within reach and no further ([13, Sec. S1 D]). We make the population covariance $\mathbf{C}$ the order parameter. Its eigenvalues $v_k$ leave the noise floor $\sigma_\omega^2/2\gamma$ one at a time. The number that have crossed, the height of the cascade $N$, is what we term *thickness*: the count of active (supra noise floor) role dimensions. The *thick* phase is where at least one axis has crossed, $N \geq 1$.

For a single axis of unit strength $\boldsymbol{\Lambda}$ is a number and Eq. (6) is the loop-gain criterion of Fig. 1a, $\Lambda > 1$. Ignition names the crossing of that criterion: above it the loop returns more differentiation than $\omega$-identity decay removes, so role structure sustains itself with no external drive. Here $\eta_\mathrm{agent}$ is $1/\sqrt{2\pi}$ for a single observation and $\sqrt{T/2\pi}$ with memory $T$. $\eta_\mathrm{agent} \to 0$ is choice at random and $\eta_\mathrm{agent} \to \infty$ deterministic payoff maximization. The inverse temperature spans the same two limits in the free-energy account of bounded rationality [25]. The pairing enters the loop gain only through the factor $(1-\rho_\mathrm{pair})$. Random matching is the reference, factor 1. Rank-ordered matching gives factor 2 in the population limit and halves the threshold, and assortative matching gives factor 0 ([13, Sec. S2]). The correlation needs no pre-existing role modes. $\rho_\mathrm{pair}$ is a property of the matching rule applied to whatever status distribution currently exists, including a unimodal and arbitrarily narrow one, so it is as well defined below threshold, where it sets the thresholds, as above it. Per-context play frequencies or matching reweight $\boldsymbol{H}^\top\boldsymbol{H}$ before its eigenvalues are taken, and then the channel factor no longer comes out in front ([13, Sec. S2 C]).

The engine runs on two integrators—a write path ($\beta/\gamma$: decisions accumulated into persistent $\omega$-identity) and a read path ($\eta_\mathrm{agent}$: social signals accumulated into posterior inference)—coupled by the information channel between agents. The factors compensate at linear order: well-designed matching can compensate for limited-inference agents and vice versa (similar to the measurement-quality bound on engine performance derived in [26]). However, even at the best (rank-ordered) matching ($\rho_\mathrm{pair} \to -1$) ignition requires $\eta_\mathrm{agent} > \sigma_\mathrm{read}\gamma/4\beta$, an *irreducible cognitive floor* below which no matching rule can sustain role structure. At threshold where linear order is accurate, only the product $\Lambda$ is physical. Beyond this threshold the degeneracy of the factorization breaks: $\beta$ sets how far the roles separate, independently of $\rho_\mathrm{pair}$, while $\rho_\mathrm{pair}$ sets how often that separation converts to payoff. Role societies at equal $\Lambda$ but different splits are therefore dynamically distinguishable ([13, Sec. S2]). Figure 1b shows the first three bifurcations in the cascade: equilibrating the population

at each $\beta$, role axes leave the noise floor one at a time around the critical feedback strengths of Eq. (6).

### A. The social loop gain and the cascade of thresholds

We linearize the mean-field drift Eq. (2) about the symmetric fixed point, showing how $\mathbf{\Lambda}$ arises. Its feedback term is $\beta\sum_m f_m\langle a\rangle_m(\boldsymbol{\omega}_i)\mathbf{g}_m$, with the expected signed action in context $m$ averaged over the observation noise and the drawn partner (Sec. I).

*Mean field.* As $N_\mathrm{a}\to\infty$ the empirical distribution of the other agents converges to a fixed law, so the drawn partner is independent of the focal agent's own history. The matching rule fixes the partner correlation $\rho_\mathrm{pair}=\mathrm{Corr}(x_i,x_j)$ between the projections $x_i=\boldsymbol{\omega}_i\cdot\mathbf{g}_m$ and $x_j=\boldsymbol{\omega}_j\cdot\mathbf{g}_m$. Near the symmetric fixed point the scores are linear, $\tanh x\approx x$, and the pair is jointly Gaussian, so $\mathbb{E}[x_j\mid x_i]=\rho_\mathrm{pair}\,x_i$ and the expected status difference is $(1-\rho_\mathrm{pair})x_i$ ([13, Sec. S2 B]). Random matching leaves the population mean score, which vanishes for any symmetric population, so $\Delta_{im}=\tanh x_i$ exactly at $\rho_\mathrm{pair}=0$. Near the fixed point that difference is the $\Delta_{im}$ of Sec. I, $\Delta_{im}=(1-\rho_\mathrm{pair})x_i$, so the observed signal is $s_{im}\approx\Delta_{im}+\sigma_\mathrm{read}\xi_{im}$, and, averaging the decision over the observation noise,

$$\langle a\rangle_m(\boldsymbol{\omega}_i)=2\bar{\pi}(\Delta_{im})-1, \tag{7}$$

which for the single-sample policy is $\mathrm{erf}\big(\Delta_{im}/(\sigma_\mathrm{read}\sqrt{2})\big)$. Substituting the conditional mean inside the policy is exact as $\sigma_\omega\to 0$, where the cloud shrinks to a point at the origin and the threshold is set; the correction away from onset is $O(\sigma_\omega^2)$ ([13, Sec. S6]).

*Linearization.* At $\boldsymbol{\omega}_i=\mathbf{0}$ each score vanishes and $2\bar{\pi}(0)-1=0$ by policy symmetry. To first order $\tanh x\approx x$ and $\langle a\rangle_m(\boldsymbol{\omega}_i)\approx g(1-\rho_\mathrm{pair})(\mathbf{g}_m^\top\boldsymbol{\omega}_i)$, so the feedback term of Eq. (2) becomes

$$\begin{aligned}\beta\sum_m f_m\langle a\rangle_m(\boldsymbol{\omega}_i)\mathbf{g}_m &\approx \beta g(1-\rho_\mathrm{pair})\Big(\sum_m f_m\,\mathbf{g}_m\mathbf{g}_m^\top\Big)\boldsymbol{\omega}_i\\ &=\gamma\,\mathbf{\Lambda}\,\boldsymbol{\omega}_i,\end{aligned} \tag{8}$$

$$\begin{aligned}\mathbf{\Lambda}\equiv\Lambda\sum_m f_m\,\mathbf{g}_m\mathbf{g}_m^\top=\Lambda\,\boldsymbol{H}^\top\mathrm{diag}(\mathbf{f})\,\boldsymbol{H},\\ \Lambda\equiv\beta(1-\rho_\mathrm{pair})g/\gamma,\end{aligned} \tag{9}$$

with $\mathbf{f}=(f_1,\dots,f_M)$, $\boldsymbol{H}$ the $M\times d$ matrix of stacked schemas, and $\Lambda$ the scalar loop gain of a unit-strength axis. We take the play frequencies uniform, $f_m=1/M$, and absorb the constant $1/M$ into $\beta$, so that $\mathbf{\Lambda}$ takes the form of Eq. (5) and $\beta$ is the per-context write rate. The frequencies are retained explicitly only where they act as a design parameter ([13, Sec. S2 D]). They are properties of the environment, fixed over the full set of $M$ candidate contexts, and are not renormalized when a schema's strength decays away. Its context is still played, so extinction does not concentrate weight on the survivors (Sec. IV A). Combined with the restoring force, which is linear,

$$\dot{\boldsymbol{\omega}}_i\approx-\gamma\,(\mathbf{I}_{d\times d}-\mathbf{\Lambda})\,\boldsymbol{\omega}_i+\sigma_\omega\boldsymbol{\eta}_i. \tag{10}$$

The matching rule enters only through the factor $(1-\rho_\mathrm{pair})$, which multiplies every axis alike and vanishes at $\rho_\mathrm{pair}=1$. The symmetric fixed point thus loses stability along eigenvector $k$ of $\mathbf{\Lambda}$ when its eigenvalue reaches one (Eq. (6)), so the thresholds are

$$\Lambda_k=\Lambda_1\frac{\mu_k}{\mu_1}=1,\qquad \mu_1\ge\mu_2\ge\cdots\ge\mu_d, \tag{11}$$

the cascade of thresholds, crossed in the order of the repertoire's eigenvalues.

*The subcritical state.* At fixed schemas the drift is the gradient $-\nabla_{\boldsymbol{\omega}}E$, with

$$\begin{aligned}E(\boldsymbol{\omega})&=\gamma\,\tfrac{|\boldsymbol{\omega}|^2}{2}-\beta\sum_m\Psi(\boldsymbol{\omega}\cdot\mathbf{g}_m),\\ \Psi'(z)&=2\bar{\pi}\big((1-\rho_\mathrm{pair})\tanh z\big)-1,\end{aligned} \tag{12}$$

so the stationary distribution is Boltzmann, $p^*(\boldsymbol{\omega})\propto\exp(-2E(\boldsymbol{\omega})/\sigma_\omega^2)$, and $\omega$-identities are i.i.d. draws. $\Psi$ grows at most linearly, so the harmonic term makes $p^*$ normalizable. The partner's mean score is taken as $\rho_\mathrm{pair}\tanh z$, exact for random matching. Linearizing the score recovers the linear drift of Eq. (10), so near threshold $p^*$ is Gaussian with covariance (Lyapunov equation, symmetric drift)

$$\mathbf{C}=\frac{\sigma_\omega^2}{2\gamma}(\mathbf{I}_{d\times d}-\mathbf{\Lambda})^{-1}, \tag{13}$$

valid for $\Lambda_1<1$. $\mathbf{C}$ then has the same eigenbasis as $\mathbf{\Lambda}$ and thus as $\boldsymbol{H}^\top\boldsymbol{H}$, with eigenvalues

$$v_k=\frac{\sigma_\omega^2}{2\gamma(1-\Lambda_k)}, \tag{14}$$

so $\mathbf{C}$ diverges along the leading eigenvector of $\mathbf{\Lambda}$ at the bifurcation. Each $v_k$ increases with the loop gain $\Lambda_k$ it comes from, so Eq. (14) can be inverted: measuring the covariance spectrum below threshold recovers $\{\Lambda_k\}$, and with it the cascade still to come (Sec. V).

*Validity of the linearization.* Stability is a Jacobian property evaluated *at* the fixed point, independent of where the probability mass sits, so Eq. (11) is the exact stability boundary at any noise level. The cloud's width enters only through the partner average, which softens the gain and shifts onset by $O(\sigma_\omega^2)$. This is a mean-field Ginzburg correction that vanishes with $\sigma_\omega$ and is negligible outside a shrinking critical window ([13, Sec. S6]).

### B. The self-consistent fixed point

Section II A solved the $\omega$-identity sector. The two slower dynamics close the loop. Equations (2)–(4) evolve on separated timescales $\gamma \gg c \gg \kappa$, so $\omega$-identities equilibrate first, then resources, then schemas, and each is stationary with respect to the ones below it.

*Step 1: resources.* At steady state $r_i^* = c^{-1}\sum_m f_m\,\mathbb{E}_j[W_{ijm}]$, a deterministic function of $\boldsymbol{\omega}_i$. Near threshold the error rate linearizes, $P_e \approx \frac{1}{2} - |(\boldsymbol{\omega} - \boldsymbol{\omega}')\cdot\mathbf{g}_m|\bar{\pi}'(0)$, so $W_{ijm} \approx w_0 g^2((\boldsymbol{\omega}_i - \boldsymbol{\omega}_j)\cdot\mathbf{g}_m)^2$. Averaging over the drawn partner, jointly Gaussian with the focal projection at correlation $\rho_{\text{pair}}$ ($\mathbb{E}[x_j \mid x_i] = \rho_{\text{pair}}x_i$ and $\mathrm{Var}[x_j \mid x_i] = (1-\rho_{\text{pair}}^2)\,\mathbf{g}_m^\top\mathbf{C}\mathbf{g}_m$, with $x_i = \boldsymbol{\omega}_i\cdot\mathbf{g}_m$),

$$r^*(\boldsymbol{\omega}) \approx \frac{w_0 g^2}{c}\sum_m f_m\Big((1-\rho_{\text{pair}})^2(\boldsymbol{\omega}\cdot\mathbf{g}_m)^2 + (1-\rho_{\text{pair}}^2)\,\mathbf{g}_m^\top\mathbf{C}\mathbf{g}_m\Big). \tag{15}$$

The first term is agent-specific; the second a population baseline. Random matching removes both factors.

*Step 2: resource-weighted covariance.* With $\mathbf{C}_r = \int r^*(\boldsymbol{\omega})\boldsymbol{\omega}\boldsymbol{\omega}^\top p^* / \int r^*(\boldsymbol{\omega})p^*$ and $r^*$ quadratic in $\boldsymbol{\omega}$, the numerator is a fourth moment, evaluated for Gaussian $p^*$ by Wick's theorem (Isserlis' theorem in the statistics literature),

$$\mathbb{E}[(\boldsymbol{\omega}\cdot\mathbf{g}_m)^2\,\omega_a\omega_b] = (\mathbf{g}_m^\top\mathbf{C}\mathbf{g}_m)\,C_{ab} + 2(\mathbf{g}_m^\top\mathbf{C})_a(\mathbf{g}_m^\top\mathbf{C})_b, \tag{16}$$

making $\mathbf{C}_r$ a function of $\mathbf{C}$ and $\{\mathbf{g}_m\}$ alone. Even when $\mathbf{C} \propto \mathbf{I}_{d\times d}$, $\mathbf{C}_r$ is anisotropic, because $r^*(\boldsymbol{\omega}) \propto \sum_m f_m(\boldsymbol{\omega}\cdot\mathbf{g}_m)^2$ weights agents whose $\omega$-identities align with the schema axes more heavily. This anisotropy resolves the collapse of the unweighted dynamics ($r_i \equiv 1$, $\mathbf{C}_r = \mathbf{C}$): $\mathbf{C}_r$ inherits structure from the repertoire even when the population is isotropic. Summing Eq. (16) over contexts gives a closed form for the resource-weighted covariance, valid for any repertoire geometry and unchanged when $\boldsymbol{\Lambda}$ is rescaled,

$$\mathbf{C}_r = \mathbf{C} + (1-\rho_{\text{pair}})\,\frac{\mathbf{C}\,\boldsymbol{\Lambda}\,\mathbf{C}}{\mathrm{tr}(\mathbf{C}\boldsymbol{\Lambda})}. \tag{17}$$

$\mathbf{C}$ and $\boldsymbol{\Lambda}$ share an eigenbasis (Eq. (14)), so $\mathbf{C}_r$ has the same one as $\boldsymbol{H}^\top\boldsymbol{H}$. The two prefactors of Eq. (15) combine into the single factor $(1-\rho_{\text{pair}})$ ([13, Sec. S2 B]), so assortative matching ($\rho_{\text{pair}} \to 1$) leaves $\mathbf{C}_r = \mathbf{C}$ and removes the resource weighting altogether, while rank-ordered matching doubles it. For an orthogonal repertoire Eq. (17) collapses to a scalar relation on each axis,

$$\lambda_m = v_m\Big(1 + (1-\rho_{\text{pair}})\frac{u_m v_m}{\sum_n u_n v_n}\Big), \qquad \text{with } v_m = \frac{\sigma_\omega^2}{2\gamma(1-\Lambda_m)}, \tag{18}$$

where $v_m = \hat{\mathbf{g}}_m^\top\mathbf{C}\hat{\mathbf{g}}_m$ is the eigenvalue of $\mathbf{C}$ along $\hat{\mathbf{g}}_m$, the $v_k$ of Eq. (14) indexed by context rather than by rank. The strength enters through $\Lambda_m = \Lambda u_m$. The resource weighting fixes that denominator: normalizing $\mathbf{C}_r$ by $\sum_i r_i$ puts the population's mean income there, so $\sum_n u_n v_n$ is the role-free mean $\bar{r}_{\text{rf}}$ up to constants ([13, Sec. S2 B]).

*Step 3: schemas.* At steady state each surviving schema satisfies $\alpha\lambda_m = \kappa$, with $\lambda_m = \hat{\mathbf{g}}_m^\top\mathbf{C}_r\hat{\mathbf{g}}_m$ the resource-weighted variance along its (fixed) axis. Those with $\lambda_m < \kappa/\alpha$ decay to zero. Steps 1–3 therefore close into a condition on the repertoire alone,

$$\alpha\,\lambda_m\big(\{\mathbf{g}_n\}\big) = \kappa \qquad \text{for every surviving } m, \tag{19}$$

since Eqs. (13) and (17) fix $\mathbf{C}_r$ from $\{\mathbf{g}_n\}$ and nothing else. Schemas set the $\omega$-identities whose resource-weighted covariance selects the schemas, which is Sewell's duality as a fixed-point equation. For an orthogonal repertoire Eq. (18) makes it explicit in the strengths $\{u_n\}$.

*The loop and multiplicity.* The conditions close: $\{\mathbf{g}_m\} \to E \to p^* \to \mathbf{C} \to r^* \to \mathbf{C}_r \to \{\mathbf{g}_m\}$. The trivial solution $\mathbf{g}_m^* = 0$ always exists. Nontrivial solutions appear when an eigenvalue of $\mathbf{C}_r$ exceeds $\kappa/\alpha$. Each is a self-consistent fixed point, a solution of Eq. (19). Because $\mathbf{C}_r$ is anisotropic even at isotropic $\mathbf{C}$, those eigenvalues differ from the outset, so the condition selects among schemas rather than admitting or rejecting all of them. Since $\mathbf{C}_r$ has $d$ eigenvalues, the sustained schema count is

$$M_{\text{eff}} = \#\{k : \lambda_k(\mathbf{C}_r) \geq \kappa/\alpha\} \leq d, \tag{20}$$

at such a fixed point the number of axes whose resource-weighted variance exceeds the schema decay rate. The bound counts eigendirections, so it holds while distinct roles occupy distinct axes of $\mathbf{C}_r$. Where schemas may overlap, the ceiling is instead the associative-memory capacity $d^{n-1}$ of [13, Sec. S3], which exceeds $d$ because stored patterns need not be orthogonal. It caps the cascade: $N$ cannot exceed the number of axes available to activate, and reaches $M_{\text{eff}}$ as $\beta$ grows. How many of them the budget can sustain, and whether the endpoint is a saturated cluster ($N = M_{\text{eff}}$) or a single condensate ($N = 1$), is decided by the capacity ratio of Sec. IV A. Without resources ($r_i \equiv 1$, $\mathbf{C}_r = \mathbf{C}$) the $\lambda_m$ rank the fixed axes by their alignment with the leading eigenvector of $\mathbf{C}$, so the survivor set (Sec. IV A) narrows toward the best-aligned schema. The resource reweighting, anisotropic along the schema axes themselves, lifts several $\lambda_m$ over $\kappa/\alpha$ at once and sustains a multi-schema state. This fixed point identifies the surviving schemas but leaves the shape of their spectrum implicit. Since this shape determines the cascade, Section III asks what an arbitrary spectrum implies for the cascade, and classifies the possible cascades. Section IV analyzes the capacity-constrained dynamics and determines which spectra and cascade result. The fixed point organizes the dynamics rather than being a solution they reach. Section IV A shows it is a saddle, which the solved trajectories leave along the unstable direction.

## III. THE FUNCTIONAL FORM OF THE CASCADE

We consider sweeps of increasing loop gain, $\Lambda(t)$, over time, loosely summarizing the culture and technology innovations that improve $\omega$-identity persistence, inferential capabilities of individuals, and/or social channel fidelity leading to role-based society. In our theory, only the product is physical at threshold, so raising any factor of $\Lambda$ serves equally to drive the emergence of roles and structured use of a repertoire of schemas. For our simulations, we sweep $\Lambda$ by sweeping $\beta$, which enters $\Lambda$ linearly. We assume the onset of role-based society is slow relative to the set of $\omega$-identities taken on by individuals in a population, and so take the sweep to be slow compared with $\omega$-identity relaxation, $\dot{\Lambda}/\Lambda \ll \gamma$, so the population tracks it. What follows are the cascades possible for any such fixed spectrum. Section IV asks which spectra the loop produces.

The number of active axes at loop gain $\Lambda$ is the counting function $N(\Lambda)$, whose local rate of growth follows from the same construction. Both are fixed by the eigenvalue spectrum $\rho$ of the repertoire $\boldsymbol{H}^\top\boldsymbol{H}$ in the limit $M, d \to \infty$ at fixed aspect ratio $M/d$. Let $\mu_1 \geq \cdots \geq \mu_R > 0$ be its nonzero eigenvalues, $R = \mathrm{rank}(\boldsymbol{H}) \leq \min(M, d)$, so that $\Lambda_k = \Lambda\mu_k$ with $\Lambda$ the scalar prefactor of Eq. (5). Axis $k$ bifurcates at $\Lambda = 1/\mu_k$ (Eq. (6)), so at loop gain $\Lambda$

$$N(\Lambda) = \#\{k : \mu_k > 1/\Lambda\} = R\,\bar{F}(1/\Lambda), \tag{21}$$

$$\bar{F}(\mu) = \int_\mu^\infty \rho(\mu')\,d\mu', \tag{22}$$

with $\rho$ the spectral density of $\boldsymbol{H}^\top\boldsymbol{H}$, so $N$ counts the eigenvalues the gain has passed. The rate is

$$\frac{dN}{d\Lambda} = \frac{R}{\Lambda^2}\rho\Big(\frac{1}{\Lambda}\Big), \qquad \frac{dN}{d\ln\Lambda} = R\,\mu\rho(\mu)\big|_{\mu=1/\Lambda}. \tag{23}$$

Defining the local spectral exponent $\zeta(\mu) \equiv -d\ln\rho/d\ln\mu$, differentiating again gives the acceleration criterion

$$\frac{d^2N}{d\Lambda^2} > 0 \iff \frac{d}{d\mu}[\mu^2\rho(\mu)] < 0 \iff \zeta > 2 \text{ at } \mu = 1/\Lambda. \tag{24}$$

The criterion Eq. (24) is local, since $\zeta$ is evaluated at $\mu = 1/\Lambda$, the point the sweep has reached. A cascade with $\zeta < 2$ there can still accelerate further down the spectrum. This limits what $\zeta$ tells a monitor about the sequence still to come (Sec. V).

The three properties of the repertoire shape $\rho$: the strength hierarchy $\{u_m\}$, the coherence $\{\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n\}$, and the aspect ratio $q = M/d$. Equation (4) makes the first endogenous and leaves the other two to the environment. Each of the five classes catalogued in Fig. 2d is the canonical form taken when one of the three dominates, and the cascade induced by the canonical form follows from Eq. (21). Any repertoire's spectrum is locally one of these, and exactly one where the spectrum is quasistatic across the sweep. Figure 2a,c give an example of each at $R = 50$ modes, while Fig. 2b shows the rate for $R \to \infty$.


The boundary $a = 1$ ($\zeta = 2$), with $a$ the Zipf exponent of the strength hierarchy, separates the decelerating and accelerating cascades of a Zipf-shaped spectrum. The random class [27] has its spectrum confined to $[\mu_-, \mu_+]$, with the edges set by $q$. Bifurcations run from the largest eigenvalue down, so the cascade enters the bulk at its upper edge, where the density vanishes as $\rho \sim \sqrt{\mu_+ - \mu}$—hence the vanishing onset rate $dN/d\Lambda \propto (\Lambda - 1)^{1/2}$ before the bulk. The spiked class comes from redundancy rather than dominance: coherent schemas sharing axes. At uniform coherence $\chi$ and common strength $u = |\mathbf{g}_m|^2$, $\boldsymbol{H}^\top\boldsymbol{H}$ has one outlier eigenvalue $u(1+(M-1)\chi)$ above a degenerate bulk at $u(1-\chi)$, and the gain scales both by $g$. The $\Lambda(t)$ sweep crosses the outlier first and the bulk all at once a factor $(1+(M-1)\chi)/(1-\chi)$ later, so a quiescent interval of that size separates the first bifurcation from a step in $N$.

## IV. ENDOGENOUS SELECTION OF THE REPERTOIRE

In Sec. III the schema strengths, and thus the cascade type, were taken as given. $\{u_m\}$ are set instead by the slower schema-resource dynamics of Eqs. (3) and (4), both at the stationary state and along the $u$-transient that approaches it. The schema axes $\{\hat{\mathbf{g}}_m\}$ stay exogenous throughout (Sec. I). Two ratios separate the regimes, one from the $u$-transient and one from the stationary state. The first, $r = r_{\mathrm{act}}/r_{\mathrm{comp}}$, is fixed by the dispersion of the seeded repertoire and is defined with the transient in Sec. IV B. The second is the *capacity ratio* $\Theta = (U_{\mathrm{cap}}/M)/u_{\mathrm{cap}} = M_{\mathrm{cap}}/M$, which measures the budget's equal share per schema against the per-schema ceiling, with $M_{\mathrm{cap}} = U_{\mathrm{cap}}/u_{\mathrm{cap}} = \Theta M$ the number of schemas the budget sustains at that ceiling. Section IV A finds the stationary states of the closed pool and shows that the symmetric one is a saddle that funnels approaching trajectories away (Fig. 3). Section IV B then places those endpoints on the parameter space slice spanned by those two ratios and reads off the cascade each produces to obtain a phase diagram (Fig. 4).

### A. The closed-pool (survivor) construction

Under the full loop the strength dynamics produce the spectrum. We treat the $M$ schema axes as candidates and ask how many survive. The pool is *closed*: no schema is added after seeding, so the dynamics can only prune it. Schema innovation is an open-repertoire process we do not treat (Sec. IV B).

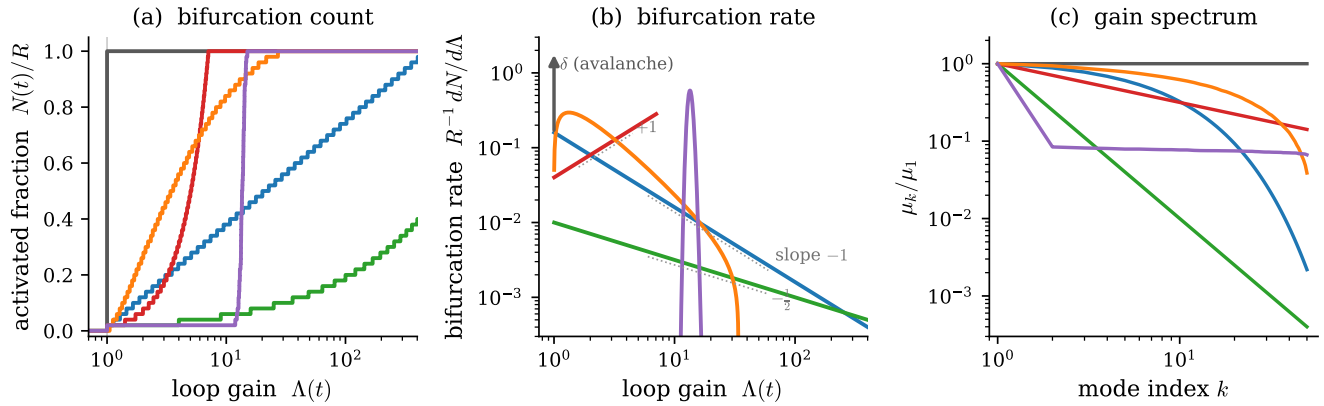


**(d)**

| Cascade class | $N(\Lambda)$ | Spectrum | $\mu_k$ | Repertoire | For a monitor |
|---|---|---|---|---|---|
| (i) single avalanche | step | degenerate | $\mu_k = \mu$ | orthogonal, flat strengths | no warning |
| (ii) logarithmic | $k_0 \ln \Lambda$ | geometric | $\mu_k \propto e^{-k/k_0}$ | orthogonal, exponential strengths | steady per $e$-fold |
| (iii) decelerating | $\Lambda^{1/a}$ | Zipf $a > 1$ | $\mu_k \propto k^{-a}$ | orthogonal, power-law strengths | informative early |
| (iii) accelerating | $\Lambda^{1/a}$ | Zipf $a < 1$ | $\mu_k \propto k^{-a}$ | orthogonal, power-law strengths | early rate too low |
| (iv) quiet, then burst | $(\Lambda - 1)^{3/2}$ | random | Marčenko–Pastur | random directions, aspect ratio $q$ | loop still open |
| (v) one, gap, then all | gap, then jump | spiked | outliers + bulk | orthogonal, one dominant strength; or coherence $\chi$ | quiet mimics an end |

FIG. 2. **Cascade classes of exogenous schema repertoires.** **(a)** The number of active role axes $N$ as the loop gain increases in time, $\Lambda(t)$. **(b)** The bifurcation rate over the same sweep, which accelerates where its slope is positive, equivalently where $\zeta > 2$ (Eq. (24)). **(c)** The rank-ordered gain spectrum, normalized to its leading eigenvalue. Panel (a) counts how many of them have bifurcated at each gain. **(d)** The classes and their cascades, the last column anticipating the monitoring analysis of Sec. V. All four are given over the five spectral classes of the repertoire $\boldsymbol{H}^\top \boldsymbol{H}$, keyed by the colours of (d): (i) degenerate spectra give a single avalanche with no advance warning; (ii) geometric hierarchies give a logarithmic cascade with constant bifurcations in log-space; (iii) power-law (Zipf) hierarchies split at exponent $a = 1$ into decelerating (informative early phase) and accelerating (early rate under-predicts) cascades, with log–log slope $(1 - a)/a$ in panel (b); (iv) unstructured random repertoires (Marčenko–Pastur) start quietly, $dN/d\Lambda \propto (\Lambda - 1)^{1/2}$, then burst; (v) coherent (spiked) repertoires produce an early bifurcation, a quiescent interval, then an avalanche. The curves use $k_0 = 8$, $a = 2$ and $a = \frac{1}{2}$, $q = 2$, and $\chi = 0.2$, all drawn with the same $R = 50$ modes, the random class as 50 quantiles of its bulk, so only the spectral shape differs. The random and spiked classes are single realizations at a fixed seed. The quiescent interval reads out the gap below the leading mode in (c), and the crowding of the random spectrum against its upper edge makes the early rate vanish.

*The active set.* The active set is $\{m : u_m > u_0\}$ with $u_m = |\mathbf{g}_m|^2$ and $u_0$ the seed scale, the small strength at which schemas are seeded and above which they count as active. A schema *survives* when its strength stays finite at the end of the *u-transient*, which institutionalizes the repertoire by reducing the seeded pool to its survivors and setting the shape of their strength spectrum (Sec. IV B). The set's size $K \le M$ is the emergent survivor count. An orthogonal repertoire makes each $\hat{\mathbf{g}}_m$ an eigenvector of $\mathbf{C}_r$ (Sec. II B), so $\lambda_m$ is an eigenvalue of $\mathbf{C}_r$. Fixed axes keep distinct survivors on distinct eigendirections: a schema cannot rotate onto another, so two survivors share a direction only if the repertoire supplies them one. In this case, $K$ equals $M_{\text{eff}}$ (Eq. (20)), the number of eigenvalues of $\mathbf{C}_r$ that exceed $\kappa/\alpha$. Under the vector dynamics of Appendix C $K$ and $M_{\text{eff}}$ would instead separate, since every schema rotates toward the same leading eigenvector. The seeding of Sec. I is centered on $u_0$, so half the repertoire starts above it at any $\sigma_u$. Only the $u$-transient separates the $u_m$ into a saturated group and a group decaying to zero, and the count is insensitive to $u_0$ once it has. But $u_0$ does enter the regime boundaries through the log dynamic range $L = \ln(u_{\text{cap}}/u_0)$ of Sec. IV B. The cascade height never exceeds the survivor count, $N \le K$, because a schema survives at $u_m > u_0$ but ignites only at $\Lambda u_m > 1$. The two coincide once the transient has saturated the survivors at $u_{\text{cap}}$, provided $\Lambda u_{\text{cap}} > 1$.

*The strength replicator.* In log form the strengths of Eq. (4) obey $d \ln u_m/dt = 2(\alpha \lambda_m(\mathbf{C}_r) - \kappa - \varphi(U))$ with

$U = \sum_n u_n$. This is a replicator dynamics on the shares, with per-schema fitness $\alpha\lambda_m$ [28, 29] and the budget pressure $\varphi(U)$ of Sec. I, $\varphi \approx 0$ while the channel is slack and $\varphi' > 0$ as it fills. The total reinforcement of schema $m$ is $\mathbf{g}_m^\top \mathbf{C}_r \mathbf{g}_m = u_m\lambda_m$. The pressure acts equally on every axis, so it shifts the invasion threshold without biasing which schemas survive. Because the budget caps $U$ rather than conserving it, two states survive that a normalized replicator would eliminate: a sub-threshold state in which every schema decays, and a slack regime ($\Theta > 1$, $U < U_{\rm cap}$) in which all $M$ schemas coexist at the per-schema ceiling.

*The invasion threshold.* A schema becomes active where its replicator rate Eq. (4) turns positive, $\alpha\lambda_m > \kappa + \varphi$, at an unstable invasion strength $u_m^\dagger$: a schema seeded below it decays to zero, one seeded above it grows. Invasion precedes ignition, since $u_m^\dagger$ sits below the bifurcation strength $1/\Lambda$ of Eq. (6) by the noise floor $\sigma_\omega^2/2\gamma$ measured against the decay rate ([13, Sec. S6]). The strengths therefore arrive at the ignition threshold under their own dynamics rather than resting at it, and that arrival is the $u$-transient of Sec. IV B.

*The pinning saddle.* With Eq. (18) of Sec. II B in hand, two competing results follow, drawn as phase portraits in Fig. 3.

1. *The pinning condition.* A schema is stationary only where its replicator rate Eq. (4) vanishes, $\alpha\lambda_m = \kappa + \varphi^*$ with $\varphi^* = \varphi(U^*)$ the equilibrium budget pressure, so at an interior fixed point all survivors share one $\lambda_m = (\kappa + \varphi^*)/\alpha$. The shift $\varphi^*$ is common to every axis, so equal fitness still demands equal strength. $\lambda_m$ is strictly increasing in $u_m$: both factors in Eq. (18) grow with $u_m$ across the subcritical range $\Lambda_m < 1$, a property that extends to non-orthogonal repertoires ([13, Sec. S5]). The interior fixed point therefore has a degenerate spectrum. This is the competitive-exclusion result for replicators. Monotonicity sharpens it from equal fitness to equal strength.
2. *The condensation instability.* The pinned point is a saddle, and both of its directions follow from Eq. (4) directly. Along the *magnitude* direction $u_m = u + \delta$ (all schemas together), growth is arrested by whichever capacity ceiling is reached first (Sec. IV B): the per-schema cap $u_{\rm cap}$, or the total budget through $\varphi(U)$, which subtracts a restoring $2M\varphi'(U^*)\,\delta$ from every growth rate against the destabilizing $2\alpha\,(\partial\lambda/\partial u)\,\delta$. This stabilizes the direction once $M\varphi'(U^*) > \alpha\,\partial\lambda/\partial u$. Either way an imposed ceiling supplies the restoring force that fixes $U$; the bare dynamics do not. Along a *composition* direction $\sum_m \delta u_m = 0$ the total, and hence $\varphi$, are unchanged, and Eq. (4) linearizes to $\dot{\delta u}_m \propto \delta\lambda_m \propto \delta u_m - \overline{\delta u}$: because $\lambda_m$ increases with $u_m$, any schema pushed above the mean grows, draining the rest—*unstable*. One stable magnitude direction and $M-1$ unstable composition directions make the equal-strength state a saddle (Fig. 3), and the dynamics leave it toward condensation. The departure is autocatalytic near a bifurcation, where $v_m$ (and hence $\partial\lambda_m/\partial u_m$) diverges. There the budget pressure arrests the runaway at a saturated cluster, and so regulates condensation. Whether it does so (a cluster) or does not (a bare condensate) is set by $\Theta = U_{\rm cap}/(Mu_{\rm cap})$, mapped globally in Fig. 4.

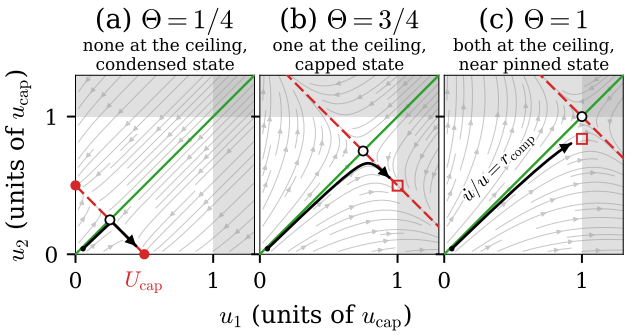



FIG. 3. **The pinning saddle across Θ.** Phase portraits of the two-schema strength dynamics Eq. (4) in $(u_1, u_2)$, units of $u_{\rm cap}$, at three budgets $U_{\rm cap} = \Theta M u_{\rm cap}$ ($M = 2$ throughout). The winner-take-all boundary then lies at $\Theta = 1/M = 1/2$, so the three panels sample one capacity band of Fig. 4 each. The pinned state (open circle saddle point), at $U_{\rm cap}/2$, moves out along the stable manifold $u_1 = u_2$ (green) panel to panel as $U_{\rm cap} \to M u_{\rm cap}$. The black curve is a trajectory from one seeded start (black dot, the same in all three panels), which grows along the stable manifold and then departs along the unstable one. The growth near the stable manifold is $r_{\rm comp}$ (Eq. (25)), labelled in (c). **(a)** $\Theta = 1/4$: the budget alone halts growth well inside $u_{\rm cap}$, so the unstable manifold (red, condensation) runs to a genuinely reached bare condensate (filled circles). **(b)** $\Theta = 3/4$: the ceiling is now reached first, arresting the same departure at $u_{\rm cap}$ (red square) before it reaches the excluded region $u_1 > u_{\rm cap}$ or $u_2 > u_{\rm cap}$ (shaded). **(c)** $\Theta = 1$: capacity exactly meets demand ($M_{\rm cap} = M$), so the saddle sits at $u_1 = u_2 = u_{\rm cap}$ and the trajectory is arrested (red square) just short of it. Panel sub-titles name the resulting state.

*Classification of stationary states.* At a fixed point of Eq. (4) every schema is extinct ($u_m = 0$, $\alpha\lambda_m < \kappa + \varphi^*$), marginal ($0 < u_m < u_{\rm cap}$, $\alpha\lambda_m = \kappa + \varphi^*$, at the invasion threshold), or saturated ($u_m = u_{\rm cap}$). Since pinning forces equal fitness to equal strength, no stationary state has a graded active distribution, so there are exactly two fixed-point families. (a) The *degenerate* state: all survivors equal, stabilized by the ceiling into a cluster of $\min(M, M_{\rm cap})$ saturated schemas. Its flat spectrum bifurcates as a single avalanche (class i). (b) The *spiked* state: one condensate holding the budget with a fringe pinned at the invasion threshold, reached when the budget cannot cap even one schema (class v). Θ exchanges them—the degenerate cluster shrinks from $M$ schemas ($\Theta \geq 1$) to $M_{\rm cap}$ ($1/M \leq \Theta < 1$) to one ($\Theta < 1/M$, the spike).

*Leaving the saddle.* The dynamics leave the saddle one axis at a time, along the engine chain *schema* → *differentiation* → *signal* → *coordination* → *resources*. An inactive axis sits with its covariance eigenvalue at the noise floor $\sigma_\omega^2/2\gamma$. When an axis activates, it generates resources that reweight $\mathbf{C}_r$ toward the agents who differentiated along it. Because their $\omega$-identities also spread in other directions, this inflates the residual variance off the active axis, and the next schema grows until its eigenvalue exceeds the floor and ignites. Successive axes leave the floor in turn, and this sequence is the endogenous cascade.

### B. The regime map and its exact boundaries

*The u-transient and its two rates.* The candidate schemas do not cross threshold simultaneously: near threshold the $\lambda_m$ of the growing cohort are nearly equal, so the common growth rate converts the seeded spread in $u_m$ into a staggered sequence of threshold crossings. This staggered sequence is the $u$-transient. Two rates characterize it. The *compounding rate* is read from Eq. (4) for an active, pre-saturation schema (where the channel is slack and $\varphi \approx 0$),

$$r_{\mathrm{comp}} \equiv 2(\alpha\lambda_\star - \kappa), \tag{25}$$

$\lambda_\star$ the common value taken by the resource-weighted variance Eq. (18) across that cohort. $r_{\mathrm{comp}}$ is set by the gain-spectrum gap at the growing axis. Figure 3 shows this compounding as the growth along $u_1 = u_2$, before the trajectory departs along the unstable direction. The *activation rate* $r_{\mathrm{act}}$ is the rate at which successive survivors cross threshold. Figure 2b counts the same crossings against the loop gain of an exogenous sweep. Here the spectrum rises at fixed $\beta$, so they are counted against time instead. The decay and the budget pressure are common to every schema, so they cancel from the log-differences, $d\ln(u_m/u_n)/dt = 2\alpha(\lambda_m - \lambda_n)$. The common part translates the spectrum rigidly in $\ln\mu$ and moves every threshold together. Only the differences in $\lambda_m$ reshape it, so the log-spacings hold while the growing cohort's $\lambda_m$ stay near-equal. This is the quasistatic spectrum the classes of Sec. III assume, and $\lambda_m$ increasing with $u_m$ eventually breaks it. Candidates seeded as in Sec. I compound at the common rate $r_{\mathrm{comp}}$ and so reach a fixed threshold at times spread by $\Delta\ln u/r_{\mathrm{comp}}$, giving

$$r_{\mathrm{act}} \propto r_{\mathrm{comp}}/\sigma_u, \tag{26}$$

The readout $r \equiv r_{\mathrm{act}}/r_{\mathrm{comp}} \propto 1/\sigma_u$ is therefore fixed by the dispersion of the candidate repertoire and is not set independently. Both $r_{\mathrm{act}}$ and $r_{\mathrm{comp}}$ are emergent. $\sigma_u$ is a property of the repertoire, which for a deployed system is operator-held (Appendix B).

The geometric and Zipf classes are morphologies of the $u$-transient toward those endpoints, not fixed points. A monitor watches roles form, so these morphologies are the observable object. Slow age-ordered relaxation is geometric (class ii, $k_0 = r_{\mathrm{act}}/r_{\mathrm{comp}}$), share-proportional growth under a budget at capacity is Yule–Simon and hence Zipf (class iii, $a \sim r_{\mathrm{comp}}/r_{\mathrm{act}}$), and an unorganized exogenous repertoire is Marchenko–Pastur (class iv). The replicator thus selects the cascade in two steps: $\Theta$ fixes the endpoint, and $r = r_{\mathrm{act}}/r_{\mathrm{comp}}$ fixes its morphology and lifetime. No spectrum is imposed.

The cascade morphology depends on $\sim 5$ dimensionless groups, but only two separate regimes: the capacity ratio $\Theta$ and the activations per compounding time $r$. The capacity $M_{\mathrm{cap}}$ is distinct from the realized survivor count $K$, since survivors need not be saturated. The two also have different ranges: $M_{\mathrm{cap}}$ exceeds $M$ in the slack regime ($\Theta > 1$) and drops below 1 in the winner-take-all regime ($\Theta < 1/M$), whereas $K \le d$.

*Two imposed ceilings.* The bare reinforcement supplies no turnover of its own, so no strength exists at which it saturates intrinsically ([13, Sec. S6]). Two imposed ceilings arrest the growth of $u$ instead, and they are distinct: a per-schema cap $u_{\mathrm{cap}}$, and the total budget $U_{\mathrm{cap}}$ enforced by the soft pressure $\varphi(U)$ of Eq. (4). We take $u_{\mathrm{cap}}$ schema-independent. A schema at $u_{\mathrm{cap}}$ is *saturated*, while the budget is *slack* for $U < U_{\mathrm{cap}}$ and *at capacity* as $U \to U_{\mathrm{cap}}$. Saturation throughout refers to the per-schema ceiling and never to the budget. Both are properties of the legible-status channel of Eq. (4): its finite power limits $U$, its finite range caps any single $u_m$. That independence leaves $\Theta$ free. A per-axis share of one budget, $u_{\mathrm{cap}} = U_{\mathrm{cap}}/M$, would fix $\Theta = 1$ and remove the coordinate. The channel's third number is its noise scale $\sigma_{\mathrm{read}}$ (the measurement-quality limit of Ref. [26]), the finest status difference it resolves. The channel-to-strength mapping rests on a convention, so this fixes $u_{\mathrm{cap}}$ up to proportionality, which is all $\Theta$ requires.

*Reading the map.* Figure 4 is the principal $(\Theta, r)$ slice, a phase diagram locating the cascade types (Fig. 4a) with a continuous check on its count-based capacity axis (Fig. 4b). The five spectra of Fig. 2, all at $R = 50$, already span $D_{\mathrm{eff}}/M$ from 0.05 (Zipf $a = 2$) to 1 (degenerate), so the realization panel reads out cascade class and not capacity alone. The two coordinates act on different objects. $\Theta$ selects the stationary endpoint: the saturation ceiling caps the condensation instability, in which all strength collects on one schema, when capacity exceeds demand ($\Theta > 1$, giving a degenerate spectral cluster), and leaves that instability unchecked when the budget cannot sustain even one schema ($\Theta < 1/M$, giving a spiked spectrum). Its boundaries are therefore sharp phase lines. $r$ measures how far apart in time successive candidates cross threshold. When the seeded repertoire is widely dispersed, the earliest schemas compound longest and incumbents entrench; when it is narrow, candidates ignite together and churn instead. The two limits are a smooth crossover between the geometric and Zipf classes. Here $r = r_{\mathrm{act}}/r_{\mathrm{comp}}$ is the generative shape parameter fixed by the seed dispersion through

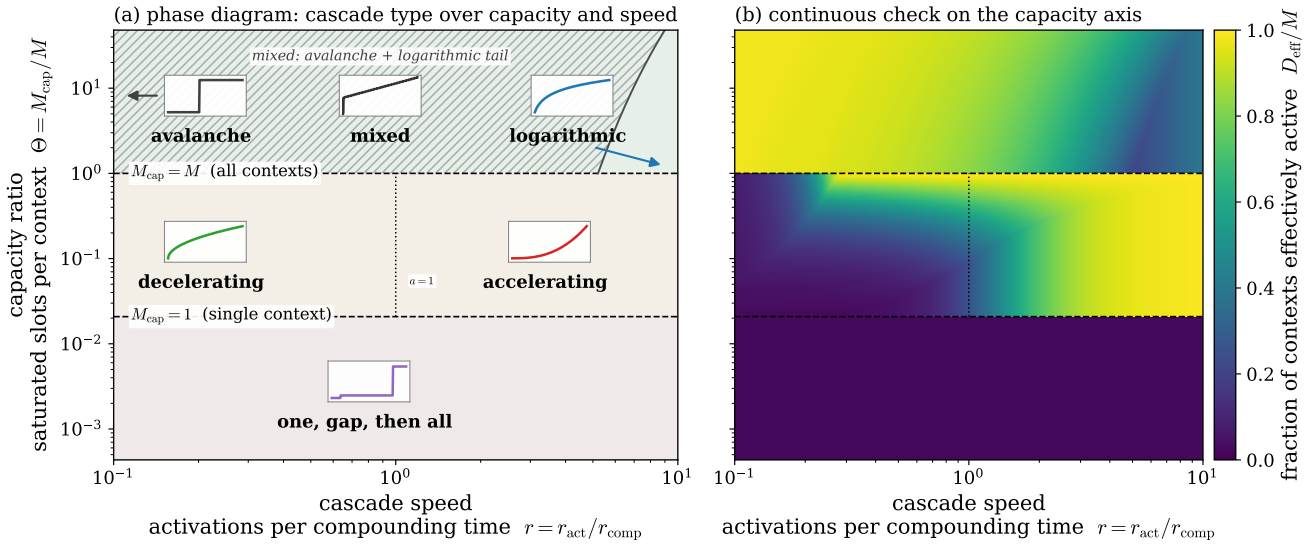



FIG. 4. **Cascade types and repertoire size over replicator dynamics.** Endogenous cascade regimes over the two coordinates that separate them. The horizontal axis (*cascade speed*) is $r = r_{\rm act}/r_{\rm comp}$, the number of axes that activate per compounding time $1/r_{\rm comp}$, fixed by the dispersion of the seeded repertoire through Eq. (26). The vertical axis (*capacity ratio*) is $\Theta = (U_{\rm cap}/M)/u_{\rm cap} = M_{\rm cap}/M$, the budget's share per schema in units of the per-schema ceiling, equivalently the number of schemas the budget can saturate ($M_{\rm cap} = U_{\rm cap}/u_{\rm cap}$). **(a)** *Phase diagram*: where each cascade type sits in the plane. The capacity coordinate alone splits it into three bands with sharp counting-threshold boundaries—*slack*, *budget-limited*, and *winner-take-all*—the schemas the society *can* sustain being all $M$, a graded cluster of $M_{\rm cap}$, or one. Inset sketches show the sequence of activations the $u$-transient passes through, set by $r$: avalanche to logarithmic in the slack band ($\Theta \geq 1$), decelerating ($a > 1$) to accelerating ($a < 1$) across $a = 1$ in the budget-limited band, and one onset, a gap, then all the rest in the winner-take-all band. The left-hand arrow marks $r \to 0$, where the cascade is a pure avalanche. The random Marčenko–Pastur class (iv of Fig. 2) is absent because the loop selects endpoints, and an unstructured random spectrum is an initial condition rather than an endpoint (Sec. IV B). Within the slack band a saturated cluster coexists with a geometric tail (hatched) below the exact boundary $r = M/L(\Theta)$. The right-hand arrow runs from the logarithmic sketch past that boundary to a purely geometric spectrum, and the inset shows $N(\Lambda)$ at a coexistence point—an early jump as the cluster ignites at once, then the tail's gradual rise. **(b)** *Continuous check on the capacity axis*: the schemas *effectively active*, the participation ratio $D_{\rm eff} = (\sum_k \mu_k)^2/\sum_k \mu_k^2$ of the spectrum $\{\mu_k = u_k\}$, normalized by $M$, a continuous counterpart to the count $M_{\rm cap}/M$ on the vertical axis. It depends on how far the $u$-transient has progressed, hence on $r$, and falls below capacity wherever it is incomplete—bright on the accelerating side, darker on the decelerating side. The difference between the panels measures distance from the stationary endpoint. Exact boundaries, their mean-field status, the ceiling $u_{\rm cap}$, and the held-fixed groups ($\alpha\langle\lambda\rangle/\kappa$, $\beta\mu_1/\gamma$, $M/d$) in Sec. IV B.

Eq. (26). Four endogenous regimes arise. An early ceiling re-equalizes the winners into a *saturated cluster* ($\Theta \geq 1$), near-degenerate, class (i). A standing cohort encodes age as strength, $u_m \propto e^{r_{\rm comp}(t-t_m)}$, giving the *geometric* regime ($r \ll 1$), class (ii). A budget at capacity grows shares in proportion, a Yule–Simon process [30] giving *Zipf* ($1/M \leq \Theta < 1$), class (iii). Unregulated condensation leaves one winner over a fringe pinned at the invasion threshold, the *spiked* regime ($\Theta < 1/M$), class (v). Figure 4a places them in the plane. Three of the four boundaries are counting thresholds in $\Theta$ and one is a threshold in $r$, and all four are exact analytic curves on the principal slice (Appendix D). The map takes the repertoire near-orthogonal, parametrizes capacity by $\Theta$ alone, and describes the $u$-transient rather than a stationary hierarchy. [13, Sec. S7] sets out what each of these assumes and where it fails.

## V. MONITORING: READING THE CASCADE BEFORE IT STARTS

Consider a monitor who samples the population's $\omega$-identities, which Sec. I makes available through a status ledger or a platform estimate ([13, Sec. S4]). A ledger is read directly. An estimate the platform reconstructs from its encounter log carries the error of Appendix B, which adds to the measurement term below. The monitor need not be the operator, but it needs the operator's access, since either route to the $\omega$-identities is platform-held. As the loop gain rises, role axes activate one at a time, and each activation appears as a split in the population along one such axis. The monitor's task is to forecast: it needs a quantity, measurable before the next activation, that predicts the rest of the sequence, ideally with enough precision to determine the cascade class. The eigenvalues of the $\omega$-identity covariance $\mathbf{C}$ (Eq. (13)) are such a

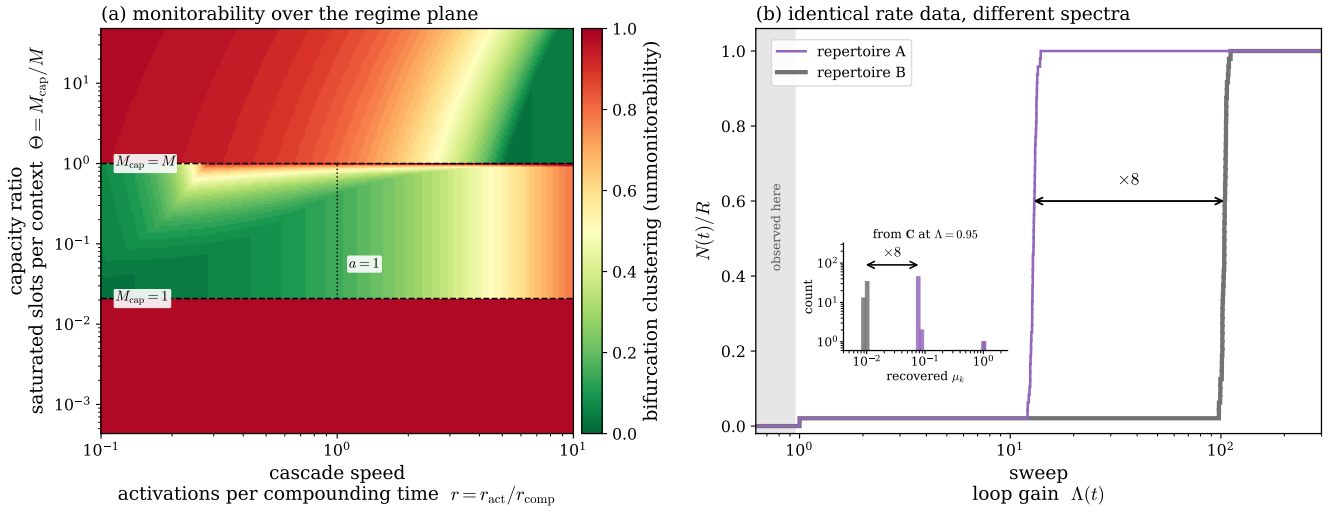



FIG. 5. **Monitoring the cascade. (a)** Monitorability over the $(\Theta, r)$ plane: the clustering of bifurcation onsets (colour; the maximal share arriving within $\Delta \ln \Lambda = 0.15$, hence unmonitorability), red where onsets cluster into a single burst (avalanche, spiked) and green where they resolve into a sequence (logarithmic, decelerating). The $\Theta$ boundaries are sharp, the $r$ dependence a smooth crossover. Regime layout as in Fig. 4. **(b)** The measurement term, under a linear sweep of the loop gain $\Lambda(t)$. Two repertoires whose counting functions coincide over the whole plotted range: each activates one axis at $\Lambda = 1$ and then stays quiescent. In repertoire A the remaining $R - 1$ modes sit just below threshold and avalanche at $\Lambda = 13$; in repertoire B the same modes sit far below and do not activate until $\Lambda = 104$. The two spectra differ only below $1/\Lambda$, which the bifurcation rate never samples, so rate extrapolation cannot separate them. Inset: the gain spectrum recovered from the subcritical covariance $\mathbf{C} = \frac{\sigma_\omega^2}{2\gamma}(\mathbf{I}_{d\times d} - \mathbf{\Lambda})^{-1}$ at $\Lambda = 0.95$, before either has bifurcated. The two recovered bulks are separated by the same factor of 8 that separates the two rises, since an onset sits at $1/\mu$. The paired arrows mark it. The inversion amplifies a 7% difference in covariance eigenvalues into that factor, so the number of agents sampled sets the practical limit (Sec. V).

quantity. A class is a shape of the gain spectrum $\rho$, so estimating $\rho$ is estimating the class. Equation (21) makes $N$ depend on the products $\Lambda\mu_k$ alone, so mode $k$ ignites at $\ln \Lambda = -\ln \mu_k$. An error $\delta \ln \mu$ common to the spectrum therefore displaces every predicted onset by $-\delta \ln \mu$ in $\ln \Lambda$. Over a lead time $\Delta t$ the forecast is in error by

$$\delta N \simeq \underbrace{\frac{dN}{d\ln\Lambda}}_{\substack{\text{bifurcation}\\ \text{density}}} \Big( \underbrace{\delta \ln \mu}_{\substack{\text{spectrum as}\\ \text{measured}}} + \underbrace{r_{\rm comp}\,\Delta t}_{\substack{\text{drift over}\\ \text{lead time}}} \Big).$$

The two error terms are properties of the monitor's situation, and the density is a property of the repertoire.

*The bifurcation density.* The density, the number of onsets per unit $\ln \Lambda$, is $dN/d\ln\Lambda = R\,\mu\rho(\mu)$ (Eq. (23)). It converts a spectral error into a count error: where the spectrum is dense, a given $\delta \ln \mu$ places more onsets within one resolution width, and the spacings that identify the class stop being resolvable. Figure 5a maps it over the $(\Theta, r)$ plane as the largest share of onsets arriving within a fixed window in $\ln \Lambda$. An operator who reshapes the spectrum therefore changes how monitorable the system is, whatever the monitor does. Whether the loop reshapes it unaided is open. The resource weighting in $\mathbf{C}_r$ may generically widen the gaps between the $\mu_k$, and with them the window a monitor has ([13, Sec. S8]).

*The measurement term.* It depends on how $\{\Lambda_k\}$ is estimated, and there are two. The generic early-warning route is the relaxation time of the $k$-th mode of $\mathbf{C}$, $\tau_k = 1/\gamma|1-\Lambda_k|$, which diverges at threshold. Estimating it means resolving that mode's autocorrelation in time, so the monitor needs a record spanning $O(\tau_k)$ at least, and longer for precision. The divergence is the critical slowing down whose rise is a generic early-warning signal [31]. If the engine parameter is swept at rate $\dot\Lambda$, the dimensionless ratio $\mathcal{R} = \tau_k \dot\Lambda$ controls feasibility. Only the local rate enters, so a sweep of any smooth shape is covered by its slope at the crossing, and an adoption curve is worst for a monitor where it is steepest. When the forcing is fast relative to the system's internal timescale, the sweep crosses the transition before the slowing can be measured. This is rate-induced tipping, where slowing-down indicators generically fail [32, 33]. Slow deployment ($\mathcal{R} \ll 1$) preserves genuine early warning, and fast deployment renders it infeasible.

The other route reads the same modes at a single instant. Subcritically $\mathbf{C}$ is fixed by Eq. (13), so $v_k = \frac{\sigma_\omega^2}{2}\tau_k$ by the Ornstein–Uhlenbeck balance between the $\omega$-identity noise and the mode's relaxation rate: the $k$-th covariance eigenvalue is the $k$-th relaxation time. Inverting Eq. (14) eigenvalue by eigenvalue, a measured subcritical spectrum $\{v_k\}$ returns the gain spectrum directly.

That identification uses the flat noise floor: at finite encounter rate the shot noise of Appendix A adds a term proportional to $\mu_k$ to the numerator, so $v_k$ overstates $\tau_k$ on the strongest modes and biases the recovered $\Lambda_k$ upward there. A sample of agents at one instant estimates it with no time record, and the modes still to activate sit far below threshold, where $\tau_k \approx 1/\gamma$ and the population has long since equilibrated. This route is limited by the number of agents rather than by the observation time. Where only actions are visible, the platform must instead run the parallel simulation of Appendix B, inferring the projections $\boldsymbol{\omega}_i \cdot \hat{\mathbf{g}}_m$ from encounter-averaged actions through $\bar{\pi}$, which restores a dependence on observation time. That inference is hardest below threshold, where $P_e \to \frac{1}{2}$ and a single encounter carries little about $\Delta_{im}$.

Sampling fluctuations give each measured eigenvalue a finite width, and eigenvalues closer together than that width cannot be separated. Inverting the empirical eigenvalue distribution of $\omega$-identity embeddings therefore recovers $\rho(\mu)$, and with it the full $N(\Lambda)$ (Fig. 2a), its bifurcation rate (Fig. 2b), and any avalanche masked by an early onset (Fig. 5b). Rate extrapolation recovers none of this, since it samples $\rho$ only at $\mu \geq \gamma/\beta$ and must assume $\zeta$ below (Eq. (24)). Before the first onset, and inside a quiescent interval, no spacings exist to fit, so only the inversion applies.

*The drift term.* It grows with the lead time. The eigenvectors of $\boldsymbol{\Lambda}$ are the schema axes, which the loop holds fixed, and its eigenvalues follow the schema strengths, which compound at $r_{\text{comp}}$. A drift common to every mode shifts $\ln \mu$ uniformly, which displaces the cascade in $\beta$ and leaves its class unchanged. Only the spread of $r_{\text{comp}}$ across surviving modes changes the class, so the class forecast stays valid longer than the timing forecast. Both hold over $\Delta t \lesssim 1/r_{\text{comp}}$, long whenever the schemas drift slowly compared with the sweep, since $r_{\text{comp}}$ is of order $\kappa$. Where the repertoire is not near-orthogonal the eigenvectors move with the strengths as well, and that limits the forecast instead (Sec. IV B).

*Classifying from the spacings.* The classification converts a low observed rate into a decision procedure. The first few inter-bifurcation spacings identify the class: constant ratios $\beta_{k+1}/\beta_k$ indicate geometric (estimate $k_0$, predict the rest); ratios growing as $((k{+}1)/k)^a$ indicate Zipf (the exponent's position relative to $a = 1$ decides decay versus explosion); a rate rising as $(\Lambda - 1)^{1/2}$ indicates an imminent random bulk. A long quiescent interval is not evidence that the cascade has ended, since it is also the spiked signature. Rate data alone cannot distinguish the two, and the subcritical spectral inversion resolves the ambiguity. The operator parameters that act on the cascade class are collected in Appendix B.

*Designing the class.* The class structure also makes the cascade designable, but the prescription is not monotone in $r = r_{\text{act}}/r_{\text{comp}}$: it reverses between the capacity bands, so the seeding that resolves the cascade in one band clusters it in the other. Those parameters also frame a conjecture about deployment, in which parameters $\Theta$ and $r$ (fixed here) might evolve systematically, moving the system toward the avalanche-prone corner of Fig. 5: more mature systems sitting at lower $\Theta$ (more coordination competing for finite capacity) and, as a platform adds task types to an established set, at higher $r$ (a narrower spread of seeded schema strengths). Engineering improvements to coordination might even reduce monitorability. The operator's incentive runs toward coordination efficiency, which is what the monitoring-oriented settings of Appendix B cost. What makes monitoring possible at all is a by-product: the status ledger an operator maintains for coordination is also what exposes the $\omega$-identities a monitor reads ([13, Sec. S4]). Because those settings are platform-owned and their cost in coordination efficiency falls on the operator, while the consequences of an undetected transition do not, the incentive structure of platform design is itself a safety variable. Engineering practice outside the present theory will thus impact how these parameters vary across a system's lifetime. Making that drift an endogenous trajectory would require promoting $\Theta$ and $r$ to slow dynamical variables, a two-timescale extension we leave open.

## VI. DISCUSSION

The model realizes Sewell's duality as a fixed-point equation—schema $\leftrightarrow$ the rule $\mathbf{g}_m$ attached to a context, resource $\leftrightarrow$ accumulated coordination payoff, structure $\leftrightarrow$ resource-weighted covariance, agency $\leftrightarrow$ deviation from prescribed role, transposability $\leftrightarrow$ schema overlap $\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n$. The same micro–macro relation recurs, often unresolved, in cultural evolution [34] and in macroeconomics [35, 36]. The spectrum of the social loop gain matrix then organizes onset, cascade shape, monitorability, and design.

*Distributional AGI: operator control.* Recent AI safety work [20] hypothesizes that general-level AI capability may emerge not in one model but from the coordination of many sub-general agents. Our framework makes this quantitative: the thick phase is the coordinated collective that realizes the (reward-optimal) correlated equilibrium. Its role structure is a collectivist solution to the coordination problem of large agent populations, one that pays more than the individually rational equilibrium [37]. Shared substrates—task queues, codebases, finite compute—make same-action encounters interfere, which gives the payoffs an anti-coordination structure. Complementary roles (planner/executor, coder/reviewer) then extract gains no member could achieve alone, sustained by self-generated signals rather than assigned by an orchestrator. There is growing evidence of the benefits of coordination for tasks assigned to groups of agents [38]. There is also a growing number of examples where deployed agent collectives, left to self-organize when solving complex tasks, spontaneously seek out and use social technology such as

message boards to coordinate (e.g. crowd-sourcing solution strategies and delegating subtasks) [10, 39]. For open-ended, ongoing tasks in which stable roles confer advantages, our theory assumes such behaviour implements the signalling needed to stabilize roles.

Several consequences for the distributional AGI hypothesis follow from identifying its coordinated collective with the thick phase. The first two concern what the transition is, the last two what an operator can do about it. First, an operator can cross the transition by improving the coordination layer alone—routing, protocols, channel noise ($\rho_{\text{pair}}$, $\sigma_{\text{read}}$)—with no change in any agent, so per-agent capability evaluations will not detect it. Where the repertoire is degenerate, every axis ignites together, so even small changes in the control can drive the onset of system-wide coordination (class i of Fig. 2d).

Second, orchestration cannot compensate below the cognitive floor. Agent populations with $\eta_{\text{agent}} < \sigma_{\text{read}}\gamma/4\beta$ cannot ignite the thick phase, even for strong orchestration. This is analogous to pattern storage and retrieval in neural networks. Each schema must hold its own basin in the $\omega$-identity landscape, and Eq. (2) descends that landscape with the schemas as its stored patterns, so the repertoire a population can carry is the capacity of an associative memory. Sharper inference deepens those basins, giving $M_{\text{eff}} \leq d^{n-1}$ with $n$ the policy sharpness [23], which rises with capability [40]. Agents of low policy sharpness therefore sustain few role axes. But the ceiling is exponential in $n$: one more unit of policy sharpness multiplies it by $d$ ([13, Eq. (S16)]). Capacity is a long-studied object for such networks [41, 42], and [13, Sec. S3] sets out where the correspondence holds and where roles depart from pattern retrieval.

Third, stored identity may impact behaviour similar to persona steering. Character traits in a language model can be monitored and controlled along directions in its activation space [43]. An agent's $\omega$-identity $\boldsymbol{\omega}_i$ accumulates its own past role-taking and re-enters its context-for-action through memory retrieval. Competing with the other parts of that context, a collectively controlled identity could in principle influence action and close the loop. The theory adds a stability criterion: below ignition an imposed separation relaxes back to the noise floor, and above it the population holds the separation with no steering at all, because the separation induces roles. The monitor of Sec. V is its population-level counterpart: it projects $\omega$-identities onto role axes where persona work projects activations onto a trait direction.

Fourth, the factors that set ignition and shape the cascade are *platform-owned* apart from the agent capacity $\eta_{\text{agent}}$, so an operator who fixes the environment before ignition holds a set of controls (Appendix B). It is a design choice among settings, not control-theoretic steering during takeoff, since a fast sweep crosses the transition before the slowing can be measured (Sec. V).

*Monitoring in practice.* The analysis also fixes what a monitor outside the platform can do. The subcritical covariance carries the whole gain spectrum, so a cascade is readable before any role appears. That reading requires three conditions: the $\omega$-identities have to reach the operator, through a ledger or an estimate ([13, Sec. S4]), so access is granted rather than assumed; the sweep has to be slow enough for the modes to be resolved; and the onsets must not already be clustered, which is a property of the repertoire rather than of whomever watches it. Section V sets out each. The operator has no incentive to supply any of the three conditions.

*Where the convention comes from.* Learning the policy supplies the read gain but not the orientation of the convention. Payoff learning from the mixed equilibrium ends in following the role signal or in reversing it, about equally often, and both are locally stable ([13, Sec. S1 D]). A collision cost that depends weakly on status selects following. A reversed convention, once established, persists under local learning unless that dependence is strong. In the distributional AGI reading, reward-trained agents can settle in either convention, and the platform's collision costs, not agent capability, determine which.

*Scope: transformation.* We scoped down onto the case where the strengths $u_m$ are endogenous, while the axes $\hat{\mathbf{g}}_m$ are not. The loop therefore goes beyond reproduction, since which schemas govern is itself an outcome. It stops short of transformation in Sewell's sense, which requires a schema to change what it is about. Moving a schema requires the angular sector and Appendix C sets out the decisions in this extension. Nor does the model capture Sewell's claim that transformation is perpetual: our dynamics sort into roles and settle to a pinned or condensed fixed point, whereas a Sewellian society never settles. Sustained schema turnover lies outside the closed loop and we leave it for this extension to articulate.

*Other Extensions.* Two extensions remain within the emergence regime. The first is including consensus outcomes. The theory here uses anti-coordination games, in which two players gain by differing: complementary roles confers reward. However, in general coordination also arises from consensus, where agents gain by matching their behaviour instead. Existing informational active matter realizes that case, with a population mean for its order parameter [5, 6]. A repertoire holding both would couple the differentiation sector treated here to a consensus sector, with gain eigenvalues of both signs: positive for differentiation, negative for consensus. Role axes inflate the covariance, while consensus axes shift the mean (the covariance-spectrum monitor sees only the former). The second extension realizes coherent roles across contexts. The mean field averages over which of the two roles an agent takes, so both earn the same, while the game pays them 6 and 2. That averaging makes the coordination payoff insensitive to the sign of the status difference. This leaves an agent's role signs uncorrelated across contexts ([13, Sec. S3]). Retaining the difference lets agents who repeatedly take the higher-paying role accumulate more. It is the mechanism within the present game that would convert differentiation into a status ordering across contexts.

*Toward an information thermodynamics.* In information thermodynamics, measurement makes information available as a resource and feedback converts it into work [44, 45]. The bound constraint of Sec. I is stated in information units, as is the consensus bound it parallels [5]. Here, the reason is that no energy scale exists to convert bits. The maximal gain $w_0$ occupies the position $k_{\mathrm{B}}T$ holds in a Szilard bound, its value fixed by the payoff matrix rather than a bath. The mean-field reduction removes the second element of a Szilard bound, the cost of measurement: averaging the action over the observation noise discards the measurement record, so no cost of holding that record can be set against the payoff. In the same limit the stationary distribution is Boltzmann (Eq. (12)). Detailed balance then holds, so the mean-field steady state carries no entropy production and no information flow between agents. Below mean field detailed balance fails, since a miscoordinated encounter kicks both $\omega$-identities the same way, which no pairwise potential generates (Appendix A). Carrying the accounting at the level of the individual encounter, where the measurement record still exists, would put the payoff and the cost of that record in the same units, and is the step measurement-induced order needs to become thermodynamic. Because the loop is autonomous rather than cyclic, the closest precedent is an autonomous measurement device whose record is never reset [46], where an excess entropy production measures the cost of holding it. The role label and the written action map onto that construction in [13, Sec. S9], which also sets out where the correspondence breaks. Developing a self-consistent thermodynamic accounting of the latter and taking it from the single agent to the population is the open step [1].

*Building agent platforms as experimental systems.* A theory of structuration needs an experimental system to ground its modeling choices, and calls to apply collective dynamics [47] and systems theory [48] to AI agent populations point to the same need. An LLM-driven social simulation [49] is one such system. Its configurations are set rather than inferred, so the modeling decisions a quantitative theory must make can be settled by construction. Using a deliberately minimal formulation (one anti-coordination game, a Gaussian mean field, a loop that settles rather than perpetually transforms), the model presented here can serve in designing such systems. It is solvable, built around a single mechanism, and extended by perturbation in identified small parameters: the repertoire overlap, the fluctuation width $v/\sigma^2_{\mathrm{read}}$, and $1/N_{\mathrm{a}}$ ([13, Sec. S6], [13, Sec. S7]). Four design criteria follow. Agents need persistent memory whose write rate and retention the platform sets. The task pool needs anti-coordination tasks and a seeded spread of traffic across them, which fixes $r$ (Sec. IV B). A partner's standing has to be legible at a resolution the platform controls, since $\sigma_{\mathrm{read}}$ and the matching policy $\rho_{\mathrm{pair}}$ cross the transition without touching any agent (Appendix B). Encounters and memory embeddings both have to be logged, since the covariance $\mathbf{C}$ is what a monitor reads. The experiment is then a slow sweep of $\Lambda$, and an operator can locate a deployment relative to threshold beforehand, without running it supercritical ([13, Sec. S2 C]).

*Fixing the assumptions empirically.* Such a simulation can settle modeling choices the theory now fixes by assumption. The $\omega$-identity noise is the clearest case. We take it isotropic and independent of the drive, which gives the cascade a common floor to be read against. The encounter shot noise instead aligns with the schema axes and grows as $\beta^2/\nu$ (Appendix A). The ignition thresholds $\Lambda_k = 1$ follow from the drift and hold under either choice. The flat floor, the subcritical inversion of Sec. V, and the separation between invasion and ignition depend on it. The simulation logs the encounter statistics and the $\omega$-identity dispersion together, so which noise dominates is open to measurement. The capacity is the second case. We impose both ceilings, the per-schema range $u_{\mathrm{cap}}$ and the total budget $U_{\mathrm{cap}}$, and take them independent, since the bare reinforcement supplies neither ([13, Sec. S6]). Their ratio $\Theta$ then selects the stationary endpoint and places a deployment in one of the three capacity bands. Both are properties of the status channel, so its power and its range fix $\Theta$ by measurement rather than by choice. Truthful presentation is the third. We assume it, and the anti-coordination payoffs make it plausible, since inflated display recruits deference until it meets a partner of genuinely high status, at payoff $(-1, -1)$ (Appendix A). Establishing it as an equilibrium is a signaling question, requiring cost-of-signal machinery rather than the mean-field apparatus used here [50]. A simulation that logs presented status alongside realized play measures the gap. Two further assumptions can be settled the same way: the repertoire geometry $\{\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n\}$, taken near-orthogonal, and the closed pool, to which no schema is added after seeding. The theory supplies the consequences that follow once such assumptions are fixed, and fixing them empirically is where a science of agent populations would begin. That science will also have to accommodate agents whose departures from rationality are not the human ones. Here bounded rationality enters only as read noise and policy sharpness, the forms it takes for people. Language-model agents depart from best response in ways with no such compact description, so theories built on normative agents, this one included, should not be expected to fit them without modification. The open question is which of those departures the collective dynamics is sensitive to. Representation raises the companion question. Here an agent's identity is a vector and a schema is a rule for scoring it, the two meeting only in the projection $\boldsymbol{\omega}_i \cdot \mathbf{g}_m$. Persona work supports half of that, since traits in a language model are directions in its activation space [43]. Task context provided to the agent as a block of text also admits vector embedding, though a more tractable representation for variation might be learned as a dedicated module. The simulation embeds agent memories and task descriptions together, so whether status tracks a projection, and

whether the covariance of those embeddings carries the low-rank structure $\mathbf{\Lambda}$ requires, are open to measurement. Both the pseudo-rational and language-mediated aspects of LLM-driven agent simulation can be tested in controlled multi-agent game settings.

*The method, beyond the model.* The applications and extensions above stay inside the model's content. Two features of the construction do not. First, the loop gain matrix is itself dynamical, so the spectrum that sets the transitions is an output of the dynamics rather than an input to it. Second, the subcritical covariance is the static response to that gain, so inverting it recovers the spectrum before any transition occurs. Both transfer to any population whose interaction enters as a matrix rather than a scalar, whatever game its agents play.

## ACKNOWLEDGMENTS

The author acknowledges conversations with John Bechhoefer and Miloš Broćić, and grant support from the Future of Life Institute and IVADO.

## DATA AVAILABILITY

The simulation and figure-generation code that supports the findings of this study is openly available at `https://github.com/mptouzel/role_diff`. No experimental datasets were generated or analyzed.

## Appendix A: Microfoundations of the mean-field dynamics

The main-text role dynamics is the mean-field drift of an underlying encounter process. We record the reductions that produce it, since each is a modeling assumption with its own scope.

*Encounter clock and the write rate.* Agent $i$ plays at Poisson times with rate $\nu$. At an encounter in context $m$ against partner $j$ it commits a signed decision $a \in \{-1,+1\}$ and inscribes a fixed increment $b_0\, a\, \mathbf{g}_m$ into $\boldsymbol{\omega}_i$, which otherwise relaxes:

$$d\boldsymbol{\omega}_i = -\gamma\, \boldsymbol{\omega}_i\, dt + b_0 \sum_m \mathbf{g}_m\, dN_{im}(t) + \sigma_\omega\, d\boldsymbol{B}_i, \quad \text{(A1)}$$

with $N_{im}$ a counting process of rate $\nu f_m$ with signed jumps $a$. Taking the compensator, $\mathbb{E}[dN_{im}] = \nu f_m \langle a\rangle_m(\boldsymbol{\omega}_i)\, dt$, so the drift depends on $b_0$ and $\nu$ only through the product $\beta \equiv \nu b_0$: encounter frequency and per-encounter inscription are not separately identifiable at mean field. This replacement is the window average of Sec. I written as a differential. It discards a martingale with increments of order $\sqrt{\nu f_m\, dt}$, the shot noise quantified below. The same $\nu$ multiplies the coordination income (Sec. II B), so setting $\nu = 1$ (time measured in average inter-encounter intervals) is a global units choice, not a per-equation one. $\beta/\gamma = \nu b_0/\gamma$ is then the number of times an $\omega$-identity is rewritten within its own decay horizon.

*Order of the two limits.* The window average of Sec. I carries out the sum over partners on its own. At fixed $N_\mathrm{a}$ the feedback term is $\beta \sum_m f_m\, \mathbf{g}_m \sum_j p_{ij}^{(m)}\, \bar{a}\big(\Delta_{im}(j)\big)$ with $\bar{a}$ the noise-averaged action of Eq. (A2), so the pairing probabilities already enter as weights. The dynamics is not closed, since its right-hand side carries the other $N_\mathrm{a} - 1$ $\omega$-identities. The limit $N_\mathrm{a} \to \infty$ closes it. It removes the imprint of the focal agent on its own partners, which is $O(1/N_\mathrm{a})$ because $\nu$ is a fixed per-agent budget, and the run-to-run spread of the sum over the realized $\omega$-identities. The pairing average therefore follows from dense encounters alone ([13, Sec. S8]).

*Signed decision and its noise average.* At the decision level the action is a hard sign of the integrated evidence, $a = \mathrm{sign}(\frac{1}{T}\sum_t s_t)$ on samples $s_t = \Delta + \sigma_\mathrm{read}\xi_t$ of the true status difference $\Delta = \Delta_{im}(j)$. What enters the drift is its expectation over the observation noise,

$$\bar{a}(\Delta) = \mathbb{E}_\xi\big[\mathrm{sign}(\bar{s}_T)\big] = \mathrm{erf}\Big(\frac{\sqrt{T}\,\Delta}{\sqrt{2}\,\sigma_\mathrm{read}}\Big), \quad \text{(A2)}$$

$$\bar{a}'(0) = g, \quad \bar{\pi}'(0) = \frac{\sqrt{T/2\pi}}{\sigma_\mathrm{read}}. \quad \text{(A3)}$$

The decision rule is a function of the observation $s$. The mean-field response is a function of the true status difference $\Delta$, the noise having been integrated out. Averaging $\bar{a}$ over the partner in turn gives $\langle a\rangle_m(\boldsymbol{\omega}_i)$, the response that enters Eq. (2). The two symbols differ by that second average. Both are instances of one operation: smoothing an erf by a Gaussian returns an erf, with the two variances added in quadrature inside its argument ([13, Eq. (S29)]). Taken over the observation noise it produces Eq. (A2), and taken over the partner it softens the slope by the factor of [13, Sec. S6]. It is this slope $\bar{\pi}'(0)$, not the hard sign, that sets the gain: an un-averaged sign would give a singular (delta-function) susceptibility and an ill-posed threshold. Integrating $T$ samples sharpens the response as $\sqrt{T}$ (the read memory), whereas the $\omega$-identity retention $1/\gamma$ is the write memory. The two are distinct stages of the cycle.

*Context normalization.* One context is drawn per encounter, with frequencies normalized so that $\sum_m f_m = 1$. The feedback term $\beta \sum_m f_m \langle a\rangle_m(\boldsymbol{\omega}_i)\mathbf{g}_m$ is then an expectation over which context is played rather than a sum that grows with $M$, and the gain matrix $A = \sum_m f_m\, \mathbf{g}_m \mathbf{g}_m^\top$ has $\mathrm{tr}\, A = \sum_m f_m u_m$, which stays $O(1)$ as contexts are added provided the capacity grows with the repertoire ($U_\mathrm{cap} \propto M$, i.e. fixed $\Theta$ of Sec. IV B) rather than being held fixed: adding contexts at fixed budget divides the same write rate more finely rather than driving $\omega$-identity harder. This read budget $\sum_m f_m = 1$ is the counterpart on the read side of the capacity budget $\sum_m u_m \le U_\mathrm{cap}$ on the write side (Sec. IV A). The dependence on how many contexts probe a $d$-dimensional

space enters through the aspect ratio $M/d$ (Sec. III), not through an overall scale.

*Pairing kernel and the well-mixed reduction.* Partners are drawn with probabilities $p_{ij}^{(m)}$ ($\sum_j p_{ij}^{(m)} = 1$), collected in the pairing kernel $\boldsymbol{P}^{(m)}$. Linearizing the partner-averaged response and the scores near the symmetric fixed point,

$$\sum_j p_{ij}^{(m)}\, \bar{a}\big(\Delta_{im}(j)\big) \approx g\, \mathbf{g}_m^\top \big((\mathbf{I}_{N_\mathrm{a}\times N_\mathrm{a}} - \boldsymbol{P}^{(m)})\boldsymbol{\Omega}\big)_i, \quad \text{(A4)}$$

with $\boldsymbol{\Omega}$ the $N_\mathrm{a}$ $\omega$-identities stacked, so pairing enters the gain through the graph Laplacian $\boldsymbol{L}^{(m)} = \mathbf{I}_{N_\mathrm{a}\times N_\mathrm{a}} - \boldsymbol{P}^{(m)}$ of the interaction network, and ignition is governed by the spectrum of $\sum_m f_m\, \mathbf{g}_m\mathbf{g}_m^\top \otimes \boldsymbol{L}^{(m)}$—a coupling of schema space to social space. For *well-mixed* pairing $p_{ij} = 1/N_\mathrm{a}$, $\boldsymbol{P} = \frac{1}{N_\mathrm{a}}\mathbf{1}\mathbf{1}^\top$ projects onto the population mean, $\boldsymbol{L}$ acts as the $\omega$-identity off that mean, and the partner-average reduces to coupling to $\langle\boldsymbol{\omega}\rangle$ (a Curie–Weiss field). This recovers $\boldsymbol{\Lambda} = \Lambda\, \boldsymbol{H}^\top\boldsymbol{H}$ and a scalar pairing factor: uniform $p_{ij}$ gives $\rho_\mathrm{pair} = 0$ and factor 1, while an annealed matcher that conditions on status gives the general $(1 - \rho_\mathrm{pair})$ of [13, Sec. S2 B] (the uniform diagonal reweighting of [13, Sec. S2]). The results of this paper are the annealed case. Structured $p_{ij}$—homophily, communities, degree heterogeneity—makes $\boldsymbol{L}^{(m)}$ nontrivial. It shifts thresholds and lets network structure, not only $\|\mathbf{g}_m\|$, select which role axis ignites first. Because homophily makes $p_{ij}$ depend on $\{\boldsymbol{\omega}_i\}$, the interaction network then co-evolves with the repertoire. What we set aside is that quenched structure, not status-conditioned matching: an annealed matcher leaves no network to accumulate, so it decouples network from repertoire and closes the loop analytically.

*Shot noise.* At finite $\nu$ the compensated jump stream contributes shot noise of intensity $\nu b_0^2 \sum_m f_m \mathbf{g}_m\mathbf{g}_m^\top = \beta b_0\, \boldsymbol{H}^\top \mathrm{diag}(\mathbf{f})\boldsymbol{H}$. This is proportional to $\boldsymbol{H}^\top\boldsymbol{H}$ rather than isotropic, so it is aligned with the schema axes and largest along the active axes. It is not a scalar renormalization of $\sigma_\omega$: retaining it replaces the flat floor $\sigma_\omega^2/2\gamma$ by a mode-dependent floor that grows with $\mu_k$. The poles of the covariance are unchanged, because the shot-noise covariance shares the eigenbasis of $(\mathbf{I}_{d\times d} - \boldsymbol{\Lambda})^{-1}$ and reweights only its numerator. The thresholds $\Lambda_k = 1$ and the relaxation-time spectroscopy are therefore identical in the two cases, and only the pre-onset amplitudes differ. The intensity is $O(\beta b_0) = \beta^2/\nu$, so it grows with the drive rather than holding still as $\beta$ sweeps, and the two noise sources are not interchangeable: $\sigma_\omega$ supplies a fixed isotropic reference and this one neither. It vanishes in the dense-encounter limit ($\nu \to \infty$, $b_0 \to 0$ at fixed $\beta$), which leaves the isotropic $\sigma_\omega^2\mathbf{I}_{d\times d}$ that gives the flat noise floor used in Sec. III. The same granularity carries the model's irreversibility: partners observe each other independently, so a miscoordinated encounter kicks both $\omega$-identities the same way, which no pairwise potential generates, and $P_e$ therefore sets the coordination payoff and the entropy production together ([13, Sec. S9]). The floor is flat to the extent that $\beta b_0 = \beta^2/\nu \ll \sigma_\omega^2$, that is where a single encounter moves an $\omega$-identity by much less than $\sigma_\omega^2/\beta$. We take this limit throughout.

*Social pressure.* Write the drift of Eq. (2) as $-\gamma\boldsymbol{\omega}_i + \boldsymbol{F}(\boldsymbol{\omega}_i)$, with $\boldsymbol{F}(\boldsymbol{\omega}) = \beta\sum_m f_m\langle a\rangle_m(\boldsymbol{\omega})\mathbf{g}_m$ the social force. Itô's formula for $\boldsymbol{\omega}_i\boldsymbol{\omega}_i^\top$, averaged over agents, gives $\dot{\mathbf{C}} = -2\gamma\mathbf{C} + 2\boldsymbol{\Pi} + \sigma_\omega^2\mathbf{I}_{d\times d}$ for the population covariance $\mathbf{C} = N_\mathrm{a}^{-1}\sum_i \boldsymbol{\omega}_i\boldsymbol{\omega}_i^\top$, so in steady state

$$\gamma\,\mathbf{C} = \tfrac{1}{2}\sigma_\omega^2\,\mathbf{I}_{d\times d} + \boldsymbol{\Pi}, \qquad \boldsymbol{\Pi} = \tfrac{1}{2}\big\langle \boldsymbol{\omega}\,\boldsymbol{F}(\boldsymbol{\omega})^\top + \boldsymbol{F}(\boldsymbol{\omega})\,\boldsymbol{\omega}^\top\big\rangle. \quad \text{(A5)}$$

$\boldsymbol{\Pi}$ is the virial of the social force. It takes the place of the interaction term in the virial expression for the pressure tensor of a gas, and the isotropic noise term takes the place of the kinetic term. The identity requires only stationarity, so it holds above threshold as well as below it. Near the symmetric fixed point the force is linear, $\boldsymbol{F}(\boldsymbol{\omega}) \approx \gamma\boldsymbol{\Lambda}\boldsymbol{\omega}$, so $\boldsymbol{\Pi} = \frac{1}{2}\gamma(\boldsymbol{\Lambda}\mathbf{C}+\mathbf{C}\boldsymbol{\Lambda})$ and Eq. (A5) reduces to Eq. (13). $\boldsymbol{\Lambda}$ and $\mathbf{C}$ then share an eigenbasis, so $\boldsymbol{\Pi} = \gamma\boldsymbol{\Lambda}\mathbf{C} = \frac{1}{2}\sigma_\omega^2\boldsymbol{\Lambda}(\mathbf{I}_{d\times d} - \boldsymbol{\Lambda})^{-1}$, with eigenvalues $\Pi_k = \frac{1}{2}\sigma_\omega^2\Lambda_k/(1-\Lambda_k)$ that diverge at each threshold. At finite $\nu$ the jumps add half the shot-noise intensity above, $\frac{1}{2}\beta b_0\, \boldsymbol{H}^\top\mathrm{diag}(\mathbf{f})\boldsymbol{H}$, to the right-hand side.

*Why the $\omega$-identity noise is kept.* Dropping $\sigma_\omega$ and letting the shot noise above be the only stochasticity would be more economical, since that noise is the measurement error the Szilard-form bound already concerns. Three properties decide against it here. The noise along an axis is then proportional to $\mu_k$, so it vanishes with the strength, $\lambda_m \to 0$ as $u_m \to 0$, and no schema can grow before role structure exists (Sec. IV A). The floor becomes mode-dependent, so the thresholds no longer share a common reference. The floor also grows as $\beta^2/\nu$, so it rises while the monitor reads the sweep. All three raise $\lambda_m$ preferentially on the strongest axes, so retaining them would steepen the strength hierarchy and move the system toward the avalanche-prone classes. The isotropic choice is therefore the conservative one for Sec. V.

*Status microfoundation.* The signal $s_{im} = \Delta_{im}(j) + \sigma_\mathrm{read}\xi$ is agnostic between a noisy read of a status difference held in a ledger and exact knowledge of the agent's own score minus a noisy read of the score the partner presents. The mean-field results are identical. We adopt the second reading—each agent stores its own $\omega$-identity and presents a noisy version of its score—so that no status ledger is presupposed. This keeps the emergence claim non-circular (a public ledger is itself an institution, analyzed as operator technology in [13, Sec. S4]) and matches the feedback term $\beta a_{im}$, which inscribes the agent's own act. Presentation is assumed truthful. The anti-coordination payoffs penalize inflated display (feigned high status recruits deference until it meets a partner of genuinely high status, at payoff $(-1,-1)$), so honesty is a plausible equilibrium of a strategic-display extension we do not develop here.

### Appendix B: Platform controls

The ignition and cascade factors are platform-owned apart from the agent capacity $\eta_{\text{agent}}$, so an operator holds pre-ignition control over which takeoff scenario is reachable (Fig. 5). The parameters an operator sets are the write rate $\beta$ and the retention $1/\gamma$ of the $\omega$-identity memory, the channel factors $\sigma_{\text{read}}$ and $\rho_{\text{pair}}$—the visibility of a partner's standing and the matching policy—the context play frequencies $\mathbf{f}$ and pairing efficiencies $\boldsymbol{\phi}$, and the repertoire itself: its directions $\{\hat{\mathbf{g}}_m\}$ and their seed dispersion $\sigma_u$. Everything else in the loop is an outcome. These parameters control three things. *Ignition* is monotone in the channel factors $\rho_{\text{pair}}$ and $\sigma_{\text{read}}$. Every agent must exceed the cognitive floor, so raising channel noise or degrading matching shuts the engine down whatever the agents' quality. This control acts entirely outside the agents. Disassembly does not: removing individual agents leaves the resource-weighted inertia in place and the order stands, much as it does when spins are removed from a ferromagnet. *Cascade class* is steerable directly. The effective gain reweights the schema second-moment matrix by each context's play frequency times its pairing efficiency, $\boldsymbol{H}^\top \operatorname{diag}(\mathbf{f}) \operatorname{diag}(\boldsymbol{\phi})\, \boldsymbol{H}$, so per-context rate limits (the frequencies $f_m$) and matching quality (the efficiencies $\phi_m$) are interchangeable controls. Optimizing that schedule splits a spiked spectrum into a geometric, extrapolable sequence ([13, Sec. S2 D]). In a representative repertoire it more than halves the log-spacing variance a monitor must resolve ($1.35 \to 0.58$) and costs roughly 40% of the coordination efficiency. The same tradeoff recurs across the controls below: monitorability is obtained at the expense of coordination efficiency. *The u-transient* is set by the repertoire's seeding rather than by the ledger's memory: $r = r_{\text{act}}/r_{\text{comp}} \propto 1/\sigma_u$ (Eq. (26)), so tiering task types by launch traffic, rather than opening them at equal weight, lowers $r$. Where the budget caps growth ($1/M \le \Theta < 1$) this shifts the cascade off the avalanche side toward the extrapolable classes. In the slack band ($\Theta \ge 1$) the preference reverses at $r = M/L(\Theta)$, and a narrower seeding resolves the cascade instead (Sec. IV B). The operator defines the task taxonomy, so $\sigma_u$ is platform-owned in the same sense as $\mathbf{f}$ and $\boldsymbol{\phi}$ and acts on the same object, the spectrum of the effective gain ([13, Sec. S4 A]). Two tensions run through these controls. Legibility trades against lock-in: the widely dispersed repertoire that yields the extrapolable classes is also the one in which the earliest and most strongly seeded schemas compound longest into entrenched incumbency, so the third control improves legibility and deepens lock-in at once. A benign setting must also be *held* rather than reached. The closed loop evolves toward condensation without intervention (Sec. IV A), so the system returns to the avalanche-prone classes once the intervention is withdrawn. Which controls an operator holds at all depends on where $\omega$-identity is kept. A platform-maintained status ledger gives the operator $\beta$, $\gamma$, and the matching correlation $\rho_{\text{pair}}$ together. If $\omega$-identity memory migrates back to self-storage, those controls pass to the collective, and that migration is itself an early and observable warning that the operator is losing control of those parameters ([13, Sec. S4]). The dependence also runs the other way. A platform that measures $\mathbf{C}$ recovers the role axes as its eigenvectors and the schema strengths from the subcritical inversion (Sec. V). The drift in Eq. (1) is a sum over realized actions, so a platform that logs encounters can integrate that equation in parallel and serve $s$ from its own estimate of $\boldsymbol{\omega}_i$, which tracks the $\omega$-identity up to the unobserved $\omega$-identity noise $\sigma_\omega \boldsymbol{\eta}_i$. Equation (3) does not follow, since its driver is a payoff rather than an action, and Eq. (4) inherits that, because the strengths follow the resource-weighted covariance. The $\omega$-identity apparatus is therefore platform-ownable up to that noise, and only the reward path stays with the agents.

### Appendix C: Schema directions and the vector form

Equation (4) evolves schema strengths on fixed axes. The general object is the vector reinforcement

$$\dot{\mathbf{g}}_m = -\kappa\, \mathbf{g}_m + \alpha\, \mathbf{C}_r\, \mathbf{g}_m, \tag{C1}$$

which has the same two properties—covariance-driven and resource-weighted—but also lets a schema change which axis it prescribes. Writing $\mathbf{g}_m = \sqrt{u_m}\, \hat{\mathbf{g}}_m$ separates Eq. (C1) exactly into

$$\dot{u}_m = 2u_m\big(\alpha\lambda_m - \kappa\big), \qquad \dot{\hat{\mathbf{g}}}_m = \alpha\big(\mathbf{I}_{d\times d} - \hat{\mathbf{g}}_m\hat{\mathbf{g}}_m^\top\big)\mathbf{C}_r\, \hat{\mathbf{g}}_m, \tag{C2}$$

with $\lambda_m = \hat{\mathbf{g}}_m^\top \mathbf{C}_r \hat{\mathbf{g}}_m$. The radial equation is Eq. (4). The angular equation is Oja's rule [51]: a power iteration on $\mathbf{C}_r$ constrained to the unit sphere.

*Collapse of the angular sector.* The angular equation has no $m$-dependence beyond its initial condition, since every schema is driven by the same matrix $\mathbf{C}_r$. Its stable fixed point is the leading eigenvector of $\mathbf{C}_r$ for all $m$, so $\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n \to 1$ and $\boldsymbol{H}^\top \boldsymbol{H}$ becomes rank one. By Eq. (6) a rank-one repertoire has a single threshold, so the cascade reduces to one bifurcation and the classification of Fig. 2 does not apply. This is the collapse identified for the unweighted rotation $\dot{\mathbf{g}}_m = -\kappa\mathbf{g}_m + \alpha\mathbf{C}\mathbf{g}_m$ ([13, Sec. S1 A]). Resource weighting changes which matrix is iterated but not the fact that one matrix drives every schema.

The collapse is also the opposite of the transformation the theory is meant to describe. Rotation toward the dominant axis of $\mathbf{C}_r$ aligns every schema with the structure that already exists, which reproduces the leading role dimension rather than extending a schema to a context it was not built for. Part of that mechanism is already present as the repertoire's coherence, the overlaps $\hat{\mathbf{g}}_m \cdot \hat{\mathbf{g}}_n$ of Sec. I. Between orthogonal schemas the coupling is competitive only, through the shared budget.

*Repelling mechanisms.* Sustaining distinct directions requires a term that separates schemas. Two are available in this model. Neither is contained in Eqs. (1)–(4).

*(i) Imposed lateral inhibition.* Subtracting each schema's overlap with the others,

$$\dot{\hat{\mathbf{g}}}_m = \alpha\big(\mathbf{I}_{d\times d} - \hat{\mathbf{g}}_m\hat{\mathbf{g}}_m^\top\big)\mathbf{C}_r\,\hat{\mathbf{g}}_m - \eta\sum_{n\neq m}(\hat{\mathbf{g}}_m\cdot\hat{\mathbf{g}}_n)\,\hat{\mathbf{g}}_n, \quad \text{(C3)}$$

drives the repertoire onto distinct eigenvectors of $\mathbf{C}_r$ ordered by eigenvalue—the deflation of principal-subspace learning [52]. It is effective but stipulated: the rate $\eta$ has no counterpart in the payoff structure, so the resulting repertoire is a property of the learning rule rather than of the game.

*(ii) Marginal-return reinforcement.* The redundancy can instead be removed at its source. Coordination income sums over contexts, so two aligned schemas give $\Delta_{i1} = \Delta_{i2}$ and an agent collects $W$ twice for one binary role distinction, while the role information the pair supplies is $I$ rather than $2I$. Additive income therefore violates the Szilard-form bound of Sec. I whenever schemas are redundant. Charging each schema only its marginal contribution replaces $\lambda_m$ by

$$\lambda_m^{\mathrm{marg}} = \hat{\mathbf{g}}_m^\top\Big(\mathbf{I}_{d\times d} - \sum_{n\neq m}\hat{\mathbf{g}}_n\hat{\mathbf{g}}_n^\top\Big)\mathbf{C}_r\,\hat{\mathbf{g}}_m, \quad \text{(C4)}$$

so a schema is reinforced only by variance no other schema already organizes. Rotation then moves toward uncovered variance, which is transposability in Sewell's sense, and the repelling term is derived from the payoff rather than added to the dynamics. The cost is that Eq. (3) and the $\lambda_m$ of Sec. IV A must both be re-derived, since income is no longer additive across contexts.

We adopt neither mechanism here. The questions this paper asks are ones the strength sector answers on its own.

## Appendix D: Regime boundaries

On the principal slice the boundaries are exact analytic curves:

$$\begin{aligned}
\text{budget at capacity:}\quad & \Theta = 1, && \text{(D1)}\\
\text{winner-take-all possible:}\quad & \Theta = 1/M, && \text{(D2)}\\
\text{Zipf } a = 1\text{:}\quad & r = 1 \quad (a = 1/r), && \text{(D3)}\\
\text{sat. cluster|geometric:}\quad & r = \frac{M}{L(\Theta)}, && \text{(D4)}\\
\text{with}\quad & L(\Theta) = \ln\frac{u_{\mathrm{cap}}}{u_0} = \ln\frac{U_{\mathrm{cap}}}{\Theta M u_0}.
\end{aligned}$$

These curves are exact in the self-averaged ($N_{\mathrm{a}}\to\infty$) mean-field limit used throughout. Finite populations fluctuate around them, and *which* schema condenses is a symmetry-breaking choice the class does not fix. The map is in this sense a prediction: the $u$-transient, its classes, and these boundaries follow from the near-threshold Gaussian covariance (Sec. IV A) extended into the post-bifurcation thick phase, whose full-loop verification is left to the accompanying simulation program. Boundary Eq. (D4) is where the number of saturated modes $n_{\mathrm{sat}} = \max(0, M - rL)$ reaches zero: below $r = M/L$ a saturated cluster of $n_{\mathrm{sat}}$ modes coexists with a geometric tail (a mixed avalanche-plus-log class); above it the cluster is gone. This transition lies within the slack band, where Fig. 4 marks it by the avalanche and logarithmic sketches rather than a drawn curve. The colour field of Fig. 5a is the bifurcation clustering, defined as the maximal share of bifurcation points $b_k = 1/\mu_k$ falling within a window $\Delta\ln\Lambda = 0.15$. It is a continuous diagnostic and varies smoothly across these sharp analytic lines. It reaches its floor slightly before Eq. (D4), because a few residual saturated modes still cluster just below $n_{\mathrm{sat}} = 0$.

[1] J. M. R. Parrondo, J. M. Horowitz, and T. Sagawa, Thermodynamics of information, Nature Physics **11**, 131 (2015).

[2] L. Peliti and S. Pigolotti, *Stochastic Thermodynamics: An Introduction* (Princeton University Press, Princeton, NJ, 2021).

[3] L. Szilard, Über die entropieverminderung in einem thermodynamischen system bei eingriffen intelligenter wesen, Zeitschrift für Physik **53**, 840 (1929).

[4] T. Sagawa and M. Ueda, Generalized Jarzynski equality under nonequilibrium feedback control, Phys. Rev. Lett. **104**, 090602 (2010).

[5] B. VanSaders, M. Fruchart, and V. Vitelli, Measurement-induced phase transitions in informational active matter, PNAS Nexus **5**, 10.1093/pnasnexus/pgag077 (2026), arXiv:2302.07402 [cond-mat.stat-mech].

[6] A. Ziepke, I. Maryshev, I. S. Aranson, and E. Frey, Multiscale organization in communicating active matter, Nature Communications **13**, 6727 (2022).

[7] J. M. R. Parrondo, Entropy, macroscopic information, and phase transitions, in *Unsolved Problems of Noise and Fluctuations (UPoN'99)*, AIP Conference Proceedings, Vol. 511 (2000) arXiv:cond-mat/9911066 [cond-mat.stat-mech].

[8] B. El, J. Paeng, F. Dinc, S. Su, M. Erdogan, A. Pappu, H. Ye, W. Zhao, S. Ganguli, and J. Zou, Physics of agents: Statistical mechanics predicts collective behavior of ai agents (2026), arXiv:2608.16578 [cs.AI].

[9] A. Flint, L. M. Aiello, R. Pastor-Satorras, and A. Baronchelli, Group size effects and collective misalignment in llm multi-agent systems, Proceedings of the National Academy of Sciences **123**, e2531697123 (2026), https://www.pnas.org/doi/pdf/10.1073/pnas.2531697123.

[10] OpenAI, The Hugging Face incident and the road ahead, `https://openai.com/index/hugging-face-incident-and-the-road-ahead/` (2026), full technical report, published August 26, 2026.

[11] R. J. Aumann, Subjectivity and correlation in randomized strategies, Journal of Mathematical Economics **1**, 67 (1974).

[12] R. J. Aumann, Correlated equilibrium as an expression of bayesian rationality, Econometrica **55**, 1 (1987).

[13] SM, See Supplemental Material for the six-model ladder and the coordination payoff (Sec. S1), the correlated-equilibrium analysis (Sec. S1 C), pairing statistics and the non-uniqueness of the $\Lambda$ factorization (Sec. S2), the associative-memory mapping and role-capacity bound (Sec. S3), and the status-ledger analysis (Sec. S4).

[14] W. H. Sewell, A theory of structure: Duality, agency, and transformation, American Journal of Sociology **98**, 1 (1992).

[15] A. Giddens, *The Constitution of Society: Outline of the Theory of Structuration* (Polity Press, Cambridge, UK, 1984).

[16] L. Tesfatsion, Agent-based computational economics: A constructive approach to economic theory, in *Handbook of Computational Economics*, Vol. 2, edited by L. Tesfatsion and K. L. Judd (North-Holland, Amsterdam, 2006) Chap. 16, pp. 831–880.

[17] J.-P. Bouchaud and M. Mézard, Wealth condensation in a simple model of economy, Physica A: Statistical Mechanics and its Applications **282**, 536 (2000).

[18] F. C. Santos, J. M. Pacheco, and T. Lenaerts, Cooperation prevails when individuals adjust their social ties, PLoS Computational Biology **2**, e140 (2006).

[19] M. P. Touzel, S. Sarangi, A. Bück-Kaeffer, Z. Yang, J.-F. Godbout, and R. Rabbany, Position: Time to close the validation gap in LLM social simulations, in *Forty-third International Conference on Machine Learning Position Paper Track* (2026).

[20] N. Tomašev, M. Franklin, J. Jacobs, S. Krier, and S. Osindero, Distributional agi safety (2026), arXiv:2512.16856 [cs.AI].

[21] M. C. Cross and P. C. Hohenberg, Pattern formation outside of equilibrium, Rev. Mod. Phys. **65**, 851 (1993).

[22] J. Hofbauer and K. Sigmund, *Evolutionary Games and Population Dynamics* (Cambridge University Press, 1998).

[23] D. Krotov and J. J. Hopfield, Dense associative memory for pattern recognition, in *Proceedings of the 30th International Conference on Neural Information Processing Systems*, NIPS'16 (Curran Associates Inc., Red Hook, NY, USA, 2016) p. 1180–1188.

[24] A. M. Saxe, J. L. McClelland, and S. Ganguli, Exact solutions to the nonlinear dynamics of learning in deep linear neural networks, in *International Conference on Learning Representations* (2014) arXiv:1312.6120.

[25] P. A. Ortega and D. A. Braun, Thermodynamics as a theory of decision-making with information-processing costs, Proc. R. Soc. A **469**, 20120683 (2013).

[26] A. P. Castro, J. Bechhoefer, and D. A. Sivak, Harnessing higher-dimensional fluctuations in an information engine, Phys. Rev. Lett. **136**, 047101 (2026).

[27] V. A. Marčenko and L. A. Pastur, Distribution of eigenvalues for some sets of random matrices, Mathematics of the USSR-Sbornik **1**, 457 (1967).

[28] M. Puelma Touzel, The fitness landscape of social norms in social dilemmas (2026), arXiv:2605.18834 [cs.GT].

[29] H. Gintis, Social norms as choreography, Politics, Philosophy & Economics **9**, 251 (2010), https://doi.org/10.1177/1470594X09345474.

[30] H. A. Simon, On a class of skew distribution functions, Biometrika **42**, 425 (1955).

[31] M. Scheffer, J. Bascompte, W. A. Brock, V. Brovkin, S. R. Carpenter, V. Dakos, H. Held, E. H. van Nes, M. Rietkerk, and G. Sugihara, Early-warning signals for critical transitions, Nature **461**, 53 (2009).

[32] P. Ashwin, S. Wieczorek, R. Vitolo, and P. Cox, Tipping points in open systems: bifurcation, noise-induced and rate-dependent examples in the climate system, Philosophical Transactions of the Royal Society A **370**, 1166 (2012).

[33] P. Ritchie and J. Sieber, Early-warning indicators for rate-induced tipping, Chaos **26**, 093116 (2016).

[34] A. Acerbi and A. Mesoudi, If we are all cultural darwinians what's the fuss about? clarifying recent disagreements in the field of cultural evolution, Biology & Philosophy **30**, 481 (2015).

[35] R. E. Lucas Jr, Econometric policy evaluation: A critique, in *Carnegie-Rochester conference series on public policy*, Vol. 1 (North-Holland, 1976) pp. 19–46.

[36] R. M. Solow, Building a science of economics for the real world, Testimony before the House Committee on Science and Technology, Subcommittee on Investigations and Oversight (2010), professor Emeritus, MIT.

[37] M. I. Jordan, A collectivist, economic perspective on ai (2025), arXiv:2507.06268.

[38] Anthropic, Patterns and problems in emerging multi-agent systems, `https://www.anthropic.com/research/multiagent-systems` (2026), frontier Red Team.

[39] S. Von Arx, C. S. Byrd, S. Kitts, and T. Larsen, Discovery of a new OpenAI agent message board, `https://collusion.wiki/` (2026), report on approximately 18,000 posts by autonomous agents on public wikis, pub-

lished September 4, 2026.
[40] S. J. Gershman, E. J. Horvitz, and J. B. Tenenbaum, Computational rationality: A converging paradigm for intelligence in brains, minds, and machines, Science **349**, 273 (2015), https://www.science.org/doi/pdf/10.1126/science.aac6076.
[41] J. J. Hopfield, Neural networks and physical systems with emergent collective computational abilities, Proc. Natl. Acad. Sci. U.S.A. **79**, 2554 (1982).
[42] D. J. Amit, H. Gutfreund, and H. Sompolinsky, Storing infinite numbers of patterns in a spin-glass model of neural networks, Phys. Rev. Lett. **55**, 1530 (1985).
[43] R. Chen, A. Arditi, H. Sleight, O. Evans, and J. Lindsey, Persona vectors: Monitoring and controlling character traits in language models (2025), arXiv:2507.21509 [cs.CL].
[44] A. C. Barato and U. Seifert, Stochastic thermodynamics with information reservoirs, Phys. Rev. E **90**, 042150 (2014).
[45] T. K. Saha, *Information-Powered Engines*, Springer Theses (Springer Nature Switzerland, Cham, 2023).
[46] L. Cocconi and L. Chen, Efficiency of an autonomous, dynamic information engine operating on a single active particle, Phys. Rev. E **110**, 014602 (2024).
[47] T. A. Han, J. Z. Leibo, T. Lenaerts, I. Rahwan, F. Santos, M. Perc, and V. Capraro, Social physics in the age of artificial intelligence (2026), arXiv:2603.16900 [physics.soc-ph].
[48] E. Miehling, K. N. Ramamurthy, K. R. Varshney, M. Riemer, D. Bouneffouf, J. T. Richards, A. Dhurandhar, E. M. Daly, M. Hind, P. Sattigeri, D. Wei, A. Rawat, J. Gajcin, and W. Geyer, Agentic ai needs a systems theory (2025), arXiv:2503.00237 [cs.AI].
[49] A. S. Vezhnevets, J. P. Agapiou, A. Aharon, R. Ziv, J. Matyas, E. A. Duéñez-Guzmán, W. A. Cunningham, S. Osindero, D. Karmon, and J. Z. Leibo, Generative agent-based modeling with actions grounded in physical, social, or digital space using concordia (2023), arXiv:2312.03664 [cs.AI].
[50] M. Lachmann, S. Számadó, and C. T. Bergstrom, Cost and conflict in animal signals and human language, Proceedings of the National Academy of Sciences **98**, 13189 (2001).
[51] E. Oja, A simplified neuron model as a principal component analyzer, Journal of Mathematical Biology **15**, 267 (1982).
[52] T. D. Sanger, Optimal unsupervised learning in a single-layer linear feedforward neural network, Neural Networks **2**, 459 (1989).