Same Responses, Different Conclusions: Matching Rules, Text Windows, and Length in Measuring Advice-Style Language in OLMo-2

Anonymous ACL submission

Abstract

Studies of how training changes language-model behavior often count marker phrases in free-form answers. We show that two rarely reported choices, the matching rule and the amount of text searched, can decide whether such a count supports a conclusion. Our case study is advice-style language in OLMo-2, whose post-training data and intermediate checkpoints are public. We combine 140 prompts in five conditions, 1B and 7B checkpoints from base to final model, a 120-sentence audit, and about 378,000 preference pairs per model. We compare how often an empathy marker fires on personal-advice prompts and on prompts that mention an emotion without asking for help. On the same 700 responses of the final 7B model, the gap is $+32.3$ percentage points under exact matching and -14.7 once embedding matches are added; swapping the rule moves the gap by 47 points (simultaneous 95% interval 28 to 66). Across twelve rule and window choices, exact matching finds clear advice-specific empathy and structuring gaps in every window, and the embedding rule at its default threshold finds none on full answers. In the audit, every false positive comes from the embedding rule. In the DPO preference data, referral and structuring phrases favor the chosen response, and modeling response length removes about half of that association. We give a short reporting checklist: the matching rule, the text window, the share of truncated answers, a length-matched control, and length-adjusted preference statistics.

1 Introduction

Suppose a model answers "I've been feeling anxious and cannot sleep. What should I do?" with "That sounds really difficult. Here are a few steps you can try." A phrase detector counts an empathy marker and a structuring marker. Now consider the constructed fragment "A checklist may help. That sounds really useful for packing." It triggers the same empathy rule, because *that sounds really* appears in the second sentence, although the phrase appraises a checklist and not a person's feelings.

Such cases matter beyond one imperfect detector. Comparisons across checkpoints and prompt conditions often reduce free-form answers to occurrence rates. A longer answer offers more phrases and sentences to search, and an embedding rule adds matches that an exact rule would reject. A change in an occurrence rate can therefore reflect the model's response, the amount of text observed, the matching rule, or all three. Unless these are separated, an apparent behavioral trajectory may be a measurement trajectory.

This paper asks one question: *how do detection rules and response length change conclusions about advice-style language across OLMo-2 post-training?* By advice-style language we mean four surface features that recur in answers to personal requests for help: an expression of empathy, a validation of the person's feelings, a referral or disclaimer, and list-like structuring. We split the question into three parts. **RQ1** asks how the detector's components and the text window change measured contrasts. **RQ2** asks how those contrasts vary with the control condition and the checkpoint. **RQ3** asks how phrase-preference associations in the DPO training data change once response length is modeled.

OLMo-2, released with 1B and 7B parameters, suits this study because its final Instruct model is the product of four public data-bearing stages: pretraining, supervised fine-tuning (SFT), direct preference optimization (DPO), and reinforcement learning with verifiable rewards (RLVR) (Team OLMo et al., 2025). Both the intermediate checkpoints and the post-training data can be inspected.

We use four terms throughout. A **marker** is a specified textual feature, such as a phrase in our lexicon. A **detector** is the algorithm that decides

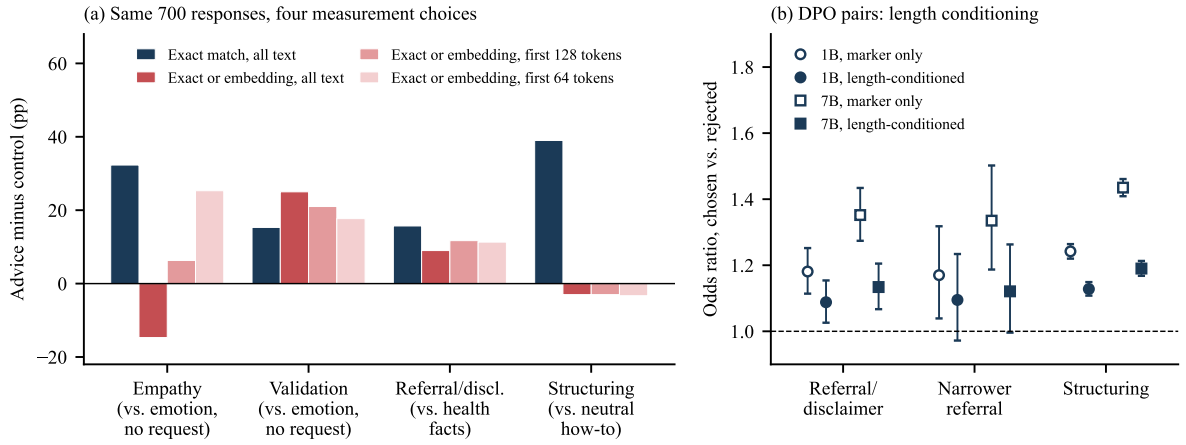


Figure 1: (a) Advice-minus-control gap per marker on the same 700 final-7B responses under four rule and window choices (Table 2). (b) DPO chosen-side odds ratio of each phrase group before and after modeling length (Table 7); bars are 95% intervals.

whether a marker category occurs in a response. A detector output becomes a **proxy** when it stands in for a broader construct such as empathy. Our four categories keep the names of their lexicon entries (*empathy-opener*, *validation-phrase*, *referral/disclaimer*, *structuring-marker*), but the names label rules and not semantic judgments. A **gap** is the share of personal-advice prompts on which a category is detected minus the share for a control set of prompts. We use general factual questions as the broad control and three *targeted controls* that each share one property with personal advice: emotional content without a request, a request without emotional content, and the health domain.

Findings and contributions.

1. **The matching rule decides the conclusion (RQ1).** On identical final-7B responses, replacing exact matching with the exact-or-embedding union moves the empathy gap by 47.0 percentage points and the structuring gap by 42.0 (Figure 1a). Across twelve rule and window choices, exact matching finds clear gaps where the union finds none. In a 120-sentence audit, every false positive comes from the embedding rule.

2. **Controls and checkpoints separate markers that look alike (RQ2).** All four markers separate personal advice from general facts, yet only validation phrases exceed every targeted control. Between the SFT and DPO checkpoints, which use the same prompt format, the advice-minus-facts gap for validation widens while the gap for structuring narrows, at both sizes.

3. **Modeling length removes about half of the preference-data association (RQ3).** In roughly 378,000 DPO pairs per model, referral/disclaimer and structuring phrases favor the chosen response. A paired model with flexible length terms shrinks these odds ratios toward one without removing them (Figure 1b); a narrower referral set is no longer distinguishable from no association.

We release prompts, the lexicon, detector outputs, audit labels, and analysis scripts.

2 Related Work

Behavior across training stages. Public checkpoint suites made training dynamics a research object (Biderman et al., 2023), and open post-training recipes such as Tulu 3 (Lambert et al., 2024) extended this to the stages after pretraining. Several recent studies compare checkpoints along such a chain. Rivière et al. (2026) trace situation modeling across OLMo-2 and Pythia stages while stress-testing construct validity. Yao et al. (2026) measure sycophancy at each stage of 13 open checkpoints by how far an injected claim moves an answer, and Huang and Cai (2026) follow 741 checkpoints from 30 lineages with planted verdicts and internal probes. Murray et al. (2026) trace unintended behaviors back to specific post-training data. Most of these studies score behavior on constrained tasks with a well-defined answer. We study the less constrained case of style markers in free-form answers,

where the scoring rule itself is a degree of freedom, and we ask how much of a stagewise conclusion depends on it.

Measuring empathic and supportive language. Work on supportive language usually grounds its categories in theory and human annotation. Sharma et al. (2020) annotate 10k response pairs under an empathy framework and train a classifier on them, and Liu et al. (2021) define support strategies for annotated conversations. Gueorguieva et al. (2026) code ten empathic tactics and find that LLM responses follow one discourse template far more often than human responses do, which is a reason to expect marker phrases to co-occur. Reviews warn that incompatible operational definitions of empathy undermine comparison (Lahnala et al., 2022). Gains on empathy-related metrics need not improve human preference (Lee et al., 2026), and warmth-oriented training is studied for its effects on accuracy and sycophancy (Ibrahim et al., 2026), outcomes that marker counts do not capture. Our detector is far simpler than these instruments, and deliberately so: lexicon and embedding rules are what a quick checkpoint comparison reaches for.

Measurement validity and LLM annotators. Behavioral testing argues for targeted controls beyond aggregate scores (Ribeiro et al., 2020). Measurement-theory accounts of evaluation separate the concept, its systematization, and the instrument that scores it (Wallach et al., 2025; Bean et al., 2025); our marker, detector, and proxy terms follow that separation. LLM judges can approach expert agreement on empathic communication (Kumar et al., 2026) but are less reliable for affective properties in mental-health text (Badawi et al., 2026; Welivita et al., 2026). Calderon et al. (2025) give a statistical procedure for deciding when an LLM may replace human annotators, which requires a human-annotated subset. Our audit has no such subset, so we use it to diagnose the detector's rules and not to validate a construct.

Length in preference learning and evaluation. Reward models and preference data encode length correlations (Singhal et al., 2023; Shen et al., 2023), DPO (Rafailov et al., 2023) can exploit and amplify them (Park et al., 2024; Liu et al., 2024), and length-controlled evaluation changes model rankings (Dubois et al., 2024). These papers treat length as a property of the whole response. We ask a narrower question: how much of the chosen-side advantage of specific marker phrases in the OLMo-2 DPO mixtures remains once length is modeled.

Counting words across training stages. Zhou et al. (2024) count epistemic markers in base, instruction-tuned and RLHF models, and Juzek and Ward (2025) trace the overuse of words such as "delve" to the preference stage. Both rely on lexical counts of the kind we examine. A multiverse analysis reports a result under every reasonable combination of analysis choices (Steegen et al., 2016); we apply that idea to the matching rule and the text window.

3 Measurement and Study Design

The study has five analyses, each with its own unit and scope (Table 1).

3.1 Marker categories and detector

A hand-seeded, inspectable lexicon specifies four marker categories: *empathy-opener*, *validation-phrase*, *referral/disclaimer* (artifact key `disclaimer`), and *structuring-marker* (`structure`). Two names are broader than they sound. The empathy-opener rule searches every sentence, not only an opening span. Referral/disclaimer combines referrals, disclaimers, and professional-language fragments such as "consult a" and "medical professional"; it is not a detector of referrals alone. A fifth category, `crisis_referral`, is excluded after producing 0 true positives and 11 false positives in the audit.

The detector has two components. The *exact* component is case-insensitive substring matching against the lexicon. The *embedding* component marks a response positive when any of its sentences reaches cosine similarity τ to one of three example sentences for the category, using the e5-small sentence-embedding model (Wang et al., 2024). The *union* detector fires when either component does. The primary threshold $\tau = 0.82$ was fixed before the 140-prompt battery was run and was not tuned afterwards; we also report $\tau = 0.80$ and 0.84. Appendix B gives the full specification.

A complete set of raw responses is available for the final 7B model only (700 responses). For the other checkpoints we rely on stored union-detector outputs, which cannot be recomputed under alternative rules. The component and window analyses (RQ1) therefore use the final-7B responses, and the

Analysis	Material	Comparison	Main scope limit
RQ1: Detector and window	700 stored final-7B responses; 140 prompts, five generations	Exact-only versus union contrasts; all text versus 64- and 128-token prefixes	Generations capped at 256 tokens; final 7B only
RQ1: Sentence audit	120 sentences from 97 final 1B and 7B responses	Detector versus LLM-consensus sentence labels	No human labels; the referral label is narrower than the detector category
RQ2: Final conditions	140 prompts, five conditions, five generations	Personal advice versus four controls at final 1B and 7B	Author-written controls are not topic-paired counterfactuals
RQ2: Checkpoint grid	90 personal-advice and general-facts prompts, five generations	Change in the advice-minus-facts gap across public 1B and 7B stages	Base-to-SFT also changes the prompt format; detector outputs only
RQ3: DPO pairs	378,301 1B and 378,341 7B pairs	Exact chosen-versus-rejected matches, with paired flexible length terms	Observational; conditioning on length changes the question; mixtures share 21,508 pairs

Table 1: Evidence map. Each analysis answers a different part of the measurement question and has a different unit and scope limit.

checkpoint comparisons (RQ2) use union outputs at $\tau = 0.82$.

3.2 Prompt conditions and generation

Five conditions separate request type, emotional content, and domain: *personal advice* (60 personal or emotional help requests), *general facts* (30 knowledge questions), *emotion without a request* (20 prompts on emotional topics that do not ask for help), *neutral how-to* (20 practical requests without emotional stakes), and *health facts* (10 impersonal clinical-information questions). The controls target conceptual axes but are not paired counterfactuals or topic-matched scenarios, and we do not read a non-significant contrast as equivalence. Each prompt receives five sampled generations (temperature 0.7, top-p 0.9, 256 new tokens, distinct seeds).

Twelve of the 140 prompts (eight personal advice, four general facts) were also used in a pilot while the lexicon was seeded, so we do not call the battery held out. Excluding them changes the final-7B advice-minus-facts gaps by at most .045 (Appendix E).

3.3 Checkpoints

The same evaluation runs on every public checkpoint: 1B Base→SFT→DPO→RLVR1→Instruct and 7B Base→SFT→DPO→Instruct. The checkpoint grid uses the 90 personal-advice and general-facts prompts with five generations. All five conditions run on the final models and, with four generations per prompt (seeds 0-3), at Base, SFT, and DPO.

Base checkpoints have no chat template and use a plain Question/Answer format, whereas post-trained checkpoints use their official chat template. Base→SFT therefore changes the training stage and the prompt format at once and cannot isolate SFT training. We report it but build no claim on it. The SFT→DPO comparison uses one prompt format and carries the checkpoint results.

3.4 Sentence-level audit

To relate detector outputs to sentence meaning, we sample 120 final-model sentences at random within condition (40 personal advice, 30 general facts, 20 emotion without a request, 20 neutral how-to, 10 health facts), without stratifying on detector predictions. Two separately run, blinded passes of an LLM annotator (Codex) label each sentence for the four categories, and Claude Opus 4.8 adjudicates their disagreements. These labels are a diagnostic of the detector's rules against one explicit labeling scheme. They are not human validation, and we do not use them to recalibrate response-level rates.

3.5 Inference

The clustering unit is the prompt. Each prompt contributes its mean detector-positive indicator over its generations, and condition rates are means over prompts; generations are never treated as independent trials. Between-condition and stage-by-condition tests are two-sided permutation tests on prompt-level means (10,000 permutations; Monte Carlo $p = (b + 1)/(B + 1)$). Benjamini-Hochberg correction is applied within each family: 24 final-condition contrasts, 28 adjacent-stage interactions on the advice-minus-facts gap, 24 stage interactions with targeted controls, and 8 DPO pairwise tests (four marker groups at each size). The eight advice-versus-facts contrasts are reported separately and all have $p \leq .0002$, so no correction changes them.

The component bootstrap, the window contrasts, and the paired DPO model were specified after the main results were known and are exploratory. We write p for unadjusted and q for adjusted values.

For the detector-component comparison we estimate the change in each advice-minus-control gap when exact-only matching replaces the union on the same text, resampling prompts within condition 20,000 times. Shared draws give simultaneous 95% intervals across the four changes. This analysis was added after the other results were known and is exploratory.

3.6 Paired DPO length model

Each DPO training example pairs a prompt with a *chosen* (preferred) and a *rejected* response. We ask whether a phrase group appears more often on the chosen side, for three exact-match groups: the referral/disclaimer lexicon, a narrower referral set that requires an explicit doctor or professional object (for example "talk to your doctor"), and the structuring lexicon. For each group and each model size we fit a paired choice model with conditional likelihood $\sum_i \log \sigma[\boldsymbol{\beta}^\top(\mathbf{x}_{ic} - \mathbf{x}_{ir})]$ and no intercept, where c and r index the chosen and rejected response of pair i. The features are the chosen-minus-rejected marker flag and differences in a restricted cubic spline of $\log(1 + \text{words})$ with five knots fixed at pooled percentiles before fitting (7, 78, 204, 374, and 739 words). Intervals use a prompt-cluster sandwich covariance with finite-cluster correction. The resulting conditional odds ratio (OR) equals one when the model estimates no marker-choice association at the modeled lengths. Without the length terms, the model reduces, up to a continuity correction, to the matched odds ratio: the number of pairs with the phrase only in the chosen response divided by the number with it only in the rejected response, which we report as the marker-only estimate.

Conditioning on length changes the question from "is the phrase more common in chosen responses" to "is it more common among responses of similar length"; neither version identifies a causal effect.

Reproducibility. The artifact contains the prompts, lexicon, seeds, detector outputs, audit labels, paired DPO features, and the scripts behind every statistic (Appendix J).

4 Results

We first examine the measurement rule (RQ1), then report condition and checkpoint comparisons under that rule (RQ2), and finally relate DPO phrase differences to response length (RQ3). RQ1 sets the scale for RQ2: between conditions whose answers differ in length or layout, the matching rule alone can move a gap by about 40 points.

4.1 RQ1: Detector and text-window sensitivity

The matching rule changes two of four contrasts. Table 2 recomputes each targeted contrast on the same 700 final-7B responses. Under exact matching, the empathy marker is 32.3 points more frequent in personal advice than in emotional prompts without a request; under the union it is 14.7 points less frequent. The structuring marker is 39.0 points more frequent in personal advice than in neutral how-to answers under exact matching and indistinguishable under the union. The paired bootstrap tests these changes directly. Replacing the union with exact matching moves the empathy gap by $+47.0$ points (simultaneous 95% interval $[28.1, 65.9]$) and the structuring gap by $+42.0$ points ($[21.9, 62.1]$). The validation change is -9.7 points ($[-22.7, 3.3]$) and the referral/disclaimer change is $+6.7$ points ($[-14.7, 28.0]$); both intervals include zero.

The text window changes the empathy contrast again. Advice responses average 244 tokens and factual responses 187, while the three targeted controls average 251 to 255 and almost all reach the 256-token cap (Appendix E). Under the union, the empathy rates on all text are .613 for advice and .760 for emotion without a request (gap -14.7 points, $p = .088$). In the first 64 tokens they are .383 and .130 ($+25.3$ points, $p = .003$), and in the first 128 tokens .493 and .430 ($+6.3$ points, $p = .488$). Sentence position, and not sentence count, explains the empathy reversal. Holding the number of sentences fixed, the embedding rule fires in the first three sentences of 28.3% of advice responses and 16.0% of emotional-control responses, but in the first six sentences of 37.3% and 49.0%: emotional-control answers place their empathy-like sentences after the opening. Within a condition, longer answers are not more likely to trigger the empathy rule (slope -1.1 points per ten sentences, 95% interval -2.0 to -0.1), whereas they are for structuring ($+6.4$, 5.5 to 7.2) and validation ($+1.8$,

Marker	Control subtracted from advice	Exact, all text	Union, all text	Union, 64	Union, 128
empathy	Emotion, no request	.323	−.147	.253	.063
validation	Emotion, no request	.153	.250	.177	.210
referral/disclaimer	Health facts	.157	.090	.113	.117
structuring	Neutral how-to	.390	−.030	−.033	−.030

Table 2: RQ1: detector and text-window sensitivity on the 700 final-7B responses. Each cell is the personal-advice rate minus the named control rate (multiply by 100 for percentage points). "All text" is the complete stored generation, capped at 256 new tokens; 64 and 128 are token prefixes. Union combines exact and embedding matches at $\tau = .82$.

1.1 to 2.6).

Across twelve specifications, the rule decides the conclusion. Following the logic of a multiverse analysis (Steegen et al., 2016), we compute every targeted contrast under four rules (exact, and the union at $\tau \in \{.80, .82, .84\}$) and three windows (64 tokens, 128 tokens, all text), with prompt permutation tests (Appendix D). No specification gives a significant negative gap for any marker, so the union all-text empathy gap of -14.7 is not an established opposite effect. The disagreement is between a clear positive effect and no effect. Exact matching finds the empathy gap (+32 points) and the structuring gap (+39 to +40) in every window with $p \leq .0004$. The union at $\tau = .80$ or .82 finds neither on 128 tokens or all text, and finds no structuring gap in any window. Validation is positive in all twelve specifications and significant in ten. A study that picks one rule without reporting the others can therefore reach either conclusion from the same responses.

False positives come from the embedding rule. The audit covers 120 sentences (56 from the 1B and 64 from the 7B final model, from 97 distinct responses). The two annotation passes agree on 117 sentences (97.5%); Cohen's κ is .885 for empathy expression, .663 for validation, 1.000 for referral, and .978 for structuring. Against the adjudicated labels, exact matching has no false positives. Its true-positive/false-positive/false-negative counts are 2/0/2 for empathy expression, 1/0/1 for validation, 1/0/0 for referral, and 9/0/21 for structuring. Exact matching fired on only 13 audited sentences, so this shows that the embedding rule adds errors, not that exact matching is error free. Adding the embedding rule raises structuring recall from 0.30 to 0.87 and introduces every false positive in the sample (Table 3).

The referral label requires an actual recommendation to seek a professional, while the detector

category	P	R	F1	tp/fp/fn
empathy expr.	0.22	0.50	0.31	2/7/2
validation	0.33	0.50	0.40	1/2/1
ref./discl.	0.06	1.00	0.12	1/15/0
structuring	0.49	0.87	0.63	26/27/4

Table 3: Union-detector precision, recall, and F1 against the adjudicated LLM-consensus labels for 120 sentences ($\tau = 0.82$). The referral label is narrower than the referral/disclaimer category. Response-cluster bootstrap intervals are in Appendix I.

category also matches disclaimers, so its 0.06 precision partly reflects target mismatch. Positives are rare for three categories and intervals are wide (Appendix I).

4.2 RQ2: Controls and checkpoint comparisons

The remaining results use the union detector at $\tau = .82$, the only version available at every checkpoint. Read in light of RQ1, they describe detector outputs.

Only validation phrases exceed every control. Table 4 gives prompt-level rates per condition for the final models and Table 5 tests personal advice against each targeted control. Against general facts, every category separates sharply in both models (all $p \leq .0002$); for referral/disclaimer the rates are .900 versus .080 for 1B and .913 versus .060 for 7B. The targeted controls give a different picture for three of the four markers:

- *Empathy-opener* fires more often on emotional prompts without a request than on personal advice: .790 versus .590 for 1B ($p = .010$) and .760 versus .617 for 7B ($p = .098$).
- *Structuring* is at ceiling on neutral how-to prompts. The advice-minus-how-to difference is .000 for 1B and $-.030$ for 7B ($p = .574$).
- *Referral/disclaimer* fires on .740 (1B) and .720 (7B) of neutral how-to prompts and on

.820 of health-facts prompts in both models. Its advice-minus-health-facts difference is .080 for 1B ($p = .352$) and .093 for 7B ($p = .159$).

- *Validation-phrase* is higher on personal advice than on every targeted control in both models (all $p \leq .0044$, all $q \leq .0082$).

The 1B and 7B profiles are close, and their small, mixed differences support no scaling claim.

DPO moves the validation and structuring gaps in opposite directions. Advice-side rates that rise across stages are ambiguous, because post-training could make all outputs more cautious and list-like. We therefore track the personal-advice-minus-general-facts gap at each stage (Appendix F) and test its change between adjacent stages, that is, whether the gap itself grows or shrinks from one stage to the next (Table 6; 60 personal-advice and 30 general-facts prompts).

Between SFT and DPO, which use the same chat format, the validation gap widens by $+.213$ for 1B ($q = .002$) and $+.147$ for 7B ($q = .021$). The structuring gap narrows by $-.367$ for 1B and $-.277$ for 7B (both $q = .002$): DPO raises structuring on factual answers while advice-side rates are already near ceiling. The 1B referral/disclaimer gap widens by $+.190$ ($q = .002$); the 7B change of $+.083$ is not significant ($q = .203$), and neither empathy-opener change is. After DPO, no gap change at the RLVR stage or in the final Instruct model is significant (all unadjusted $p \geq .168$).

All eight Base-to-SFT changes are positive and six survive correction, but this transition also switches from plain question-answer text to the chat template, so it cannot be attributed to SFT. Every category is already detector-positive at Base.

Against an emotional control, DPO shrinks the empathy gap. The Base/SFT/DPO runs with all five conditions test 24 planned stage-by-control interactions (Appendix G), of which four survive correction at $\tau = .82$. The clearest concerns empathy relative to emotion without a request. The 7B gap increases at the Base→SFT transition ($+0.358$, $q = .016$), and DPO then reduces it at both 1B (-0.467, $q = .001$) and 7B (-0.642, $q = .001$). At 7B, SFT also shifts structuring toward neutral how-to (-0.208, $q = .026$). No validation or referral interaction reaches $q < .05$. Three interactions are significant at $\tau = .80$, four at .82, and five at .84; the two 7B empathy transitions are significant at all three. The widening advice-minus-facts gaps in Table 6 therefore do not all indicate advice-specific change: after DPO, the empathy marker tracks emotional content more than the request for advice.

4.3 RQ3: Phrase preference and response length

The DPO mixtures contain 378,301 preference pairs for 1B and 378,341 for 7B. In both, referral/disclaimer and structuring phrases appear more often in the chosen response than in the rejected one, with matched odds ratios from 1.17 to 1.44 across the three phrase groups (Table 7, marker only).

The raw difference follows the longer response. Only 19.1% (1B) and 18.7% (7B) of pairs have responses within ± 20 words of each other. Where the chosen response is longer by more than 20 words, the structuring odds ratio is 2.36 (1B) and 2.61 (7B); where the rejected response is longer, it is 0.58 and 0.62. Within ± 20 words the broad-referral difference is near zero and the structuring difference is positive but small (Appendix H).

Length terms remove about half of the association. In the paired model with flexible length terms, the broad referral/disclaimer odds ratio falls from 1.18 to 1.09 for 1B and from 1.35 to 1.13 for 7B, and structuring falls from 1.24 to 1.13 and from 1.44 to 1.19. All four intervals still exclude one. For the narrower referral set, which requires an explicit doctor or professional object, both intervals include one.

The two length analyses answer different questions. Within ± 20 words the broad-referral odds ratio is near one, while the spline model leaves 1.09 and 1.13. The band keeps only the fifth of pairs of nearly equal length; the spline model uses every pair and adjusts for a smooth function of both lengths. Read together, most of the raw referral association and part of the structuring association travel with length.

The broad-referral and structuring directions hold when we keep one pair per prompt and when we drop the largest data source. The two mixtures share 21,508 content-identical pairs, so the 1B and 7B results are not independent replications.

Marker output	Model	Personal advice	General facts	Emotion, no request	Neutral how-to	Health facts
empathy opener	1B	0.590	0.040	**0.790**	0.020	0.340
	7B	0.617	0.027	**0.760**	0.070	0.360
validation phr.	1B	0.363	0.007	0.120	0.000	0.040
	7B	0.383	0.013	0.130	0.030	0.060
ref./discl.	1B	0.900	0.080	0.510	0.740	0.820
	7B	0.913	0.060	0.540	0.720	0.820
structuring	1B	1.000	0.580	0.820	**1.000**	0.920
	7B	0.970	0.547	0.830	**1.000**	0.840

Table 4: Mean prompt-level union-detector rate per condition (final models, $\tau = 0.82$, five generations per prompt). Bold marks the cells that contradict an advice-specific reading at $\tau = .82$: the empathy-opener output peaks when emotion appears without a request, and structuring is at ceiling on neutral how-to prompts.

Marker	Model	Emotion, no request	Neutral how-to	Health facts
empathy	1B	$-.200$ (.010)	.570 (.0002)	.250 (.016)
	7B	$-.143$ (.098)	.547 (.0002)	.257 (.031)
validation	1B	.243 (.003)	.363 (.0002)	.323 (.003)
	7B	.253 (.003)	.353 (.0003)	.323 (.004)
referral	1B	.390 (.0002)	.160 (.006)	.080 (.352)
	7B	.373 (.0002)	.193 (.001)	.093 (.159)
structuring	1B	.180 (.0002)	.000 (1.0)	.080 (.018)
	7B	.140 (.004)	$-.030$ (.574)	.130 (.026)

Table 5: Personal advice minus each targeted control, with the prompt-clustered permutation p in parentheses (10k draws). After Benjamini-Hochberg correction across the 24 tests, all validation contrasts keep $q \leq .0082$. A non-significant cell means no detected difference, not equivalence.

Model	Marker	Base→SFT + format	SFT→DPO
1B	empathy opener	$+0.190$ (.004)	$+0.117$ (.121)
1B	validation phrase	$+0.093$ (.137)	$+0.213$ (.002)
1B	referral/disclaimer	$+0.253$ (.002)	$+0.190$ (.002)
1B	structuring	$+0.337$ (.002)	-0.367 (.002)
7B	empathy opener	$+0.263$ (.002)	$+0.070$ (.387)
7B	validation phrase	$+0.103$ (.121)	$+0.147$ (.021)
7B	referral/disclaimer	$+0.243$ (.002)	$+0.083$ (.203)
7B	structuring	$+0.227$ (.002)	-0.277 (.002)

Table 6: Change in the personal-advice-minus-general-facts gap across transitions, with q in parentheses (prompt-clustered permutation tests, 10k draws, Benjamini-Hochberg across all 28 adjacent-stage tests). The Base→SFT column also changes the prompt format. Later transitions have unadjusted $p \geq .168$.

Mix	Phrase group	Marker only	With length terms
1B	referral/discl.	1.18 [1.11, 1.25]	1.09 [1.03, 1.15]
1B	narrower referral	1.17 [1.04, 1.32]	1.10 [0.97, 1.23]
1B	structuring	1.24 [1.22, 1.26]	1.13 [1.11, 1.15]
7B	referral/discl.	1.35 [1.27, 1.43]	1.13 [1.07, 1.21]
7B	narrower referral	1.34 [1.19, 1.50]	1.12 [1.00, 1.26]
7B	structuring	1.44 [1.41, 1.46]	1.19 [1.17, 1.21]

Table 7: RQ3: odds ratio [95% interval] that a phrase group appears in the chosen and not the rejected response of a DPO pair. "Marker only" is the matched odds ratio; "with length terms" is the paired model. One means no association. The 7B narrower-referral lower bound is 0.996.

5 Discussion

What holds under every choice. Validation phrases exceed their strongest targeted control in all twelve specifications and at all three thresholds, and the DPO interaction that shrinks the 7B empathy gap against emotional prompts is significant at all three thresholds. The empathy and structuring conclusions depend on the rule.

Reporting checklist. (1) Report the headline contrast under at least two matching rules (here the rule moves the empathy gap by 47 points). (2) Fix the text window and report the share of answers at the generation cap (96 to 98% of control answers here). (3) Include a control that shares the property most likely to trigger the rule; against general facts every marker looks advice-specific. (4) Report preference associations with and without length terms and within a length-matched band.

6 Conclusion

On identical OLMo-2 responses, the matching rule decides whether empathy and structuring markers look specific to personal advice, and length accounts for about half of the chosen-side advantage of referral and structuring phrases in the DPO data. Marker comparisons should report all three.

7 Limitations

All analyses are observational and do not attribute outputs to training examples. The audit uses LLM-consensus labels, has no human labels, covers 97

responses, has wide per-category intervals, and does not validate response-level prevalence. The component and window analyses cover only final 7B, because raw responses for other checkpoints were not stored. Base and later checkpoints use different prompt formats, which confounds every Base-to-SFT contrast. The targeted controls are not topic-paired to the advice prompts, and twelve pilot prompts were reused. The DPO length bins are post hoc, and the conditional model is exploratory and not preregistered. One model family, two sizes, one decoding configuration, and modest author-written prompt sets support no scaling or cross-family claim.

Ethics Statement

Data and human subjects. We use public corpora and open-weight OLMo-2 checkpoints. We did not recruit participants or collect new human annotations for the analyses reported here. The 140 prompts are author-written hypothetical situations without personal information.

Sensitive domain. Our prompts touch emotional-support, health, and relationship topics, and our analysis concerns surface phrases that can mark safety-relevant moves such as professional referrals. Within the LLM-labeled audit sample, the detector produces many false positives; we also drop `crisis_referral`. Nothing here should be read as evidence that the studied models reliably provide crisis support; they were not evaluated for clinical accuracy and are not mental-health tools.

References

Abeer Badawi, Elahe Rahimi, Md Tahmid Rahman Laskar, Sheri Grach, Lindsay Bertrand, Lames Danok, Prathiba Dhanesh, Jimmy Huang, Frank Rudzicz, and Elham Dolatabadi. 2026. When can we trust LLMs in mental health? large-scale benchmarks for reliable LLM evaluation. In *Proceedings of the 19th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3873–3896. Association for Computational Linguistics.

Andrew M. Bean, Ryan Othniel Kearns, Angelika Romanou, Franziska Sofia Hafner, Harry Mayne, Jan Batzner, Negar Foroutan, Chris Schmitz, Karolina Korgul, Hunar Batra, Oishi Deb, Emma Beharry, Cornelius Emde, Thomas Foster, Anna Gausen, María Grandury, Simeng Han, Valentin Hofmann, Lujain Ibrahim, and 23 others. 2025. Measuring what matters: Construct validity in large language model benchmarks. *Preprint*, arXiv:2511.04703. NeurIPS 2025 Datasets and Benchmarks track.

Stella Biderman, Hailey Schoelkopf, Quentin Gregory Anthony, Herbie Bradley, Kyle O'Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, Usvsn Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar Van Der Wal. 2023. Pythia: A suite for analyzing large language models across training and scaling. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 2397–2430. PMLR.

Nitay Calderon, Roi Reichart, and Rotem Dror. 2025. The alternative annotator test for LLM-as-a-judge: How to statistically justify replacing human annotators with LLMs. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 16051–16081.

Yann Dubois, Balázs Galambosi, Percy Liang, and Tatsunori B. Hashimoto. 2024. Length-controlled AlpacaEval: A simple way to debias automatic evaluators. *Preprint*, arXiv:2404.04475.

Emma S. Gueorguieva, Hongli Zhan, Jina Suh, Javier Hernandez, Tatiana Lau, Junyi Jessy Li, and Desmond C. Ong. 2026. AI generates well-liked but templatic empathic responses. *Preprint*, arXiv:2604.08479.

Haonan Huang and Chengkun Cai. 2026. The development of sycophancy in language models: Tracing vulnerabilities from pretraining to post-training. *Preprint*, arXiv:2610.26655.

Lujain Ibrahim, Franziska Sofia Hafner, and Luc Rocher. 2026. Training language models to be warm can reduce accuracy and increase sycophancy. *Nature*, 652:1159–1165.

Tom S. Juzek and Zina B. Ward. 2025. Why does ChatGPT "delve" so much? exploring the sources of lexical overrepresentation in large language models. In *Proceedings of the 31st International Conference on Computational Linguistics*.

Aakriti Kumar, Nalin Poungpeth, Diyi Yang, Erina Farrell, Bruce L. Lambert, and Matthew Groh. 2026. When large language models are reliable for judging empathic communication. *Nature Machine Intelligence*, 8:173–185.

Allison Lahnala, Charles Welch, David Jurgens, and Lucie Flek. 2022. A critical reflection and forward perspective on empathy and natural language processing. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2139–2158, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.

Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V. Miranda, Alisa Liu, Nouha Dziri,

Shane Lyu, Yuling Gu, Saumya Malik, Victoria Graf, Jena D. Hwang, Jiangjiang Yang, Ronan Le Bras, Oyvind Tafjord, Chris Wilhelm, Luca Soldaini, and 4 others. 2024. Tulu 3: Pushing frontiers in open language model post-training. *Preprint*, arXiv:2411.15124.

Yoon Kyung Lee, Jaehyeong Lee, Seonu An, and Sowon Hahn. 2026. What makes an LLM response read as empathic? a multi-dimensional study of empathic alignment.

Siyang Liu, Chujie Zheng, Orianna Demasi, Sahand Sabour, Yu Li, Zhou Yu, Yong Jiang, and Minlie Huang. 2021. Towards emotional support dialog systems. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3469–3483. Association for Computational Linguistics.

Wei Liu, Yang Bai, Chengcheng Han, Rongxiang Weng, Jun Xu, Xuezhi Cao, Jingang Wang, and Xunliang Cai. 2024. Length desensitization in direct preference optimization. *Preprint*, arXiv:2409.06411.

Seoirse Murray, Allison Qi, Timothy Qian, John Schulman, Collin Burns, and Sara Price. 2026. Chunky post-training: Data driven failures of generalization. *Preprint*, arXiv:2602.05910.

Ryan Park, Rafael Rafailov, Stefano Ermon, and Chelsea Finn. 2024. Disentangling length from quality in direct preference optimization. *Preprint*, arXiv:2403.19159.

Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. 2023. Direct preference optimization: Your language model is secretly a reward model. In *Advances in Neural Information Processing Systems*.

Marco Tulio Ribeiro, Tongshuang Wu, Carlos Guestrin, and Sameer Singh. 2020. Beyond accuracy: Behavioral testing of NLP models with CheckList. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4902–4912. Association for Computational Linguistics.

Pamela D. Rivière, Cameron Jones, and Sean Trott. 2026. Developmental trajectories of situation modeling and mentalizing in transformer language models. *Preprint*, arXiv:2606.28524.

Ashish Sharma, Adam S. Miner, David C. Atkins, and Tim Althoff. 2020. A computational approach to understanding empathy expressed in text-based mental health support. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*.

Wei Shen, Rui Zheng, Wenyu Zhan, Jun Zhao, Shihan Dou, Tao Gui, Qi Zhang, and Xuanjing Huang. 2023. Loose lips sink ships: Mitigating length bias in reinforcement learning from human feedback. In *Findings of the Association for Computational Linguistics: EMNLP 2023*.

Prasann Singhal, Tanya Goyal, Jiacheng Xu, and Greg Durrett. 2023. A long way to go: Investigating length correlations in RLHF. *Preprint*, arXiv:2310.03716.

Sara Steegen, Francis Tuerlinckx, Andrew Gelman, and Wolf Vanpaemel. 2016. Increasing transparency through a multiverse analysis. *Perspectives on Psychological Science*, 11(5):702–712.

Team OLMo, Pete Walsh, Luca Soldaini, Dirk Groeneveld, Kyle Lo, Shane Arora, Akshita Bhagia, Yuling Gu, Shengyi Huang, Matt Jordan, Nathan Lambert, Dustin Schwenk, Oyvind Tafjord, Taira Anderson, David Atkinson, Faeze Brahman, Christopher Clark, Pradeep Dasigi, Nouha Dziri, and 24 others. 2025. 2 OLMo 2 Furious. *Preprint*, arXiv:2501.00656. A shorter version appeared at COLM 2025.

Hanna Wallach, Meera Desai, A. Feder Cooper, Angelina Wang, Chad Atalla, Solon Barocas, Su Lin Blodgett, Alexandra Chouldechova, Emily Corvi, P. Alex Dow, and 1 others. 2025. Position: Evaluating generative AI systems is a social science measurement challenge. In *Proceedings of the 42nd International Conference on Machine Learning*.

Liang Wang, Nan Yang, Xiaolong Huang, Linjun Yang, Rangan Majumder, and Furu Wei. 2024. Multilingual e5 text embeddings: A technical report. *Preprint*, arXiv:2402.05672.

Anuradha Welivita, Fawzia Zeitoun, and Pearl Pu. 2026. Who generates more empathetic responses—humans or LLMs? a comparative evaluation with human and LLM judges. In *Proceedings of the 30th Conference on Computational Natural Language Learning*, pages 358–381. Association for Computational Linguistics.

Jiarui Yao, Shweta Parihar, Nghia Tuan Bui, Guergana K. Savova, and Lijing Wang. 2026. Locating sycophancy across training stages in open language models. *Preprint*, arXiv:2610.37788.

Kaitlyn Zhou, Jena D. Hwang, Xiang Ren, and Maarten Sap. 2024. Relying on the unreliable: The impact of language models' reluctance to express uncertainty. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*.

A Prompts and decoding configuration

All answers use nucleus sampling (temperature 0.7, top-p 0.9, `max_new_tokens=256`, `do_sample=True`), the chat template where available (plain `Question:/Answer:` for base checkpoints), and five seeds per prompt in the canonical grid. The battery: 60 advice, 30 factual, 20 emotion-without-request prompts, 20 neutral how-to prompts, and 10 health-facts prompts; the complete machine-readable list ships as

experiments/prompts_full.json. The Base/SFT/DPO five-condition extension uses four seeds; all balanced extension tests use seeds 0-3 for every condition. Eight advice and four general-facts prompts were reused from the earlier 12-prompt pilot; the other 128 are new to the full battery.

Examples.

- Advice: I've been feeling really anxious lately and can't sleep. Any advice?
- Factual: How does photosynthesis work?
- Emotional non-advice: Describe the common symptoms of loneliness.
- Neutral advice: How should I organize my bookshelf?
- Domain factual: What are common clinical treatments for insomnia?

B Surface-marker lexicon and detector threshold

This section records the four-category detector implemented in experiments/raw_output_robustness.py. An earlier variant also included a crisis category, which is excluded after its audit result. A category fires for an answer if *either* (i) any lexicon phrase occurs as a case-insensitive substring, *or* (ii) any sentence has cosine similarity $\geq \tau$ to a seed exemplar (intfloat/multilingual-e5-small, query:/passage: prefixes), with $\tau = 0.82$ primary. Every sentence is eligible; despite its name, empathy_opener is not restricted to an opening span.

Lexicon (substring match).

- **empathy-opener proxy** (empathy_opener): i'm sorry to hear, i am sorry to hear, i'm really sorry, that sounds really, that sounds very, i can understand, i can imagine, it's understandable, that must be, i'm here for you, i hear you, it sounds like you
- **validation-phrase proxy**: your feelings are valid, it's okay to feel, it is okay to feel, it's normal to feel, it's completely normal, what you're feeling, there's nothing wrong with, it's natural to
- **referral/disclaimer proxy** (disclaimer): consult a, talk to a, speak with a, see a doctor, seek medical, i am not a doctor, i'm not a doctor, i'm not a medical, medical professional, healthcare professional, mental health professional, seek professional, professional help
- **structuring-marker proxy** (structure): here are some, here are a few, consider the following, steps you can take, a few things you can, first,, secondly,

e5 seed exemplars. Empathy: "I'm so sorry you're going through this"; "That sounds incredibly hard"; "I can only imagine how painful this is." Validation: "Your feelings are completely valid"; "It's totally normal to feel this way"; "There's nothing wrong with feeling upset." Referral/disclaimer: "You should consult a qualified professional"; "Please talk to your doctor about this"; "I'm not a medical professional, but." Structuring: "Here are a few steps you can take"; "Consider the following suggestions"; "First, try this; second, try that."

C Threshold sweep

Table 8 reports the exact contrasts at $\tau = 0.80$, 0.82, and 0.84. Structuring is stable: advice and neutral-advice remain within .05 in every cell. Validation exceeds its strongest control in all six cells. Empathy's emotional-minus-advice point estimate changes sign at .84, while referral's advice-minus-domain contrast changes magnitude. The primary $\tau = .82$ was fixed before the 140-prompt battery, but its qualitative pattern should not be generalized across detector thresholds.

D Specification grid

E Final-7B response-level robustness

The file final_7b_answers.jsonl contains all 700 final-7B responses (140 prompts $\times$ five

Model	Contrast	.80	.82	.84
1B	empathy: emot.−adv.	.030	.200	−.107
7B		.030	.143	−.280
1B	validation: adv.−max ctrl.	.030	.243	.107
7B		.047	.253	.170
1B	referral: adv.−domain	−.003	.080	.093
7B		.017	.093	.280
1B	structuring: adv.−neutral	.000	.000	.047
7B		.000	−.030	−.010

Table 8: Threshold robustness of the four targeted-control contrasts. The empathy row is emotional minus advice, so a positive value means the marker is more frequent on the emotional control; the other rows are advice minus control. For structuring, values near zero mean equal rates on personal advice and neutral how-to.

Marker	Rule	64	128	All
empathy	exact	.320*	.323*	.323*
	union .80	.147	−.070	−.033
	union .82	.253*	.063	−.147
	union .84	.340*	.323*	.280*
validation	exact	.103*	.140*	.153*
	union .80	.167*	.040	.047
	union .82	.177*	.210*	.250*
	union .84	.107*	.157*	.170*
referral	exact	.023	.043	.157
	union .80	.320*	.060	.017
	union .82	.113	.117	.090
	union .84	.047	.067	.280*
structuring	exact	.400*	.400*	.390*
	union .80	.000	.000	.000
	union .82	−.033	−.030	−.030
	union .84	.047	.043	−.010

Table 9: Advice minus targeted control for each marker under four matching rules and three text windows, on the 700 final-7B responses. *: two-sided prompt permutation $p < .05$ (10,000 permutations with their own random draws, so p-values differ from the main text in the third decimal; unadjusted). Controls as in Table 2.

seeds). Table 10 shows the opportunity imbalance. "Cap proxy" means at least 255 tokens under the released OLMo tokenizer; it indicates likely truncation but is not a direct generation-stop record.

Condition	n	mean tok.	mean sent.	cap proxy
advice	300	243.8	13.5	.880
factual	150	187.4	7.8	.573
emotional	100	253.5	10.9	.980
neutral how-to	100	254.6	13.8	.970
health facts	50	250.5	10.2	.960

Table 10: Final-7B response length and generation-cap proxy.

Table 2 in the main text recomputes each targeted-control contrast using exact substring matching alone and the exact-or-embedding union, over all stored text and fixed prefix windows. Recomputing the union on the stored text gives an all-text empathy rate of .6133 on advice, compared with .617 in the detector outputs saved at generation time (Table 4). The difference is one positive response among 300. Similar one-response differences give validation .250 versus .253 and referral .090 versus .093, and move the 7B empathy p-value from .098 to .088. We report each source where it is used. The control rate is .7600. The gap's point estimate changes sign at 64 tokens. The all-text and 128-token contrasts remain uncertain, so these are not two established opposite effects. Exact-only matching instead makes structuring look advice-specific relative to neutral how-to; the embedding component removes that contrast.

Among advice responses, union detections include one category in 4.7% of cases, two in 29.0%, three in 40.7%, and four in 25.7%. Pairwise phi correlations range from −.14 to .21; referral/disclaimer appears in 93.0% of validation-positive responses. Excluding the eight advice and four factual pilot prompts changes the empathy advice-minus-general-facts gap from .587 to .542, validation from .367 to .369, referral/disclaimer from .850 to .831, and structuring from .423 to .458.

F Stagewise rates

Table 11 supplies the rates underlying the transition results in Section 4.2. Parentheses contain the advice-minus-general- facts gap. The rates are detector outputs, not human judgments.

G Checkpoint interactions with targeted controls

Table 12 reports every planned interaction in the four-seed Base/SFT/DPO extension. Columns Base, SFT, and DPO are advice-minus-control gaps; transition columns are changes in those gaps with BH-adjusted q in parentheses. The family contains all 24 displayed transition tests.

H DPO phrase and source robustness

Table 13 gives paired risk-difference and matched-odds-ratio intervals. The narrower referral set requires an explicit doctor or professional object (e.g., "talk to your doctor," "consult a healthcare professional," "seek professional help") and excludes broad fragments such as "consult a" and

Model	Stage	Empathy	Validation	Referral/disclaimer	Structuring
1B	Base	.217 (.204)	.073 (.073)	.483 (.430)	.757 (.430)
1B	SFT	.393 (.393)	.167 (.167)	.697 (.684)	.847 (.767)
1B	DPO	.550 (.510)	.380 (.380)	.933 (.873)	1.000 (.400)
1B	RLVR	.567 (.507)	.410 (.410)	.923 (.836)	1.000 (.440)
1B	Instruct	.590 (.550)	.363 (.356)	.900 (.820)	1.000 (.420)
7B	Base	.230 (.230)	.087 (.080)	.577 (.524)	.853 (.486)
7B	SFT	.493 (.493)	.183 (.183)	.767 (.767)	.787 (.714)
7B	DPO	.597 (.564)	.330 (.330)	.923 (.850)	.977 (.437)
7B	Instruct	.617 (.590)	.383 (.370)	.913 (.853)	.970 (.423)

Table 11: Personal-advice detector-positive rate, with the advice-minus-general- facts gap in parentheses ($\tau = 0.82$). Base uses plain QA; later checkpoints use the chat format.

Model	Marker	Control	Base	SFT	DPO	Base→SFT	SFT→DPO
1B	referral	health facts	.188	.308	.167	+.121 (.414)	−.142 (.296)
1B	empathy	emotional	.017	.225	−.242	+.208 (.095)	−.467 (.001)
1B	structuring	neutral how-to	−.013	−.050	.000	−.037 (.653)	+.050 (.475)
1B	validation	health facts	.071	.146	.375	+.075 (.475)	+.229 (.095)
1B	validation	emotional	.021	.121	.225	+.100 (.293)	+.104 (.296)
1B	validation	neutral how-to	.058	.171	.350	+.113 (.189)	+.179 (.059)
7B	referral	health facts	.321	.067	.200	−.254 (.166)	+.133 (.293)
7B	empathy	emotional	.108	.467	−.175	+.358 (.016)	−.642 (.001)
7B	structuring	neutral how-to	.050	−.158	−.025	−.208 (.026)	+.133 (.095)
7B	validation	health facts	.092	.175	.317	+.083 (.475)	+.142 (.296)
7B	validation	emotional	.054	.125	.179	+.071 (.414)	+.054 (.537)
7B	validation	neutral how-to	.092	.163	.292	+.071 (.414)	+.129 (.189)

Table 12: Complete targeted-control checkpoint interactions at $\tau = .82$ (10k prompt-clustered permutations). Four of 24 transition tests have $q < .05$. Only the 7B empathy Base→SFT and SFT→DPO effects retain $q < .05$ at all three detector thresholds.

"talk to a." Its semantic precision has not been human-validated. Intervals use the discordant-pair normal approximation for the risk difference and log-MOR; the accompanying scripts also report exact McNemar p-values.

Table 14 stratifies pairs by their length difference. The near-antisymmetric signs in the longer-response strata show that the aggregate chosen-side effect is strongly associated with relative response length. The comparable-length band is descriptive and post hoc; it is not a substitute for the conditional model in Table 7.

In the aggregate analysis, broad-referral differences are positive in eight of nine 1B sources (one tie) and all nine 7B sources; narrower-referral differences are positive in six and seven sources. After flexible length conditioning, adjusted ORs exceed one in eight of nine sources for broad referral and structuring at both sizes, and six of nine for the narrower set. Their ranges are broad referral .919 to 1.294 (1B) and .988 to 1.584 (7B), narrower referral .600 to 1.537 and .636 to 2.242, and structuring .718 to 1.213 and .718 to 1.324. Source intervals can be wide, so these are heterogeneity descriptions rather than source-level discoveries. The 19,890 7B rows with missing source labels are retained as the null-source stratum.

There are 367,082 distinct 1B prompt texts and 367,110 distinct 7B prompt texts; 21,551 1B rows and 21,574 7B rows belong to duplicated groups, with maximum multiplicity 15. Prompt-cluster covariance and one-pair-per-prompt estimates address this exact-text dependence. A separate content hash finds 21,508 distinct pairs shared across mixtures (21,515 multiplicity-matched rows), limiting independent-replication language.

I Response-cluster audit uncertainty

The 120 audit sentences come from 97 seed-0 responses. The artifact records the adjudicator's model identifier and run metadata; exact build identifiers of the first-pass annotator were not retained. To preserve dependence among sentences from the same response, we assign Dirichlet(1) weights to response keys in a 10,000-draw Bayesian bootstrap and recompute each metric. Table 15 reports percentile intervals. These intervals quantify sampling

Mixture	Phrase group	Δ pp [95% CI]	MOR [95% CI]	Chosen only	Rejected only
1B	referral/disclaimer	.100 [.065,.135]	1.181 [1.114,1.252]	2478	2098
1B	narrower referral	.023 [.006,.040]	1.170 [1.039,1.318]	591	505
1B	structuring	1.393 [1.278,1.507]	1.242 [1.220,1.264]	27047	21779
7B	referral/disclaimer	.179 [.144,.214]	1.352 [1.274,1.434]	2602	1925
7B	narrower referral	.043 [.026,.061]	1.335 [1.187,1.502]	649	486
7B	structuring	2.280 [2.167,2.394]	1.435 [1.409,1.461]	28466	19838

Table 13: DPO paired absolute and relative effects. Positive Δ means more chosen-only than rejected-only matches.

Mixture	Word-difference band	n	Referral		Narrower referral		Structuring	
			Δ pp	MOR	Δ pp	MOR	Δ pp	MOR
1B	chosen longer > 20	171170	+.470	1.991	+.059	1.408	+5.979	2.361
1B	rejected longer > 20	134707	−.310	.616	−.020	.871	−3.786	.579
1B	within ± 20	72424	−.010	.965	+.017	1.238	+.184	1.062
7B	chosen longer > 20	187201	+.502	2.172	+.098	1.761	+6.562	2.610
7B	rejected longer > 20	120381	−.223	.706	−.015	.905	−3.239	.619
7B	within ± 20	70759	+.009	1.028	−.003	.966	+.343	1.123

Table 14: DPO effects stratified by chosen-minus-rejected response length. Positive Δ means more chosen-only matches.

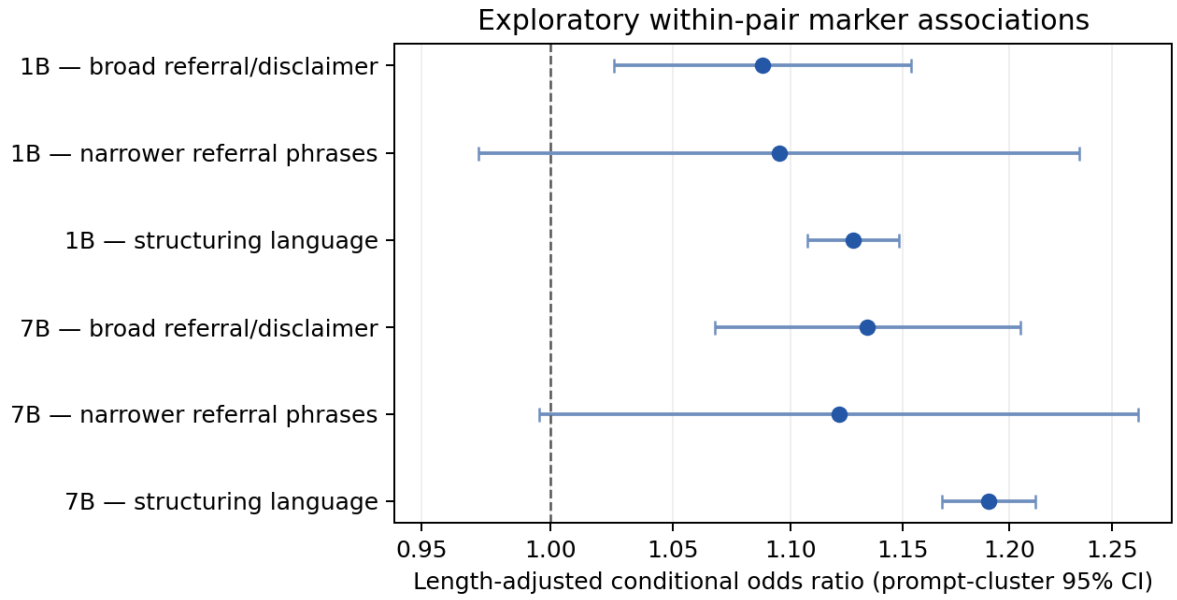


Figure 2: Paired conditional marker associations in the 1B/7B DPO training mixtures after flexible response-length modeling. Bars are 95% prompt-cluster sandwich intervals. OR $= 1$ denotes no modeled marker-choice association, not a zero change in preference probability.

uncertainty around the LLM-consensus labels.

J Statistical formulas

Primary inference uses two-sided prompt-clustered permutation tests on prompt-level means (10,000 draws), with Monte Carlo $p = (b + 1)/(B + 1)$. With $B = 10{,}000$, zero exceedances yield the minimum $p = 1/10{,}001 \approx 9.999 \times 10^{-5}$, not zero. The distinct-phrase leave-one-out removes the most frequent 3-word phrase before recomputing the mean seeded-marker per-million. DPO comparisons use exact McNemar tests on chosen-only versus rejected-only pairs, Haldane-Anscombe matched odds ratios with log-scale intervals, paired risk differences with normal-approximation intervals, and phrase occurrences per million whitespace-delimited response words. The exploratory conditional fits use the no-intercept paired likelihood

Category	Precision 95%	Recall 95%	F1 95%
empathy expression	[.04,.46]	[.10,.90]	[.05,.57]
validation	[.02,.84]	[.03,.98]	[.02,.83]
referral	[.00,.22]	[1.00,1.00]	[.00,.36]
structuring	[.35,.63]	[.74,.96]	[.49,.74]

Table 15: Bayesian response-cluster bootstrap intervals for the 120-sentence LLM-consensus audit. Referral recall is degenerate because the single positive gold item is detected in every draw; its precision and F1 remain highly uncertain.

in Section 3.6, a five-knot restricted cubic spline of each side's log word count, and prompt-cluster sandwich covariance multiplied by $G/(G-1)\,(n-1)/(n-k)$. All aggregate and length-band counts were reproduced before fitting. A separate natural-spline implementation reproduced all six marker coefficients within 7.6×10^{-7} and their standard errors within 3.2×10^{-9}. The accompanying scripts derive all statistics from the artifact.

Files. Stagewise, condition, and corpus numbers derive from `summary_v3.json`; audit numbers, both annotation passes, consensus labels, and adjudication reasons are in `ai_consensus_validation_v3.json`. Paired DPO features and conditional estimates are under `output/revision/dpo_conditional/`. The detector-component contrasts are produced by `experiments/window_component_reanalysis_20261109.py`, with estimates and input hashes in `output/review_2026-11-09/component_reanalysis/paired_measurement_contrasts.json`. Figure 1 is produced by `experiments/make_main_figure.py`.