

Class16 Extra Credit

Matthew

3/2/2023

```
library(tximport)
```

```
folders <- dir(pattern="SRR21568*")
samples <- sub("_quant", "", folders)
files <- file.path( folders, "abundance.h5" )
names(files) <- samples

txi.kallisto <- tximport(files, type = "kallisto", txOut = TRUE)
```

```
## 1 2 3 4
```

```
head(txi.kallisto$counts)
```

```
##           SRR2156848 SRR2156849 SRR2156850 SRR2156851
## ENST00000539570      0           0    0.00000      0
## ENST00000576455      0           0    2.62037      0
## ENST00000510508      0           0    0.00000      0
## ENST00000474471      0           1    1.00000      0
## ENST00000381700      0           0    0.00000      0
## ENST00000445946      0           0    0.00000      0
```

```
colSums(txi.kallisto$counts)
```

```
## SRR2156848 SRR2156849 SRR2156850 SRR2156851
##   2563611   2600800   2372309   2111474
```

```
sum(rowSums(txi.kallisto$counts)>0)
```

```
## [1] 94561
```

```
to.keep <- rowSums(txi.kallisto$counts) > 0
kset.nonzero <- txi.kallisto$counts[to.keep,]
```

```
keep2 <- apply(kset.nonzero,1,sd)>0
x <- kset.nonzero[keep2,]
```


```
pca <- prcomp(t(x), scale=TRUE)
```

```
summary(pca)
```

```
## Importance of components:
```

```
##           PC1      PC2      PC3  PC4
## Standard deviation 183.6379 177.3605 171.3020 1e+00
## Proportion of Variance 0.3568 0.3328 0.3104 1e-05
## Cumulative Proportion 0.3568 0.6895 1.0000 1e+00
```

```
plot(pca$x[,1], pca$x[,2],
     col=c("blue", "blue", "red", "red"),
     xlab="PC1", ylab="PC2", pch=16)
```

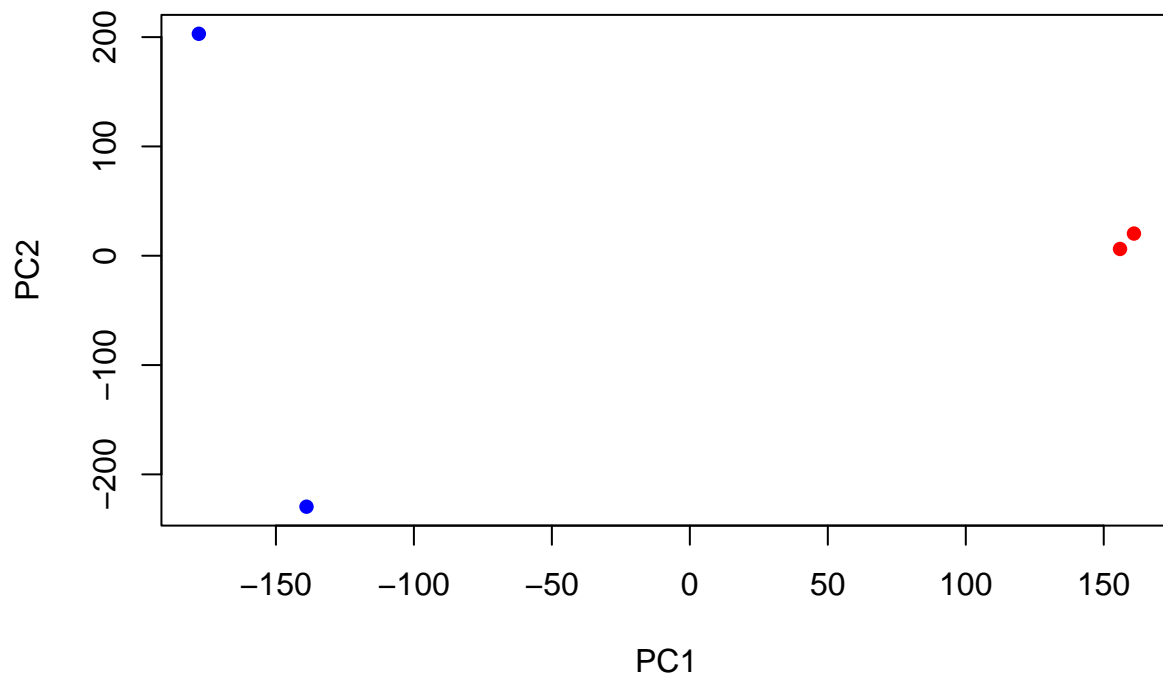

```
library(ggplot2)
```

```
library(ggrepel)
```


```
# Make metadata object for the samples
```

```
colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)
```

```
# Make the data.frame for ggplot
```

```
y <- as.data.frame(pca$x)
y$Condition <- as.factor(colData$condition)
```

```
ggplot(y) +
  aes(PC1, PC2, col=Condition) +
  geom_point() +
  geom_text_repel(label=rownames(y)) +
  theme_bw()
```

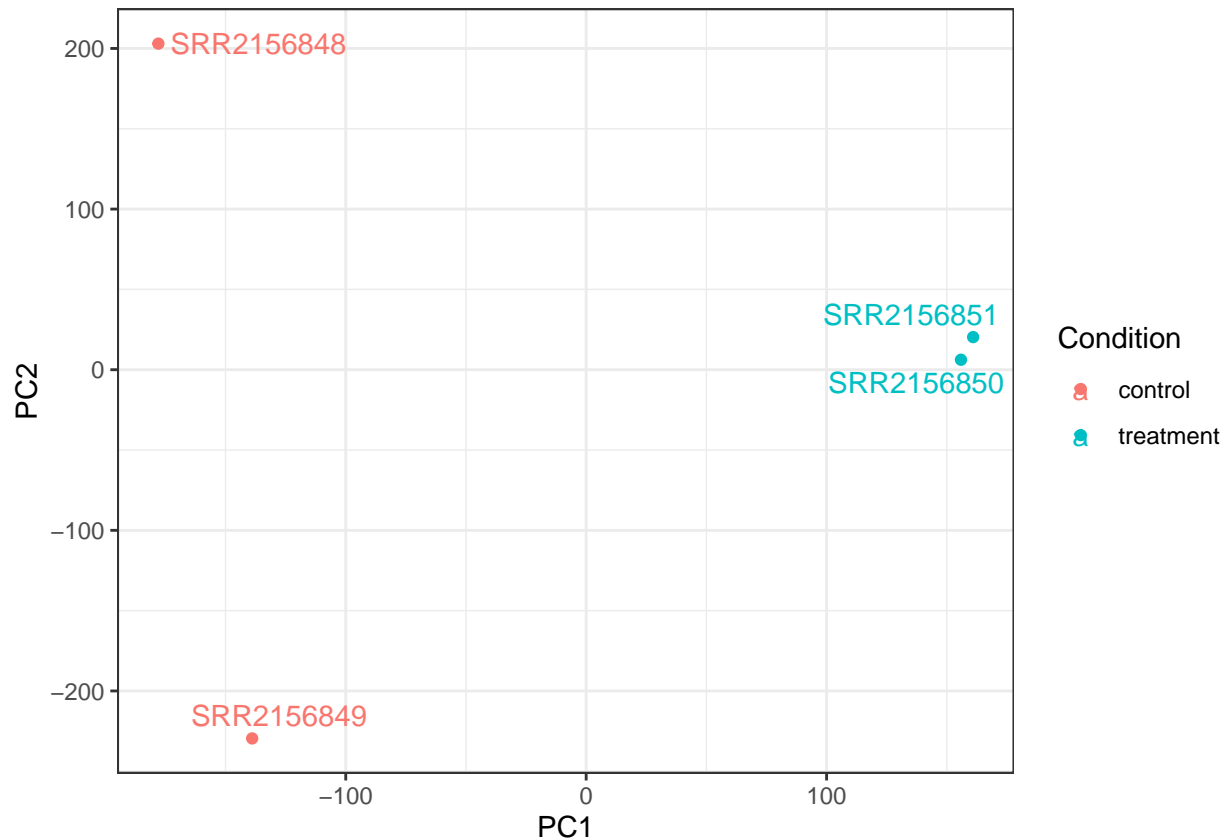

Q. Use ggplot to make a similar figure of PC1 vs PC2 and a separate figure PC1 vs PC3 and PC2 vs PC3.

```
library(ggplot2)
library(ggrepel)

# Make metadata object for the samples
colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)


# Make the data.frame for ggplot
y <- as.data.frame(pca$x)
y$Condition <- as.factor(colData$condition)

ggplot(y) +
```

```

aes(PC1, PC3, col=Condition) +
geom_point() +
geom_text_repel(label=rownames(y)) +
theme_bw()

```

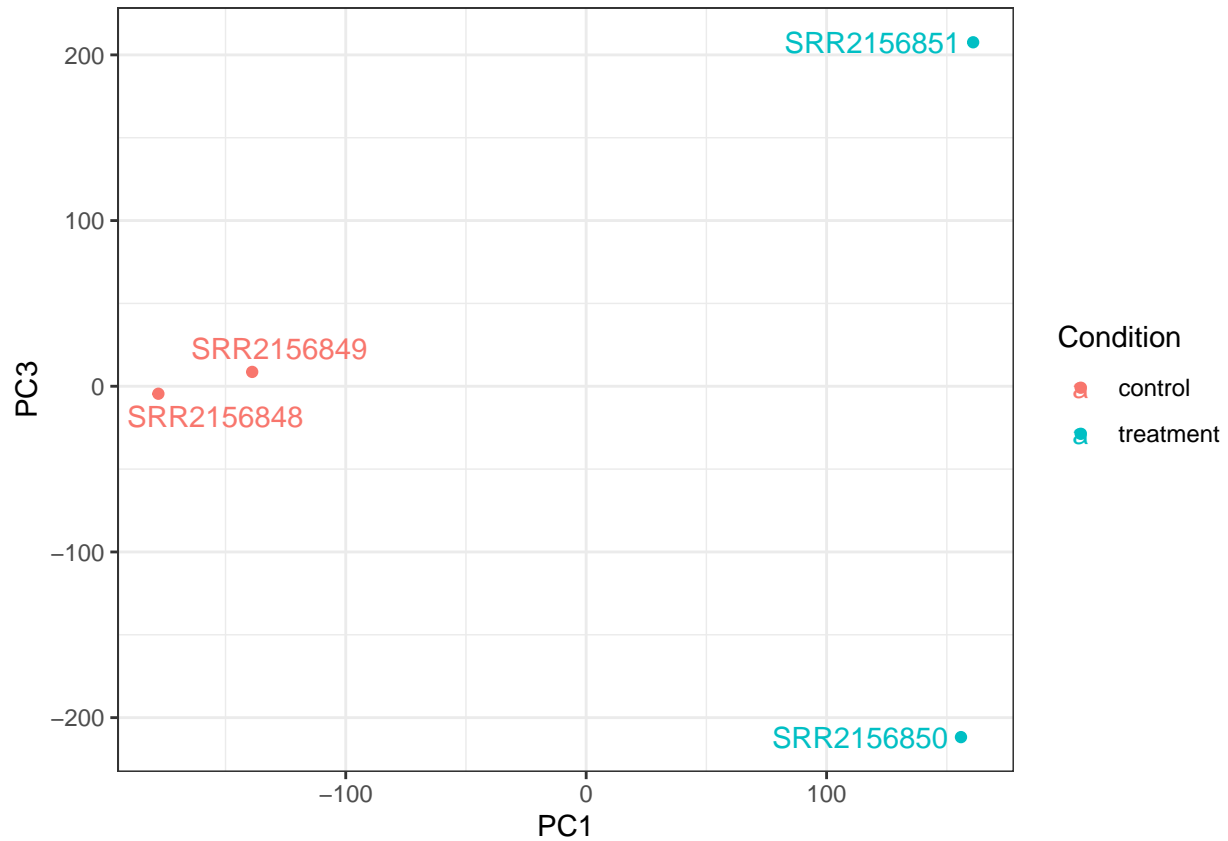

```


library(ggplot2)
library(ggrepel)

# Make metadata object for the samples
colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)


# Make the data.frame for ggplot
y <- as.data.frame(pca$x)
y$Condition <- as.factor(colData$condition)

ggplot(y) +
  aes(PC2, PC3, col=Condition) +
  geom_point() +
  geom_text_repel(label=rownames(y)) +
  theme_bw()

```

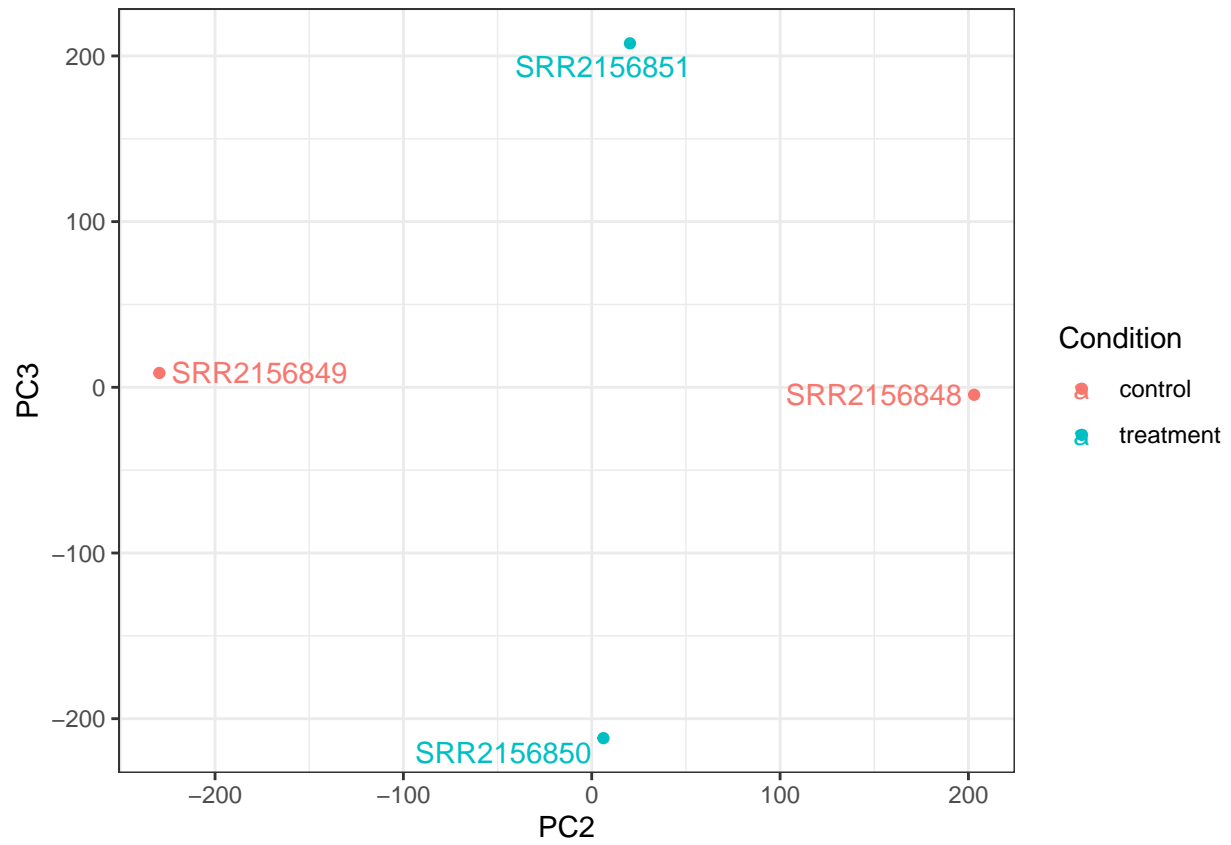

```
plot(pca$x[,1], pca$x[,3],  
     col=c("blue", "blue", "red", "red"),  
     xlab="PC1", ylab="PC3", pch=16)
```

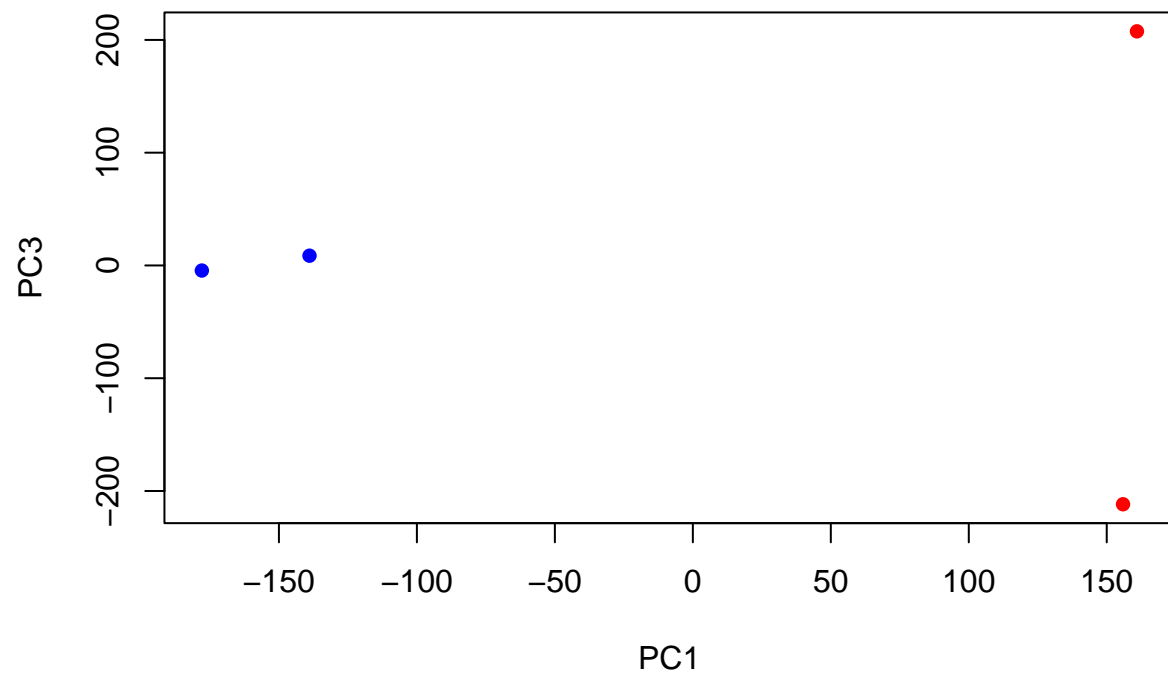

```
plot(pca$x[,2], pca$x[,3],  
     col=c("blue", "blue", "red", "red"),  
     xlab="PC2", ylab="PC3", pch=16)
```

