


Practical-13: Advanced Programs Using File Handling

1) Append one file at the end of other. (A)

Program :-

```
#include <stdio.h>
void main(){
    FILE *fp1,*fp2;
    char ch;
    fp1 = fopen("Demo.txt","r");
    fp2 = fopen("Temp.txt","a");
    do{
        ch = getc(fp1);
        putc(ch,fp2);
    }while(ch != EOF);
    fclose(fp1);
    fclose(fp2);
    printf("File Appended Successfully.");
}
```

Output :-




```
File Appended Successfully.
-----
```

2) Copy one file to another file.(A)

Program :-

```
#include <stdio.h>
void main(){
    FILE *fp1,*fp2;
    char ch;
    fp1 = fopen("Demo.txt","r");
    fp2 = fopen("DemoCopy.txt","w");
    do{
        ch = getc(fp1);
        putc(ch,fp2);
    }while(ch != EOF);
    fclose(fp1);
    fclose(fp2);
    printf("File copied successfully...");
}
```

Output :-

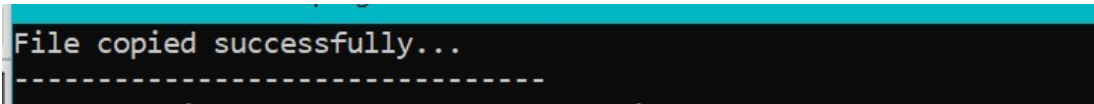

```
File copied successfully...
-----
```

3) Merge alternate lines from two files.(B)

Program :-

```
#include <stdio.h>
void main() {
    FILE *file1, *file2, *output;
    int ch;
    int newline_count;

    // Open the files
    file1 = fopen("file1.txt", "r");
    file2 = fopen("file2.txt", "r");
    output = fopen("output.txt", "w");

    // Alternate between file1 and file2
    do {
        newline_count = 0;

        // Read one line from file1
        do {
            ch = getc(file1);
            if (ch == '\n') {
                newline_count++;
                break;
            }
        } while(ch != EOF);
        putc(ch, output);
        putc('\n', output);

        // Read one line from file2
        do {
            ch = getc(file2);
            if (ch == '\n') {
                newline_count++;
                break;
            }
        } while(ch != EOF);
        putc(ch, output);
        putc('\n', output);
    }while(ch != EOF);

    // Close the files
    fclose(file1);
    fclose(file2);
    fclose(output);

    printf("Files merged successfully into output.txt\n");
}
```

Output :-

```
Files merged successfully into output.txt
```

4) Delete all blank lines in a file then insert a blank line after the third line in a file.(C)

Program :-

```
#include <stdio.h>
```

```
void main() {
```

```
    FILE *input, *temp;
```

```
    int ch;
```

```
    int line_count = 0, is_blank = 0;
```

```
    input = fopen("input.txt", "r");
```

```
    temp = fopen("temp.txt", "w");
```

```
    do {
```

```
        is_blank = 1; // Assume the line is blank initially
```

```
        // Read and process characters for the current line
```

```
        do {
```

```
            ch = getc(input);
```

```
            if (ch == EOF) {
```

```
                break; // End of file, exit loop
```

```
            }
```

```
            if (ch != '\n' && ch != ' ' && ch != '\t') {
```

```
                is_blank = 0; // Found a non-whitespace character
```

```
            }
```

```
            if (!is_blank) {
```

```
                putc(ch, temp); // Write non-blank content to temp
```

```
            }
```

```
        } while (ch != '\n' && ch != EOF);
```

```
        // Write the newline if the line was not blank
```

```
        if (!is_blank && ch == '\n') {
```

```
            putc('\n', temp);
```

```
            line_count++;
```

```
        }
```

```
        // Insert a blank line after the third line
```

```
        if (line_count == 3) {
```

```
            putc('\n', temp);
```

```
            line_count++; // Increment to prevent adding multiple blank lines
```

```
        }
```

```
    } while (ch != EOF);
```




Subject : 2304CS201– C Programming - II

Faculty: Prof. Ashok G. Badresiya

```
// Close the files
fclose(input);
fclose(temp);

printf("File processed successfully.\n");
}
```

Output :-

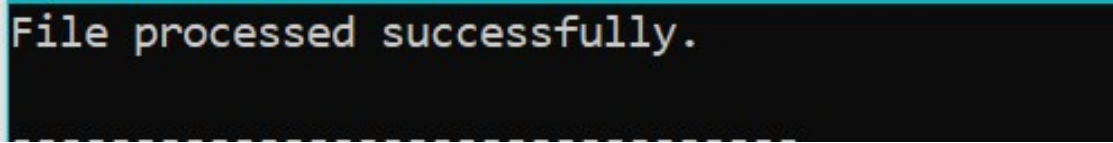

```
File processed successfully.
```