


Integration sensitivity | conclusions that do not depend on the correction

A Reporter time course — identical under both



B Rod paralog ratios after correction (bars per subcluster; an inversion needs pairs to cross 1.0 in opposite directions)

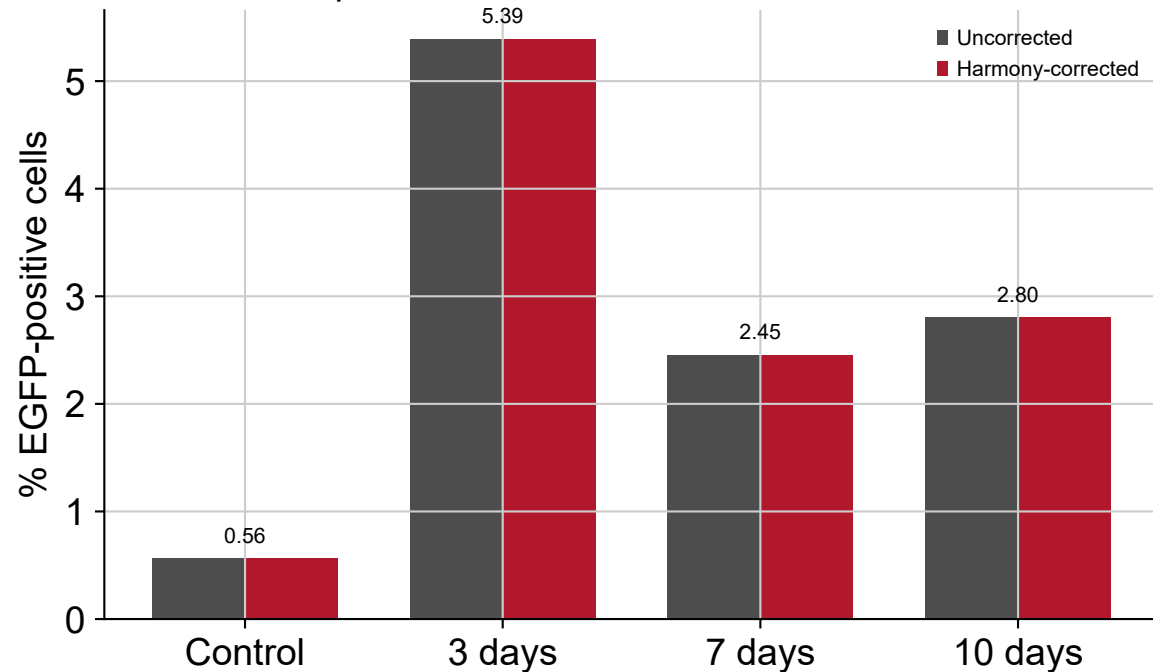