

SourceKit Comprehensive Workflow Guide

Full sourcing workflow + complete API functionality map with live product screenshots

What This Guide Covers

End-to-end recruiter workflow from role brief to persistent Webset pipeline, plus all major API integrations and their exact responsibilities.

App <https://getsourcekit.vercel.app>

Provider Stack



Edge Function To Provider Matrix

SourceKit routes provider integrations through Supabase Edge Functions to keep API keys server-side.

Edge Function	Primary Responsibility	External APIs Used
research-role	Role/JD -> strategy JSON	Anthropic + Harmonic
github-search	Primary ranked search pipeline	GitHub + Exa + Anthropic
search-candidates	Blended discovery endpoint	Exa + Parallel
find-similar-candidates	Lateral candidate expansion	Exa findSimilar
exa-websets	Webset CRUD + monitors + items	Exa Websets + Supabase mappings
import-candidates	Bulk candidate URL import	Exa Webset imports
webset-webhook	Webhook event ingestion	Exa webset events -> Supabase
parse-jd	JD text extraction	Parallel extract (+ HTML fallback)
company-intel	Poach-company intelligence	Parallel Task API
map-company-talent	Engineer map for a target company	Parallel FindAll API
github-profile	Candidate profile detail API	GitHub API
enrich-linkedin	LinkedIn URL enrichment	Exa + Anthropic
generate-outreach	Recruiter outreach drafts	Anthropic
harmonic-search	Company graph search	Harmonic
harmonic-enrich	Company/person enrichment	Harmonic + Supabase cache

Capture Targets, Areas, and Output Paths

This guide uses a stable screenshot library so the walkthrough can be refreshed without reworking the layout. Each step below maps the exact screen to frame, the UI area to emphasize, and the saved output asset path.

Step	Target	Area To Frame	Output Asset
Step 1 Open SourceKit and sign in	Chrome window with the SourceKit authentication screen in view.	The SourceKit logo, sign-in form, and primary CTA with no extra desktop chrome.	<code>../output/guide-screenshots/workflow/step-01-sign-in.png</code>
Step 2 Start in New Search	New Search workspace immediately after opening the recruiter dashboard.	Left navigation plus the Research & Strategy inputs and quick templates.	<code>../output/guide-screenshots/workflow/step-02-new-search.png</code>
Step 3 Build sourcing strategy	Research & Strategy screen while the strategy builder is actively running.	Progress module, role context, and emerging target-repo / target-company logic.	<code>../output/guide-screenshots/workflow/step-03-build-strategy.png</code>
Step 4 Write a target-company and target-repo query	Results tab with the search bar populated from strategy output.	Query text, visible repo/company anchors, and top of the ranked result list.	<code>../output/guide-screenshots/workflow/step-04-query-composition.png</code>
Step 5 Launch search and monitor progress	Results screen during a live search run.	Progress timeline, loading cards, and status labels that show the pipeline advancing.	<code>../output/guide-screenshots/workflow/step-05-search-progress.png</code>
Step 6 Review ranked results	Completed results view with candidate cards loaded.	Score badges, evidence snippets, and enough of the list to show ranking quality.	<code>../output/guide-screenshots/workflow/step-06-ranked-results.png</code>
Step 7 Handle no-results and broaden safely	Results state that demonstrates how a narrow query can be broadened safely.	Query guidance, broadened targeting, and the part of the list or hint state that shows recovery.	<code>../output/guide-screenshots/workflow/step-07-broaden-search.png</code>
Step 8 Drill into candidate profile	Candidate profile side panel opened from a completed search.	EEA signals, notable work, company context, and recruiter action controls in one frame.	<code>../output/guide-screenshots/workflow/step-08-candidate-profile.png</code>
Step 9	Websets builder with a fully populated criteria	Criteria text, enrichment selections, and the	<code>../output/guide-screenshots/workflow/step-09-</code>

Step	Target	Area To Frame	Output Asset
Create Webset from strategy criteria	form.	reusable sourcing definition layout.	webset-criteria.png
Step 10 Submit Webset and track completion	Immediate post-submit Webset state after clicking Create Webset.	Submission feedback, visible status, and any success or failure notification.	../output/guide-screenshots/workflow/step-10-webset-status.png
Step 11 Navigate to completed run results	History tab with completed SourceKit runs listed.	Run names, timestamps, result counts, and the action affordance to reopen a run.	../output/guide-screenshots/workflow/step-11-history.png
Step 12 Export and move candidates into pipeline	Results screen with Export menu or pipeline action controls visible.	Export menu, handoff options, and the shortlist context surrounding the action.	../output/guide-screenshots/workflow/step-12-export.png

Step 1

Open SourceKit and sign in

Do this: Go to getsourcekit.vercel.app and sign in with email or Google using your approved account.

You should see: You should see the current SourceKit auth screen, then land in the recruiter workspace.

SCREENSHOT TARGET

Chrome window with the SourceKit authentication screen in view.

AREA TO FRAME

The SourceKit logo, sign-in form, and primary CTA with no extra desktop chrome.

OUTPUT PATH

../output/guide-screenshots/workflow/step-01-sign-in.png



Example view with current SourceKit branding.

APIs Active In This Step

- Supabase Auth (session + JWT)
- No provider search APIs yet

Best Practice

Use one consistent account so saved history and websets are retained.

Step 2

Start in New Search

Do this: Open New Search and set role/company context (example: Staff ML Engineer at Anthropic).

You should see: Role and company fields become the base input for strategy generation.

SCREENSHOT TARGET


New Search workspace immediately after opening the recruiter dashboard.

AREA TO FRAME

Left navigation plus the Research & Strategy inputs and quick templates.

OUTPUT PATH

../output/guide-screenshots/workflow/step-02-new-search.png

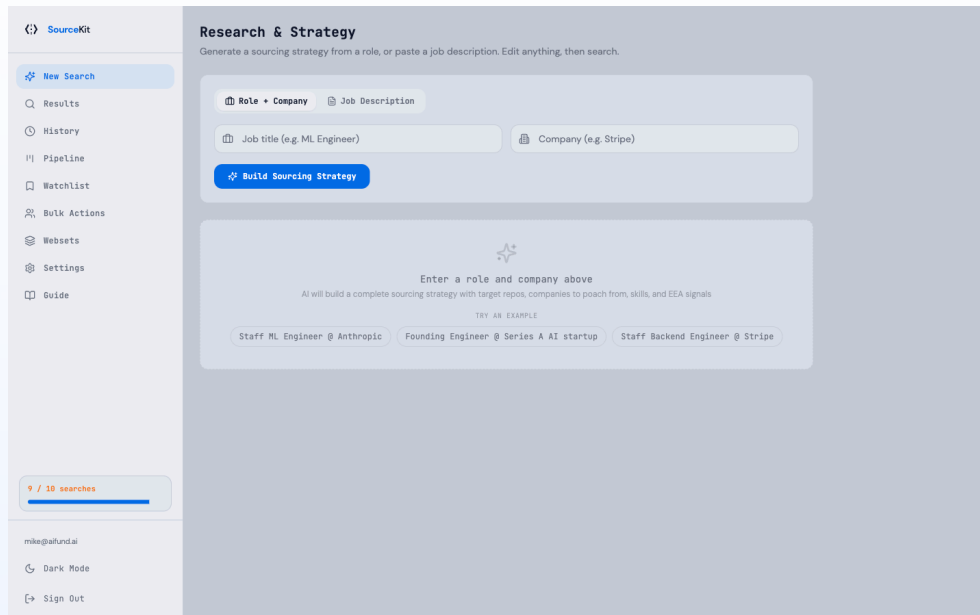

Live application screenshot.

APIs Active In This Step

- Front-end state only
- No external provider call until strategy is launched

Best Practice

Role specificity strongly improves repo targeting and candidate quality.

Step 3

Build sourcing strategy

Do this: Click Build Sourcing Strategy to generate search query, target repos, target companies, and EEA signals.

You should see: You should see strategy progress states and role-specific sourcing logic.

SCREENSHOT TARGET


Research & Strategy screen while the strategy builder is actively running.

AREA TO FRAME

Progress module, role context, and emerging target-repo / target-company logic.

OUTPUT PATH

../output/guide-screenshots/workflow/step-03-build-strategy.png

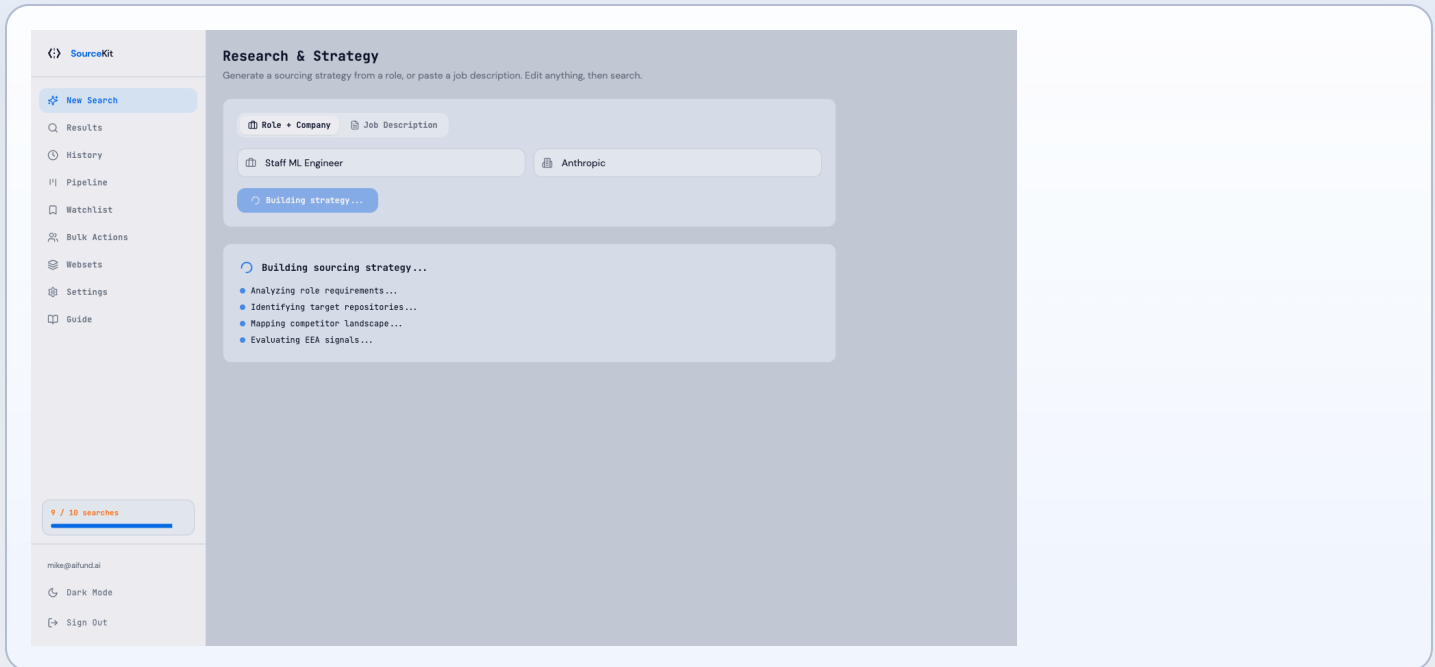

Live application screenshot.

APIs Active In This Step

- Edge function: research-role
- Anthropic Messages API (tool call for structured strategy)
- Harmonic Companies + Similar Companies APIs for enrichment/expansion

Best Practice

This is where target companies and target repos are formed; review before searching.

Step 4

Write a target-company and target-repo query

Do this: In Results, use strategy output to compose a query that names target companies and repo ecosystems.

You should see: Your query is visible in the search bar with immediate context on the ranked slate.

SCREENSHOT TARGET


Results tab with the search bar populated from strategy output.

AREA TO FRAME

Query text, visible repo/company anchors, and top of the ranked result list.

OUTPUT PATH

../output/guide-screenshots/workflow/step-04-query-composition.png

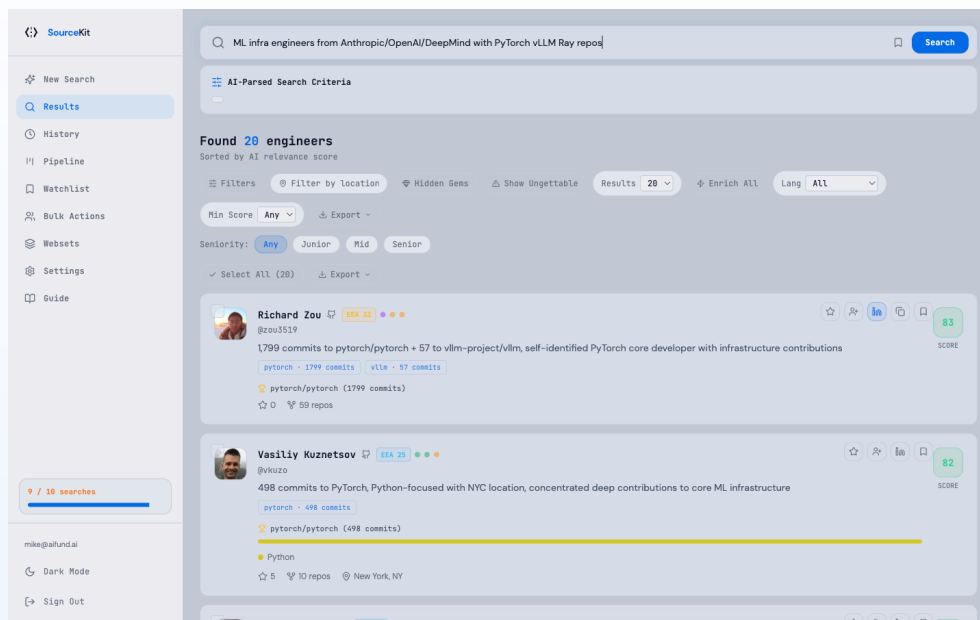

Live application screenshot.

APIs Active In This Step

- Edge function: github-search (or search-candidates flow depending entry point)
- GitHub API and Exa Search API are primed by query intent

Best Practice

Best practice: use fewer company names plus stronger repo signals to avoid over-constraining.

Step 5

Launch search and monitor progress

Do this: Click Search and wait for parsing, retrieval, enrichment, and scoring to complete.

You should see: You should see real-time progress lines and loading cards.

SCREENSHOT TARGET


Results screen during a live search run.

AREA TO FRAME

Progress timeline, loading cards, and status labels that show the pipeline advancing.

OUTPUT PATH

../output/guide-screenshots/workflow/step-05-search-progress.png

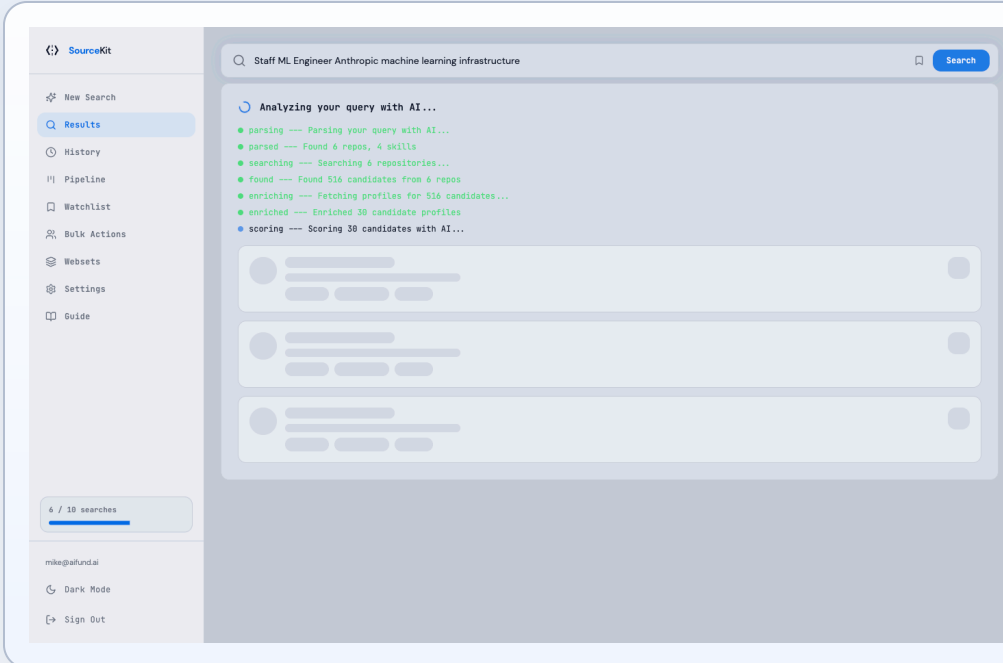

Live application screenshot.

APIs Active In This Step

- GitHub API (contributors/users/repos/events)
- Exa Search API (semantic candidate assist)
- Anthropic Messages API (query parsing + scoring summaries)

Best Practice

Do not tune filters mid-run; let ranking finish first.

Step 6

Review ranked results

Do this: Open the completed run and inspect score, evidence snippets, and repo contribution depth.

You should see: You should see a ranked list with candidate cards and quick actions.

SCREENSHOT TARGET


Completed results view with candidate cards loaded.

AREA TO FRAME

Score badges, evidence snippets, and enough of the list to show ranking quality.

OUTPUT PATH

../output/guide-screenshots/workflow/step-06-ranked-results.png

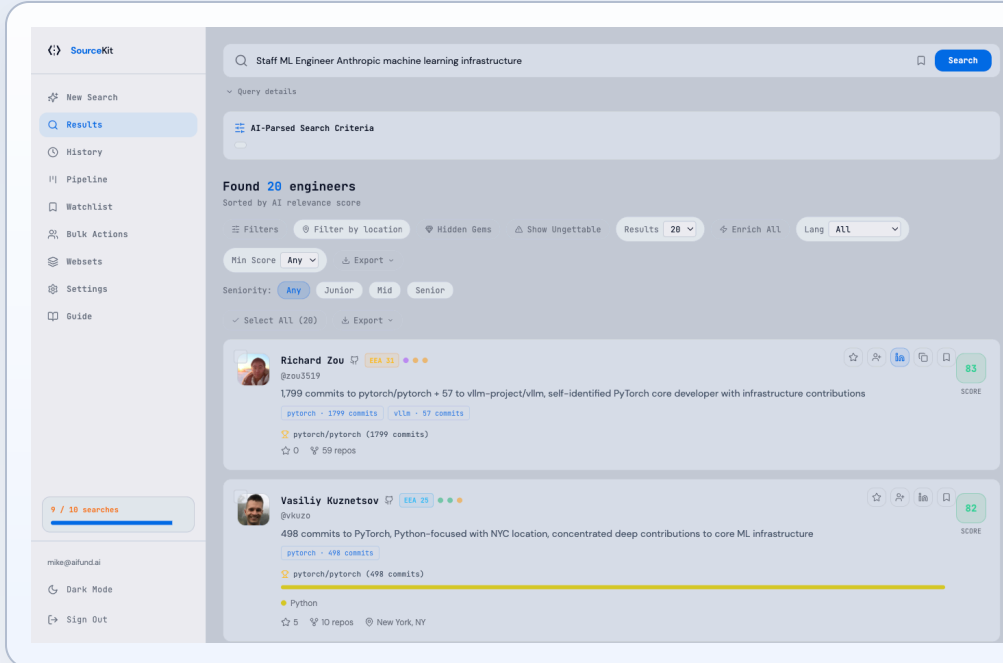

Live application screenshot.

APIs Active In This Step

- Supabase candidate cache + query-scoped scoring persistence
- No new upstream call needed when loading cached completed runs

Best Practice

Score is evidence strength from public artifacts, not final interview recommendation.

Step 7

Handle no-results and broaden safely

Do this: If no engineers found, reduce strict company constraints and retain technical repo anchors.

You should see: You should see guidance hints and can rerun with broader criteria.

SCREENSHOT TARGET


Results state that demonstrates how a narrow query can be broadened safely.

AREA TO FRAME

Query guidance, broadened targeting, and the part of the list or hint state that shows recovery.

OUTPUT PATH

../output/guide-screenshots/workflow/step-07-broaden-search.png

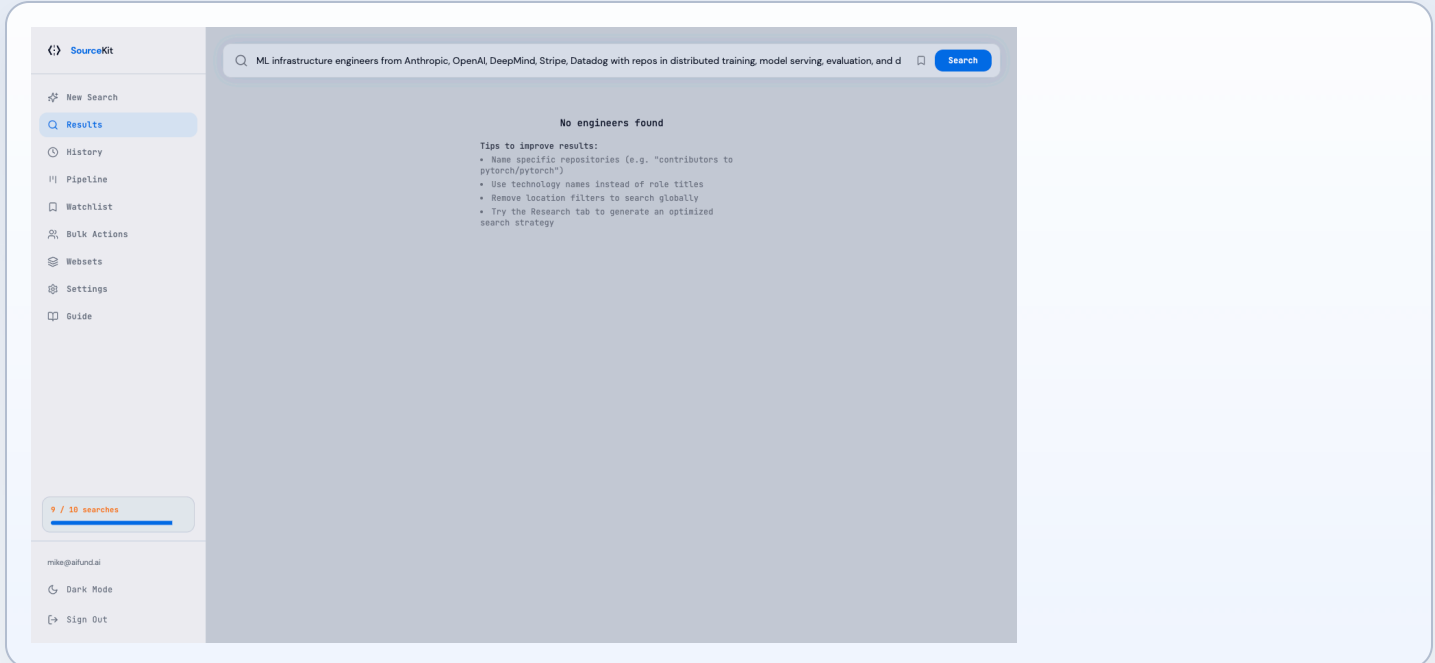

Live application screenshot.

APIs Active In This Step

- Same search pipeline with adjusted query
- No-results guidance from SourceKit result layer

Best Practice

Broaden company scope first. Keep high-signal repo and technology constraints.

Step 8

Drill into candidate profile

Do this: Click a candidate to open profile details, EEA indicators, notable work, and outreach tools.

You should see: A side panel shows summary evidence and action controls.

SCREENSHOT TARGET


Candidate profile side panel opened from a completed search.

AREA TO FRAME

EEA signals, notable work, company context, and recruiter action controls in one frame.

OUTPUT PATH

../output/guide-screenshots/workflow/step-08-candidate-profile.png

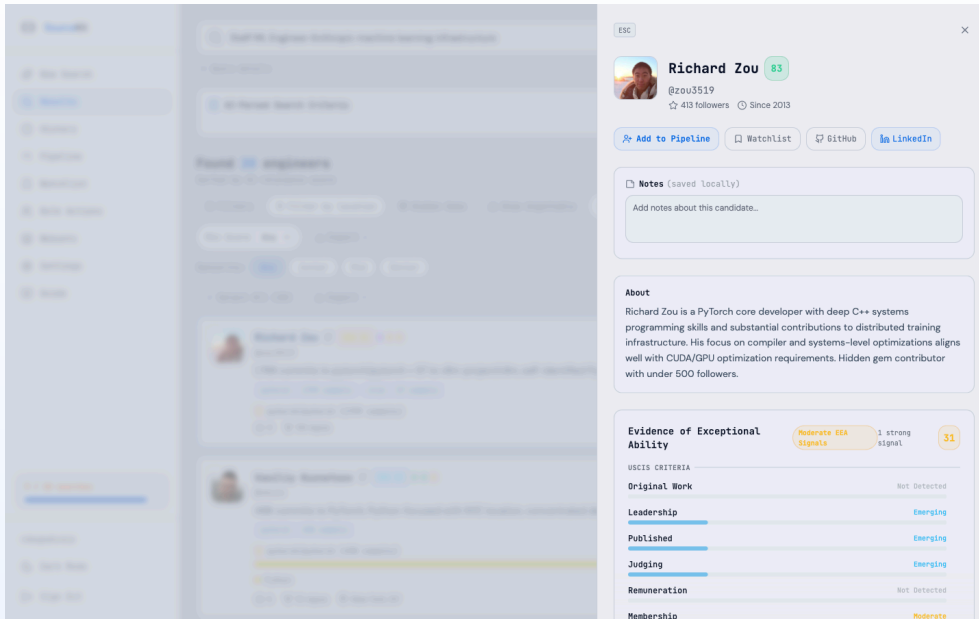

Live application screenshot.

APIs Active In This Step

- GitHub profile data from cached/enriched candidate records
- Anthropic Messages API for generated outreach when requested
- Optional Exa + Anthropic via enrich-linkedin flow

Best Practice

Use cited repo evidence in outreach for higher response quality.

Step 9

Create Webset from strategy criteria

Do this: Open Websets and convert strategy logic into persistent criteria and enrichment fields.

You should see: A Webset definition captures query + criteria + enrichments for recurring monitoring.

SCREENSHOT TARGET


Websets builder with a fully populated criteria form.

AREA TO FRAME

Criteria text, enrichment selections, and the reusable sourcing definition layout.

OUTPUT PATH

../output/guide-screenshots/workflow/step-09-webset-criteria.png

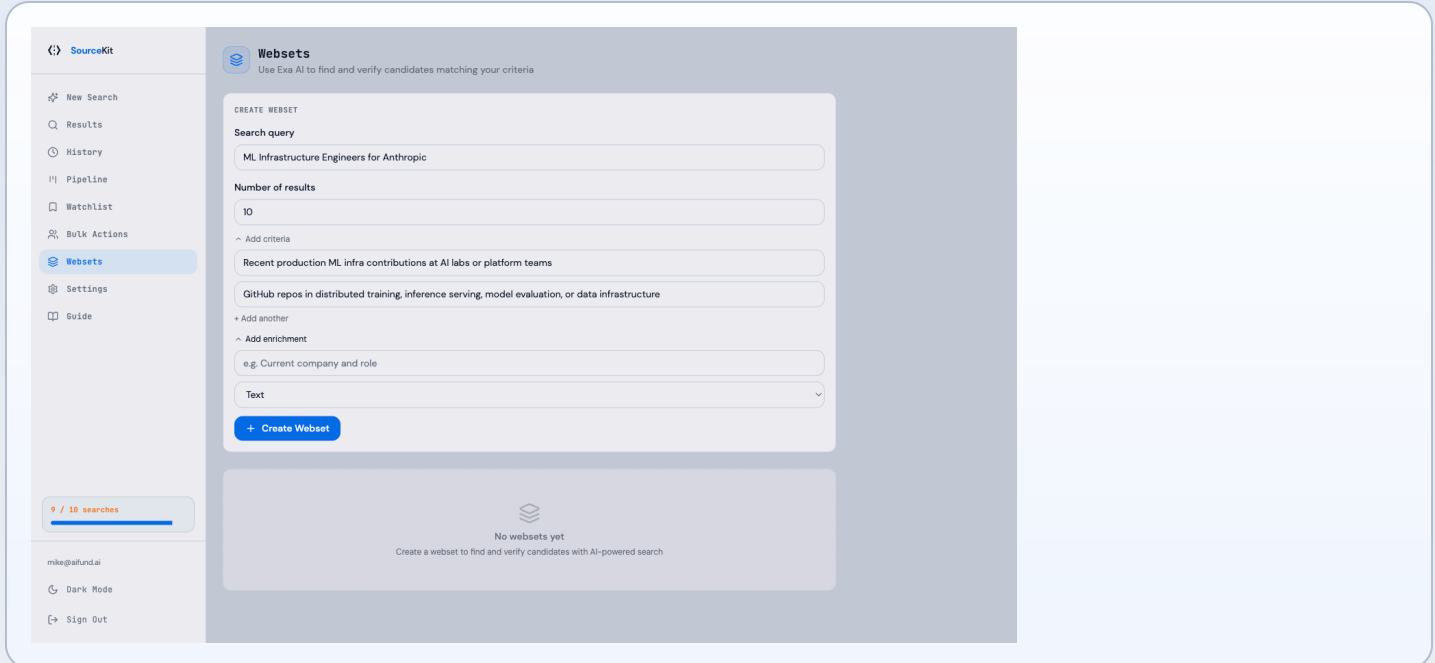

Live application screenshot.

APIs Active In This Step

- Edge function: exa-websets
- Exa Websets API (create/list/items/enrichments)

Best Practice

Criterion text should describe verifiable evidence patterns, not generic title matching.

Step 10

Submit Webset and track completion

Do this: Click Create Webset and observe status; investigate errors if submission fails.

You should see: You should see success progression or an explicit failure notification.

SCREENSHOT TARGET


Immediate post-submit Webset state after clicking Create Webset.

AREA TO FRAME

Submission feedback, visible status, and any success or failure notification.

OUTPUT PATH

../output/guide-screenshots/workflow/step-10-webset-status.png

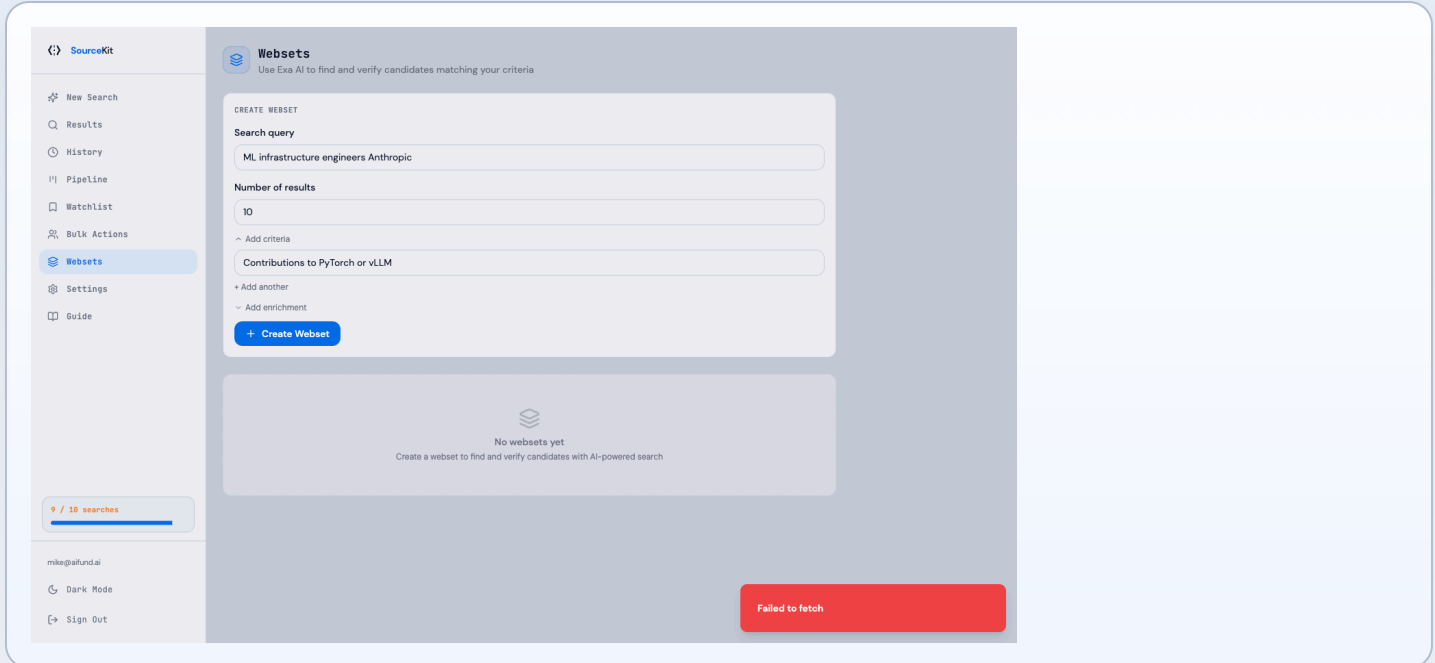

Live application screenshot.

APIs Active In This Step

- Exa Websets create call
- webset-webhook event ingestion (idle/item/enrichment events) when configured

Best Practice

If you see Failed to fetch, verify server-side EXA key, quota, and network path first.

Step 11

Navigate to completed run results

Do this: Open History to load completed search/webset-backed runs and continue pipeline actions.

You should see: Completed runs show timestamp + count; opening a run restores ranked results.

SCREENSHOT TARGET


History tab with completed SourceKit runs listed.

AREA TO FRAME

Run names, timestamps, result counts, and the action affordance to reopen a run.

OUTPUT PATH

../output/guide-screenshots/workflow/step-11-history.png

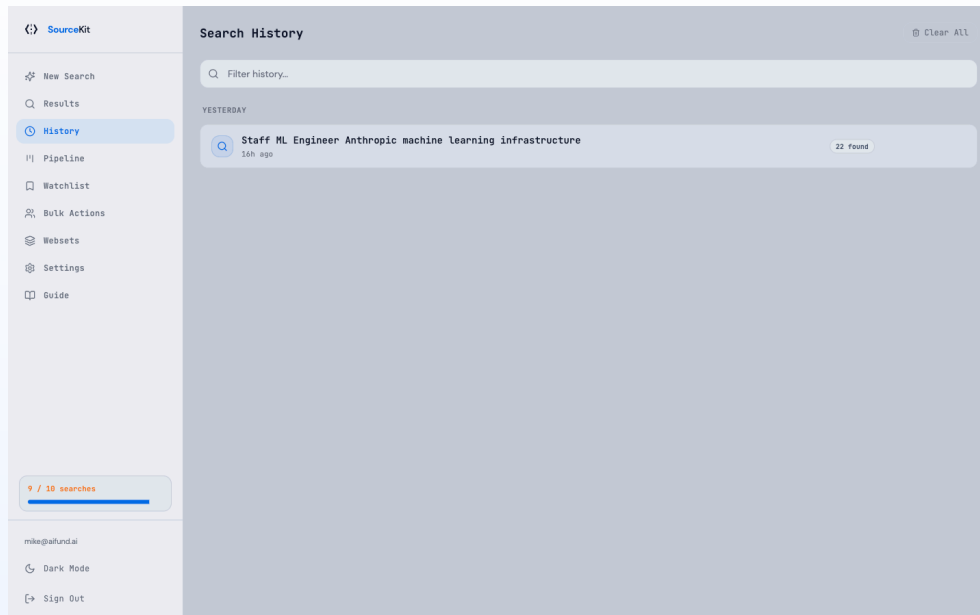

Live application screenshot.

APIs Active In This Step

- Supabase persistence for search history and webset mappings
- No re-search required to review completed runs

Best Practice

History is the fastest way to return to completed result sets after async processing.

Step 12

Export and move candidates into pipeline

Do this: Use Export and pipeline actions once shortlist quality is confirmed.

You should see: CSV/JSON export and stage movement controls are available from results/pipeline screens.

SCREENSHOT TARGET


Results screen with Export menu or pipeline action controls visible.

AREA TO FRAME

Export menu, handoff options, and the shortlist context surrounding the action.

OUTPUT PATH

../output/guide-screenshots/workflow/step-12-export.png

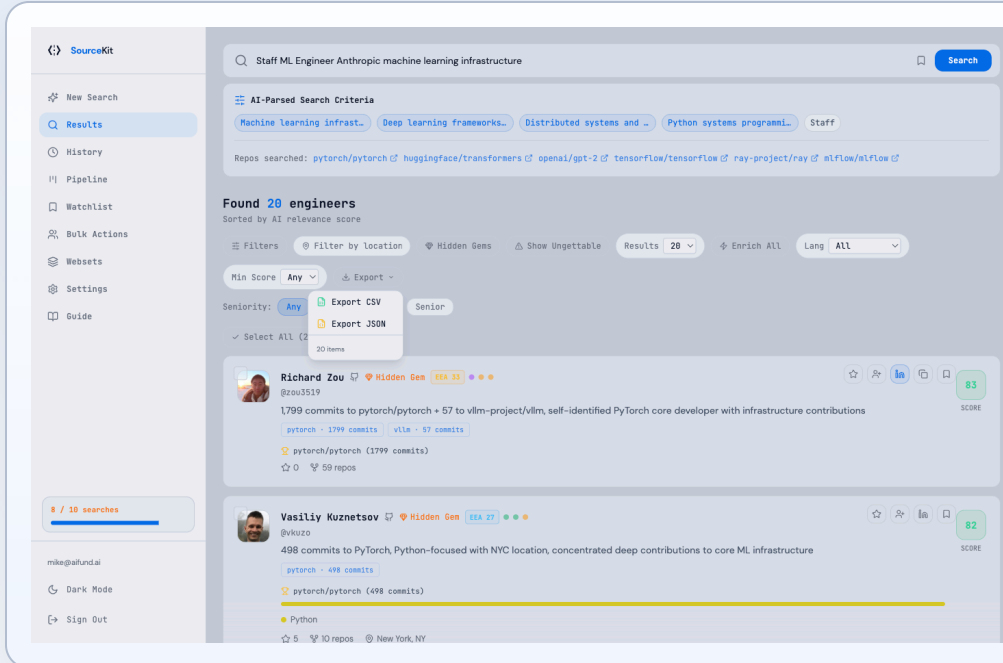

Live application screenshot.

APIs Active In This Step

- Supabase pipeline state updates
- Optional exa-websets batch_pipeline import path for webset items

Best Practice

Freeze final filters before export to prevent noisy handoff files.



Exa API

Semantic retrieval, candidate expansion, and persistent Webset infrastructure.



API Surface	SourceKit Function	Upstream Endpoint	Functionality	Status
Search API	search-candidates, github-search, enrich-linkedin	POST /search	Neural person discovery, profile leads, and LinkedIn search candidates.	Live
findSimilar API	find-similar-candidates	POST /findSimilar	Lateral discovery from a strong profile to similar engineers.	Live
Websets API	exa-websets	/websets/v0/websets*	Create/list/get/delete websets, fetch items, add enrichments.	Live
Webset Monitors	exa-websets	/websets/{id}/monitors*	Create/list/pause/resume scheduled monitors.	Live
Webset Imports	import-candidates	POST /websets/{id}/imports	Import existing candidate URLs into websets.	Live
Answer API	Not wired in current repo	N/A	Product narrative includes grounded summaries, but no direct /answer call in current code.	Planned



Parallel API



Company intelligence, dynamic page extraction, and async talent-mapping tasks.

API Surface	SourceKit Function	Upstream Endpoint	Functionality	Status
Extract API	parse-jd	POST /v1beta/extract	Extracts JD content from JS-rendered pages with fallback parsing.	Live
Search API	search-candidates	POST /v1beta/search	Secondary candidate retrieval stream merged with Exa output.	Live
Task API	company-intel	POST/GET /v1beta/tasks	Per-company intelligence jobs: headcount, stack, attrition, rationale.	Live
FindAll API	map-company-talent	POST/GET /v1beta/findall	Maps engineers at target companies with profile links and notable work.	Live



GitHub API

Primary evidence signal: contributors, commits, repos, and developer activity.



API Surface	SourceKit Function	Upstream Endpoint	Functionality	Status
Contributors API	github-search	GET /repos/{owner}/{repo}/contributors	Builds candidate pool from target repositories.	Live
Users Search API	github-search	GET /search/users	Adds candidate candidates from skill/location qualifiers.	Live
Users/Repos/Events	github-search, github-profile	GET /users/*, /repos, /events	Enriches candidate evidence packets and profile views.	Live
Repo Verification	github-search	GET /repos/{owner}/{name}	Validates strategy repos before retrieval.	Live
Code Quality Inputs	github-code-quality	Repos + commits + contents endpoints	Computes deeper repository quality and AI usage indicators.	Live



Claude (Anthropic) API



Structured strategy generation, ranking/scoring intelligence, and recruiter writing tools.

API Surface	SourceKit Function	Upstream Endpoint	Functionality	Status
Tool-based strategy	research-role	POST /v1/messages (tool call)	Returns structured strategy JSON with repos, companies, and EEA signals.	Live
Query parsing	github-search	POST /v1/messages	Parses recruiter query into repos/skills/location/seniority hints.	Live
Candidate scoring	github-search	POST /v1/messages	Scores and summarizes candidates with recruitability signal.	Live
Outreach generation	generate-outreach	POST /v1/messages	Creates concise personalized outreach drafts.	Live
LinkedIn disambiguation	enrich-linkedin	POST /v1/messages (tool call)	Chooses best LinkedIn profile match from search results.	Live



Harmonic

Harmonic API

Company graph enrichment and expansion for stronger poach-company intelligence.

 Harmonic

API Surface	SourceKit Function	Upstream Endpoint	Functionality	Status
Companies API	research-role, harmonic-enrich	POST /companies	Enriches target companies with stage, funding, growth, and graph context.	Live
Similar Companies	research-role, harmonic-search	POST /search/similar_companies	Expands adjacent target-company graph from strong seed URNs.	Live
Company/Person Enrichment	harmonic-enrich	companies/persons/employees/status	Normalized enrichment wrappers with caching and status checks.	Live
Search Agent + Keyword	harmonic-search	search_agent + companies_by_keywords + typeahead	Natural language and keyword company landscape discovery.	Live

Implementation Notes

- **Exa Answer API:** product narrative references grounded answer synthesis, but no direct Exa `/answer` call is currently wired in this repository.
- **Webset create failures:** `Failed to fetch` states are typically key/quota/connectivity issues in provider path, not just UI issues.
- **Search gating:** strategy/search flows enforce auth/subscription gate before expensive provider calls.
- **Webset criteria normalization:** server-side webset create path limits criteria to the first five entries.
- **History as completion hub:** completed runs (including async paths) are reopened through History for stable results review.

Approved Logo System

Primary SourceKit identity and partner marks used in this guide. This page uses the current SourceKit logo set.

SourceKit Brand Identity

CURRENT VERSION



Primary sourcekit-full.svg



Mark sourcekit-mark-new.svg

Exa

RESEARCH



exa-full.svg



exa-mark.svg

Parallel

COMPANY INTEL



parallel-full.svg



parallel-mark.svg

GitHub

EVIDENCE



github-full.svg



github-green.svg

Claude

REASONING



claudes-full.svg



claudes-mark.svg

Harmonic

GRAPH



harmonic-full.svg

mark asset not provided

Logo Usage: Do

- Use `sourcekit-full.svg` for title bars and headers.
- Use `sourcekit-mark-new.svg` for compact badges and avatars.
- Keep clear space around every logo mark.

Logo Usage: Avoid

- Do not stretch or recolor partner logos.
- Do not mix old SourceKit marks with the current set.
- Do not place low-contrast logos on similar background tones.