


RECURRENT NEURAL NETWORK


FEED FORWARD NETWORKS

- In Feed forward network flow of information takes place in the forward direction, as x is used to calculate some intermediate function in the hidden layer which in turn is used to calculate y .
- A trained feedforward network can be exposed to any random collection of photographs and the first photo it exposed will not affect how it classifies the second photo.



WHY NOT FEED FORWARD NETWORKS?

- When you read a book, you understand it based on your understanding of previous words.
- we cannot predict the next word in a sentence if we use feedforward nets.



WHERE WE USE RECURRENT NEURAL NETWORK?


Recurrent Networks are a type of artificial neural network designed to recognize patterns in sequence in data such as:

- Text
- Handwriting
- Spoken words
- Numerical times series data emanating from sensors etc.




HOW TO OVER COME THIS CHALLENGE?


- Recurrent Neural Network

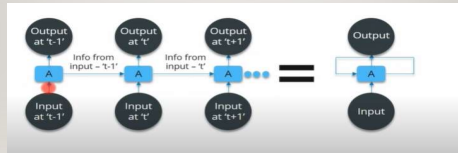


RECURRENT NEURAL NETWORK

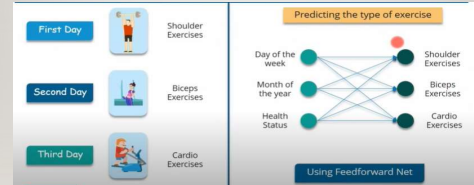


RECURRENT NEURAL NETWORK

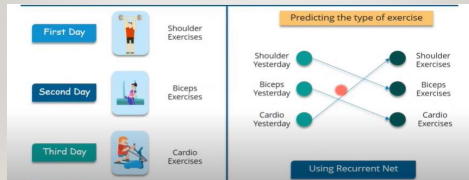


RECURRENT NEURAL NETWORK

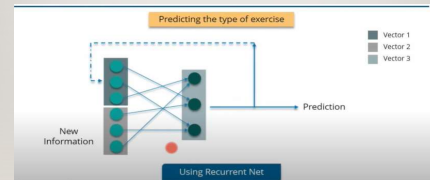

RECURRENT NEURAL NETWORK

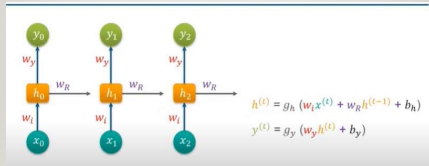


RNN VS FEED FORWARD

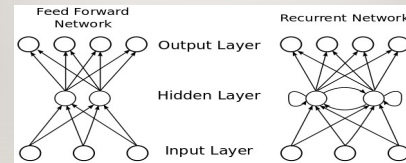

TYPES OF RECURRENT NEURAL NETWORKS

One to One RNN


This type of neural network is known as the Vanilla Neural Network. It's used for general machine learning problems, which has a single input and a single output.



TYPES OF RECURRENT NEURAL NETWORKS

One to Many RNN


This type of neural network has a single input and multiple outputs. An example of this is the image caption.



TYPES OF RECURRENT NEURAL NETWORKS

• Many to One RNN


This RNN takes a sequence of inputs and generates a single output. Sentiment analysis is a good example of this kind of network where a given sentence can be classified as expressing positive or negative sentiments.



TYPES OF RECURRENT NEURAL NETWORKS


• Many to Many RNN

This RNN takes a sequence of inputs and generates a sequence of outputs. Machine translation is one of the examples.




TRAINING A RECURRENT NEURAL NETWORK

- Recurrent Neural nets uses backpropagation algorithm, but it is applied for every time stamp. It is commonly known as backpropagation through Time (BTT).



FLOW DIAGRAM

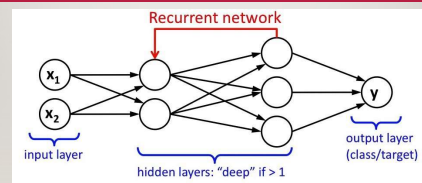

CODE

CODE

```
* # Imports
* import torch
* import torchvision # torch package for vision related things
* import torch.nn.functional as F # Parameterless functions, like (some) activation functions
* import torchvision.datasets as datasets # Standard datasets
* import torchvision.transforms as transforms # Transformations we can perform on our dataset for augmentation
* from torch import optim # For optimizers like SGD, Adam
* from torch import nn # All neural network modules
* from torch.utils.data import DataLoader # Gives easier dataset management by creating mini batches etc.
* from tqdm import tqdm # For a visual progress bar!
* import numpy as np
* import matplotlib.pyplot as plt
* # Set device( if GPU is available all parameters copy into GPU and start execution otherwise CPU)
* device = torch.device("cuda" if torch.cuda.is_available() else "cpu")
```

CODE

```
* # Hyperparameters(hyperparameter is that is set before the learning process begins.These parameters affect
how well a model trains)
* #each image is size of (1x 28 x 28) (EXPECTED FEATURES)
* input_size = 28
* sequence_length = 28
* #Number of nodes in hidden layers
* hidden_size = 256
* #Number of Recurrent Layers in models
* num_layers = 2
* #Mnist dataset have 10 classes (hand written digits from 0 to 9)
* num_classes = 10
* # a tuning parameter in an optimization algorithm that determines the step size at each iteration while
moving toward a minimum of a loss function.
* learning_rate = 0.005
* #The batch size defines the number of samples that will be propagated through the network.
* batch_size = 64
* #the number times that the learning algorithm will work through the entire training dataset. One epoch means
that each sample in the training dataset has had an opportunity to update the internal model parameters
```

CODE

```
* # Recurrent neural network (many-to-one)
* class RNN(nn.Module): #nn.module is a parent class (inherited) call by RNN which
is child class
*     def __init__(self, input_size, hidden_size, num_layers, num_classes):
*         super(RNN, self).__init__() #give access to child class in parent class
*         self.hidden_size = hidden_size #give number of nodes in hidden layer to
model
*         self.num_layers = num_layers #Number of Recurrent layers
*         # IF batch first TRUE then the input and output tensors are provided as
(batch, seq, feature)
*         self.rnn = nn.RNN(input_size, hidden_size, num_layers, batch_first=True)
*         # give all data to model
*         # "hidden size * sequence_length" is number of input features and
num_classes is output features.linear transformation to the incoming data: y =
wx^T + b
*         self.fc = nn.Linear(hidden_size * sequence_length, num_classes) #After
linear transformation output will fully connected
```

CODE

```

def forward(self, x): # input data x

# Set initial hidden and cell states
#creat tensor with scalar vlue 0 of (x.size(0) give number of rows so its define the shape of tensor)
h0 = torch.zeros(self.num_layers, x.size(0), self.hidden_size).to(device)

# Forward propagate
out, _ = self.rnn(x, h0)

#the given out is unknown dimension and we want numpy to figure it outby giving(-1) and count its number of rows with shape(0).
out = out.reshape(out.shape[0], -1)

# Decode the hidden state of the last time step
out = self.fc(out)

return out

```

CODE

```

# download data from tensorflow
train_dataset = datasets.MNIST(root="dataset/", train=True, transform=transforms.ToTensor(), download=True)
test_dataset = datasets.MNIST(root="dataset/", train=False, transform=transforms.ToTensor(), download=True)

# load the data with batches given in batch_size and shuffle the data
train_loader = DataLoader(dataset=train_dataset, batch_size=batch_size, shuffle=True)
test_loader = DataLoader(dataset=test_dataset, batch_size=batch_size, shuffle=True)

# Initialise Recurrent neural network
model = RNN(input_size, hidden_size, num_layers, num_classes).to(device)

# Loss function and optimizer
#CrossEntropy is used as loss function
criterion = nn.CrossEntropyLoss()
#use Adam optimizer with model parameters and LR
optimizer = optim.Adam(model.parameters(), lr=learning_rate)

```

CODE

```

# Train Network
for epoch in range(num_epochs):

# enumerate data with batch id (data is input images and targets are labels) and tqdm is used for visual progress bar
for batch_id, (data, targets) in enumerate(tqdm(train_loader)):

# use data to make predictions
# squeeze() if input is of shape:(A*B*C*D) then the out tensor will be of shape:(A*B*C*D).
data = data.to(device=device).squeeze(1) #input images and check gpu is available or not
targets = targets.to(device=device) #labels and check gpu is available or not

# forward
#calculate the model output (predictions)
scores = model(data)

#now loss function is calculate with model predictions and actual output
loss = criterion(scores, targets)

#for every mini-batch during the training phase, we typically want to explicitly set the gradients to zero before starting to do backpropagation because PyTorch accumulates the gradients on subsequent backward passes

#if it not zero the gradient would be a combination of the old gradient, which you have already used to update your model parameters, and the newly-computed gradient.
optimizer.zero_grad()

loss.backward()

#detach tensors from graph to conserve memory
optimizer.step()

```

CODE

```

# Check accuracy on training & test to see how good our model
def check_accuracy(loader, model):

num_correct = 0
num_samples = 0

# Set model to eval
model.eval() # model in evaluating mode so deactivates all dropout layers or training is stop

with torch.no_grad(): #stop gradient calculation
#x is input and Y is output (data and labels)
for x, y in loader: #load contain data x is input image and y is label data

# squeeze remove single-dimensional entries
x = x.to(device=device).squeeze(1)
y = y.to(device=device)

#calculate scores
scores = model(x)

```

CODE

```

_, predictions = scores.max(1)
# y contain actual label output it compare with prediction to calculate total number of number
correct_predictions
    num_correct += (predictions == y).sum()
# Number of all predictions.size(0) give number of rows
num_samples += predictions.size(0)
# Toggle model back to train
model.train()
return num_correct / num_samples
# Print the accuracy
print(f"Accuracy on training set: {check_accuracy(train_loader, model)*100:2f}%")
print(f"Accuracy on test set: {check_accuracy(test_loader, model)*100:2f}%")

```

CODE

```

# Disable grad
with torch.no_grad(): #stop gradient calculation
# Retrieve item
index = 256
item = test_dataset[index]
image = item[0] # take first image
true_target = item[1] # take actual output
# Generate prediction
prediction = model(image)
# Predicted class value using argmax....(returns indices of the max element of the array in a particular axis)
predicted_class = np.argmax(prediction)
# Reshape image
image = image.reshape(28,28,1)
# Show result
plt.imshow(image, cmap="gray")

plt.title("Prediction: {predicted_class}, Actual target: {true_target}")
plt.show()

```

REFERENCES

- <https://www.edureka.co/>
- <https://towardsdatascience.com/>

THANKS