

The Complete SQL HandBook

•=Comprehensive Notes and Tips=x•

HandWritten By
Bhavana

Contents

1. Introduction to Databases

2. Introduction to SQL [Basic Concepts]:

2.1. Creating Tables

2.2. Inserting Rows

2.3. Retrieving Data

2.4. Update Rows

2.5. Delete Rows

2.6. Alter Tables

3. Querying with SQL:

3.1. Comparison Operators

3.2. String Operators

3.3. Logical Operators

3.4. In and Between Operators

3.5. Order By and Distinct

4. Aggregations and Group By

4.1. Aggregations

4.2. Group By

5. Common Concepts:

5.1. SQL Expressions

5.2. SQL Functions

6. Modeling Databases:

6.1. Core Concepts of ER Model

6.2. Creating a Relational Database

7. Joins:

- 7.1. Natural Join
- 7.2. Inner Join
- 7.3. Left Join
- 7.4. Right Join
- 7.5. Full Join
- 7.6. Cross Join

8. Views and Subqueries

9. Transaction and Indexes

- 9.1. Transactions
- 9.2. Indexes

Introduction to Databases

Concepts in focus

* Data

* Database

* Database Management System (DBMS)

- Advantages

* Types of Databases

- Relational Database

- Non-Relational Database

⇒ Data :-

→ Any sort of information that is stored is called data.

Examples:- 1. Messages & multimedia on WhatsApp.

2. products and order on Amazon

3. Contact details in telephone directory,
etc.

⇒ Database :-

→ An organized collection of data is called a database.

⇒ Database Management System (DBMS) :-

→ A software that is used to easily store and access data from the database in a secure way.



Web Application

Servers



AI Models



Recommendation
Engines




Database

...


- * Security: Data is stored & maintained securely.
- * Ease of Use: provides simpler ways to create & update data at the rate it is generated and updated respectively.
- * Durability and Availability: Durable and provides access to all the clients at any point in time.
- * Performance:- Quickly accessible to all the clients (applications and stakeholders).

⇒ Types of Databases:-


→ There are different types of databases based on how we organize the data.




Relational




Analytical

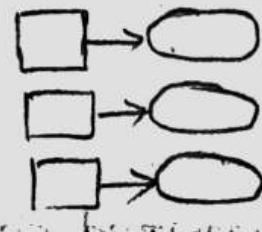


key value



Column family




Graph

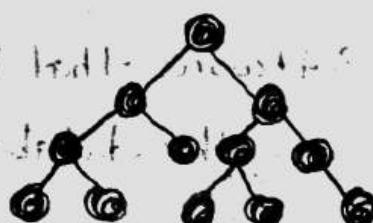

Document

Relational Database:-

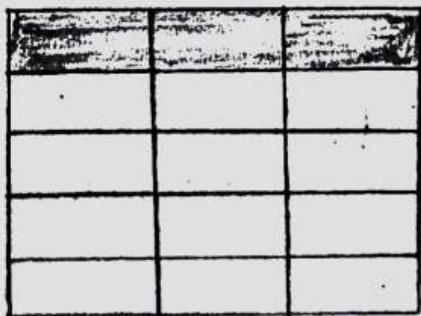

In relational databases, the data is organized in the form of tables.

Non-Relational Database

→ Graph, key value, column family, Document.

→ These four types are commonly referred as non-relational databases.

Note:-

* Choice of database depends on our requirements.

* Relational database is the most commonly used database.

⇒ Relational DBMS:-

→ A Relational DBMS is a DBMS designed specifically for relational database. Relational databases organise the data in the form of tables.

Examples:- Oracle, PostgreSQL, MySQL, SQLite, SQL Server, IBM DB2, etc.

⇒ Non-Relational DBMS:-

→ A Non-relational DBMS is a DBMS designed specifically for non-relational databases. Non-relational databases store the data in a "non-tabular form".

Examples:- Elasticsearch, CouchDB, DynamoDB, MongoDB, Cassandra, Redis, etc.

② Introduction to SQL [Basics]

- SQL stands for **Structured Query language**
- SQL is used to perform operation on **Relational DBMS**
- SQL is declarative. Hence, easy to learn.
- SQL provides multiple clauses (commands) to perform various operations like **create, retrieve, update and delete** the data.

* Create Table :-

- Creates a new table in the database

Syntax:-

```
CREATE TABLE table-name(
```

```
    column1 type1,
```

```
    column2 type2,
```

```
    ...
```

```
) ;
```

Here, **type1** and **type2**, in the syntax are the datatypes of **column1** and **column2** respectively. Datatypes that are supported in SQL are mentioned below:

Example :-

Create a player table to store the following details of players.

column-name	data-type
name	VARCHAR (200)
age	INT / INTEGER
score	INT / INTEGER

CREATE TABLE player(

name VARCHAR(200),
age INTEGER,
score INTEGER
);

* We can check the details of the created table at any point in time using the **PRAGMA** command.

Data Types :- i.e. combination with the table.
→ Following data types are frequently used in SQL.

Datatype	Syntax
Integer	INT/INTEGER
Float	FLOAT
String	VARCHAR
Text	TEXT
Date	DATE
Time	TIME
Datetime	DATETIME
Boolean	BOOLEAN

Note:-

1. Boolean values are stored as integers 0(FALSE) and 1(TRUE)

2. Date object is represented as: 'YYYY-MM-DD'

Notes by Bhavana

3. Datetime object is represented as: 'YYYY-MM-DD HH:MM:SS'

PRAGMA

PRAGMA_TABLE_INFO command returns the information about a specific table in a database.

Syntax:-

PRAGMA TABLE_INFO(table-name);

Example:-

Let's find out the information of the employee table that's present in the database.

PRAGMA TABLE_INFO(employee);

Note:-

If the given table name does not exist, PRAGMA TABLE_INFO doesn't give any result.



Inserting Rows:-

⇒ **INSERT** clause is used to insert new rows in a table.

Syntax:-

INSERT INTO

table_name(column1, column2, ..., columnN)

VALUES

(value1, value2, ..., valueN),

(value1, value2, ..., valueN),

- * Any number of rows from 1 to n can be inserted into a specific table using the above syntax.

Database

The **player** table that stores the details of players in a tournament respectively.

→ **player** table store the name, age and score of players.

Example :-

Insert name, age and score of 2 players in the player table.

```
INSERT INTO  
    player(name, age, score)
```

```
VALUES  
( "Rakesh", 39, 35),  
( "Sai", 41, 38);
```

Upon executing the above data code, both the entries would be added to the player table.

Let's View the added data!

→ we can retrieve the inserted data by using the following command

```
SELECT *
```

```
FROM player;
```

Output :-

name	age	score
Rakesh	39	35
Sai	41	38

possible Mistakes:-

Mistake 1:

- The number of values that we're inserting must match with the number of column names that are specified in the query

SQL:- `INSERT INTO player(name, age, score)`
`VALUES ("Virat", 31);`

Output:-

Error: 2 values for 3 columns!

Mistake 2:

- We have to specify only the existing tables in the database

SQL:- `INSERT INTO player-information(name, age, score)`
`VALUES ("Virat", 31, 38);`

Output:-

Error: no such table: player-information

Mistake 3:

- Do not add additional parenthesis () post VALUES keyword in the code.

SQL:- `INSERT INTO player(name, age, score)`

VALUES

```
( ("Rakesh", 39, 35), ("Sai", 39, 40));
```

Output:-

Error: 2 values for 3 columns

Mistake 4:-

→ while inserting data, be careful with the datatypes of the input values. Input value datatype should be same as the column datatype.

INSERT INTO

player(name, age, score)

VALUES

```
( "Virat", 30, "Hundred");
```

Warning

Output:-

If the datatype of the input value doesn't match with the datatype of column, ~~SOLITE~~ doesn't raise an error

Retrieving Data :-

SELECT clause is used to retrieve rows from a table.

Database:-

The database consists of a **player** table stores the details of players who are a part of a tournament. **player** table stores the name, age and score of players.

⇒ **Selecting Specific Columns**

→ To retrieve the data of only specific columns from a table, add the respective column names in the **SELECT** clause.

Syntax:-

```
SELECT  
    column1,  
    column2,  
    ...  
    columnN
```

```
FROM  
    table-name;
```

Example:-

Let's fetch the name and age of the players from the player table.

```
SELECT  
    name,  
    age
```

```
FROM  
    player;
```

OUTPUT:-

<u>name</u>	<u>age</u>
Virat	32
Rakesh	39
Sai	47
...	

⇒ Selecting All Columns

→ Sometimes, we may want to select all the columns from a table. Typing out every column name, for every time we have to retrieve the data, would be a pain.

Syntax:-

```
SELECT *  
FROM table-name; Notes by Bhavana
```

Example

Get all the data of players from the player table.

SELECT *

FROM player;

Output:-

<u>name</u>	<u>age</u>	<u>score</u>
Virat	32	50
Rakesh	39	35
Sai	41	30
...

⇒ Selecting Specific Rows

We use WHERE clause to retrieve only specific rows.

Syntax:

SELECT *

FROM table-name

WHERE condition;

* WHERE clause specifies a condition that has to be satisfied for retrieving the data from a database.

Example:

Get name and age of the player whose name is 'Ram' from the player table

SELECT *

FROM player

WHERE name = "Sai";

Output:-

<u>name</u>	<u>age</u>	<u>score</u>
Sai	41	30

* Update Rows

UPDATE clause is used to update the data of an existing table in database. We can update all the rows or only specific rows as per the requirement.

→ Update all Rows

Syntax:-

```
UPDATE  
    table-name  
SET  
    column1 = value1;
```

Example:-

```
UPDATE  
    player  
SET  
    score = 100;
```

→ Update Specific Rows

Syntax:-

```
UPDATE  
    table-name  
SET  
    column1 = value1  
WHERE  
    column2 = value2;
```

Example:-

```
UPDATE  
    player  
SET  
    score = 150  
WHERE  
    name = 'Ram' ;
```

Delete Rows

DELETE clause is used to delete existing records from a table.

→ Delete All Rows

Syntax:-

```
DELETE FROM  
    table-name;
```

Example:-

Delete all the Rows from player table

```
DELETE FROM  
    player;
```

→ Delete Specific Rows

Syntax:-

```
DELETE FROM  
    table-name  
WHERE  
    column1 = Value1;
```

Example:-

* Delete 'shyam' from the player table

Note:- We can uniquely identify a player by name.

```
DELETE FROM
```

player

WHERE

name = "shyam";

Warning :- We can not retrieve the data once we delete the data from the table.

⇒ **DROP table:-**

DROP clause is used to delete a table from the database.

Syntax:-

DROP TABLE

table-name

Example:-

* Delete player table from the database

DROP TABLE player;

*

Alter Table:-

ALTER clause is used to add, delete, or modify columns in an existing table.

⇒ **Add Column**

Syntax

ALTER TABLE

table-name

ADD

column-name datatype;

Example:-

Add a new column jersey_num of type integer to the player table.

ALTER TABLE

player

ADD

jersey_num INT;

Note:-

Default values for newly added columns in the existing rows will be NULL.

⇒ Rename Column

Syntax:-

ALTER TABLE

table_name RENAME COLUMN c1 TO c2;

Example 1:-

Rename the column jersey_num in the player table to jersey_number.

ALTER TABLE

player RENAME COLUMN jersey_num TO jersey_number;

→ Drop Column :-

Syntax:-

ALTER TABLE

table_name DROP COLUMN column-name;

Example:-

Remove the column jersey-number from the player table.

ALTER TABLE

player DROP COLUMN jersey-number;

Note:- DROP COLUMN is not supported in some DBMS, including SQLite.

* Comparison Operators:-

Ex:-

In a typical e-commerce scenario, users would generally filter the products with good ratings, or want to purchase the products of a certain brand or of a certain price. Let's see how comparison operators are used to filter such kind of data using the following database.

⇒ Database:-

The database contains a product table that stores the data of products like name, category, price, brand and rating.

Comparison Operators:-

operator	Description
=	Equals to
<>	Not equals to
<	Less than
<=	Less than or equal to
>	Greater than
>=	Greater than or equal to

Examples:-

1. Get all the details of the products whose category is "Food" from the product table.

SELECT

*

FROM

product

WHERE

category = "Food";

Output:-

name	category	price	brand	rating
Chocolate cake	Food	25	Britannia	3.7
Strawberry cake	Food	60	Cadbury	4.1
Chocolate cake	Food	60	Cadbury	2.5
....

2. Get all the details of the products that does not belongs to Food category from the product table.

SELECT

*

FROM

product

WHERE

category <> "Food".

Output:-

name	category	price	brand	rating
Blue shirt	Clothing	150	Denim	3.8
Blue jeans	Clothing	200	Puma	3.6
Black jeans	Clothing	150	Denim	4.5
....

* Similarly, we can use other comparison operators like greater than ($>$), greater than or equal to (\geq), less than ($<$), less than or equal to (\leq) to filter the data as per the requirement.

String Operations :-

LIKE Operator

→ **LIKE** operator is used to perform queries on strings. This operator is especially used in **WHERE** clause to retrieve all the rows that match the given pattern.

→ We write patterns using the following **wildcard characters**:

Symbol	Description	Example
percent sign (%)	Represents zero or more characters	ch% finds ch, chips, chacos...
underscore (_)	Represents a single character	_at finds mat, hat, bat...

Common patterns:-

pattern	Example	Description
Exact Match	WHERE name LIKE "Mobiles"	Retrieves products whose name is exactly equals to "mobiles".
Starts with	WHERE name LIKE "mobiles%"	Retrieves products whose name starts with "mobiles".
Ends with	WHERE name LIKE "%mobiles"	Retrieves products whose name ends with "mobiles".
Containing	WHERE name LIKE "%mobiles%"	Retrieves products whose name contains with "mobiles".

pattern
Matching

WHERE name LIKE
"a-%"

Retrieves products whose name starts with "a" and have at least 2 characters in length.

Syntax:-

SELECT

*

FROM

table_name

WHERE

c1 LIKE matching-pattern;

ANS

Examples:-

1. Get all the products in the "Gadgets" category from the product table.

SELECT

*

FROM

product

WHERE

category LIKE "Gadgets";

Output:-

name	Category	price	brand	rating
Smart Watch	Gadgets	17000	Apple	4.9
Smart Cam	Gadgets	2600	Realme	4.7
Smart TV	Gadgets	40000	Sony	4.0
Realme Smart Band	Gadgets	3000	Realme	4.6

2. Get all the products whose name starts with "Bourbon" from the product table

```
SELECT *  
FROM product  
WHERE name LIKE "Bourbon%";
```

* Here % represents that, following the string "Bourbon", there can be 0 or more characters.

Output:-

name	category	price	brand	rating
Bourbon Small	food	10	Britannia	3.9
Bourbon Special	food	15	Britannia	4.6
Bourbon with extra cookies	food	30	Britannia	4.4

3. Get all smart electronic products i.e., name contains "smart" from the product table

```
SELECT *  
FROM product  
WHERE name LIKE "%smart%";
```

* Here % before and after the "string" represents that there can be 0 or more characters succeeding or preceding the string.

Output:-

name	Category	price	brand	rating
Smart Watch	Gadgets	17000	Apple	4.9
Smart Cam	Gadgets	2600	realme	4.7
Smart TV	Gadgets	40000	Sony	4
Realme Smart Band	Gadgets	3000	Realme	4.6

4. Get all the products which have exactly 5 characters in brand from the product table.

SELECT

*

FROM

product

WHERE

brand LIKE '_____';

Output:-

name	category	price	brand	rating
Blue Shirt	Clothing	750	Denim	3.8
Black Jeans	Clothing	150	Denim	4.5
Smart Watch	Gadgets	17000	Apple	4.9
....

Note:-

The percent Sign (%) is used when we are not sure of the number of characters present in "the string".

If we know the exact length of the string, then the wildcard character underscore (_) comes in handy.

* Logical Operators :-

→ Based on with logical operators, we can perform queries based on multiple conditions. Let's learn.

→ AND, OR, NOT

Operator	Description
AND	Used to fetch rows that satisfy two or more conditions
OR	Used to fetch rows that satisfy at least one of the given conditions
NOT	Used to negate a condition in the WHERE clause

Syntax:-

```
SELECT  
*  
FROM  
table_name  
WHERE  
Condition1 ,  
operator Condition2  
operator Condition3  
.....;
```

Example:

1. Get all the details of the products whose
 - * category is "clothing" and
 - * price less than equal to 1000 from the product table.

```
SELECT  
*  
FROM  
product  
WHERE  
category = "clothing"  
AND price <= 1000;
```

output:-

name	category	price	brand	rating
Blue Shirt	Clothing	750	Denium	3.8
Blue Jeans	Clothing	800	puma	3.6
Black Jeans	Clothing	750	Denium	4.5
...

2. Ignore all the products with name containing "cake" from the list of products.

SELECT

*

FROM

product

WHERE

NOT name LIKE "%cake%" ;

output:-


name	category	price	brand	rating
Blue Shirt	Clothing	750	Denium	3.8
Blue Jeans	Clothing	800	puma	3.6
Black Jeans	Clothing	750	Denium	4.5
...

→ Multiple Logical Operators:-

We can also use the combinations of logical operators to combine two or more conditions. These compound conditions enable us to fine-tune the data retrieval requirements.

precedence

→ When a query has multiple operators, operator precedence determines the sequence of operations.

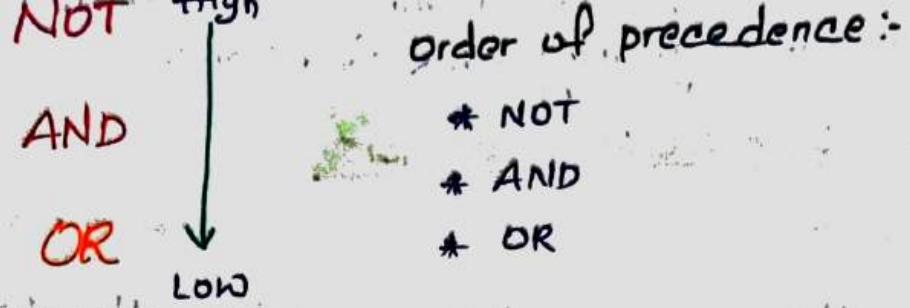

Example:-

fetch the products that belongs to

- * Redmi brand and rating greater than 4 or
- * the products from oneplus brand

SELECT

*

FROM

product

WHERE

brand = "Redmi"

AND rating > 4

OR brand = "Oneplus";

* In the above query, AND has the precedence over OR.

So, the above query is equivalent to:

SELECT

*

FROM

product

WHERE

(brand = "Redmi")

AND rating > 4)


OR brand = "Oneplus";

Quick Tip:- It is suggested to always use parenthesis to ensure correctness while grouping the conditions.

* IN and BETWEEN Operators

IN Operator:-

Retrieves the corresponding rows from the table if the value of column(c1) is present in the given values (v₁, v₂,..)

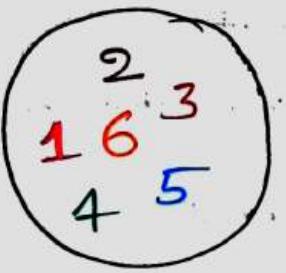

Syntax:-

```
SELECT  
*  
FROM  
table_name  
WHERE  
c1 IN (v1, v2,..);
```

Example:-

Get the details of all the products from product table, where the brand is either "puma", "Maffi", "Levi's", "Lee" or "Denim".

```
SELECT  
*  
FROM  
product  
WHERE  
brand IN ("puma", "Levi's", "Maffi", "Lee", "Denim")
```

name	category	price	brand	rating
Blue shirt	clothing	750	Denim	3.8
Blue jeans	clothing	800	puma	3.6
Black jeans	clothing	750	Denim	4.5
...

⇒ BETWEEN Operator:-

→ Retrieves all the rows from table that have column (c1) value present between the given range (v1 and v2).

1 ----- 9

Syntax:-

SELECT

*

FROM

table-name

WHERE

c1 BETWEEN v1

AND v2;

Note:- BETWEEN operator is inclusive, i.e, both the lower and upper limit values of the range are included.

Example:-

Find the products with price ranging from 1000 to 5000

SELECT

name

price

brand

FROM
product

WHERE

price BETWEEN 1000

AND 5000;

Output:-

name	price	brand
Blue shirt	1000	puma
Smart Cap	2600	Realme
Realme Smart Band	3000	Realme

possible Mistakes:-

1. when using the BETWEEN operator, the first value should be less than second value. If not, we'll get an incorrect result depending on the DBMS.

SELECT

name,

price,

brand

FROM

product

WHERE

price BETWEEN 500

AND 300;

Output:-

name price brand

We have to give both lower limit and upper limit in the range.

SELECT

name,

price,

brand

FROM

product

WHERE

price BETWEEN

AND 300;

OUTPUT:-

Error near " AND": Syntax error

3. The data type of the column for which we're using the BETWEEN operator must match with the data types of the lower and upper limits.

SELECT

name,

price,

brand

FROM

product

WHERE

name BETWEEN 300

AND 500;

Output:-

name	price	brand

ORDER BY

We use ORDER BY clause to order rows. By default, ORDER BY sorts the data in the ascending order.

Element	
FOX	Apple
Balloon	Ballow
COW	cow
Apple	Dog
Element	
Dog	FOX

Syntax:-

```
SELECT ...  
        column1,  
        column2,  
        ... columnN,  
FROM  
        table_name [WHERE condition]  
ORDER BY  
        column1 ASC / DESC,  
        column2 ASC / DESC;
```

Example :- Get all products in order of lowest price and highest rating in "puma" brand.

```
SELECT  
        name,  
        price,  
        rating
```

FROM

product

WHERE

brand = "puma"

ORDER BY

price ASC,

rating DESC;

Output:-

name	price	rating
Black shirt	600	4.8
Blue jeans	800	3.6
Blue shirt	1000	4.3

DISTINCT

DISTINCT clause is used to return the distinct i.e., unique values.

Syntax:-

SELECT

DISTINCT column 1,

column 2, ...

column N

FROM

table_name

WHERE

[condition];

Example :-

Get all the brands present in the product table

SELECT

DISTINCT brand

FROM

product

ORDER BY

brand;

Output:-

Brand

Absa

Apple



* pagination:-

Using pagination, only a chunk of the data can be sent to the user based on their request. And, the next chunk of data can be fetched only when the user asks for it.

⇒ we use **LIMIT** and **OFFSET** clauses, to select a chunk of the results.

LIMIT:-

LIMIT clause is used to specify the number of rows(n) we would like to have in result.

Syntax:-

```
SELECT  
    column1,  
    column2,...  
    columnN  
FROM  
    table-name  
LIMIT n;
```

Example:-

```
SELECT  
    name,  
    price,  
    rating  
FROM  
    product  
WHERE  
    brand = "puma"  
ORDER BY  
    rating DESC  
LIMIT 2;
```

Output:-

name	price	rating
Black shirt	600	4.8
Blue shirt	1000	4.3

Note:-

If the limit value is greater than the total number of rows, then all rows will be retrieved.

OFFSET

OFFSET clause is used to specify the position (from (n+1)th row) from where the chunk of the results are to be selected.

Syntax:-

SELECT

column1,

column2, -

columnN

FROM

table_name

LIMIT m

OFFSET n;

Example:-

- Q. Get all the details of 5 top-rated products, starting from 7th row.

SELECT

name,

price,

rating

FROM

product

ORDER BY

rating DESC

LIMIT 5

OFFSET 6 ;

Output:-

name	price	rating
Burbon Special	15	4.6
Realme Smart Band	3000	4.6
Hairy Potter and the Goblet of fire	431	4.6
Black Teans	150	4.5
potato chips cream & onion	63	4.5

possible Mistakes:-

- * Using 'OFFSET' before the 'LIMIT' clause.

```

SELECT *
FROM
product
    OFFSET 2
    LIMIT 4;
  
```

output:- Error: near "2"; Syntax error

- * Using only 'OFFSET' clause

```

SELECT
*
FROM
product
    OFFSET 2;
  
```

output:- Error! near "2"; Syntax error

Note:- 'OFFSET' clause should be placed after the 'LIMIT' clause. Default 'OFFSET' value is 0.

Notes by Bhavana

4 Aggregations and Group By :-

→ we perform aggregations in such scenarios to combine multiple values into a single value, i.e., individual scores to an average score.

Aggregation functions:-

Combining multiple values into a single value is called aggregation. Following are the functions provided by SQL to perform aggregations on the given data.

Aggregation Functions	Description
COUNT	Counts the number of values
SUM	Adds all the values
MIN	Returns the minimum value
MAX	Returns the maximum value
AVG	Calculate the average of the values

Syntax

SELECT

aggregate_function (C1)

aggregate_function (C2)

FROM

TABLE;

Note:-

We can calculate multiple aggregate functions in a single query.

Examples:-

1. Get the total runs scored by "Ram" from the player-match-details table.

SELECT

SUM(score)

FROM

player-match-details

WHERE

name = "Ram";

Output:-

SUM(score)

221

2. Get the highest and least scores among all the matches that happened in the year 2011.

SELECT

MAX(score),

MIN(score)

FROM

player-match-details

WHERE

year = 2011;

Output:-

MAX(score)

MIN(score)

75

62

COUNT Variants:-

* Calculate the total number of matches played in the tournament.

Variant 1:-

```
SELECT COUNT(*)  
FROM player-match-details;
```

Variant 2:-

```
SELECT COUNT(1)  
FROM player-match-details;
```

Variant 3:-

```
SELECT COUNT()  
FROM player-match-details;
```

Output of Variant 1, Variant 2 and Variant 3

All the variants i.e., Variant 1, Variant 2 and Variant 3 give the same result: 18.

Note:-

In SQL, there's a difference between using COUNT(*) and COUNT(column_name):

COUNT(*) : This function counts the total number of rows in a table, regardless of whether any specific column contains NULL values. It counts all rows, including those NULL values, and returns the total count.

COUNT (column-name): This function counts the number of Non-NULL values in the specified column. It excludes NULL values from the count and only considers the Non-NULL values within the specified column.

Special Cases:

→ When SUM function is applied on non-numeric data types like strings, date, time, datetime, etc., SQLite DBMS returns 0.0 and PostgreSQL DBMS returns none.

→ Aggregate functions on strings and their outputs :-

<u>Aggregate Functions</u>	<u>Output</u>
MIN, MAX	Based on lexicographic ordering
SUM, AVG	0 (depends on DBMS)
COUNT	Default behaviour

→ NULL values are ignored while computing the aggregation values.

→ When aggregate functions are applied on only NULL values

<u>Aggregate functions</u>	<u>Output</u>
MIN	NULL
MAX	NULL
SUM	NULL
COUNT	0
AVG	NULL

Alias

→ Using keyword AS, we can provide alternate temporary names to the columns in the output.

Syntax

```
SELECT  
    c1 AS a1,  
    c2 AS a2,  
    ...  
FROM  
    table-name;
```

Example

→ Get all the names of players with column name as "player_name".

```
SELECT  
    name AS player-name  
FROM  
    player-match-details;
```

Output:-

<u>player-name</u>
Ram
Joseph
....

Group By with Having

GROUP BY

The GROUP BY clause in SQL is used to group rows which have same values for the mentioned attributes.

Syntax:-

```
SELECT  
    c1  
    aggregate_function(c2)  
FROM  
    table_name  
GROUP BY c1;
```

Example:-

* Get the total score of each player in the database

```
SELECT  
    name, SUM(score) AS total_score  
FROM  
    player_match_details  
GROUP BY name;
```

Output:-

<u>name</u>	<u>total_score</u>
David	105
Joseph	116
Lokesh	186
....	...

GROUP BY with WHERE

→ We can use WHERE clause to filter the data before performing aggregation.

Syntax:-

SELECT

C1,

aggregate_function(C2)

FROM

table-name

WHERE

C3 = V1

GROUP BY C1;

Example:- Get the number of half-centuries scored by each player

SELECT

name, COUNT(*) AS half-centuries

FROM

player-match-details

WHERE score >= 50

GROUP BY name;

Output:-

<u>name</u>	<u>half-centuries</u>
David	1
Joseph	2
Lokesh	3
...	...

HAVING :-

HAVING clause is used to filter the resultant rows after the application of GROUP BY clause.

Syntax:-

```

SELECT
    c1,
    c2,
    aggregate_function(c1)
FROM
    table_name
GROUP BY
    c1, c2
HAVING
    condition;
  
```

Example:- Get the name and number of half-centuries of players who scored more than one half century.

```

SELECT
    name
    count(*) AS half_centuries
FROM
    player-match-details
  
```

```

WHERE
    score >= 50
  
```

```

GROUP BY
    name
HAVING half_centuries > 1;
  
```

Output:-

<u>name</u>	<u>half-centuries</u>
Lokesh	2
Ram	3

Note:- WHERE vs HAVING :- WHERE is used to filter rows and this operation is performed before grouping.

→ HAVING is used to filter groups and this operation is performed after grouping.

Common Concepts

* SQL Expressions

→ We can write expressions in various SQL clauses. Expressions can comprise of various data types like integers, floats, strings, datetime etc.

→ Using Expressions in SELECT Clause

* Example:- Get profits of all movies.

Note:- Consider profit as difference between collection and budget.

SELECT

 id, name, (collection_in_cr - budget_in_cr) as profit

FROM

 movie;

Output:-

<u>id</u>	<u>name</u>	<u>profit</u>
1	The matrix	40.31
2	Inception	67.68
3	The Dark night	82.5
...

Note:-

We use "||" Operator to concatenate strings in Sqlite3

Example 2:- Get the movie name and genre in the following format: movie-name=genre

SELECT

name || " - " || genre AS movie-genre

FROM

movie;

Output:

movie_genre

The Matrix - Sci-fi

Inception - Action

The Dark knight - Drama

Toy Story 3 - Animation

...

⇒ Using Expressions in WHERE Clause:

Example:- Get all the movies with a profit at least 50 crores.

SELECT

*

FROM

movie

WHERE

(collection-in-cr - budget-in-cr) >= 50;

Output:-

<u>id</u>	<u>name</u>	<u>genre</u>	<u>budget-in-cr</u>	<u>collection-in-cr</u>	<u>rating</u>	<u>release</u>
2	Inception	Action	16.0	83.68	8.8	2010-07-24
3	The dark knight	Action	18.0	100.5	9.0	2008-07-16
4	Toy Story 3	Animation	20.0	1006.7	8.5	2010-06-25
...

⇒ Using Expressions in UPDATE clause.

Example:- Scale down ratings from 10 to 5 in movie table

UPDATE

SET rating = rating/2

⇒ Expressions in HAVING clause:-

Example:-

Get all the genres with an average profit of at least 100 crores.

SELECT

genre

FROM

movie

GROUP BY

genre

HAVING

Avg(collection-in-cr - budget-in-cr) >= 100;

Output:-

genre

Action

Animation

Mystery

...

...

SQL Functions:-

- SQL provides many built-in functions to perform various operations over data that is stored in tables.
- SQL functions can be divided into different categories such as:
 - (1) Date functions
 - (2) cast Functions
 - (3) Arithmetic functions

Date Functions:

- Date Functions are used to extract the date or time from a datetime field. One important function in date functions is the strftime() function.

strftime() :-

strftime() function is used to extract year, month, day, hour, etc. from a date (or datetime) field based on a specific format as strings.

Syntax:

strftime (format, field-name)

Example:-

strftime ("%Y", release_date)

- Various formats in date functions with an example:-

<u>Format</u>	<u>Description</u>	<u>Function</u>
%Y	year	strftime ("%Y", field-name)
%m	month	strftime ("%m", field-name)
%d	day	strftime ("%d", field-name)
%H	Hour	strftime ("%H", field-name)

How to use strftime()

1. Choose the format of the datetime that you want, such as the year, the month, or the day, etc.
2. Write the function using `strftime(Format, field_name)` in SQL query.

Note:- `strftime()` extracts date and time in the string format.

Example:- Get the movie title and year for every movie from the database

```
SELECT  
    name,  
    strftime ('%Y', release_date)  
FROM  
    movie;
```

Output:-

<u>name</u>	<u>strftime ('%Y', release_date)</u>
The Matrix	1999
Inception	2010
The Dark Knight	2008
...	

CAST Function :-

In database management systems, the CAST function is used to convert a value from one data type to another data type.

Syntax:-

CAST(value as data-type)

Example:-

CAST(strftime('%y', release_date) AS integer)

→ The CAST function takes:-

1. Value:- the value that you want to convert into a specific data type.

2. Data type:- The data type to which you want to convert the value.

Example2:- Find how many movies were released in each month of the year 2010.

SELECT

strftime("%m", release_date) AS month,
COUNT(*) AS total_movies

FROM

movie

WHERE

CAST(strftime('%y', release_date) AS integer) = 2010

GROUP BY

month;

ArithmetiC Functions:-

→ Arithmetic functions in SQL are used to perform mathematical operations on numeric values. Some commonly used arithmetic function are FLOOR, CEIL, ROUND

FLOOR Function :-

→ The FLOOR function rounds a number to the nearest integer below its current value.

Syntax:-

FLOOR(number)

Example:-

SELECT FLOOR(2,3);

Output:-

FLOOR
2

CEIL Function:-

⇒ The CEIL function rounds a number to the nearest integer above its current value.

Syntax:-

CEIL(number)

Example:-

SELECT CEIL(-2.7);

Output:- CEIL

-2

→ ROUND Function

→ The ROUND function rounds a number to a specified number of decimal places.

Syntax

ROUND(number, decimal_places)

Example

SELECT ROUND(2.345, 2);

SELECT ROUND(2.345, 1);

Output:-

ROUND

2.35

2.3

String Functions

→ String functions in SQL are used to manipulate and operate on string values or character data.

SQL function

UPPER()

Behaviour

converts a string to upper case

LOWER()

Converts a string to lowercase

Example:-

SELECT

name

FROM

movie

WHERE

Output:-

name

→ Avengers : Age of Ultron

Avengers : Endgame

UPPER(name) LIKE UPPER("%avengers%");

Note:-

Usually, UPPER() AND LOWER() functions can help us


to perform case-insensitive searches.

Notes by Bhavana


SQL Set Operations :-

- ⇒ The SQL set operation is used to combine the two or more SQL queries.
- ⇒ Let us understand common set operations by performing operations on two sets.

- * cast in "Sherlock Holmes" movie
- * cast in "Avengers Endgame" movie

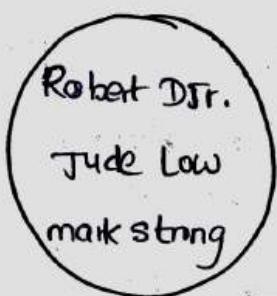


Sherlock Holmes

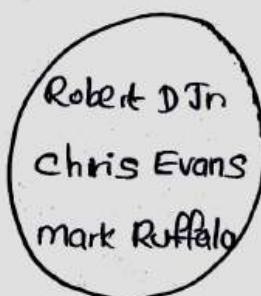

Avengers Endgame

Common Set Operators :


INTERSECT

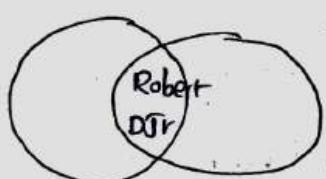

Actors who acted in both Sherlock Holmes and Avengers Endgame.

Result :- Robert D.Jr.

MINUS

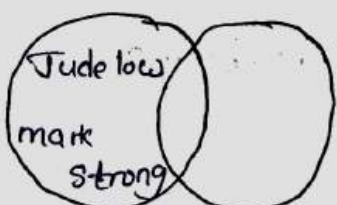


Actors who acted in Sherlock Holmes and not in Avengers Endgame.

Result :- Jude Law, Mark Strong

UNION

Unique actors who acted in Sherlock Holmes or in Avengers Endgame

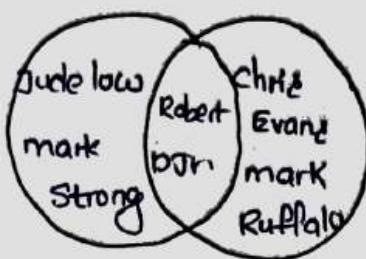

Result :- Jude Law, Mark Strong, Robert D Jr., Chris Evans, Mark Ruffalo.

UNION ALL

Doesn't eliminate duplicate results



Result : Jude Law, Mark Strong, Robert D Jr., Robert D Jr., Chris Evans, Mark Ruffalo

Applying Set Operations

⇒ We can apply these set operations on the two or more SQL queries to combine their results.

Syntax:-

```
SELECT  
    C1, C2  
FROM  
    table_name - 1  
SET_OPERATOR  
SELECT  
    C1, C2  
FROM  
    table_name - 2;
```

⇒ Basic rules when combining two SQL queries using set operators.

- Each SELECT statement must have the same columns.
- ⇒ The columns must have similar data types
- ⇒ The columns in each SELECT statement must be in the same order.

Example:- Get ids of actors who acted in both Sherlock Holmes (id = 6) and Avengers Endgame (id = 15)?

```
SELECT  
    actor_id  
FROM  
    cast  
WHERE  
    movie_id = 6
```

INTERSECT

```
SELECT  
    actor_id  
FROM  
    cast  
WHERE  
    movie_id = 15;
```

Output:-

actor_id

6

ORDER BY Clause in Set Operations

- ORDER BY clause can appear only once at the end of the query containing multiple SELECT statements.
- While using set operators, individual SELECT statements cannot have ORDER BY clause. Additionally, sorting can be done based on the columns that appear in the first SELECT query. For this reason, it is recommended to sort this kind of queries using column positions.

Example:-

Get distinct ids of actors who acted in Sherlock Holmes (id = 6) or Avengers Endgame (id = 15). Sort ids in the descending order.

```
SELECT  
    actor_id  
FROM  
    cast  
WHERE  
    movie_id = 6  
UNION  
SELECT  
    actor_id  
FROM  
    cast  
WHERE  
    movie_id = 15  
ORDER BY
```

1 DESE :

Notes by Bhavana

Pagination in Set Operations

Similar to ORDER BY clause, LIMIT and OFFSET clauses are used at the end of the list of queries.

Example:-

Get the first 5 ids of actors who acted in Sherlock Holmes (id=6) or Avengers Endgame (id=15). Sort id in the descending order.

SELECT

actor_id

FROM

cast

WHERE

movie_id = 6

UNION

SELECT

actor_id

FROM

cast

WHERE

movie_id = 15

ORDER BY

1 DESC

LIMIT

5;

Modelling Databases

SKBW

Date _____

Page _____

* Modelling Databases:-

Core Concepts in ER Model :-

Entity:-

→ Real world object/concepts are called entities in ER Model.

Ex:- John, Emma, Apple, Google

Attributes of an Entity:-

→ Properties of real world objects/concepts are represented as attributes of an entity in ER Model

Ex:- ① name: John ② name: Emma
 age: 29 age: 25

key Attribute:-

→ The attribute that uniquely identifies each entity is called key attribute.

Ex:- Aadhar no:xxx Aadhar no:xxx
 age: 29 name: Emma
 name: John age: 29

Entity Type:-

→ Entity type is a collection of entities that have the same attributes (not values)

Ex:- | — — — — — | — — — |
| Aadhar no: xxxx Aadhar no: xxx |
| name: John name: Emma |
| age: 29 age: 25 → person |

* Relationships in classes / topics based

Associating 'Association' among the entities is called a relationship.

Example:

- * person has a passport
 - * person can have many cars
 - * Each student can register for many courses, and a course can have many students

Types of Relationships:-

① one-to-one Relationship:-

→ An entity is related to only one entity, and vice versa.

Example— * A person can have only one passport
* Similarly, a passport belongs to one and only one person

② One-to-Many Relationship:

→ An entity is related to many other entities

Ex:- A person can have many cars. But a car belongs to only one person.

③ Many-to-Many Relationship

→ Multiple entities are related to multiple entities.

Ex:-

- * Each student can register to multiple courses.
- * Similarly, each course is taken by multiple students.

Cardinality Ratio:-

→ Cardinality in DBMS defines the maximum number of times an instance in one entity can relate to instances of another entity.

→ One-to-one (1:1)

→ One-to-many (1:m)

→ Many-to-one (M:1)

→ Many-to-many (m:n)

* Applying ER Model Concepts:

Let's build an ER model for a real-world scenario.

E-commerce Application needs to have:

In a typical e-commerce application, it would

* Customer has only one cart. A cart belongs to only one customer.

* Customer shall add products to cart.

* A cart contains multiple products.

* Customer can save multiple addresses in the application for further use like selecting delivery address.

→ Let's apply the concepts of ER Model to this e-commerce scenario.

Entity types

- * Customer
- * product
- * Cart
- * Address

Relationships

→ Relation Between Cart and Customer

- * A customer has only one cart
- * A cart is related to only one customer
- * Hence, the relation between customer and cart entities is One-to-One relation.

→ Relation Between Cart and products

- * A cart can have many products
- * A product can be in many carts
- * Therefore, the relation between cart and product is Many-to-Many Relations.

→ Relation Between Customer and Address

- * A customer can have multiple addresses
- * An address is related to only one customer
- * Hence, the relation between customer and address is one-to-many relations.


Attributes:

following are the attributes for the entity types in the e-commerce scenario:

• Here, attributes like id, product_id etc. are key attributes as they uniquely identify each entity in the entity.

<u>Customer</u>	<u>product</u>	<u>address</u>	<u>cart</u>
<u>id</u>	<u>product id</u>	<u>id</u>	<u>cart id</u>
<u>name</u>	<u>price</u>	<u>pin code</u>	<u>total price</u>
age	name	door no.	ii
	brand	city	state/ut
an- rock shopping hi	category	12291810	on-net

ER-Model of e-commerce application

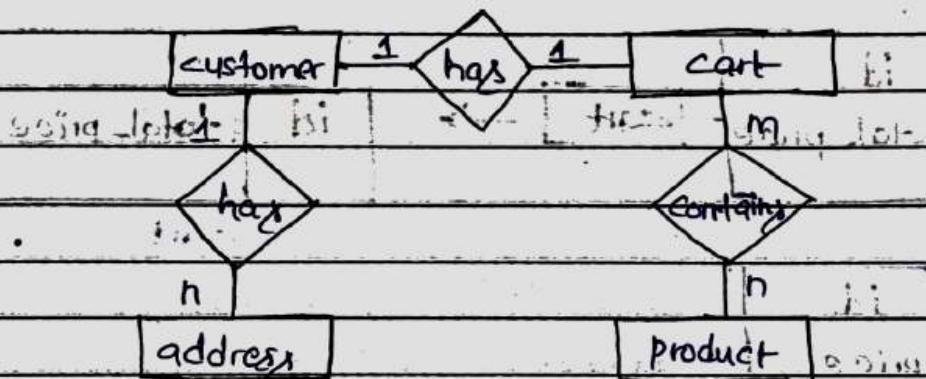

* ER Model to Relational Database

Entity Type to Table

Entity Types → Tables

Attributes \rightarrow columns

~~key Attribute → key primary key~~

primary key :- A minimal set of attributes (columns) in a table that uniquely identifies rows in a table.

→ In the following tables, all the id's are primary keys as they uniquely identify each row in the table.

id					
name	customer	→	id	name	age
age					

customer

id					
pin code					
door no.	address	→	id	pin code	door no.
city					city

address

id				
total price	cart	→	id	total price

cart

id				
price				
name				
brand	product	→	id	name
category				price brand category

product

Relationships

→ Relationship Between customer and Address -

~~one-to-many relationship~~

- * A customer can have multiple address.

- * An address is related to only one customer.

→ We store the primary key of a customer in the address table to denote that the addresses are related to a particular customer.

→ This new column/s in the table that refer to the primary key of another table is called Foreign key.

	id	pincode	door_no	...	customer_id
address					
	PK				
	FK				
	Unique FK				

Here, customer id is the foreign key that stores id (primary key) of customers.

→ Relation Between Cart and Customer ~~one-to-one~~

~~Relationship~~

- * A customer has only one cart.

- * A cart is related to only one customer.

This is similar to one-to-many relationship. But, we need to ensure that only one cart is associated to a customer.

<u>id</u>	<u>total_price</u>	<u>customer_id</u>
-----------	--------------------	--------------------

cart

→ Relation Between Cart and products - Many to Many Relationship.

- * A cart can have many products.
- * A product can be in many carts.

Here, we cannot store either the primary key of a product in the cart table or vice versa.

→ To store the relationship between the cart and product tables, we use a Junction Table.

<u>id</u>	<u>cart_id</u>	<u>product_id</u>	<u>id</u>	<u>name</u>
1	1	1	1	T-shirt
2	1	2	2	Jeans
	1	3	3	mobile
	2	1		

cart_product

FK to cart FK to product

Note:- why we use junction table?


We store the properties related to a many-to-many relationship in the junction table. For example, quantity of each product in the cart should be stored in the junction table - cart_product.

E-Commerce Usecase: ER Model to Relational Database:-

Following ER Model is represented as the below table

in the relational database

ER Model

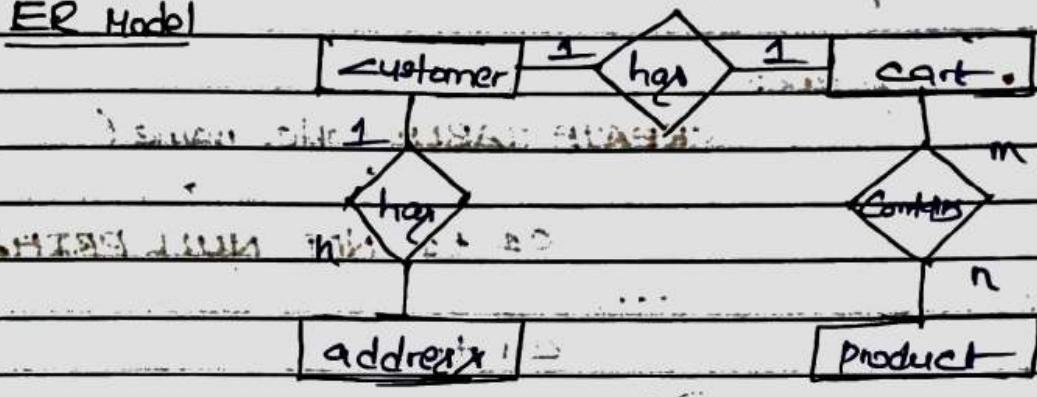

Relational Database

<u>id</u>	<u>name</u>	<u>age</u>	<u>id</u>	<u>pin-code</u>	<u>door no</u>	<u>city</u>	<u>customer-id</u>
<u>customer</u>	<u>customer</u>	<u>customer</u>	<u>address</u>	<u>address</u>	<u>address</u>	<u>address</u>	<u>address</u>

<u>id</u>	<u>total price</u>	<u>Customer-id</u>	<u>..:::</u>	<u>id</u>	<u>name</u>	<u>price</u>	<u>brand</u>	<u>category</u>
<u>123456789</u>	<u>1000</u>	<u>123456789</u>	<u>..:::</u>	<u>123456789</u>	<u>apple</u>	<u>100</u>	<u>apple</u>	<u>fruits</u>
<u>3456789</u>	<u>500</u>	<u>3456789</u>	<u>..:::</u>	<u>3456789</u>	<u>banana</u>	<u>50</u>	<u>banana</u>	<u>fruits</u>

id	cart_id	product_id	quantity
----	---------	------------	----------

(c) ~~redundant~~ ~~redundant~~ ~~redundant~~ ~~redundant~~ ~~redundant~~

* Creating a Relational Database

Primary Key

following syntax creates a table with c1 as the primary key.

Syntax:-

CREATE TABLE table name (

c1 +1 NOT NULL PRIMARY KEY,

```
    );
    chintan;
```

Foreign key

In case of foreign key, we just create a foreign key constraint.

Syntax:-

CREATE TABLE table(

c1 +1 NOT NULL PRIMARY KEY,

FOREIGN KEY(c2) REFERENCES table(c1)

ON DELETE CASCADE

);

Understanding

FOREIGN KEY(c2) REFERENCES table1(c3)

Above part of the foreign key constraint ensure that foreign key can only contain values that are in

the referenced primary key

ON DELETE CASCADE

Ensure that if a row in table 1 is deleted, then all its related rows in table 2 will also be deleted.

Note:- To enable foreign key constraints in sqlite, use `PRAGMA foreign_keys = ON;` By default it is enabled in our platform (Windows)

Creating Tables in Relational Database:-

Customer Table

```
CREATE TABLE customer
```

```
(id INTEGER NOT NULL PRIMARY KEY,  
name VARCHAR(250),  
age INTEGER, address  
);
```

product Table

```
CREATE TABLE product
```

```
(id INTEGER NOT NULL PRIMARY KEY,  
name VARCHAR(250), price  
price INTEGER, brand  
brand VARCHAR(250),  
category VARCHAR(250))
```

Address Table

```
CREATE TABLE address(
    id INTEGER NOT NULL PRIMARY KEY,
    pin code INTEGER,
    door no VARCHAR(250),
    city VARCHAR(250),
    customer id INTEGER,
    FOREIGN KEY(customer.id) REFERENCES
    Customer(id) ON DELETE CASCADE
```

Cart Table

```
CREATE TABLE cart(
    id INTEGER NOT NULL PRIMARY KEY,
    customer.id INTEGER NOT NULL,
    total price INTEGER,
    FOREIGN KEY(customer.id) REFERENCES
    customer(id) ON DELETE CASCADE
```

Cart product Table (Junction Table)

```
CREATE TABLE cart product(
    id INTEGER NOT NULL PRIMARY KEY,
    card id INTEGER,
    product id INTEGER,
    quantity INTEGER,
    FOREIGN KEY(card.id) REFERENCES cart(id)
    ON DELETE CASCADE,
    FOREIGN KEY(product.id) REFERENCES
    product(id) ON DELETE CASCADE.
```

2:

JOins

Date _____
Page _____

* Joins:-


So far we have learnt to analyse the data that is present in a single table. But in the real-world scenarios, often, the data is distributed in multiple tables. To fetch meaningful insights, we have to bring the data together by combining the tables.

→ We use JOIN clause to combine rows from two or more tables, based on a related column between them. There are various types of joins, namely Natural join, Inner join, Full Join, Cross join, Left join, Right join.

→ Let's learn about them in detail using the following database example involving relations with entities.

Database:- (involves numerous courses and students)

Here, the database stores the data of students, courses, course reviews, instructors, etc. of an e-learning platform.

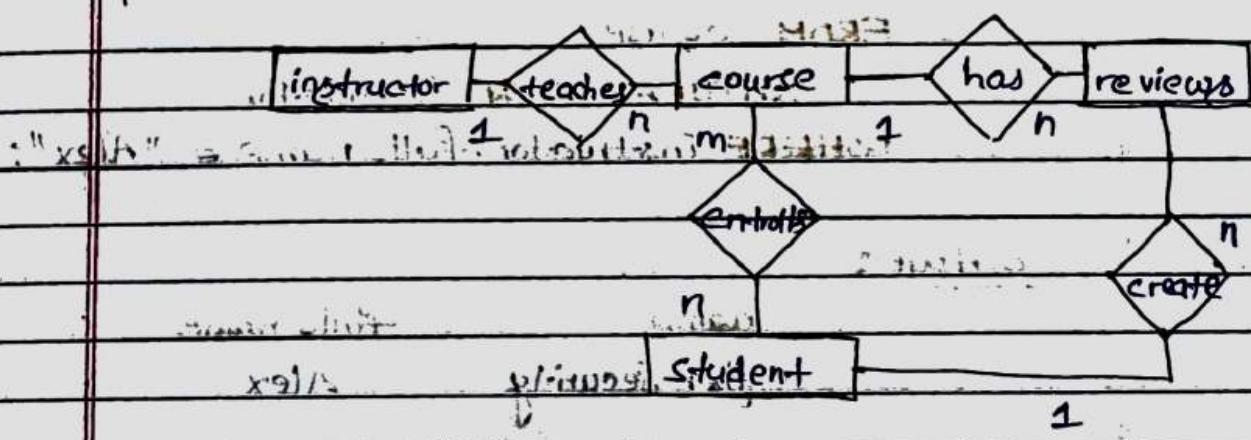

Refer the tables in the code playground for a better understanding of the database.

Natural Join

NATURAL JOIN combines the tables based on the common columns.

Syntax: ~~SELECT * FROM table1 NATURAL JOIN table2;~~

~~SELECT * FROM table1~~

~~NATURAL JOIN table2;~~

Example: The following query can be written

1. fetch the details of courses that are being taught by "Alex".

Solving this problem involves querying on data stored in two tables, i.e., course & instructor. Both the tables have common column instructor_id. Hence, we use natural join.

~~SELECT course.name, course.instructor_id,
instructor.full_name
FROM course,~~

~~NATURAL JOIN instructor~~

~~WHERE "instructor.full_name = "Alex";~~

Output:-

	name	full_name
+	Cyber Security	Alex

INNER JOIN:-

It joins rows from both the tables if they meet a specified condition.

Syntax: `SELECT *
FROM table1
INNER JOIN table2
ON table1.c1 = table2.c2;`

SELECT *

FROM table1

INNER JOIN table2

ON table1.c1 = table2.c2;

↳ older user

Note:- We can use any comparison operator in the condition.

Example:-

Get the reviews of course "cyber Security" (course with id=15).

`SELECT student.full_name,
review.content
FROM student
INNER JOIN review`

`ON student.id = review.student_id`

`WHERE review.course_id = 15;`

Output:-

full_name	content	created_at
Ajay	Good explanation	2021-01-19
Ajay	cyber security is awesome	2021-01-20

LEFT JOIN

- In LEFT JOIN, for each row in the left table, matched rows from the right table are combined. If there is no match, NULL values are assigned to the right half of the rows in the temporary table.

Syntax:-

```
SELECT *  
FROM table-1  
LEFT JOIN table-2  
ON table1.c1 = table2.c2;
```

Example:-

Fetch the full name of students who are have not enrolled for any course.

```
SELECT student.full_name
```

```
FROM student
```

```
LEFT JOIN student_course
```

```
ON student.id = student_course.student_id
```

```
WHERE student_course.id IS NULL;
```

Output:-

full_name
Afrin

Joins on Multiple Tables :-

We can also perform join on a combined table.

Example:- fetch all the students who enrolled for the courses taught by the instructor "Arun" (id = 109).

```
SELECT student.name AS student_name,
       student.full_name
```

```
FROM course
```

```
INNER JOIN student_course
```

```
ON course.id = student_course.course_id) AS T
```

```
INNER JOIN student
```

```
ON T.student_id = student.id
```

```
WHERE course.instructor_id = 109;
```

Output:-

course_name	full_name
data structures	Zaini
machine learning	Varun

Note:-

Best practices

1. Use AITAS to name the combined table

2. Use alias (table names) to refer for the columns in the combined table. Most

Using joins with other clauses

→ We can apply WHERE, ORDER BY, HAVING, GROUP BY, LIMIT and other clauses which are used for retrieving data table as well.

Example :-

Get the name of the student who scored highest in "Machine Learning" course.

```
SELECT student.full_name
```

```
FROM course
```

```
INNER JOIN student_course
```

```
ON course.id = student_course.course_id) AS T
```

```
INNER JOIN student
```

```
ON T.student_id = student.id
```

```
WHERE course.name = "Machine Learning"
```

```
ORDER BY student_course.score DESC
```

```
LIMIT 1;
```

Using joins with aggregations

→ We can apply aggregate functions such as SUM, Avg, COUNT, MAX, MIN and other to perform calculations on the temporary joined tables well.

Example :- Get the highest score in each course.

```
SELECT
```

```
course.name AS course_name
```

```
MAX(score) AS highest_score
```

```
FROM
```

```
course LEFT JOIN student_course
```

```
ON course.id = student_course.course_id
```

```
GROUP BY
```

```
course.id;
```

RIGHT JOIN :-

⇒ RIGHT JOIN or RIGHT OUTER JOIN is vice versa of LEFT JOIN i.e., in RIGHT JOIN, for each row in the right table, matched rows from the left table are combined. If there is no match, NULL values are assigned to the left half of the rows in the temporary table.

Syntax :-

SELECT *

FROM table1

RIGHT JOIN table2

ON table1.c1 = table2.c2;

Example :- perform RIGHT JOIN on course and instructor tables.

SELECT course.name,

instructor.full_name

FROM course

RIGHT JOIN instructor

ON course.instructor_id = instructor.instructor_id;

Note :- RIGHT JOIN is not supported in some DBMS (SQLite).

FULL JOIN

⇒ FULL JOIN or FULL OUTER JOIN is the result of both RIGHT JOIN and LEFT JOIN.

Syntax:-

```
SELECT *
  FROM table1
    FULL JOIN table2
```

```
  ON table1.c1 = table2.c2;
```

Example :- perform ~~a query~~ full join ON course and instructor.

```
SELECT course.name,
```

```
      instructor.full_name
```

```
  FROM course
```

```
    FULL JOIN instructor
```

```
  ON course.instructor_id = instructor.instructor_id;
```

Note :-

FULL JOINS is not supported in some dbms
(Oracle)

CROSS JOIN

- In CROSS JOIN, each row from the first table is combined with all rows in the second table.
- Cross Join is also called as CARTESIAN JOIN

Syntax:-

~~SELECT * FROM table1~~

~~FROM table1~~

~~CROSS JOIN table2;~~

Example :- perform CROSS JOIN on course and instructor

~~SELECT course_name AS course-name,~~

~~instructor_full_name AS instructor-name~~

~~FROM course~~

~~CROSS JOIN instructor;~~

Output:-

	course-name	instructor-name
i.	Machine Learning	Alex
i.	Machine Learning	Arun
i.	Cyber Security	Alex
ii.	SDI	Mini Institute

SELF JOIN

⇒ we can combine a table with itself. This kind of join is called SELF JOIN.

Syntax:-

SELECT $t_1.c_1,$

$t_2.c_2$

FROM table1 AS t_1

JOIN table1 AS t_2

ON $t_1.c_1 = t_2.c_2$

Note:- we can use any JOIN clause in self-join

Example:- Get student pairs who registered for common course.

SELECT sc1.student_id AS student_id1,

sc2.student_id AS student_id2, sc1.course

FROM

student_course AS sc1

INNER JOIN student_course sc2

ON sc1.course_id = sc2.course_id

WHERE

sc1.student_id < sc2.student_id;

Output:-

student_id1

student_id2

course_id

1

3

11

JOINS Summary :-

join-type	use case
Natural join	joining based on common columns
Inner join	joining based on a given condition
Left join	All rows from left table and matched rows from right table.
Right join	All rows from right table and unmatched rows from left table
Full join	All rows from both the tables
Cross join	All possible Combinations.

Views and Subqueries

⇒ Views :-

⇒ A view can simply be considered a name to a SQL query.

Create View

To create a view in the database, use the CREATE VIEW Statement.

Example:-

Create user_base_details view with id, name, age, gender and pincode.

```
CREATE VIEW user_base_details AS  
SELECT id, name, age, gender, pincode  
FROM user;
```

Note:-

→ In general, views are read only.

→ We cannot perform write operations like updating, deleting and inserting rows in the base table through views.

Querying Using View

We can use its name instead of writing the original query to get the data..

```
SELECT *  
FROM user_base_details;
```

→ In SQLite, to list all the available views, we use the following

query. Syntax:-

SELECT

name

FROM

sqlite_master

WHERE

TYPE = 'view';

Output:-

name

 order-with-products

 user-base-details

DELETE View:-

To remove a view from a database, use the DROP VIEW statement.

Syntax:-

DROP VIEW View-name;

Example:- Delete user-base-details view from the database

DROP VIEW user-base-details.

Advantages:-

⇒ Views are used to write complex queries that involves multiple joins, group by, etc., and can be used whenever needed.

⇒ Restrict access to the data such that a user can only see limited data instead of a complete table. **Notes by Bhavana**

Transactions and Indexes

→ Transactions :-

transaction

SELECT ...

UPDATE ...

INSERT ...

...

transaction

Debit SQL

✓ Credit SQL

✓ ... SQL

...

A transaction is a logical group of one or more SQL statements.


→ Transactions are used in various scenarios such as banking, ecommerce, social networks, booking tickets, etc.

→ A transaction has four important properties.

(1) Atomicity (2) Consistency (3) Isolation (4) Durability

Atomicity

Either all SQL statements or, none are applied to database

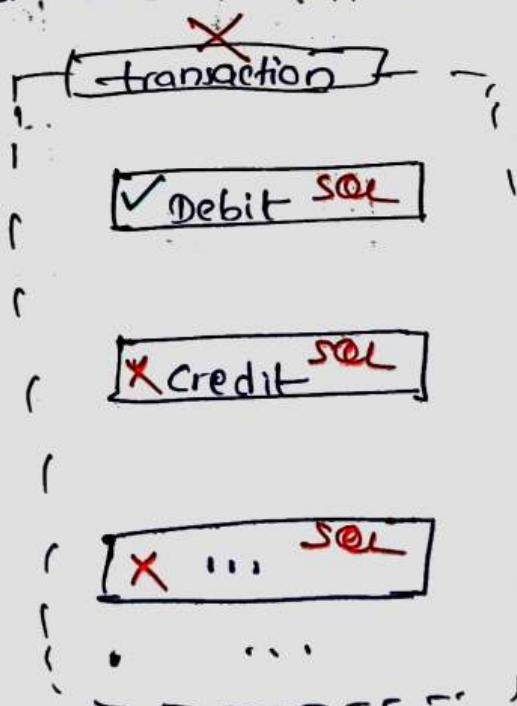

Consistency:-

Transactions always leave the database in a consistent state


$$\begin{array}{ccc} \text{Sam} & & \text{David} \\ \boxed{\text{before}} & & \boxed{10,000} + \boxed{5,000} = 15,000 \\ - - - - - & & - - - - - \end{array}$$

$$\begin{array}{ccc} \boxed{\text{Success}} & & \boxed{9,000} + \boxed{16,000} = 15,000 \end{array}$$

$$\begin{array}{ccc} \boxed{\text{Failure}} & & \boxed{10,000} + \boxed{5,000} = 15,000 \end{array}$$


Isolation:-

Multiple transactions can occur at the same time without adversely affecting the other.

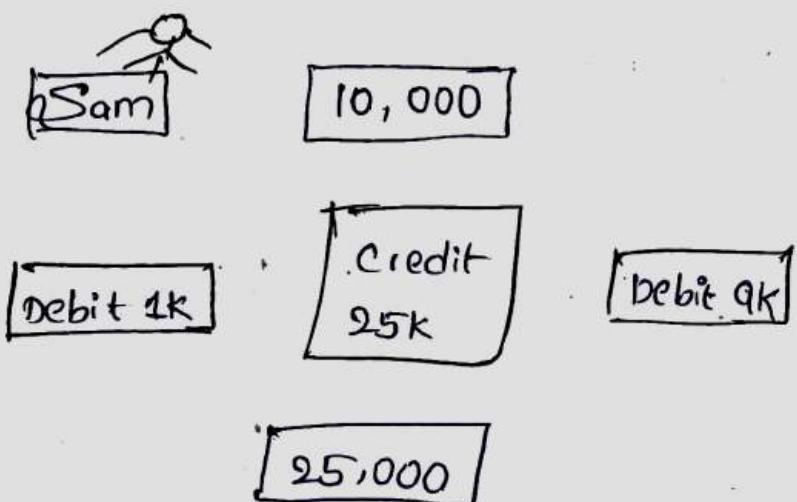

Durability :-

Changes of a successful transaction persist even after a system crash.

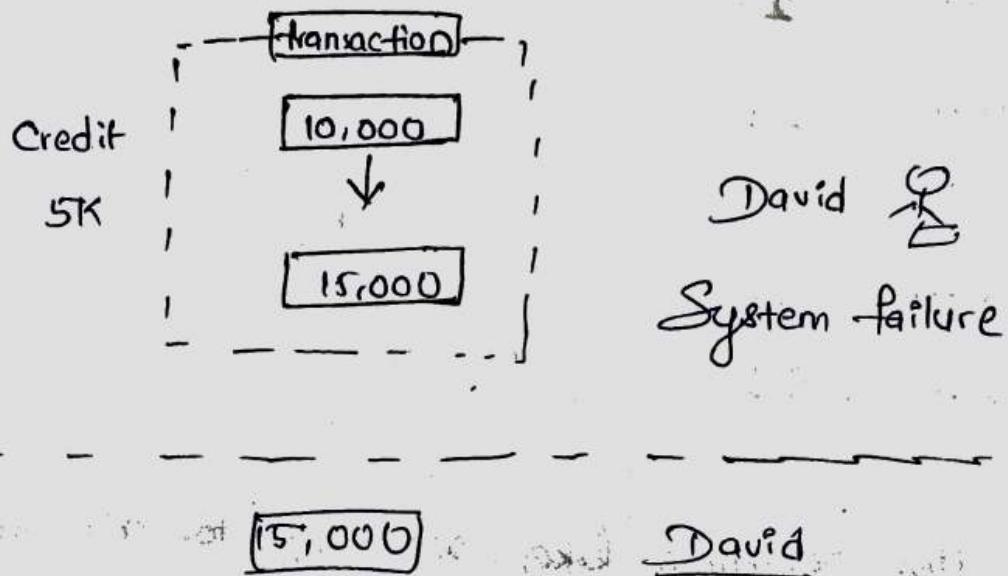

* These four properties are commonly acronymed ACID

~~A~~tomicity Consistency Isolation Durable

Indexes

A	a1...	02
	a2...	03

B	ba...	24
	bz...	32

C	ca...	33
	c2...	43

In this scenario like, searching for a word in dictionary, we use index to easily search for the word. Similarly, in databases, we maintain indexes to speed up the search for data in a table.
