

PeeGeeQ Complete Guide

© Mark Andrew Ray-Smith Cityline Ltd 2025



Welcome to **PeeGeeQ** (PostgreSQL as a Message Queue) - a production-ready message queue system built on PostgreSQL that provides both high-performance real-time messaging and transactional messaging patterns.

This guide takes you from complete beginner to production-ready implementation with progressive examples and detailed explanations.

**** Need Technical Reference? **** For detailed API specifications, database schema, and architectural details, see the [PeeGeeQ Architecture & API Reference](#).

Table of Contents

Part I: Understanding Message Queues

1. [What is a Message Queue?](#)
2. [Why Use Message Queues?](#)
3. [Message Queue Patterns Explained](#)
4. [Traditional vs. Database-Based Queues](#)

Part II: Understanding PeeGeeQ

5. [What is PeeGeeQ?](#)
6. [PeeGeeQ's Unique Approach](#)
7. [Architecture Deep Dive](#)
8. [When to Choose PeeGeeQ](#)

Part III: Getting Started (Progressive Learning)

9. [Prerequisites & Environment Setup](#)
10. [Your First Message \(Hello World\)](#)
11. [Understanding the Code](#)
12. [Adding Error Handling](#)

- 13. [Adding Configuration](#)

Part IV: Core Concepts (Detailed)

- 14. [Native Queue Pattern \(Deep Dive\)](#)
- 15. [Outbox Pattern \(Deep Dive\)](#)
- 16. [Bi-temporal Event Store \(Deep Dive\)](#)
- 17. [Choosing the Right Pattern](#)

Part V: Practical Examples (Progressive Complexity)

- 18. [Level 1: Basic Examples](#)
- 19. [Level 2: Business Scenarios](#)
- 20. [Level 3: Advanced Integration](#)

Part VI: Production Readiness

- 21. [Configuration Management](#)
- 22. [Monitoring & Metrics](#)
- 23. [Performance Tuning](#)
- 24. [Security Considerations](#)

Part VII: Advanced Features & Enterprise

- 25. [Advanced Messaging Patterns](#)
- 26. [Message Priority Handling](#)
- 27. [Enhanced Error Handling](#)
- 28. [System Properties Configuration](#)
- 29. [Security Configuration](#)
- 30. [Consumer Groups & Load Balancing](#)
- 31. [Service Discovery & Federation](#)
- 32. [REST API & HTTP Integration](#)
- 33. [Bi-Temporal Event Store](#)
- 34. [Production Readiness Features](#)
- 35. [Monitoring & Observability](#)
- 36. [Multi-Environment Configuration](#)
- 37. [Performance Optimization](#)
- 38. [Integration Patterns](#)
- 39. [Production Deployment](#)

Part VIII: Troubleshooting & Best Practices

- 40. [Common Issues & Solutions](#)
- 41. [Best Practices Checklist](#)
- 42. [Anti-patterns to Avoid](#)

Part I: Understanding Message Queues

What is a Message Queue?


A message queue is a communication method used in software architecture where applications send and receive messages asynchronously. Think of it as a reliable postal service for your applications.

Real-World Analogy

Imagine a message queue like a post office:

- **You (Producer)** drop letters (messages) in a mailbox (queue)
- **The postal service (Queue System)** stores and delivers them reliably
- **Recipients (Consumers)** receive letters from their mailboxes
- **Letters are delivered reliably**, even if recipients aren't home when they arrive

Core Components

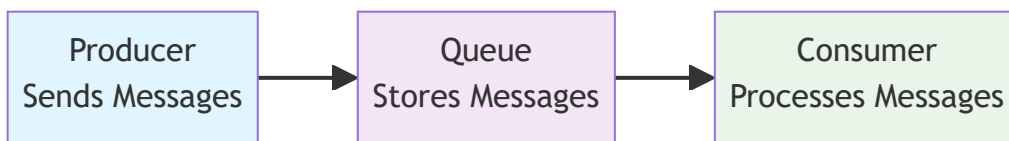

- **Producer:** An application that sends messages
- **Queue:** A storage mechanism that holds messages temporarily
- **Consumer:** An application that receives and processes messages
- **Message:** A unit of data being transmitted (text, JSON, objects, etc.)

Message Lifecycle

1. **Send:** Producer creates and sends a message to a queue
2. **Store:** Queue safely stores the message until a consumer is ready
3. **Receive:** Consumer retrieves the message from the queue
4. **Process:** Consumer processes the message (business logic)
5. **Acknowledge:** Consumer confirms successful processing
6. **Remove:** Queue removes the processed message

Why Use Message Queues?

Message queues solve fundamental problems in distributed systems:

1. Decoupling Applications

✗ Without Message Queue (Tight Coupling):

```
[Order Service] —directly calls→ [Email Service]
                  —directly calls→ [Inventory Service]
                  —directly calls→ [Payment Service]
```

- ✅ With Message Queue (Loose Coupling):

```
[Order Service] → [Queue] → [Email Service]
```

—> [Inventory Service]
—> [Payment Service]

Benefits:

- Services don't need to know about each other
- Services can be developed and deployed independently
- Adding new services doesn't require changing existing ones

2. Reliability & Fault Tolerance

- **Messages aren't lost** if a service is temporarily down
- **Automatic retry** mechanisms for failed processing
- **Dead letter queues** for messages that can't be processed

3. Scalability

- **Multiple consumers** can process messages in parallel
- **Load balancing** across consumer instances
- **Horizontal scaling** by adding more consumers

4. Asynchronous Processing


- **Producers don't wait** for consumers to process messages
- **Better user experience** - no blocking operations
- **Improved system responsiveness**

5. Traffic Smoothing

- **Handle traffic spikes** by queuing excess messages
- **Process at optimal rate** regardless of incoming load
- **Prevent system overload**

Message Queue Patterns Explained


1. Point-to-Point (Queue Pattern)

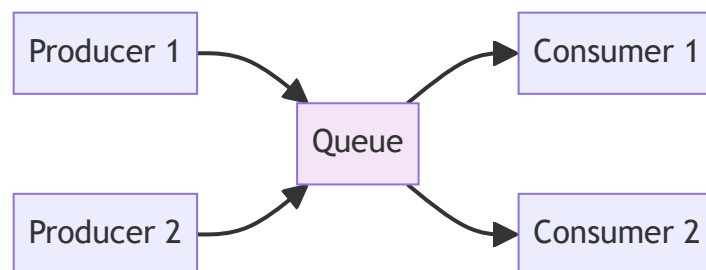

- **One message** goes to **one consumer**
- **Load balancing** across multiple consumers


- **Competing consumers** pattern
- **Use case:** Order processing, task distribution

2. Publish-Subscribe (Topic Pattern)

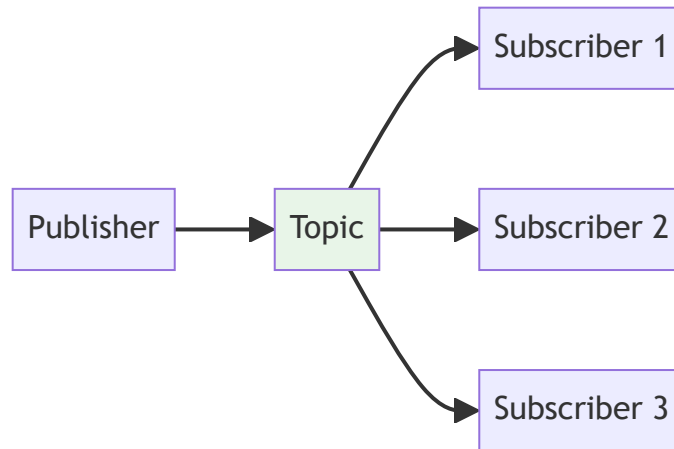

- **One message** goes to **all subscribers**
- **Broadcasting** pattern
- **Event notification** pattern
- **Use case:** News feeds, notifications, event broadcasting

3. Request-Reply Pattern

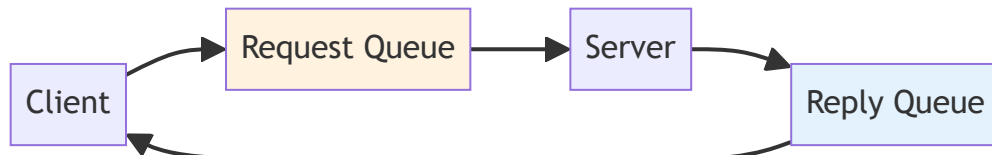

- **Synchronous-like** communication over asynchronous queues
- **Correlation IDs** to match requests with replies
- **Use case:** RPC over messaging, distributed services

Traditional vs. Database-Based Queues


Traditional Message Brokers

Examples: RabbitMQ, Apache Kafka, Amazon SQS, Apache ActiveMQ

Characteristics:

- **Separate infrastructure** to manage and maintain
- **Specialized protocols** (AMQP, MQTT, etc.)
- **High performance** and feature-rich
- **Additional operational complexity**

- **Separate failure points**

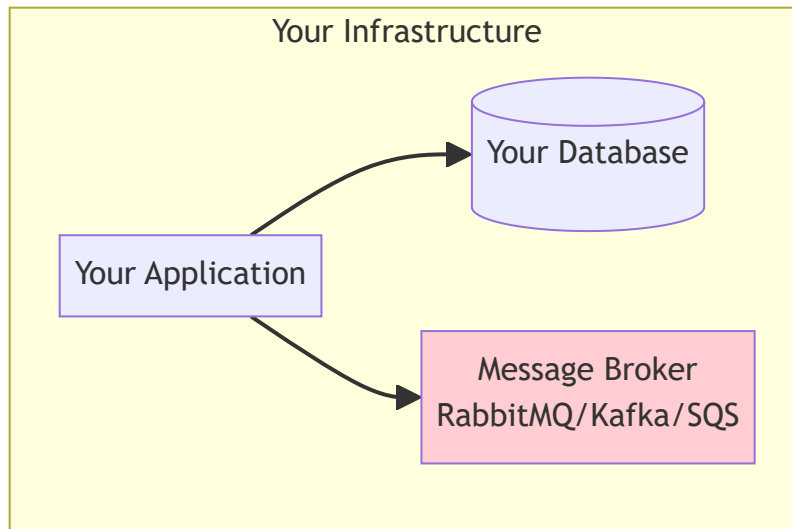


Database-Based Queues (PeeGeeQ Approach)

Examples: PeeGeeQ, AWS RDS with SQS integration

Characteristics:

- **Uses existing database** infrastructure
- **Transactional consistency** with business data
- **Simpler operational model**
- **Leverages database features** (ACID, replication, backup)
- **Single point of management**

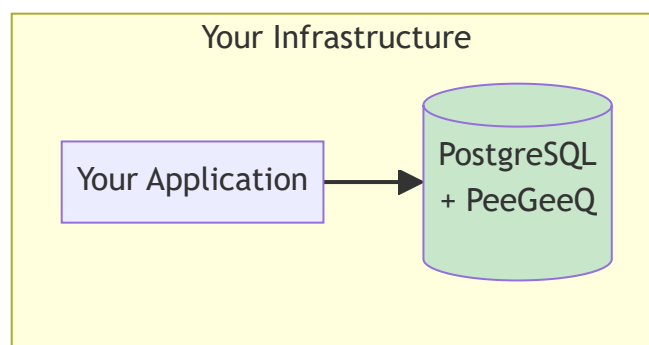

Comparison Table

Aspect	Traditional Brokers	Database-Based (PeeGeeQ)
Infrastructure	Separate service	Uses existing database
Operational Complexity	High	Low

Aspect	Traditional Brokers	Database-Based (PeeGeeQ)
Transactional Consistency	Limited	Full ACID compliance
Learning Curve	Steep	Gentle (SQL knowledge)
Backup & Recovery	Separate process	Part of database backup
Monitoring	Separate tools	Database monitoring tools
High Availability	Complex setup	Database HA mechanisms
Performance	Very High	High (10k+ msg/sec)

When to Choose Each Approach

Choose Traditional Brokers When:

- **Extreme performance** requirements (100k+ msg/sec)
- **Complex routing** and transformation needs
- **Multiple protocols** required
- **Dedicated messaging team** available

Choose Database-Based (PeeGeeQ) When:

- **Transactional consistency** is critical
- **Operational simplicity** is important
- **Existing PostgreSQL** infrastructure
- **Team familiar with SQL** and databases
- **Moderate to high performance** needs (10k+ msg/sec)



Part II: Understanding PeeGeeQ

What is PeeGeeQ?

PeeGeeQ (PostgreSQL as a Message Queue) is an enterprise-grade message queue system that transforms your existing PostgreSQL database into a powerful, production-ready message broker.

The Core Idea

Instead of adding another piece of infrastructure to your stack, PeeGeeQ leverages PostgreSQL's advanced features to provide enterprise-grade messaging capabilities:

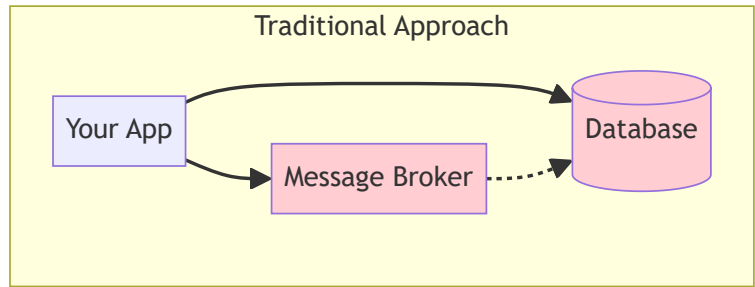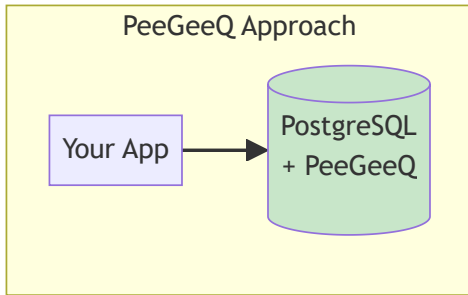

Three Powerful Patterns in One System

1. Native Queue - Real-Time Performance

- **Performance:** 10,000+ messages/second, <10ms latency
- **Mechanism:** PostgreSQL LISTEN/NOTIFY with advisory locks
- **Use Case:** Real-time notifications, live updates, event streaming

2. Outbox Pattern - Transactional Reliability

- **Performance:** 5,000+ messages/second
- **Mechanism:** Database transactions with polling-based delivery
- **Use Case:** Order processing, financial transactions, critical business events

3. Bi-Temporal Event Store - Event Sourcing

- **Performance:** 3,000+ messages/second
- **Mechanism:** Append-only event log with temporal queries
- **Use Case:** Audit trails, event sourcing, historical analysis

PeeGeeQ's Unique Approach

What Makes PeeGeeQ Different?

1. Database-Native Design

PeeGeeQ isn't a wrapper around PostgreSQL - it's designed from the ground up to leverage PostgreSQL's strengths:

- **LISTEN/NOTIFY:** Real-time message delivery without polling
- **Advisory Locks:** Prevent duplicate message processing
- **Transactions:** ACID compliance with your business data
- **JSON/JSONB:** Native support for structured message payloads
- **Triggers:** Automatic message routing and processing

2. Zero Infrastructure Overhead

Traditional Setup:

- ✓ PostgreSQL Database
- ✓ Message Broker (RabbitMQ/Kafka)
- ✓ Monitoring for Database
- ✓ Monitoring for Message Broker

- ✓ Backup for Database
- ✓ Backup for Message Broker
- ✓ HA for Database
- ✓ HA for Message Broker

PeeGeeQ Setup:

- ✓ PostgreSQL Database (with PeeGeeQ)

3. Transactional Messaging

The killer feature - true transactional consistency:

```
// This is impossible with traditional message brokers
try (Connection conn = dataSource.getConnection()) {
    conn.setAutoCommit(false);

    // 1. Update business data
    updateOrderStatus(conn, orderId, "PAID");

    // 2. Send message (same transaction!)
    producer.send(new OrderPaidEvent(orderId));

    // 3. Both succeed or both fail together
    conn.commit();
}
```

4. Familiar Technology Stack


- **SQL-based:** Use familiar SQL for queue management
- **PostgreSQL tools:** Existing monitoring, backup, and HA solutions work
- **Standard JDBC:** No new protocols or drivers to learn

Architecture Deep Dive

High-Level Architecture

Module Breakdown

PeeGeeQ consists of **9 core modules** organized in a layered architecture:

 For complete API specifications and technical details, see the [Module Structure section](#) in the Architecture & API Reference.

peegee-api - Clean Abstractions

- **MessageProducer:** Type-safe message sending with correlation IDs and message groups
- **MessageConsumer:** Type-safe message receiving with parallel processing
- **QueueFactory:** Creates producers, consumers, and consumer groups
- **QueueFactoryProvider:** Factory registry and discovery with configuration templates
- **ConsumerGroup:** Load balancing and coordinated message processing

- **EventStore:** Bi-temporal event storage and querying

peegeeq-management-ui - Web-based Administration

- **React Management Console:** Modern web interface inspired by RabbitMQ's admin console
- **System Overview Dashboard:** Real-time metrics and system health monitoring
- **Queue Management Interface:** Complete CRUD operations for queues
- **Consumer Group Management:** Visual consumer group coordination
- **Event Store Explorer:** Advanced event querying interface
- **Message Browser:** Visual message inspection and debugging
- **Real-time Monitoring:** Live dashboards with WebSocket updates

peegeeq-service-manager - Service Discovery & Federation

- **Service Discovery:** HashiCorp Consul integration for multi-instance deployments
- **Load Balancing:** Intelligent request distribution across instances
- **Health Monitoring:** Distributed health checks and failover
- **Configuration Management:** Centralized configuration with Consul KV store

peegeeq-rest - HTTP API Layer

- **Database Setup API:** RESTful endpoints for database management
- **Queue Operations API:** HTTP interface for message production and consumption
- **Event Store API:** HTTP endpoints for event storage and querying
- **Consumer Group API:** REST endpoints for consumer group management
- **Management API:** Administrative endpoints for system monitoring
- **WebSocket Support:** Real-time message streaming
- **Server-Sent Events:** Efficient real-time data streaming

peegeeq-db - Database Management

- **PeeGeeQManager:** Central configuration and lifecycle management
- **Schema Migrations:** Automatic database setup and upgrades
- **Health Checks:** Database connectivity and performance monitoring
- **Metrics Collection:** Performance and operational metrics
- **Circuit Breakers:** Fault tolerance and resilience
- **Connection Pooling:** Optimized database connection management

Implementation Modules - Pluggable Patterns

- **peegeeq-native:** LISTEN/NOTIFY based real-time messaging with consumer groups
- **peegeeq-outbox:** Transaction-safe outbox pattern with parallel processing
- **peegeeq-bitemporal:** Event sourcing with bi-temporal queries and corrections

peegeeq-examples - Comprehensive Demonstrations

- **Self-contained Demo:** Complete demonstration with TestContainers
- **17 Core Examples:** Progressive examples covering all features
- **15 Test Examples:** Advanced integration and performance tests
- **Production Patterns:** Real-world usage scenarios and best practices

When to Choose PeeGeeQ

Perfect Fit Scenarios

✔ You Should Use PeeGeeQ When:

1. You're Already Using PostgreSQL

- Leverage existing infrastructure and expertise
- Reduce operational complexity

2. Transactional Consistency is Critical

- Financial transactions
- Order processing
- Inventory management
- Any scenario where message delivery must be tied to database changes

3. You Want Operational Simplicity

- Single database to monitor and maintain
- Unified backup and recovery strategy
- Existing PostgreSQL HA solutions

4. Your Team Knows SQL Better Than Message Brokers

- Faster development and debugging
- Lower learning curve
- Familiar troubleshooting tools

5. Moderate to High Performance Requirements

- 1,000 to 50,000 messages per second
- Sub-second latency requirements
- Real-time processing needs

✗ Consider Alternatives When:

1. Extreme Performance Requirements

- 100,000+ messages per second
- Microsecond latency requirements
- Specialized hardware optimizations needed

2. Complex Message Routing

- Advanced routing rules and transformations
- Multiple protocols (AMQP, MQTT, STOMP)
- Complex message filtering and content-based routing

3. Multi-Database Architecture

- Messages need to span multiple database systems
- Polyglot persistence requirements
- Cross-platform messaging

4. Dedicated Messaging Team


- Team specialized in message broker operations
- Complex messaging infrastructure already in place


Decision Matrix

Your Situation	Recommended Choice	Why?
E-commerce platform with PostgreSQL	PeeGeeQ Outbox	Transactional order processing
Real-time dashboard with PostgreSQL	PeeGeeQ Native	Low latency, existing infrastructure
Microservices with mixed databases	Traditional Broker	Cross-database messaging

Your Situation	Recommended Choice	Why?
Financial system requiring audit trails	PeeGeeQ Bi-temporal	Event sourcing with compliance
High-frequency trading system	Traditional Broker	Extreme performance requirements
Startup with PostgreSQL	PeeGeeQ Native	Simplicity and cost-effectiveness

Architecture Overview

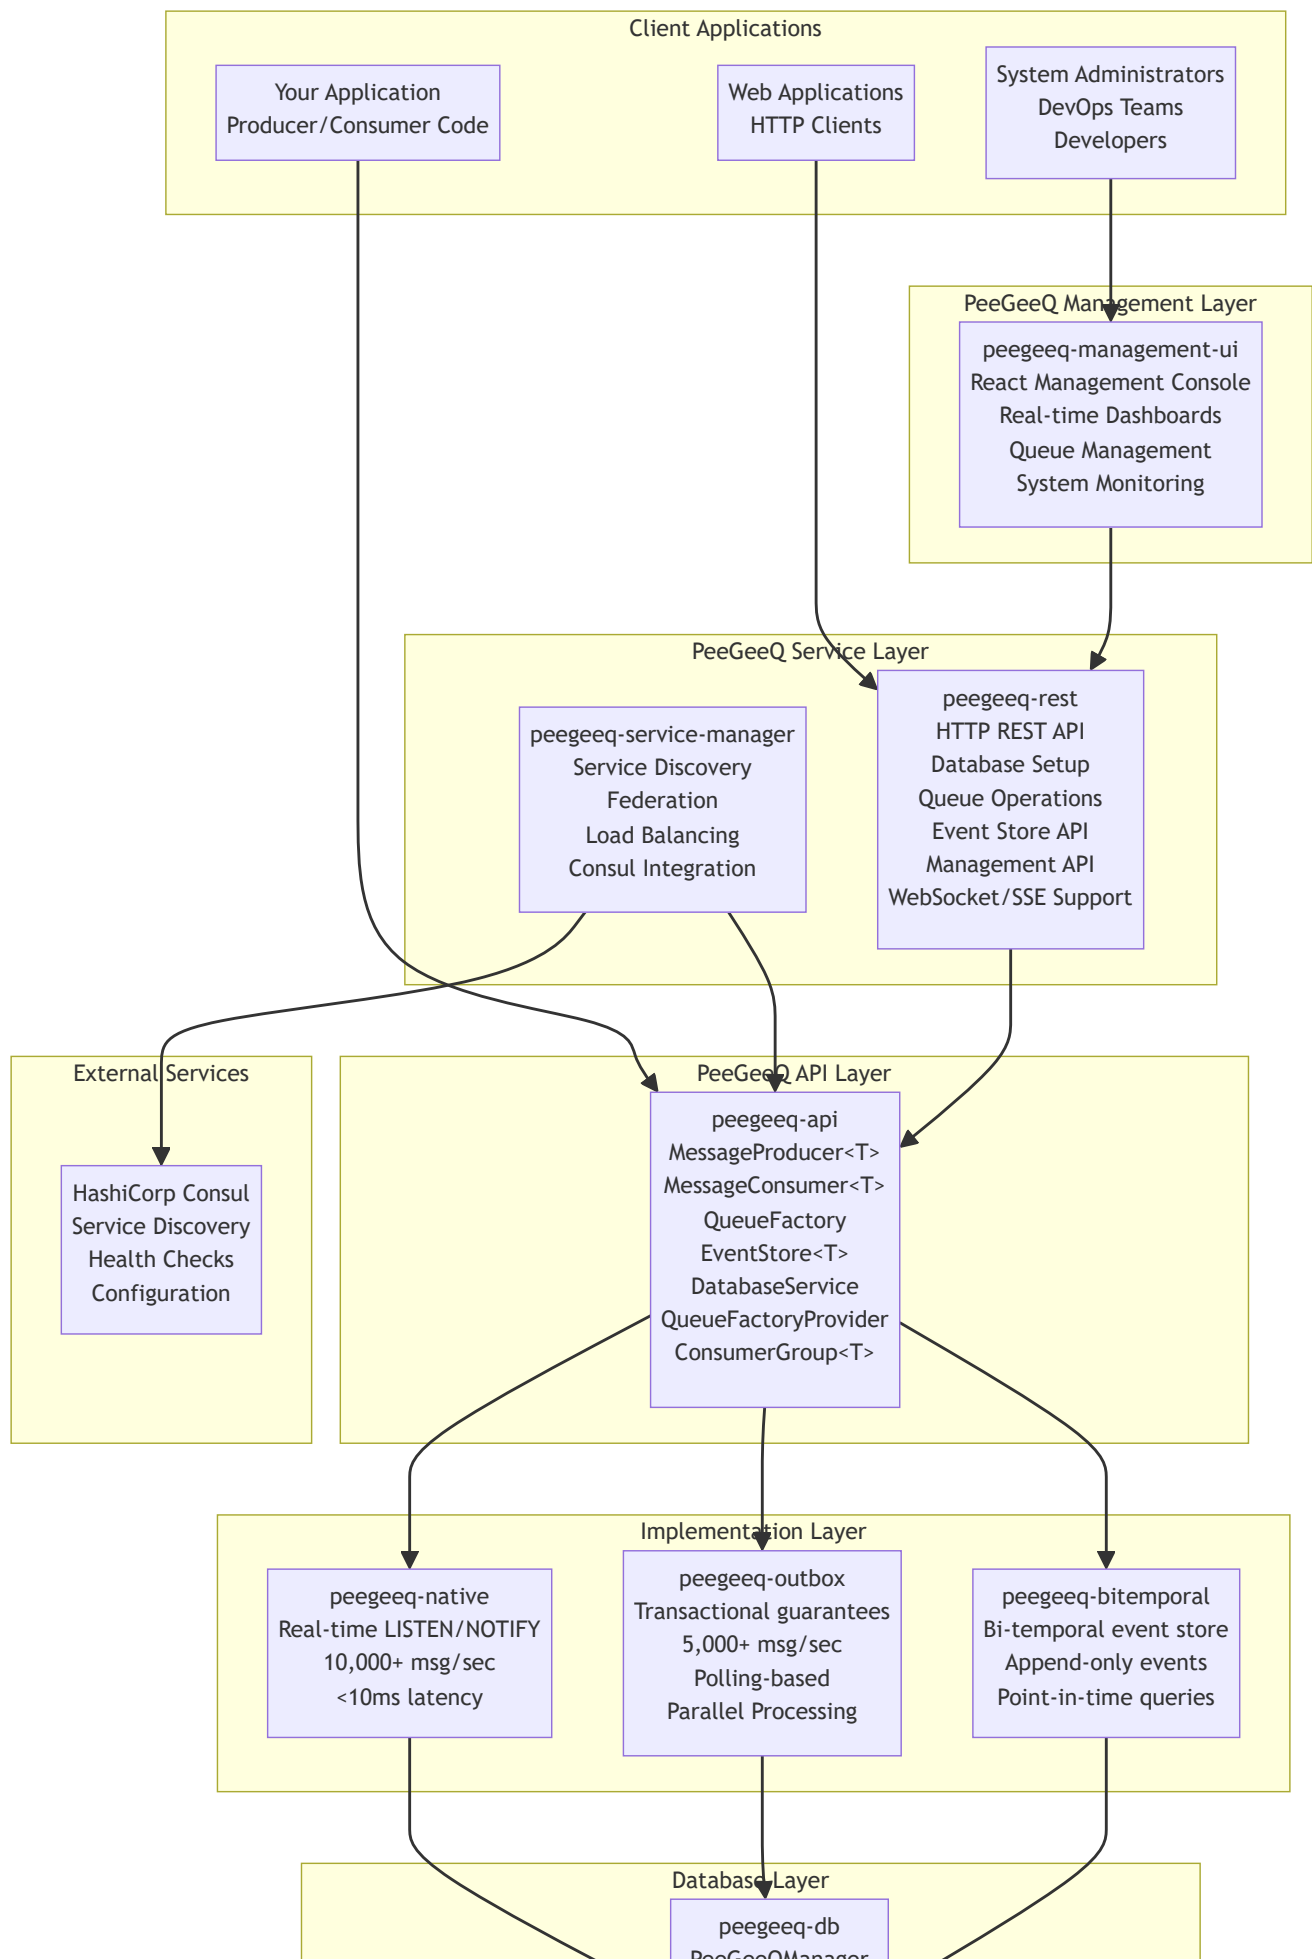

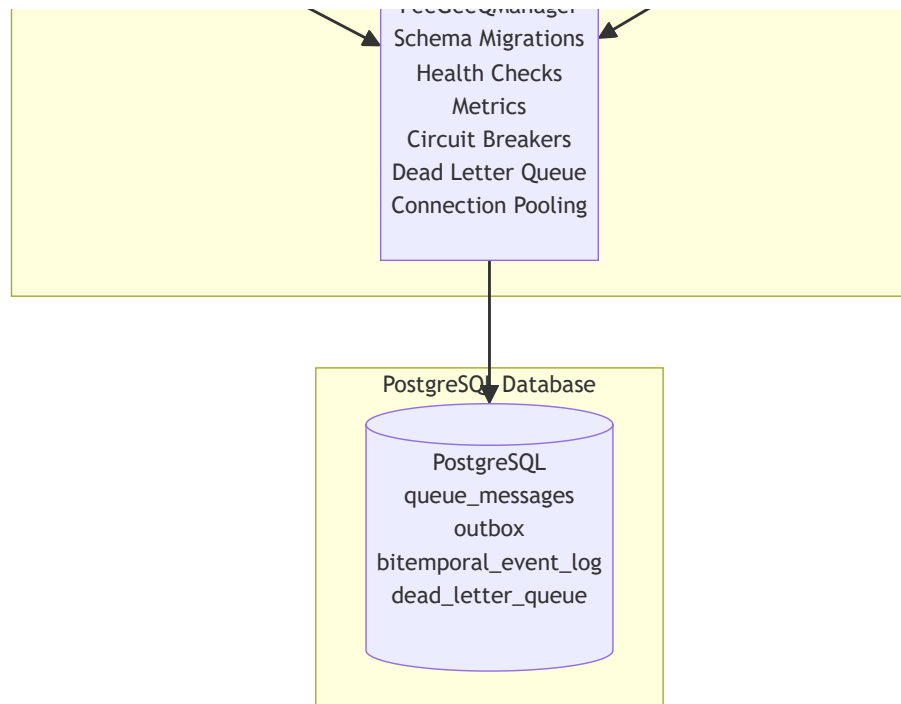

Part III: Getting Started (Progressive Learning)

Prerequisites & Environment Setup

System Requirements

- **Java 21+** (OpenJDK or Oracle JDK)
- **Maven 3.8+** for building
- **PostgreSQL 12+** for the database
- **Docker** (optional, for examples and testing)

Quick Environment Check

Let's verify your environment is ready:

```
▶# Check Java version
java -version
# Should show Java 21 or higher

# Check Maven version
mvn -version
▶# Should show Maven 3.8 or higher

# Check PostgreSQL (if installed locally)
psql --version
# Should show PostgreSQL 12 or higher

# Check Docker (optional)
docker --version
```

```
# Should show Docker version
```

30-Second Demo (Recommended First Step)

Before diving into code, see PeeGeeQ in action with our self-contained demo:

```
▶# Clone and run the demo
git clone <repository-url>
cd peegeeq

# Unix/Linux/macOS
./run-self-contained-demo.sh

# Windows
run-self-contained-demo.bat
```

What this demo shows:

1. **Starts a PostgreSQL container** (no local setup needed)
2. **Sets up the database schema** automatically
3. **Demonstrates all three patterns:** Native queue, outbox pattern, and bi-temporal event store
4. **Shows real-time message processing** with live output
5. **Cleans up automatically** when finished

Expected output:

```
Starting PeeGeeQ Self-Contained Demo...
Starting PostgreSQL container...
Setting up database schema...
Demonstrating Native Queue (real-time)...
Demonstrating Outbox Pattern (transactional)...
Demonstrating Bi-temporal Event Store...
Demo completed successfully!
Cleaning up containers...
```

✅ **Checkpoint:** If the demo runs successfully, your environment is ready!

Your First Message (Hello World)

Now let's build your first PeeGeeQ application step by step. We'll start with the absolute minimum code and gradually add features.

Step 1: Minimal Setup (2 minutes)

Create a new Java class with the absolute minimum code to get started:

```
import dev.mars.peegeeq.db.PeeGeeQManager;
import dev.mars.peegeeq.api.MessageProducer;
import dev.mars.peegeeq.api.MessageConsumer;

public class HelloPeeGeeQ {
```



```

public static void main(String[] args) throws Exception {
    // This is the absolute minimum code to get started
    PeeGeeQManager manager = new PeeGeeQManager();
    manager.start();

    System.out.println("✅ PeeGeeQ started successfully!");

    // Don't forget to clean up
    manager.close();
}
}

```

Run it:

```

▶ mvn compile exec:java -Dexec.mainClass="HelloPeeGeeQ"
▶

```

Expected output:

```

✅ PeeGeeQ started successfully!

```



Try This Now: Run the code above. If it works, you've successfully connected to PostgreSQL!

Step 2: Send Your First Message (2 minutes)

Now let's send a message:

```

import dev.mars.peggeeq.db.PeeGeeQManager;
import dev.mars.peggeeq.api.MessageProducer;
import dev.mars.peggeeq.api.QueueFactory;
import dev.mars.peggeeq.api.QueueFactoryProvider;

public class HelloPeeGeeQ {
    public static void main(String[] args) throws Exception {
        // Setup PeeGeeQ
        PeeGeeQManager manager = new PeeGeeQManager();
        manager.start();


        // Create a producer
        QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
        QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());
        MessageProducer<String> producer = factory.createProducer("hello-queue", String.class);

        // Send your first message
        producer.send("Hello, PeeGeeQ!").join();
        System.out.println("📬 Message sent: Hello, PeeGeeQ!");

        // Cleanup
        producer.close();
        manager.close();
    }
}

```

Expected output:

 Message sent: Hello, PeeGeeQ!

✅ **Checkpoint:** You've successfully sent your first message!

Step 3: Receive Your First Message (3 minutes)

Now let's receive the message we sent:

```
import dev.mars.peegeeq.db.PeeGeeQManager;
import dev.mars.peegeeq.api.*;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CountDownLatch;

public class HelloPeeGeeQ {
    public static void main(String[] args) throws Exception {
        // Setup PeeGeeQ
        PeeGeeQManager manager = new PeeGeeQManager();
        manager.start();

        // Create factory
        QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
        QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

        // Create producer and consumer
        MessageProducer<String> producer = factory.createProducer("hello-queue", String.class);
        MessageConsumer<String> consumer = factory.createConsumer("hello-queue", String.class);

        // Setup to wait for message
        CountDownLatch messageReceived = new CountDownLatch(1);

        // Start listening for messages
        consumer.subscribe(message -> {
            System.out.println("📁 Received: " + message.getPayload());
            messageReceived.countDown(); // Signal that we got the message
            return CompletableFuture.completedFuture(null);
        });




        // Give consumer a moment to start
        Thread.sleep(1000);


        // Send the message
        producer.send("Hello, PeeGeeQ!").join();
        System.out.println("📁 Message sent: Hello, PeeGeeQ!");


        // Wait for message to be received
        messageReceived.await();
        System.out.println("✅ Message processing complete!");

        // Cleanup
        consumer.close();
        producer.close();
        manager.close();
    }
}
```

Expected output:

 Message sent: Hello, PeeGeeQ!
 Received: Hello, PeeGeeQ!
 Message processing complete!

 **Checkpoint:** You've successfully sent and received your first message!

 **Try This Now:** Modify the message content and run it again:

```
// Try different messages
producer.send("Your custom message here!").join();
producer.send("Message sent at: " + java.time.Instant.now()).join();

// Send multiple messages
for (int i = 1; i <= 5; i++) {
    producer.send("Message #" + i).join();
}
```

Understanding the Code

Let's break down what just happened in your first PeeGeeQ application:

1. PeeGeeQManager - The Central Controller

```
PeeGeeQManager manager = new PeeGeeQManager();
manager.start();
```

What it does:

- **Connects to PostgreSQL** using default configuration
- **Creates database schema** if it doesn't exist
- **Starts health checks** and monitoring
- **Initializes connection pools**

Configuration sources (in order of precedence):

1. System properties (`-Dpeegee.database.host=localhost`)
2. Environment variables (`PEEGEEQ_DATABASE_HOST=localhost`)
3. `peegee.properties` file in classpath
4. Default values (localhost:5432, database: peegee)

2. QueueFactoryProvider - The Factory Registry

```
QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());
```

What it does:

- **Manages different queue implementations** (native, outbox, bitemporal)

- **Provides a unified interface** for creating producers and consumers
- **Handles dependency injection** automatically

Available factory types:

- "native" - Real-time LISTEN/NOTIFY based queues
- "outbox" - Transactional outbox pattern queues
- "bitemporal" - Event sourcing with temporal queries

3. MessageProducer - Type-Safe Message Sending

```
MessageProducer<String> producer = factory.createProducer("hello-queue", String.class);
producer.send("Hello, PeeGeeQ!").join();
```

What it does:

- **Type-safe message sending** - compile-time type checking
- **Automatic serialization** - converts objects to JSON
- **Asynchronous by default** - returns CompletableFuture
- **Queue creation** - automatically creates queue if it doesn't exist


4. MessageConsumer - Type-Safe Message Receiving

```
MessageConsumer<String> consumer = factory.createConsumer("hello-queue", String.class);
consumer.subscribe(message -> {
    System.out.println("Received: " + message.getPayload());
    return CompletableFuture.completedFuture(null);
});
```

What it does:

- **Type-safe message receiving** - automatic deserialization
- **Functional interface** - clean lambda-based processing
- **Asynchronous processing** - non-blocking message handling
- **Automatic acknowledgment** - messages are acknowledged when CompletableFuture completes

5. Message Lifecycle

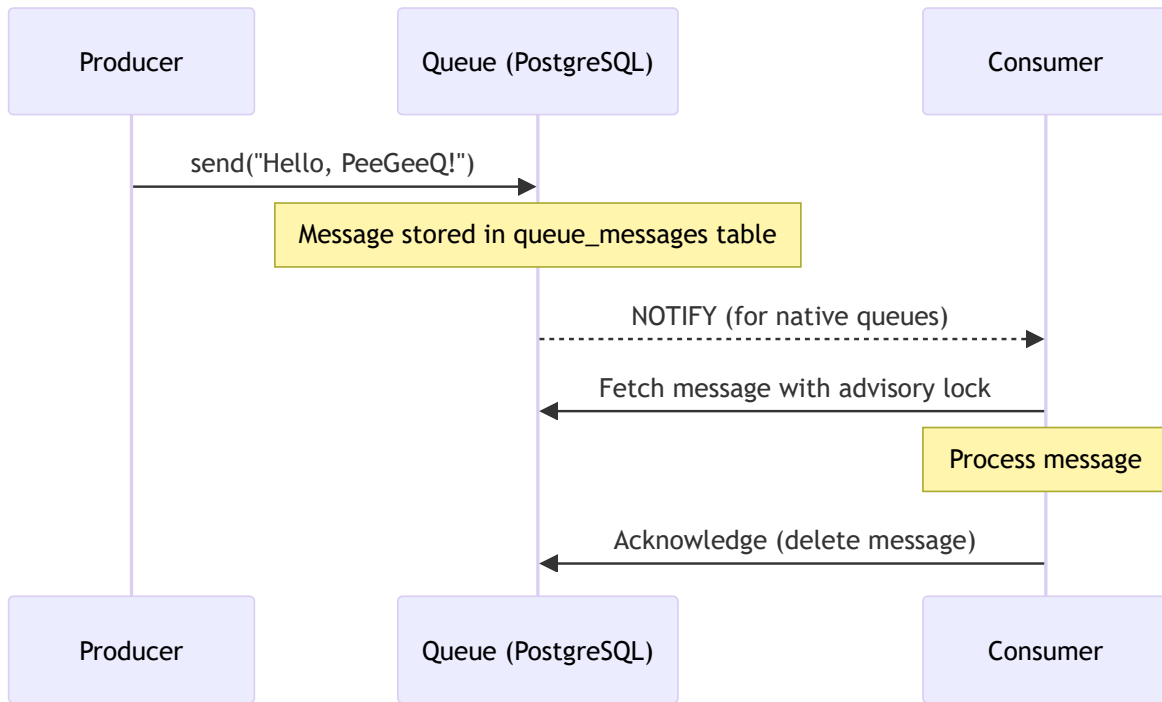

Adding Error Handling

Real applications need proper error handling. Let's enhance our example:

```

import dev.mars.peegeeq.db.PeeGeeQManager;
import dev.mars.peegeeq.api.*;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CountDownLatch;

public class HelloPeeGeeQWithErrorHandling {
    public static void main(String[] args) {
        PeeGeeQManager manager = null;
        MessageProducer<String> producer = null;
        MessageConsumer<String> consumer = null;

        try {
            // Setup with error handling
            manager = new PeeGeeQManager();
            manager.start();
            System.out.println("✅ PeeGeeQ started successfully!");

            // Create factory and components
            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

            producer = factory.createProducer("hello-queue", String.class);
            consumer = factory.createConsumer("hello-queue", String.class);

            // Setup message processing with error handling
            CountDownLatch messageReceived = new CountDownLatch(1);

            consumer.subscribe(message -> {
                try {
                    System.out.println("📄 Received: " + message.getPayload());
                }
            });
        }
    }
}

```

```

        // Simulate some processing that might fail
        if (message.getPayload().contains("error")) {
            throw new RuntimeException("Simulated processing error");
        }

        messageReceived.countDown();
        return CompletableFuture.completedFuture(null);

    } catch (Exception e) {
        System.err.println("❌ Error processing message: " + e.getMessage());
        messageReceived.countDown();
        // Return failed future to trigger retry
        return CompletableFuture.failedFuture(e);
    }
});

// Give consumer time to start
Thread.sleep(1000);

// Send messages with error handling
try {
    producer.send("Hello, PeeGeeQ!").join();
    System.out.println("📬 Message sent successfully!");
} catch (Exception e) {
    System.err.println("❌ Failed to send message: " + e.getMessage());
}

// Wait for processing
messageReceived.await();
System.out.println("✅ Processing complete!");

} catch (Exception e) {
    System.err.println("❌ Application error: " + e.getMessage());
    e.printStackTrace();
} finally {
    // Cleanup in finally block
    if (consumer != null) {
        try { consumer.close(); } catch (Exception e) { /* ignore */ }
    }
    if (producer != null) {
        try { producer.close(); } catch (Exception e) { /* ignore */ }
    }
    if (manager != null) {
        try { manager.close(); } catch (Exception e) { /* ignore */ }
    }
}
}
}

```

🎯 Try This Now:

1. Run the code above with normal messages
2. Try sending a message containing "error" to see error handling in action
3. Observe how the application handles failures gracefully

Adding Configuration

Hard-coded configuration isn't suitable for real applications. Let's add proper configuration:

Create peegee.properties

```
# Database connection
peegee.database.host=localhost
peegee.database.port=5432
peegee.database.name=peegee
peegee.database.username=peegee_user
peegee.database.password=your_password

# Connection pool
peegee.database.pool.maxSize=10
peegee.database.pool.minSize=2

# Queue settings
peegee.queue.visibilityTimeoutSeconds=30
peegee.queue.maxRetries=3

# Health checks
peegee.health.enabled=true
peegee.health.intervalSeconds=30
```

Updated Code with Configuration

```
import dev.mars.peegee.db.PeeGeeQManager;
import dev.mars.peegee.db.PeeGeeQConfiguration;
import dev.mars.peegee.api.*;
import java.util.concurrent.CompletableFuture;

public class HelloPeeGeeQConfigured {
    public static void main(String[] args) {
        try {
            // Load configuration from properties file
            PeeGeeQConfiguration config = PeeGeeQConfiguration.fromProperties("peegee.properties");

            // Or build configuration programmatically
            // PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
            //     .host("localhost")
            //     .port(5432)
            //     .database("peegee")
            //     .username("peegee_user")
            //     .password("your_password")
            //     .build();

            try (PeeGeeQManager manager = new PeeGeeQManager(config)) {
                manager.start();
                System.out.println("✅ PeeGeeQ started with custom configuration!");

                // Rest of your application code...
                QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
                QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

                try (MessageProducer<String> producer = factory.createProducer("configured-queue", String.class);
                     MessageConsumer<String> consumer = factory.createConsumer("configured-queue", String.class)) {

                    // Your messaging code here...
                    producer.send("Hello from configured PeeGeeQ!").join();
                    System.out.println("📬 Message sent with custom configuration!");

                }
            }
        } catch (Exception e) {
```

```
        System.err.println("❌ Configuration error: " + e.getMessage());
        e.printStackTrace();
    }
}
```


✅ **Checkpoint:** You now have a properly configured PeeGeeQ application with error handling!

Part IV: Core Concepts (Detailed)

Now that you've successfully sent and received your first messages, let's dive deep into PeeGeeQ's three powerful messaging patterns. Understanding these patterns will help you choose the right approach for your specific use case.

Choosing the Right Pattern

Before we explore each pattern in detail, let's start with a decision tree to help you choose:

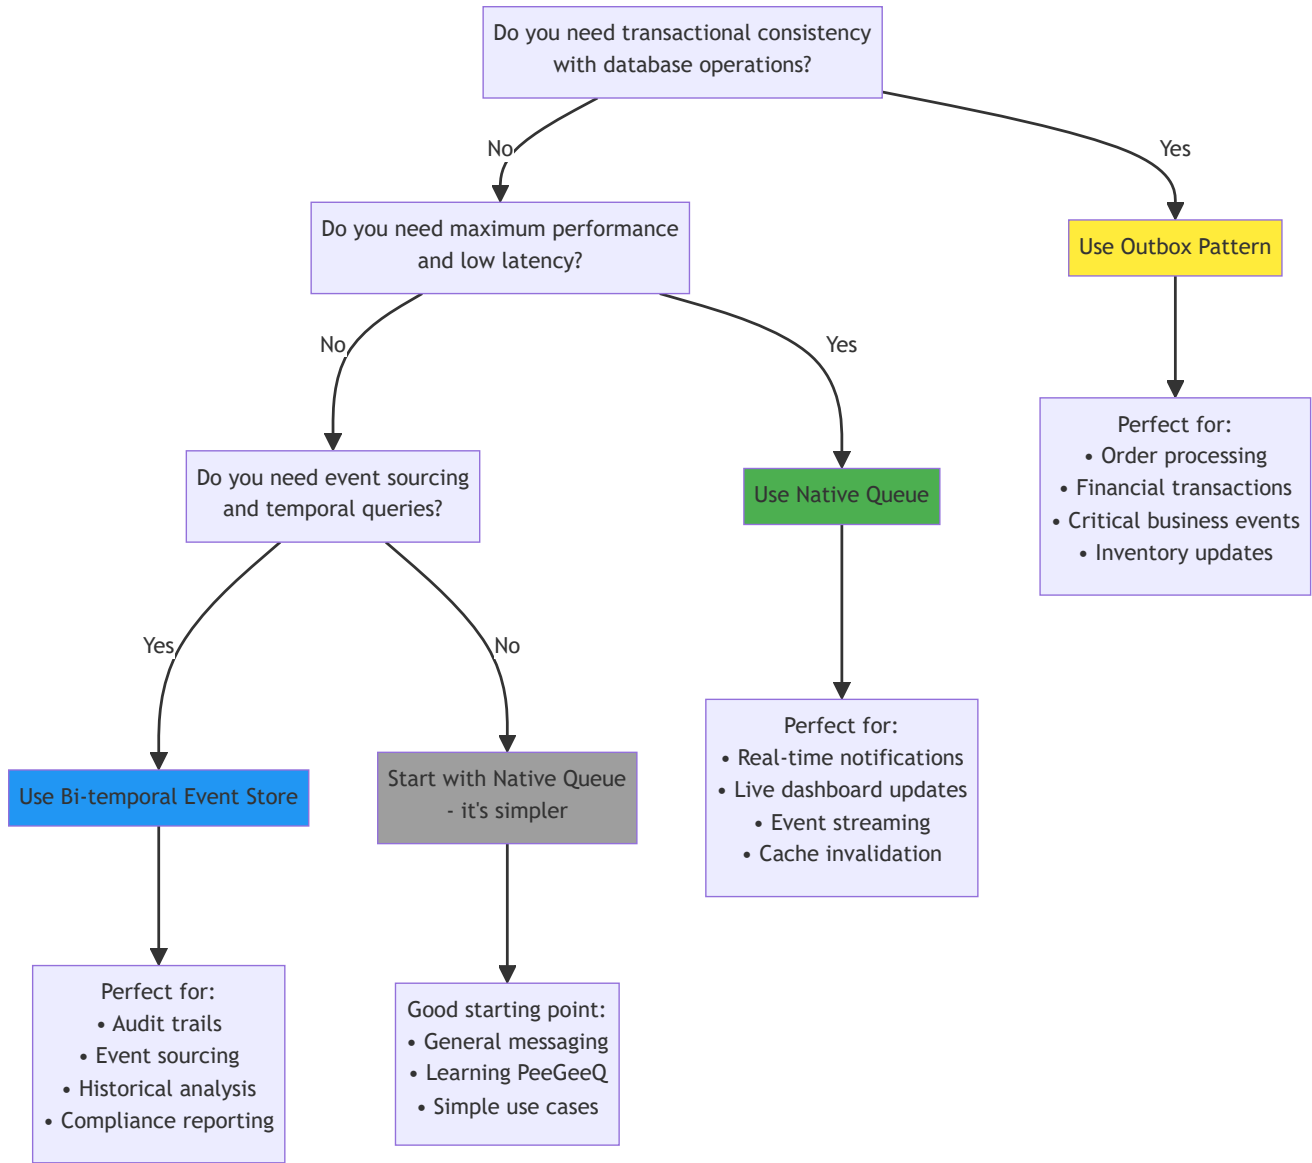


Quick Decision Guide

Your Requirement	Recommended Pattern	Why?
"I need to ensure my order and payment are processed together"	Outbox Pattern	Transactional consistency
"I need to notify users instantly when something happens"	Native Queue	Real-time, low latency
"I need to track all changes and query historical data"	Bi-temporal Store	Event sourcing capabilities
"I'm not sure, just want to get started"	Native Queue	Simplest to understand and use
"I need both real-time and transactional messaging"	Use Both	PeeGeeQ supports multiple patterns

Native Queue Pattern (Deep Dive)

The Native Queue pattern leverages PostgreSQL's LISTEN/NOTIFY mechanism for real-time message delivery with minimal latency.

How It Works

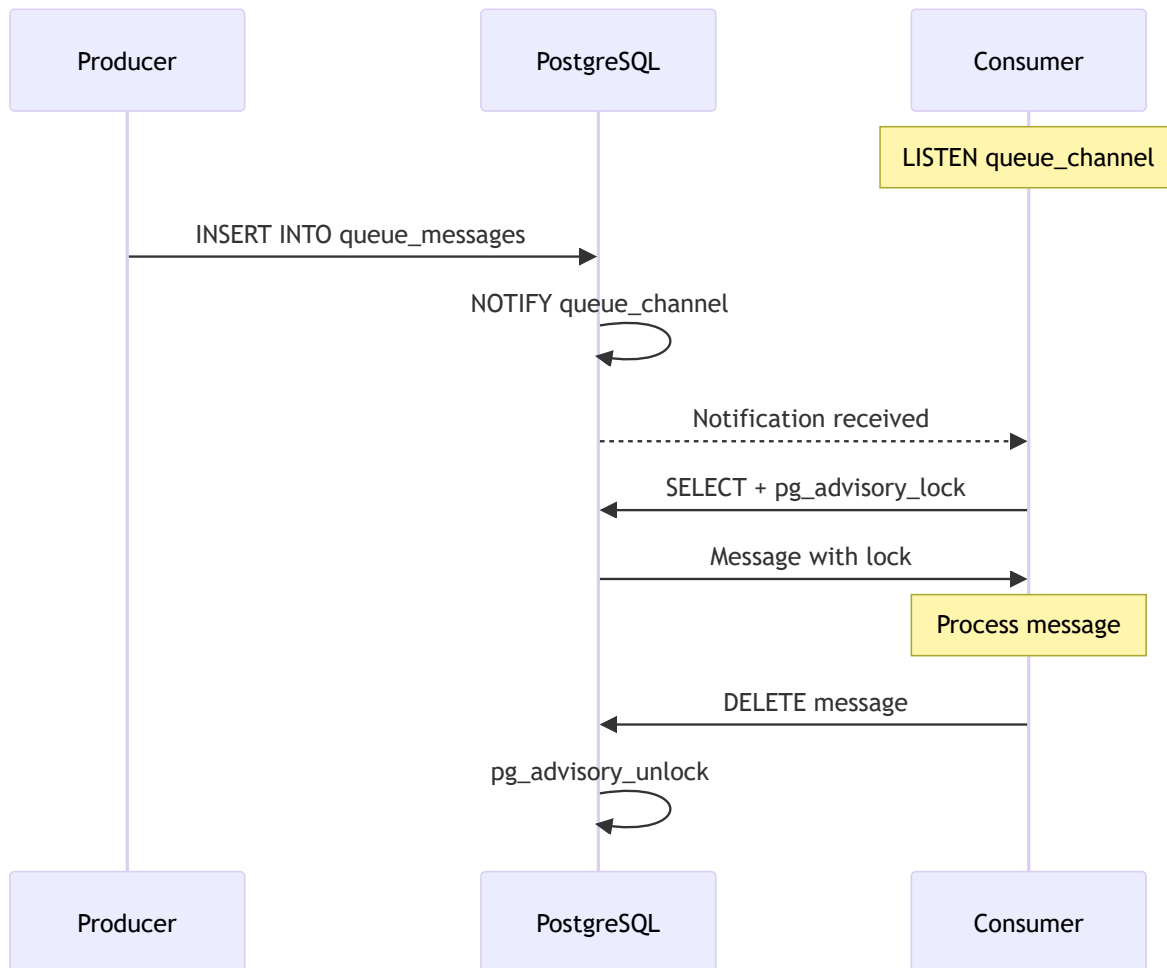

Key Characteristics

Performance

- **Throughput:** 10,000+ messages/second
- **Latency:** <10ms from send to receive
- **Scalability:** Horizontal scaling with multiple consumers

Delivery Guarantees

- **At-least-once delivery:** Messages may be delivered more than once in failure scenarios
- **Ordering:** FIFO ordering within a single queue
- **Durability:** Messages survive database restarts

Technical Implementation

- **LISTEN/NOTIFY:** Real-time notifications without polling
- **Advisory Locks:** Prevent duplicate processing across consumers
- **Automatic Cleanup:** Processed messages are automatically removed

When to Use Native Queue

✅ Perfect for:

- **Real-time notifications** (user alerts, system notifications)
- **Live dashboard updates** (metrics, status changes)
- **Event streaming** (activity feeds, audit logs)
- **Cache invalidation** (distributed cache updates)
- **System monitoring** (alerts, health checks)

❌ Not ideal for:

- **Financial transactions** (use Outbox pattern instead)
- **Critical business events** that must be tied to database changes
- **Scenarios requiring exactly-once delivery**

Native Queue Example

```
public class NativeQueueExample {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Create native queue factory
            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

            // Real-time notification system
            try (MessageProducer<NotificationEvent> producer =
                factory.createProducer("notifications", NotificationEvent.class);
                MessageConsumer<NotificationEvent> consumer =
                factory.createConsumer("notifications", NotificationEvent.class)) {

                // Start consuming notifications
                consumer.subscribe(message -> {
                    NotificationEvent event = message.getPayload();
                    System.out.printf("🔔 Notification: %s for user %s%n",
                        event.getMessage(), event.getUserId());

                    // Send to user's device, email, etc.
                    sendToUser(event);

                    return CompletableFuture.completedFuture(null);
                });

                // Simulate real-time events
                producer.send(new NotificationEvent("user123", "Your order has shipped!"));
                producer.send(new NotificationEvent("user456", "New message received"));
                producer.send(new NotificationEvent("user789", "Payment processed successfully"));

                Thread.sleep(2000); // Let messages process
            }
        }
    }
}
```

```

private static void sendToUser(NotificationEvent event) {
    // Implementation for sending notification to user
    // (push notification, email, SMS, etc.)
}

class NotificationEvent {
    private String userId;
    private String message;
    private Instant timestamp;

    public NotificationEvent(String userId, String message) {
        this.userId = userId;
        this.message = message;
        this.timestamp = Instant.now();
    }

    // Getters and setters...
}

```


Try This Now:

1. Create the NotificationEvent class
2. Run the example and observe real-time message processing
3. Try sending messages from multiple threads to see concurrent processing

Outbox Pattern (Deep Dive)

The Outbox pattern ensures transactional consistency between your business data and message delivery by storing messages in the same database transaction as your business operations.

How It Works

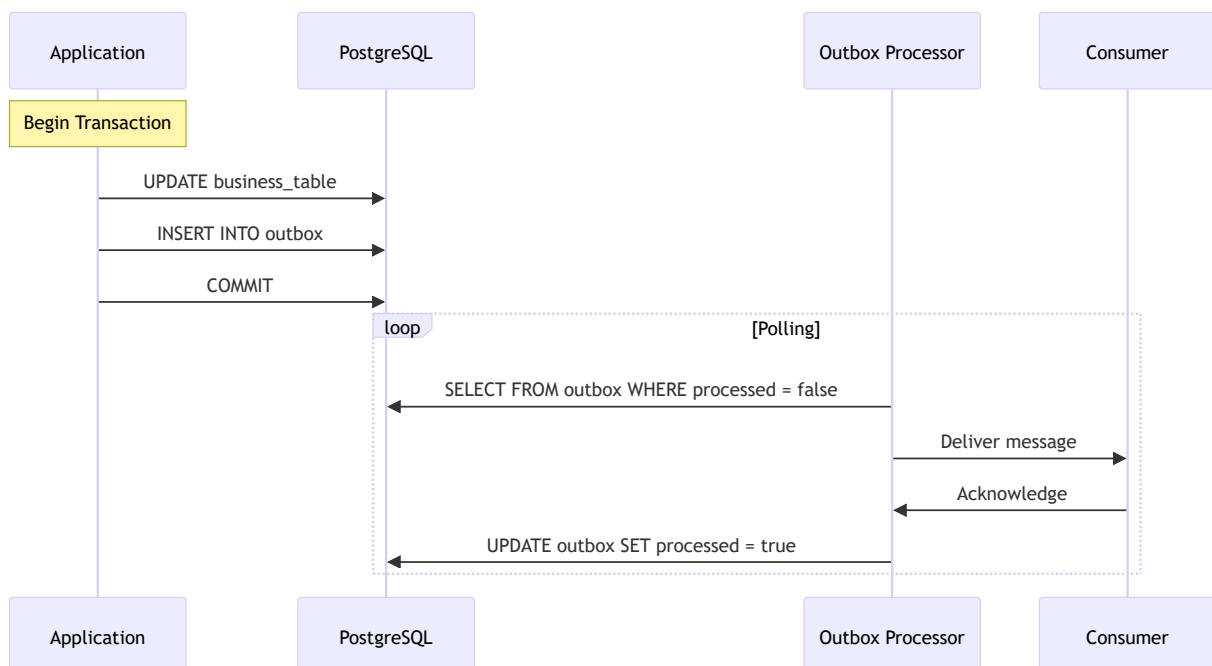

Key Characteristics

Performance

- **Throughput:** 5,000+ messages/second
- **Latency:** ~100ms (due to polling interval)
- **Scalability:** Multiple processors can handle different message types

Delivery Guarantees

- **Exactly-once delivery:** Messages are delivered exactly once
- **Transactional consistency:** Messages are only sent if business transaction succeeds
- **Ordering:** Strict ordering within message type
- **Durability:** Messages survive all types of failures

Technical Implementation

- **Database table:** Messages stored in `outbox` table
- **Polling mechanism:** Background processor polls for new messages
- **Retry logic:** Automatic retry with exponential backoff
- **Dead letter queue:** Failed messages moved to DLQ after max retries

When to Use Outbox Pattern

✅ Perfect for:

- **Order processing** (order creation + inventory update + notification)
- **Financial transactions** (payment processing + account updates + receipts)
- **User registration** (create user + send welcome email + setup defaults)
- **Inventory management** (stock updates + reorder notifications + reporting)
- **Critical business events** that must be consistent with data changes

❌ Not ideal for:

- **High-frequency events** where slight latency is acceptable
- **Non-critical notifications** that don't need transactional guarantees
- **Real-time streaming** scenarios

Outbox Pattern Example

```
public class OutboxPatternExample {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Create outbox factory for transactional guarantees
            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("outbox", manager.getDatabaseService());

            try (MessageProducer<OrderEvent> orderProducer =
                factory.createProducer("order-events", OrderEvent.class);
                MessageProducer<EmailEvent> emailProducer =
                factory.createProducer("email-events", EmailEvent.class);
                MessageConsumer<OrderEvent> orderConsumer =
                factory.createConsumer("order-events", OrderEvent.class);
```

```

        MessageConsumer<EmailEvent> emailConsumer =
            factory.createConsumer("email-events", EmailEvent.class)) {

// Setup consumers
orderConsumer.subscribe(message -> {
    OrderEvent event = message.getPayload();
    System.out.printf("📦 Processing order: %s for $%.2f%n",
        event.getOrderId(), event.getAmount());

    // Process order (update inventory, etc.)
    processOrder(event);

    return CompletableFuture.completedFuture(null);
});

emailConsumer.subscribe(message -> {
    EmailEvent event = message.getPayload();
    System.out.printf("✉️ Sending email: %s to %s%n",
        event.getSubject(), event.getToEmail());

    // Send email
    sendEmail(event);

    return CompletableFuture.completedFuture(null);
});

// Simulate order processing with transactional consistency
processOrderTransactionally(manager, orderProducer, emailProducer);

Thread.sleep(3000); // Let messages process
}
}

private static void processOrderTransactionally(
    PeeGeeQManager manager,
    MessageProducer<OrderEvent> orderProducer,
    MessageProducer<EmailEvent> emailProducer) throws Exception {

// Get database connection for transaction
try (Connection conn = manager.getDatabaseService().getConnection()) {
    conn.setAutoCommit(false);

    try {
        // 1. Create order in database
        String orderId = "ORDER-" + System.currentTimeMillis();
        PreparedStatement stmt = conn.prepareStatement(
            "INSERT INTO orders (id, customer_id, amount, status) VALUES (?, ?, ?, ?)");
        stmt.setString(1, orderId);
        stmt.setString(2, "CUST-123");
        stmt.setBigDecimal(3, new BigDecimal("99.99"));
        stmt.setString(4, "PENDING");
        stmt.executeUpdate();

        // 2. Send order event (within same transaction!)
        OrderEvent orderEvent = new OrderEvent(orderId, "CUST-123", new BigDecimal("99.99"));
        orderProducer.send(orderEvent).join();

        // 3. Send email event (within same transaction!)
        EmailEvent emailEvent = new EmailEvent(
            "customer@example.com",
            "Order Confirmation",
            "Your order " + orderId + " has been received.");
        emailProducer.send(emailEvent).join();

        // 4. Commit everything together
    }
}
}

```

```

        conn.commit();
        System.out.println("✅ Order, events, and emails committed together!");

    } catch (Exception e) {
        conn.rollback();
        System.err.println("❌ Transaction rolled back: " + e.getMessage());
        throw e;
    }
}

private static void processOrder(OrderEvent event) {
    // Implementation for order processing
}

private static void sendEmail(EmailEvent event) {
    // Implementation for email sending
}
}

class OrderEvent {
    private String orderId;
    private String customerId;
    private BigDecimal amount;
    private Instant timestamp;

    // Constructor, getters, setters...
}

class EmailEvent {
    private String toEmail;
    private String subject;
    private String body;
    private Instant timestamp;

    // Constructor, getters, setters...
}

```

Try This Now:

1. Create the OrderEvent and EmailEvent classes
2. Run the example and observe transactional consistency
3. Try introducing an error after the database insert to see rollback behavior


Bi-temporal Event Store (Deep Dive)

The Bi-temporal Event Store pattern provides event sourcing capabilities with the ability to query data as it existed at any point in time and as it was known at any point in time.

Understanding Bi-temporal

Bi-temporal means tracking two different time dimensions:

1. **Valid Time:** When the event actually occurred in the real world
2. **Transaction Time:** When the event was recorded in the system

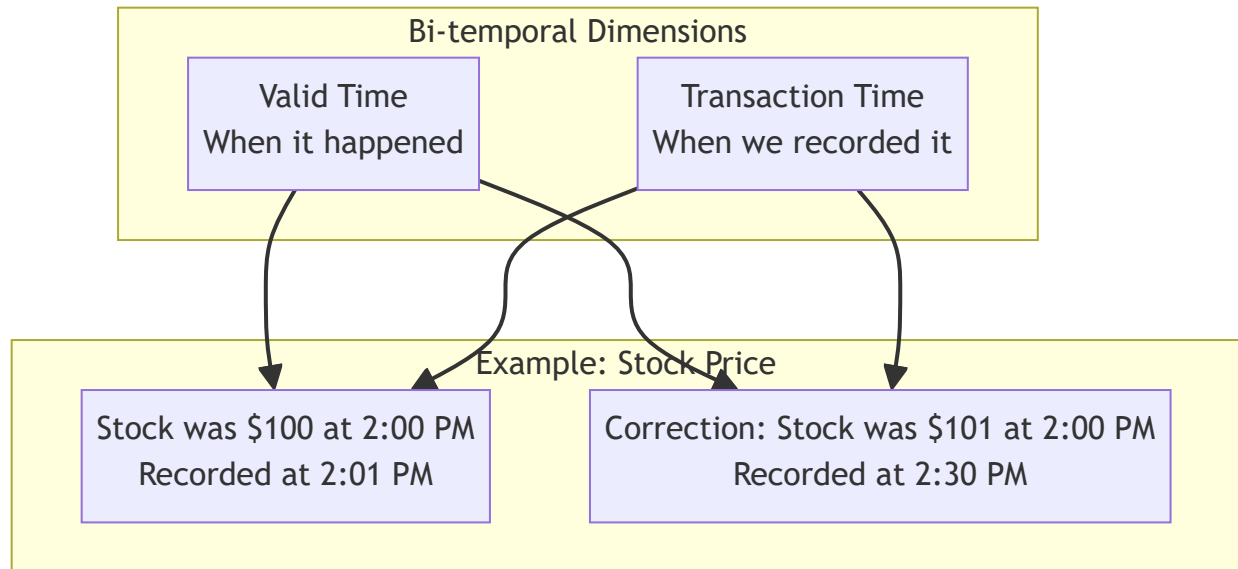

Key Characteristics

Performance

- **Throughput:** 3,000+ events/second
- **Query Performance:** Optimized for temporal queries
- **Storage:** Append-only, no updates or deletes

Capabilities

- **Event Sourcing:** Rebuild state from events
- **Time Travel:** Query data as it existed at any point
- **Audit Trail:** Complete history of all changes
- **Correction Handling:** Handle late-arriving or corrected data

Technical Implementation

- **Append-only table:** Events are never updated or deleted
- **Temporal indexes:** Optimized for time-based queries
- **Event replay:** Rebuild current state from events
- **Snapshot support:** Periodic snapshots for performance

When to Use Bi-temporal Event Store



Perfect for:

- **Financial systems** (trading, accounting, compliance)
- **Audit trails** (regulatory compliance, forensic analysis)
- **Event sourcing** (CQRS, domain-driven design)
- **Historical analysis** (business intelligence, reporting)
- **Correction handling** (late data, error corrections)



Not ideal for:

- **Simple CRUD operations** (use regular database)
- **High-frequency, low-value events** (use Native Queue)
- **Scenarios where history isn't important**

Bi-temporal Event Store Example

```
public class BiTemporalEventStoreExample {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Create bi-temporal event store
            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("bitemporal", manager.getDatabaseService());

            try (MessageProducer<AccountEvent> producer =
                factory.createProducer("account-events", AccountEvent.class);
                MessageConsumer<AccountEvent> consumer =
                factory.createConsumer("account-events", AccountEvent.class)) {

                // Setup event consumer
                consumer.subscribe(message -> {
                    AccountEvent event = message.getPayload();
                    System.out.printf("💰 Account Event: %s - %s: $%.2f%n",
                        event.getAccountId(), event.getEventType(), event.getAmount());

                    // Update account balance projection
                    updateAccountProjection(event);

                    return CompletableFuture.completedFuture(null);
                });

                // Simulate account events over time
                String accountId = "ACC-123";

                // Initial deposit
                producer.send(new AccountEvent(accountId, "DEPOSIT",
                    new BigDecimal("1000.00"), Instant.now()));

                Thread.sleep(100);

                // Withdrawal
                producer.send(new AccountEvent(accountId, "WITHDRAWAL",
                    new BigDecimal("250.00"), Instant.now()));

                Thread.sleep(100);

                // Another deposit
                producer.send(new AccountEvent(accountId, "DEPOSIT",
                    new BigDecimal("500.00"), Instant.now()));

                Thread.sleep(100);

                // Late-arriving correction (happened before withdrawal)
                Instant correctionTime = Instant.now().minus(200, ChronoUnit.MILLIS);
                producer.send(new AccountEvent(accountId, "CORRECTION",
                    new BigDecimal("50.00"), correctionTime));

                Thread.sleep(2000); // Let events process

                // Query account balance at different points in time
                queryAccountHistory(manager, accountId);
            }
        }
    }
}
```

```

    }
}

private static void updateAccountProjection(AccountEvent event) {
    // Update current account balance projection
    // This would typically update a read model/projection
}

private static void queryAccountHistory(PeeGeeQManager manager, String accountId)
    throws Exception {

    System.out.println("\n📊 Account History Analysis:");

    // Query events for this account
    try (Connection conn = manager.getDatabaseService().getConnection()) {
        PreparedStatement stmt = conn.prepareStatement(
            "SELECT event_type, amount, valid_time, transaction_time " +
            "FROM bitemporal_event_log " +
            "WHERE payload->>'accountId' = ? " +
            "ORDER BY valid_time, transaction_time");
        stmt.setString(1, accountId);

        ResultSet rs = stmt.executeQuery();
        BigDecimal balance = BigDecimal.ZERO;

        while (rs.next()) {
            String eventType = rs.getString("event_type");
            BigDecimal amount = rs.getBigDecimal("amount");
            Instant validTime = rs.getTimestamp("valid_time").toInstant();
            Instant transactionTime = rs.getTimestamp("transaction_time").toInstant();

            if ("DEPOSIT".equals(eventType) || "CORRECTION".equals(eventType)) {
                balance = balance.add(amount);
            } else if ("WITHDRAWAL".equals(eventType)) {
                balance = balance.subtract(amount);
            }

            System.out.printf("   %s: $%.2f (Valid: %s, Recorded: %s) - Balance: $%.2f\n",
                eventType, amount, validTime, transactionTime, balance);
        }
    }
}

class AccountEvent {
    private String accountId;
    private String eventType;
    private BigDecimal amount;
    private Instant validTime;
    private Instant transactionTime;

    public AccountEvent(String accountId, String eventType, BigDecimal amount, Instant validTime) {
        this.accountId = accountId;
        this.eventType = eventType;
        this.amount = amount;
        this.validTime = validTime;
        this.transactionTime = Instant.now(); // When we're recording it
    }

    // Getters and setters...
}

```

1. Create the AccountEvent class
2. Run the example and observe the event sourcing pattern
3. Try adding more events and corrections to see bi-temporal behavior

Maven Dependencies

To use PeeGeeQ in your project, add these dependencies:

```
<dependencies>
  <!-- Core API -->
  <dependency>
    <groupId>dev.mars.peggeeq</groupId>
    <artifactId>peggeeq-api</artifactId>
    <version>1.0.0</version>
  </dependency>

  <!-- Database management -->
  <dependency>
    <groupId>dev.mars.peggeeq</groupId>
    <artifactId>peggeeq-db</artifactId>
    <version>1.0.0</version>
  </dependency>

  <!-- Choose your implementation(s) -->
  <dependency>
    <groupId>dev.mars.peggeeq</groupId>
    <artifactId>peggeeq-native</artifactId>
    <version>1.0.0</version>
  </dependency>

  <dependency>
    <groupId>dev.mars.peggeeq</groupId>
    <artifactId>peggeeq-outbox</artifactId>
    <version>1.0.0</version>
  </dependency>

  <!-- Optional: Bi-temporal event store -->
  <dependency>
    <groupId>dev.mars.peggeeq</groupId>
    <artifactId>peggeeq-bitemporal</artifactId>
    <version>1.0.0</version>
  </dependency>
</dependencies>
```

Note: You can use multiple patterns in the same application. Each serves different use cases and they complement each other well.

Part V: Practical Examples (Progressive Complexity)

Now that you understand the core concepts, let's build real-world applications with increasing complexity. We'll start with simple examples and gradually introduce more sophisticated patterns.

Level 1: Basic Examples

These examples focus on fundamental messaging patterns that you'll use in most applications.

Example 1: Simple Producer/Consumer

Let's build a basic task processing system:

```
public class TaskProcessingSystem {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

            try (MessageProducer<Task> taskProducer =
                factory.createProducer("tasks", Task.class);
                MessageConsumer<Task> taskConsumer =
                    factory.createConsumer("tasks", Task.class)) {

                // Setup task processor
                taskConsumer.subscribe(message -> {
                    Task task = message.getPayload();
                    System.out.printf("🔄 Processing task: %s (Priority: %d)%n",
                        task.getDescription(), task.getPriority());

                    // Simulate task processing
                    try {
                        Thread.sleep(task.getProcessingTimeMs());
                        System.out.printf("✅ Completed task: %s%n", task.getDescription());
                    } catch (InterruptedException e) {
                        Thread.currentThread().interrupt();
                        return CompletableFuture.failedFuture(e);
                    }

                    return CompletableFuture.completedFuture(null);
                });

                // Submit various tasks
                taskProducer.send(new Task("Process user registration", 1, 1000));
                taskProducer.send(new Task("Generate monthly report", 3, 5000));
                taskProducer.send(new Task("Send welcome email", 2, 500));
                taskProducer.send(new Task("Update search index", 2, 2000));

                Thread.sleep(10000); // Let tasks process
            }
        }
    }
}

class Task {
    private String description;
    private int priority;
    private long processingTimeMs;
    private Instant createdAt;

    public Task(String description, int priority, long processingTimeMs) {
        this.description = description;
        this.priority = priority;
        this.processingTimeMs = processingTimeMs;
        this.createdAt = Instant.now();
    }

    // Getters and setters...
}
```

```
}
```

Try This Now:

1. Run the example and observe task processing
2. Add more tasks with different priorities
3. Try running multiple instances to see load balancing

Example 2: Message Serialization with Complex Objects

Let's handle more complex data structures:

```
public class UserEventSystem {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

            try (MessageProducer<UserEvent> producer =
                factory.createProducer("user-events", UserEvent.class);
                MessageConsumer<UserEvent> consumer =
                    factory.createConsumer("user-events", UserEvent.class)) {

                // Setup event processor
                consumer.subscribe(message -> {
                    UserEvent event = message.getPayload();
                    System.out.printf("👤 User Event: %s - %s%n",
                        event.getEventType(), event.getUser().getEmail());

                    // Process based on event type
                    switch (event.getEventType()) {
                        case REGISTERED:
                            handleUserRegistration(event);
                            break;
                        case LOGIN:
                            handleUserLogin(event);
                            break;
                        case PROFILE_UPDATED:
                            handleProfileUpdate(event);
                            break;
                    }
                });

                return CompletableFuture.completedFuture(null);
            }
        }

        // Create sample user events
        User user1 = new User("john@example.com", "John Doe", "Premium");
        User user2 = new User("jane@example.com", "Jane Smith", "Basic");

        // Send various events
        producer.send(new UserEvent(UserEventType.REGISTERED, user1,
            Map.of("source", "web", "campaign", "spring2024")));

        producer.send(new UserEvent(UserEventType.LOGIN, user1,
            Map.of("ip", "192.168.1.100", "device", "mobile")));

        producer.send(new UserEvent(UserEventType.PROFILE_UPDATED, user2,
            Map.of("field", "subscription", "oldValue", "Basic", "newValue", "Premium")));
    }
}
```

```

        Thread.sleep(3000);
    }
}

private static void handleUserRegistration(UserEvent event) {
    System.out.println(" 📧 Sending welcome email...");
    System.out.println(" 🎁 Creating welcome bonus...");
    System.out.println(" 📊 Updating analytics...");
}

private static void handleUserLogin(UserEvent event) {
    System.out.println(" 🕒 Updating last login time...");
    System.out.println(" 📍 Recording login location...");
}

private static void handleProfileUpdate(UserEvent event) {
    System.out.println(" 🔄 Syncing profile changes...");
    System.out.println(" 🗑 Invalidating cache...");
}

enum UserEventType {
    REGISTERED, LOGIN, LOGOUT, PROFILE_UPDATED, SUBSCRIPTION_CHANGED
}

class UserEvent {
    private UserEventType eventType;
    private User user;
    private Map<String, String> metadata;
    private Instant timestamp;

    public UserEvent(UserEventType eventType, User user, Map<String, String> metadata) {
        this.eventType = eventType;
        this.user = user;
        this.metadata = metadata;
        this.timestamp = Instant.now();
    }

    // Getters and setters...
}

class User {
    private String email;
    private String name;
    private String subscriptionTier;

    public User(String email, String name, String subscriptionTier) {
        this.email = email;
        this.name = name;
        this.subscriptionTier = subscriptionTier;
    }

    // Getters and setters...
}

```

Example 3: Basic Error Handling and Retry Logic

Let's add robust error handling:

```

public class ResilientMessageProcessing {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {

```

```

manager.start();

QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
QueueFactory factory = provider.createFactory("native", manager.getDatabaseService());

try (MessageProducer<ProcessingTask> producer =
    factory.createProducer("processing-tasks", ProcessingTask.class);
    MessageConsumer<ProcessingTask> consumer =
        factory.createConsumer("processing-tasks", ProcessingTask.class)) {

    // Setup resilient processor with retry logic
    consumer.subscribe(message -> {
        ProcessingTask task = message.getPayload();

        return processWithRetry(task, 3) // Max 3 retries
            .exceptionally(throwable -> {
                System.err.printf("❌ Failed to process task %s after retries: %s\n",
                    task.getId(), throwable.getMessage());

                // Send to dead letter queue or alert system
                handleFailedTask(task, throwable);

                return null;
            });
    });

    // Send tasks with different failure probabilities
    producer.send(new ProcessingTask("TASK-001", "reliable-operation", 0.1)); // 10% failure
    producer.send(new ProcessingTask("TASK-002", "flaky-operation", 0.7)); // 70% failure
    producer.send(new ProcessingTask("TASK-003", "stable-operation", 0.0)); // Never fails
    producer.send(new ProcessingTask("TASK-004", "unstable-operation", 0.9)); // 90% failure

    Thread.sleep(10000);
}
}

private static CompletableFuture<Void> processWithRetry(ProcessingTask task, int maxRetries) {
    return CompletableFuture.supplyAsync(() -> {
        int attempt = 0;
        Exception lastException = null;

        while (attempt <= maxRetries) {
            try {
                attempt++;
                System.out.printf("🔄 Processing %s (attempt %d/%d)\n",
                    task.getId(), attempt, maxRetries + 1);

                // Simulate processing that might fail
                if (Math.random() < task.getFailureProbability()) {
                    throw new RuntimeException("Simulated processing failure");
                }

                System.out.printf("✅ Successfully processed %s\n", task.getId());
                return null;
            } catch (Exception e) {
                lastException = e;
                System.out.printf("⚠️ Attempt %d failed for %s: %s\n",
                    attempt, task.getId(), e.getMessage());

                if (attempt <= maxRetries) {
                    try {
                        // Exponential backoff
                        long delay = (long) (1000 * Math.pow(2, attempt - 1));
                        Thread.sleep(delay);
                    } catch (InterruptedException ie) {
                        // Ignored
                    }
                }
            }
        }

        return null;
    });
}

```

```

        } catch (InterruptedException ie) {
            Thread.currentThread().interrupt();
            throw new RuntimeException("Interrupted during retry", ie);
        }
    }
}

throw new RuntimeException("Max retries exceeded", lastException);
});
}

private static void handleFailedTask(ProcessingTask task, Throwable error) {
    System.err.printf("💩 Moving task %s to dead letter queue%n", task.getId());
    // Implementation would send to DLQ or alert system
}

}

class ProcessingTask {
    private String id;
    private String operation;
    private double failureProbability;
    private Instant createdAt;

    public ProcessingTask(String id, String operation, double failureProbability) {
        this.id = id;
        this.operation = operation;
        this.failureProbability = failureProbability;
        this.createdAt = Instant.now();
    }

    // Getters and setters...
}

```


Try This Now:

1. Run the example and observe retry behavior
2. Adjust failure probabilities to see different outcomes
3. Add logging to track retry patterns

Consumer Groups & Load Balancing (Deep Dive)

Consumer Groups provide sophisticated load balancing and message distribution capabilities, allowing multiple consumers to work together efficiently to process messages from a single topic.

How Consumer Groups Work

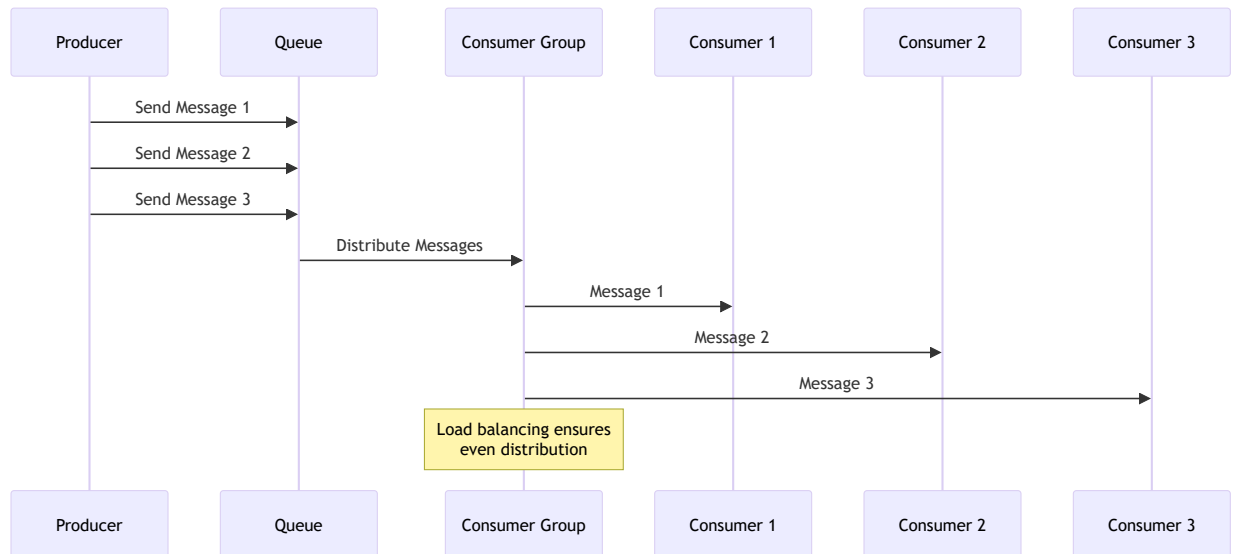

Key Features

Load Balancing

- **Round-robin distribution:** Messages distributed evenly across consumers
- **Automatic failover:** Failed consumers are removed from rotation
- **Dynamic scaling:** Add/remove consumers without interruption
- **Message affinity:** Route messages based on content or headers

Message Filtering

- **Consumer-level filters:** Each consumer can specify message criteria
- **Group-level filters:** Apply filters to the entire consumer group
- **Header-based routing:** Route messages based on header values
- **Content-based filtering:** Filter messages based on payload content

Parallel Processing

- **Configurable thread pools:** Control parallel processing per consumer
- **Batch processing:** Process multiple messages simultaneously
- **Backpressure handling:** Automatic throttling under high load
- **Resource management:** Efficient memory and connection usage

Consumer Group Example

```

public class ConsumerGroupExample {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("outbox", manager.getDatabaseService());

            // Create consumer group for order processing
            try (ConsumerGroup<OrderEvent> orderGroup =
                factory.createConsumerGroup("order-processors", "orders", OrderEvent.class);

```

```

        MessageProducer<OrderEvent> producer =
            factory.createProducer("orders", OrderEvent.class)) {

// Add region-specific consumers with filters
orderGroup.addConsumer("us-processor",
    message -> {
        System.out.println("US Processor: " + message.getPayload().getOrderId());
        return processUSOrder(message.getPayload());
    },
    message -> "US".equals(message.getHeaders().get("region"))
);

orderGroup.addConsumer("eu-processor",
    message -> {
        System.out.println("EU Processor: " + message.getPayload().getOrderId());
        return processEUOrder(message.getPayload());
    },
    message -> "EU".equals(message.getHeaders().get("region"))
);

orderGroup.addConsumer("asia-processor",
    message -> {
        System.out.println("ASIA Processor: " + message.getPayload().getOrderId());
        return processAsiaOrder(message.getPayload());
    },
    message -> "ASIA".equals(message.getHeaders().get("region"))
);

// Start the consumer group
orderGroup.start();

// Send orders to different regions
Map<String, String> usHeaders = Map.of("region", "US");
Map<String, String> euHeaders = Map.of("region", "EU");
Map<String, String> asiaHeaders = Map.of("region", "ASIA");

producer.send(new OrderEvent("US-001", 99.99), usHeaders);
producer.send(new OrderEvent("EU-001", 149.99), euHeaders);
producer.send(new OrderEvent("ASIA-001", 79.99), asiaHeaders);

Thread.sleep(5000); // Let messages process
    }
}

private static CompletableFuture<Void> processUSOrder(OrderEvent order) {
    // US-specific processing logic
    return CompletableFuture.completedFuture(null);
}

private static CompletableFuture<Void> processEUOrder(OrderEvent order) {
    // EU-specific processing logic (GDPR compliance, etc.)
    return CompletableFuture.completedFuture(null);
}

private static CompletableFuture<Void> processAsiaOrder(OrderEvent order) {
    // Asia-specific processing logic
    return CompletableFuture.completedFuture(null);
}
}

```

Parallel Processing Configuration

Configure parallel processing for high-throughput scenarios:

```
# Consumer thread configuration
peegeequeue.consumer.threads=4
peegeequeue.queue.batch-size=10
peegeequeue.queue.polling-interval=PT0.1S

# Backpressure management
peegeequeue.consumer.max-concurrent-operations=50
peegeequeue.consumer.timeout=PT30S
```

Advanced Consumer Group Patterns

Priority-based Processing

```
// High-priority consumer
orderGroup.addConsumer("high-priority-processor",
    message -> processHighPriorityOrder(message.getPayload()),
    message -> {
        Integer priority = Integer.parseInt(
            message.getHeaders().getOrDefault("priority", "5"));
        return priority >= 8; // Process only high-priority messages
    }
);

// Normal priority consumer
orderGroup.addConsumer("normal-processor",
    message -> processNormalOrder(message.getPayload()),
    message -> {
        Integer priority = Integer.parseInt(
            message.getHeaders().getOrDefault("priority", "5"));
        return priority < 8; // Process normal priority messages
    }
);
```

Customer Tier Processing

```
// VIP customer processor
orderGroup.addConsumer("vip-processor",
    message -> processVIPOrder(message.getPayload()),
    message -> "VIP".equals(message.getHeaders().get("customerTier"))
);

// Regular customer processor
orderGroup.addConsumer("regular-processor",
    message -> processRegularOrder(message.getPayload()),
    message -> !"VIP".equals(message.getHeaders().get("customerTier"))
);
```

Monitoring Consumer Groups

Consumer groups provide comprehensive monitoring capabilities:

```
// Get consumer group statistics
ConsumerGroupStats stats = orderGroup.getStats();
System.out.println("Active consumers: " + stats.getActiveConsumerCount());
System.out.println("Messages processed: " + stats.getTotalMessagesProcessed());
System.out.println("Average processing time: " + stats.getAverageProcessingTime());
```

```
// Monitor individual consumers
for (String consumerId : orderGroup.getConsumerIds()) {
    ConsumerStats consumerStats = orderGroup.getConsumerStats(consumerId);
    System.out.printf("Consumer %s: %d messages, %.2fms avg%n",
        consumerId,
        consumerStats.getMessagesProcessed(),
        consumerStats.getAverageProcessingTime());
}
```

Level 2: Business Scenarios

These examples demonstrate real-world business use cases with practical implementations.

Example 1: E-commerce Order Processing

A complete order processing system with transactional guarantees:

```
public class ECommerceOrderSystem {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Use outbox pattern for transactional consistency
            QueueFactoryProvider provider = QueueFactoryProvider.getInstance();
            QueueFactory factory = provider.createFactory("outbox", manager.getDatabaseService());

            // Setup multiple event streams
            try (MessageProducer<OrderEvent> orderProducer =
                factory.createProducer("order-events", OrderEvent.class);
                MessageProducer<InventoryEvent> inventoryProducer =
                factory.createProducer("inventory-events", InventoryEvent.class);
                MessageProducer<NotificationEvent> notificationProducer =
                factory.createProducer("notification-events", NotificationEvent.class);
                MessageProducer<PaymentEvent> paymentProducer =
                factory.createProducer("payment-events", PaymentEvent.class)) {

                // Setup event processors
                setupOrderProcessor(factory);
                setupInventoryProcessor(factory);
                setupNotificationProcessor(factory);
                setupPaymentProcessor(factory);

                // Simulate order processing workflow
                processCompleteOrder(manager, orderProducer, inventoryProducer,
                    notificationProducer, paymentProducer);

                Thread.sleep(5000); // Let all events process
            }
        }

        private static void processCompleteOrder(
            PeeGeeQManager manager,
            MessageProducer<OrderEvent> orderProducer,
            MessageProducer<InventoryEvent> inventoryProducer,
            MessageProducer<NotificationEvent> notificationProducer,
            MessageProducer<PaymentEvent> paymentProducer) throws Exception {

            String orderId = "ORDER-" + System.currentTimeMillis();
```

```

String customerId = "CUST-12345";

// Step 1: Create order with inventory reservation (transactional)
try (Connection conn = manager.getDatabaseService().getConnection()) {
    conn.setAutoCommit(false);

    try {
        // Create order record
        insertOrder(conn, orderId, customerId, new BigDecimal("299.99"));

        // Reserve inventory
        reserveInventory(conn, "PRODUCT-ABC", 2);

        // Send events within same transaction
        orderProducer.send(new OrderEvent(orderId, "CREATED", customerId,
            List.of(new OrderItem("PRODUCT-ABC", 2, new BigDecimal("149.99")))).join());

        inventoryProducer.send(new InventoryEvent("PRODUCT-ABC", "RESERVED", 2)).join();

        notificationProducer.send(new NotificationEvent(customerId,
            "ORDER_CREATED", "Your order " + orderId + " has been created")).join();

        conn.commit();
        System.out.println("✅ Order created and inventory reserved");

    } catch (Exception e) {
        conn.rollback();
        throw e;
    }
}

// Additional steps would continue here...

// Helper methods and event classes would be defined here...
}

```

Try This Now:

1. Create the event classes (OrderEvent, InventoryEvent, etc.)
2. Run the example and observe transactional consistency
3. Try introducing failures to see rollback behavior

Level 3: Advanced Integration

These examples demonstrate complex enterprise integration scenarios, microservices patterns, and sophisticated messaging architectures that you'll encounter in large-scale production systems.

Example 1: Microservices Saga Pattern

The Saga pattern coordinates distributed transactions across multiple microservices using compensating actions. This example shows how to implement a distributed order processing saga with PeeGeeQ.

```

public class OrderProcessingSaga {
    private final PeeGeeQManager manager;
    private final QueueFactory factory;
    private final SagaOrchestrator orchestrator;
}

```

```

public static void main(String[] args) throws Exception {
    try (PeeGeeQManager manager = new PeeGeeQManager()) {
        manager.start();

        QueueFactoryProvider provider = new PgQueueFactoryProvider();
        QueueFactory factory = provider.createFactory("outbox",
            new PgDatabaseService(manager));

        OrderProcessingSaga saga = new OrderProcessingSaga(manager, factory);
        saga.runSagaExample();
    }
}

public OrderProcessingSaga(PeeGeeQManager manager, QueueFactory factory) {
    this.manager = manager;
    this.factory = factory;
    this.orchestrator = new SagaOrchestrator(factory);
}

public void runSagaExample() throws Exception {
    System.out.println("=== Microservices Saga Pattern Example ===");

    // Setup saga participants
    setupSagaParticipants();

    // Process successful order
    processOrderSaga("ORDER-001", true);
    Thread.sleep(2000);

    // Process order that fails at payment
    processOrderSaga("ORDER-002", false);
    Thread.sleep(3000);

    System.out.println("Saga pattern example completed!");
}

private void setupSagaParticipants() throws Exception {
    // Inventory Service
    MessageConsumer<SagaCommand> inventoryConsumer =
        factory.createConsumer("inventory-commands", SagaCommand.class);
    inventoryConsumer.subscribe(this::handleInventoryCommand);

    // Payment Service
    MessageConsumer<SagaCommand> paymentConsumer =
        factory.createConsumer("payment-commands", SagaCommand.class);
    paymentConsumer.subscribe(this::handlePaymentCommand);

    // Shipping Service
    MessageConsumer<SagaCommand> shippingConsumer =
        factory.createConsumer("shipping-commands", SagaCommand.class);
    shippingConsumer.subscribe(this::handleShippingCommand);

    // Saga Coordinator
    MessageConsumer<SagaEvent> coordinatorConsumer =
        factory.createConsumer("saga-events", SagaEvent.class);
    coordinatorConsumer.subscribe(orchestrator::handleSagaEvent);
}

private void processOrderSaga(String orderId, boolean shouldSucceed) {
    SagaTransaction saga = SagaTransaction.builder()
        .sagaId("SAGA-" + orderId)
        .orderId(orderId)
        .addStep("RESERVE_INVENTORY", "inventory-commands", "RELEASE_INVENTORY")
        .addStep("PROCESS_PAYMENT", "payment-commands", "REFUND_PAYMENT")
        .addStep("ARRANGE_SHIPPING", "shipping-commands", "CANCEL_SHIPPING")
        .build();
}

```

```

        if (!shouldSucceed) {
            saga.setFailAtStep("PROCESS_PAYMENT");
        }

        orchestrator.startSaga(saga);
    }

    private CompletableFuture<Void> handleInventoryCommand(Message<SagaCommand> message) {
        SagaCommand command = message.getPayload();
        System.out.printf("📦 Inventory Service: %s for order %s%n",
            command.getAction(), command.getOrderId());

        // Simulate inventory processing
        try {
            Thread.sleep(500);

            if ("RESERVE_INVENTORY".equals(command.getAction())) {
                // Always succeed for demo
                orchestrator.reportSuccess(command.getSagaId(), "RESERVE_INVENTORY",
                    Map.of("reservationId", "RES-" + command.getOrderId()));
            } else if ("RELEASE_INVENTORY".equals(command.getAction())) {
                // Compensating action
                orchestrator.reportCompensationComplete(command.getSagaId(), "RESERVE_INVENTORY");
            }

        } catch (Exception e) {
            orchestrator.reportFailure(command.getSagaId(), "RESERVE_INVENTORY", e.getMessage());
        }

        return CompletableFuture.completedFuture(null);
    }

    private CompletableFuture<Void> handlePaymentCommand(Message<SagaCommand> message) {
        SagaCommand command = message.getPayload();
        System.out.printf("💰 Payment Service: %s for order %s%n",
            command.getAction(), command.getOrderId());

        try {
            Thread.sleep(800);

            if ("PROCESS_PAYMENT".equals(command.getAction())) {
                // Simulate payment failure for ORDER-002
                if (command.getOrderId().equals("ORDER-002")) {
                    orchestrator.reportFailure(command.getSagaId(), "PROCESS_PAYMENT",
                        "Insufficient funds");
                } else {
                    orchestrator.reportSuccess(command.getSagaId(), "PROCESS_PAYMENT",
                        Map.of("transactionId", "TXN-" + command.getOrderId()));
                }
            } else if ("REFUND_PAYMENT".equals(command.getAction())) {
                // Compensating action
                orchestrator.reportCompensationComplete(command.getSagaId(), "PROCESS_PAYMENT");
            }

        } catch (Exception e) {
            orchestrator.reportFailure(command.getSagaId(), "PROCESS_PAYMENT", e.getMessage());
        }

        return CompletableFuture.completedFuture(null);
    }

    private CompletableFuture<Void> handleShippingCommand(Message<SagaCommand> message) {
        SagaCommand command = message.getPayload();
        System.out.printf("🚚 Shipping Service: %s for order %s%n",
            command.getAction(), command.getOrderId());
    }

```

```

try {
    Thread.sleep(600);

    if ("ARRANGE_SHIPPING".equals(command.getAction())) {
        orchestrator.reportSuccess(command.getSagaId(), "ARRANGE_SHIPPING",
            Map.of("trackingNumber", "TRACK-" + command.getOrderId()));
    } else if ("CANCEL_SHIPPING".equals(command.getAction())) {
        // Compensating action
        orchestrator.reportCompensationComplete(command.getSagaId(), "ARRANGE_SHIPPING");
    }

} catch (Exception e) {
    orchestrator.reportFailure(command.getSagaId(), "ARRANGE_SHIPPING", e.getMessage());
}

return CompletableFuture.completedFuture(null);
}
}

```

Example 2: Event-Driven Architecture with CQRS

This example demonstrates Command Query Responsibility Segregation (CQRS) with event sourcing using PeeGeeQ's bi-temporal event store.

```

public class CQRSEventDrivenExample {
    private final EventStore<DomainEvent> eventStore;
    private final QueueFactory commandFactory;
    private final QueueFactory queryFactory;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Create event store for domain events
            BiTemporalEventStoreFactory eventStoreFactory =
                new BiTemporalEventStoreFactory(manager);
            EventStore<DomainEvent> eventStore =
                eventStoreFactory.createEventStore(DomainEvent.class);

            // Create separate factories for commands and queries
            QueueFactoryProvider provider = new PgQueueFactoryProvider();
            QueueFactory commandFactory = provider.createFactory("outbox",
                new PgDatabaseService(manager));
            QueueFactory queryFactory = provider.createFactory("native",
                new PgDatabaseService(manager));

            CQRSEventDrivenExample example = new CQRSEventDrivenExample(
                eventStore, commandFactory, queryFactory);
            example.runCQRSExample();
        }
    }

    public CQRSEventDrivenExample(EventStore<DomainEvent> eventStore,
                                   QueueFactory commandFactory,
                                   QueueFactory queryFactory) {
        this.eventStore = eventStore;
        this.commandFactory = commandFactory;
        this.queryFactory = queryFactory;
    }

    public void runCQRSExample() throws Exception {

```



```

System.out.println("=== CQRS Event-Driven Architecture Example ===");

// Setup command handlers
setupCommandHandlers();

// Setup query handlers and projections
setupQueryHandlers();

// Setup event handlers for projections
setupEventHandlers();

// Execute commands
executeCommands();

Thread.sleep(3000);

// Execute queries
executeQueries();

System.out.println("CQRS example completed!");
}

private void setupCommandHandlers() throws Exception {
    MessageConsumer<CreateAccountCommand> createAccountConsumer =
        commandFactory.createConsumer("create-account-commands", CreateAccountCommand.class);
    createAccountConsumer.subscribe(this::handleCreateAccount);

    MessageConsumer<DepositCommand> depositConsumer =
        commandFactory.createConsumer("deposit-commands", DepositCommand.class);
    depositConsumer.subscribe(this::handleDeposit);

    MessageConsumer<WithdrawCommand> withdrawConsumer =
        commandFactory.createConsumer("withdraw-commands", WithdrawCommand.class);
    withdrawConsumer.subscribe(this::handleWithdraw);
}

private void setupQueryHandlers() throws Exception {
    MessageConsumer<AccountBalanceQuery> balanceQueryConsumer =
        queryFactory.createConsumer("balance-queries", AccountBalanceQuery.class);
    balanceQueryConsumer.subscribe(this::handleBalanceQuery);

    MessageConsumer<TransactionHistoryQuery> historyQueryConsumer =
        queryFactory.createConsumer("history-queries", TransactionHistoryQuery.class);
    historyQueryConsumer.subscribe(this::handleHistoryQuery);
}

private void setupEventHandlers() throws Exception {
    // Listen for domain events to update read models
    MessageConsumer<DomainEvent> eventConsumer =
        queryFactory.createConsumer("domain-events", DomainEvent.class);
    eventConsumer.subscribe(this::updateProjections);
}

private CompletableFuture<Void> handleCreateAccount(Message<CreateAccountCommand> message) {
    CreateAccountCommand command = message.getPayload();
    System.out.printf("\ud83d\udcbb Command: Creating account %s\n", command.getAccountId());

    // Create domain event
    AccountCreatedEvent event = new AccountCreatedEvent(
        command.getAccountId(), command.getOwnerName(), command.getInitialBalance());

    // Store event
    return eventStore.append("AccountCreated", event, Instant.now(),
        Map.of("commandId", command.getCommandId(),
            command.getCommandId(), command.getAccountId())
        .thenCompose(storedEvent -> {

```

```

        // Publish event for projections
        return publishDomainEvent(event);
    })
    .thenRun(() -> System.out.printf("✅ Account %s created%n", command.getAccountId()));
}

private CompletableFuture<Void> handleDeposit(Message<DepositCommand> message) {
    DepositCommand command = message.getPayload();
    System.out.printf("📄 Command: Deposit $%.2f to account %s%n",
        command.getAmount(), command.getAccountId());

    // In real implementation, you'd load current state from event store
    // For demo, we'll just create the event
    MoneyDepositedEvent event = new MoneyDepositedEvent(
        command.getAccountId(), command.getAmount(), command.getDescription());

    return eventStore.append("MoneyDeposited", event, Instant.now(),
        Map.of("commandId", command.getCommandId(),
            command.getCommandId(), command.getAccountId())
        .thenCompose(storedEvent -> publishDomainEvent(event))
        .thenRun(() -> System.out.printf("✅ Deposited $%.2f to account %s%n",
            command.getAmount(), command.getAccountId())));
}

private CompletableFuture<Void> handleWithdraw(Message<WithdrawCommand> message) {
    WithdrawCommand command = message.getPayload();
    System.out.printf("📄 Command: Withdraw $%.2f from account %s%n",
        command.getAmount(), command.getAccountId());

    // In real implementation, you'd validate sufficient balance
    MoneyWithdrawnEvent event = new MoneyWithdrawnEvent(
        command.getAccountId(), command.getAmount(), command.getDescription());

    return eventStore.append("MoneyWithdrawn", event, Instant.now(),
        Map.of("commandId", command.getCommandId(),
            command.getCommandId(), command.getAccountId())
        .thenCompose(storedEvent -> publishDomainEvent(event))
        .thenRun(() -> System.out.printf("✅ Withdrew $%.2f from account %s%n",
            command.getAmount(), command.getAccountId())));
}

private CompletableFuture<Void> publishDomainEvent(DomainEvent event) {
    try {
        MessageProducer<DomainEvent> eventProducer =
            queryFactory.createProducer("domain-events", DomainEvent.class);
        return eventProducer.send(event);
    } catch (Exception e) {
        return CompletableFuture.failedFuture(e);
    }
}

private CompletableFuture<Void> updateProjections(Message<DomainEvent> message) {
    DomainEvent event = message.getPayload();
    System.out.printf("📊 Updating projections for event: %s%n", event.getEventType());

    // Update read models based on event type
    // In real implementation, you'd update database tables optimized for queries

    return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> handleBalanceQuery(Message<AccountBalanceQuery> message) {
    AccountBalanceQuery query = message.getPayload();
    System.out.printf("🔍 Query: Balance for account %s%n", query.getAccountId());

    // In real implementation, you'd query the read model

```

```

        System.out.printf("💰 Account %s balance: %.2f%n",
            query.getAccountId(), 1500.00); // Mock balance

        return CompletableFuture.completedFuture(null);
    }

    private CompletableFuture<Void> handleHistoryQuery(Message<TransactionHistoryQuery> message) {
        TransactionHistoryQuery query = message.getPayload();
        System.out.printf("🔍 Query: Transaction history for account %s%n", query.getAccountId());

        // In real implementation, you'd query the event store or read model
        System.out.printf("📄 Account %s has 5 transactions in the last 30 days%n",
            query.getAccountId());

        return CompletableFuture.completedFuture(null);
    }

    private void executeCommands() throws Exception {
        MessageProducer<CreateAccountCommand> createProducer =
            commandFactory.createProducer("create-account-commands", CreateAccountCommand.class);
        MessageProducer<DepositCommand> depositProducer =
            commandFactory.createProducer("deposit-commands", DepositCommand.class);
        MessageProducer<WithdrawCommand> withdrawProducer =
            commandFactory.createProducer("withdraw-commands", WithdrawCommand.class);

        // Execute commands
        createProducer.send(new CreateAccountCommand("ACC-001", "John Doe", new BigDecimal("1000.00")));
        Thread.sleep(500);

        depositProducer.send(new DepositCommand("ACC-001", new BigDecimal("500.00"), "Salary deposit"));
        Thread.sleep(500);

        withdrawProducer.send(new WithdrawCommand("ACC-001", new BigDecimal("200.00"), "ATM withdrawal"));
    }

    private void executeQueries() throws Exception {
        MessageProducer<AccountBalanceQuery> balanceProducer =
            queryFactory.createProducer("balance-queries", AccountBalanceQuery.class);
        MessageProducer<TransactionHistoryQuery> historyProducer =
            queryFactory.createProducer("history-queries", TransactionHistoryQuery.class);

        // Execute queries
        balanceProducer.send(new AccountBalanceQuery("ACC-001"));
        Thread.sleep(200);

        historyProducer.send(new TransactionHistoryQuery("ACC-001", 30));
    }
}

```

🎯 Try This Now:

1. Implement the command, event, and query classes
2. Run the saga pattern example and observe compensation behavior
3. Run the CQRS example and see command/query separation
4. Try introducing failures to see how sagas handle rollbacks

Example 3: Multi-Tenant Message Routing

This example demonstrates sophisticated message routing in a multi-tenant SaaS application where messages must be isolated by tenant and routed based on subscription levels.

```

public class MultiTenantRoutingExample {
    private final QueueFactory factory;
    private final TenantRoutingService routingService;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = new PgQueueFactoryProvider();
            QueueFactory factory = provider.createFactory("native",
                new PgDatabaseService(manager));

            MultiTenantRoutingExample example = new MultiTenantRoutingExample(factory);
            example.runMultiTenantExample();
        }
    }

    public MultiTenantRoutingExample(QueueFactory factory) {
        this.factory = factory;
        this.routingService = new TenantRoutingService();
    }

    public void runMultiTenantExample() throws Exception {
        System.out.println("=== Multi-Tenant Message Routing Example ===");

        // Setup tenant-specific consumers
        setupTenantConsumers();

        // Setup feature-based routing
        setupFeatureRouting();

        // Send messages for different tenants and subscription levels
        sendTenantMessages();

        Thread.sleep(3000);
        System.out.println("Multi-tenant routing example completed!");
    }

    private void setupTenantConsumers() throws Exception {
        // Premium tenant consumers (high priority processing)
        MessageConsumer<TenantMessage> premiumConsumer =
            factory.createConsumer("premium-tenant-messages", TenantMessage.class);
        premiumConsumer.subscribe(message -> {
            TenantMessage msg = message.getPayload();
            System.out.printf("🌟 Premium Processing: Tenant %s - %s\n",
                msg.getTenantId(), msg.getContent());

            // Premium tenants get enhanced processing
            return processWithPremiumFeatures(msg);
        });

        // Standard tenant consumers
        MessageConsumer<TenantMessage> standardConsumer =
            factory.createConsumer("standard-tenant-messages", TenantMessage.class);
        standardConsumer.subscribe(message -> {
            TenantMessage msg = message.getPayload();
            System.out.printf("📄 Standard Processing: Tenant %s - %s\n",
                msg.getTenantId(), msg.getContent());

            return processWithStandardFeatures(msg);
        });

        // Basic tenant consumers (rate limited)
        MessageConsumer<TenantMessage> basicConsumer =
            factory.createConsumer("basic-tenant-messages", TenantMessage.class);
    }

```

```

        basicConsumer.subscribe(message -> {
            TenantMessage msg = message.getPayload();
            System.out.printf("📄 Basic Processing: Tenant %s - %s\n",
                msg.getTenantId(), msg.getContent());

            // Add rate limiting for basic tier
            return processWithRateLimit(msg);
        });
    }

    private void setupFeatureRouting() throws Exception {
        // Analytics feature (premium only)
        MessageConsumer<AnalyticsEvent> analyticsConsumer =
            factory.createConsumer("analytics-events", AnalyticsEvent.class);
        analyticsConsumer.subscribe(this::processAnalytics);

        // Advanced reporting (standard and premium)
        MessageConsumer<ReportRequest> reportConsumer =
            factory.createConsumer("report-requests", ReportRequest.class);
        reportConsumer.subscribe(this::processReports);

        // Notification routing based on tenant preferences
        MessageConsumer<NotificationEvent> notificationConsumer =
            factory.createConsumer("tenant-notifications", NotificationEvent.class);
        notificationConsumer.subscribe(this::routeNotifications);
    }

    private void sendTenantMessages() throws Exception {
        MessageProducer<TenantMessage> messageRouter =
            factory.createProducer("tenant-message-router", TenantMessage.class);

        // Messages from different tenant tiers
        TenantMessage premiumMsg = new TenantMessage("TENANT-PREMIUM-001",
            "Process premium order", TenantTier.PREMIUM);
        TenantMessage standardMsg = new TenantMessage("TENANT-STD-002",
            "Process standard order", TenantTier.STANDARD);
        TenantMessage basicMsg = new TenantMessage("TENANT-BASIC-003",
            "Process basic order", TenantTier.BASIC);

        // Route messages based on tenant tier
        routeMessage(messageRouter, premiumMsg);
        routeMessage(messageRouter, standardMsg);
        routeMessage(messageRouter, basicMsg);

        // Send feature-specific messages
        sendFeatureMessages();
    }

    private void routeMessage(MessageProducer<TenantMessage> router, TenantMessage message)
        throws Exception {
        String targetQueue = routingService.determineQueue(message.getTenantTier());

        // Create headers for routing
        Map<String, String> headers = Map.of(
            "tenantId", message.getTenantId(),
            "tier", message.getTenantTier().name(),
            "targetQueue", targetQueue
        );

        // Send with routing headers
        router.send(message, headers).join();

        // Route to appropriate queue based on tier
        MessageProducer<TenantMessage> targetProducer =
            factory.createProducer(targetQueue, TenantMessage.class);
        targetProducer.send(message).join();
    }

```

```

}

private void sendFeatureMessages() throws Exception {
    // Analytics events (premium only)
    MessageProducer<AnalyticsEvent> analyticsProducer =
        factory.createProducer("analytics-events", AnalyticsEvent.class);
    analyticsProducer.send(new AnalyticsEvent("TENANT-PREMIUM-001",
        "user_action", Map.of("action", "purchase", "amount", "99.99")));

    // Report requests (standard and premium)
    MessageProducer<ReportRequest> reportProducer =
        factory.createProducer("report-requests", ReportRequest.class);
    reportProducer.send(new ReportRequest("TENANT-STD-002", "monthly_sales",
        Map.of("month", "2025-01")));

    // Notifications for all tiers
    MessageProducer<NotificationEvent> notificationProducer =
        factory.createProducer("tenant-notifications", NotificationEvent.class);
    notificationProducer.send(new NotificationEvent("TENANT-BASIC-003",
        "Your report is ready", NotificationChannel.EMAIL));
}

private CompletableFuture<Void> processWithPremiumFeatures(TenantMessage message) {
    // Premium processing includes advanced analytics, priority support, etc.
    System.out.printf(" 🚀 Enhanced processing for %s\n", message.getTenantId());
    return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> processWithStandardFeatures(TenantMessage message) {
    // Standard processing with basic features
    System.out.printf(" ⚡ Standard processing for %s\n", message.getTenantId());
    return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> processWithRateLimit(TenantMessage message) {
    // Basic processing with rate limiting
    System.out.printf(" 🕒 Rate-limited processing for %s\n", message.getTenantId());

    // Simulate rate limiting
    try {
        Thread.sleep(1000); // Slower processing for basic tier
    } catch (InterruptedException e) {
        Thread.currentThread().interrupt();
    }

    return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> processAnalytics(Message<AnalyticsEvent> message) {
    AnalyticsEvent event = message.getPayload();

    // Verify tenant has analytics feature
    if (!routingService.hasAnalyticsFeature(event.getTenantId())) {
        System.out.printf(" ❌ Analytics denied for tenant %s (not premium)\n",
            event.getTenantId());
        return CompletableFuture.completedFuture(null);
    }

    System.out.printf(" 📊 Processing analytics: %s for tenant %s\n",
        event.getEventType(), event.getTenantId());

    return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> processReports(Message<ReportRequest> message) {
    ReportRequest request = message.getPayload();

```

```

// Verify tenant has reporting feature
if (!routingService.hasReportingFeature(request.getTenantId())) {
    System.out.printf("❌ Reporting denied for tenant %s (basic tier)%n",
        request.getTenantId());
    return CompletableFuture.completedFuture(null);
}

System.out.printf("✅ Generating report: %s for tenant %s%n",
    request.getReportType(), request.getTenantId());

return CompletableFuture.completedFuture(null);
}

private CompletableFuture<Void> routeNotifications(Message<NotificationEvent> message) {
    NotificationEvent notification = message.getPayload();

    // Route based on tenant preferences and tier
    NotificationChannel channel = routingService.getPreferredChannel(
        notification.getTenantId(), notification.getChannel());

    System.out.printf("🔔 Routing notification to %s via %s for tenant %s%n",
        channel, notification.getChannel(), notification.getTenantId());

    return CompletableFuture.completedFuture(null);
}
}

// Supporting classes
class TenantRoutingService {
    private final Map<String, TenantTier> tenantTiers = Map.of(
        "TENANT-PREMIUM-001", TenantTier.PREMIUM,
        "TENANT-STD-002", TenantTier.STANDARD,
        "TENANT-BASIC-003", TenantTier.BASIC
    );

    public String determineQueue(TenantTier tier) {
        return switch (tier) {
            case PREMIUM -> "premium-tenant-messages";
            case STANDARD -> "standard-tenant-messages";
            case BASIC -> "basic-tenant-messages";
        };
    }

    public boolean hasAnalyticsFeature(String tenantId) {
        return tenantTiers.get(tenantId) == TenantTier.PREMIUM;
    }

    public boolean hasReportingFeature(String tenantId) {
        TenantTier tier = tenantTiers.get(tenantId);
        return tier == TenantTier.PREMIUM || tier == TenantTier.STANDARD;
    }

    public NotificationChannel getPreferredChannel(String tenantId, NotificationChannel requested) {
        TenantTier tier = tenantTiers.get(tenantId);

        // Basic tier only gets email notifications
        if (tier == TenantTier.BASIC) {
            return NotificationChannel.EMAIL;
        }

        return requested; // Premium and standard get their preferred channel
    }
}

enum TenantTier { BASIC, STANDARD, PREMIUM }

```

```
enum NotificationChannel { EMAIL, SMS, PUSH, SLACK }
```

Example 4: Distributed Cache Invalidation

This example shows how to implement distributed cache invalidation across multiple application instances using PeeGeeQ's native queue for real-time coordination.

```
public class DistributedCacheInvalidationExample {
    private final QueueFactory factory;
    private final LocalCache localCache;
    private final String instanceId;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = new PgQueueFactoryProvider();
            QueueFactory factory = provider.createFactory("native",
                new PgDatabaseService(manager));

            // Simulate multiple application instances
            DistributedCacheInvalidationExample instance1 =
                new DistributedCacheInvalidationExample(factory, "APP-INSTANCE-1");
            DistributedCacheInvalidationExample instance2 =
                new DistributedCacheInvalidationExample(factory, "APP-INSTANCE-2");
            DistributedCacheInvalidationExample instance3 =
                new DistributedCacheInvalidationExample(factory, "APP-INSTANCE-3");

            // Start cache invalidation listeners
            instance1.startCacheInvalidationListener();
            instance2.startCacheInvalidationListener();
            instance3.startCacheInvalidationListener();

            // Simulate cache operations
            instance1.runCacheInvalidationDemo();

            Thread.sleep(3000);
            System.out.println("Distributed cache invalidation example completed!");
        }
    }

    public DistributedCacheInvalidationExample(QueueFactory factory, String instanceId) {
        this.factory = factory;
        this.instanceId = instanceId;
        this.localCache = new LocalCache(instanceId);
    }

    public void startCacheInvalidationListener() throws Exception {
        MessageConsumer<CacheInvalidationEvent> consumer =
            factory.createConsumer("cache-invalidations", CacheInvalidationEvent.class);

        consumer.subscribe(this::handleCacheInvalidation);
        System.out.printf("🔔 %s: Started cache invalidation listener%n", instanceId);
    }

    public void runCacheInvalidationDemo() throws Exception {
        System.out.println("=== Distributed Cache Invalidation Example ===");

        MessageProducer<CacheInvalidationEvent> invalidationProducer =
            factory.createProducer("cache-invalidations", CacheInvalidationEvent.class);

        // Populate caches across all instances
    }
}
```



```

        populateInitialCache();

        // Simulate data updates that require cache invalidation
        System.out.println("\n📝 Updating user data - invalidating user caches...");
        invalidationProducer.send(new CacheInvalidationEvent(
            "user", "user:12345", CacheInvalidationType.SINGLE_KEY, instanceId));

        Thread.sleep(500);

        System.out.println("\n📝 Updating product catalog - invalidating product caches...");
        invalidationProducer.send(new CacheInvalidationEvent(
            "product", "product:*", CacheInvalidationType.PATTERN, instanceId));

        Thread.sleep(500);

        System.out.println("\n📝 System maintenance - clearing all caches...");
        invalidationProducer.send(new CacheInvalidationEvent(
            "*", "*", CacheInvalidationType.CLEAR_ALL, instanceId));
    }

    private void populateInitialCache() {
        System.out.printf("📦 %s: Populating initial cache data%n", instanceId);

        // Simulate populating cache with user data
        localCache.put("user:12345", "John Doe");
        localCache.put("user:67890", "Jane Smith");

        // Simulate populating cache with product data
        localCache.put("product:ABC123", "Laptop Computer");
        localCache.put("product:XYZ789", "Wireless Mouse");

        // Simulate populating cache with session data
        localCache.put("session:sess001", "active_session_data");

        System.out.printf("📦 %s: Cache populated with %d items%n",
            instanceId, localCache.size());
    }

    private CompletableFuture<Void> handleCacheInvalidation(Message<CacheInvalidationEvent> message) {
        CacheInvalidationEvent event = message.getPayload();

        // Don't process invalidation events from this instance
        if (instanceId.equals(event.getOriginatingInstance())) {
            return CompletableFuture.completedFuture(null);
        }

        System.out.printf("🗑️ %s: Received cache invalidation - %s:%s (type: %s)%n",
            instanceId, event.getCacheRegion(), event.getKey(), event.getType());

        int itemsInvalidated = 0;

        switch (event.getType()) {
            case SINGLE_KEY:
                if (localCache.remove(event.getKey()) != null) {
                    itemsInvalidated = 1;
                }
                break;

            case PATTERN:
                itemsInvalidated = localCache.removeByPattern(event.getKey());
                break;

            case REGION:
                itemsInvalidated = localCache.removeByRegion(event.getCacheRegion());
                break;
        }
    }

```

```

        case CLEAR_ALL:
            itemsInvalidated = localCache.size();
            localCache.clear();
            break;
    }

    System.out.printf("✅ %s: Invalidated %d cache items, remaining: %d%n",
        instanceId, itemsInvalidated, localCache.size());

    return CompletableFuture.completedFuture(null);
}
}

// Supporting classes
class LocalCache {
    private final Map<String, Object> cache = new ConcurrentHashMap<>();
    private final String instanceId;

    public LocalCache(String instanceId) {
        this.instanceId = instanceId;
    }

    public void put(String key, Object value) {
        cache.put(key, value);
    }

    public Object get(String key) {
        return cache.get(key);
    }

    public Object remove(String key) {
        return cache.remove(key);
    }

    public int removeByPattern(String pattern) {
        String regex = pattern.replace("*", ".");
        Pattern compiledPattern = Pattern.compile(regex);

        List<String> keysToRemove = cache.keySet().stream()
            .filter(key -> compiledPattern.matcher(key).matches())
            .collect(Collectors.toList());

        keysToRemove.forEach(cache::remove);
        return keysToRemove.size();
    }

    public int removeByRegion(String region) {
        if ("*".equals(region)) {
            int size = cache.size();
            cache.clear();
            return size;
        }

        String prefix = region + ":";
        List<String> keysToRemove = cache.keySet().stream()
            .filter(key -> key.startsWith(prefix))
            .collect(Collectors.toList());

        keysToRemove.forEach(cache::remove);
        return keysToRemove.size();
    }

    public void clear() {
        cache.clear();
    }
}

```

```

    public int size() {
        return cache.size();
    }
}

class CacheInvalidationEvent {
    private String cacheRegion;
    private String key;
    private CacheInvalidationType type;
    private String originatingInstance;
    private Instant timestamp;

    public CacheInvalidationEvent(String cacheRegion, String key,
                                   CacheInvalidationType type, String originatingInstance) {
        this.cacheRegion = cacheRegion;
        this.key = key;
        this.type = type;
        this.originatingInstance = originatingInstance;
        this.timestamp = Instant.now();
    }

    // Getters and setters...
}

enum CacheInvalidationType {
    SINGLE_KEY,    // Invalidate specific key
    PATTERN,       // Invalidate keys matching pattern
    REGION,        // Invalidate all keys in cache region
    CLEAR_ALL      // Clear entire cache
}

```

Try This Now:

1. Implement the supporting classes (TenantMessage, AnalyticsEvent, etc.)
2. Run the multi-tenant routing example with different tenant tiers
3. Run the cache invalidation example with multiple instances
4. Observe how messages are routed and processed differently based on context

Installation & Setup

Database Setup

1. Create Database:

```

CREATE DATABASE peegeeq;
CREATE USER peegeeq_user WITH PASSWORD 'your_password';
GRANT ALL PRIVILEGES ON DATABASE peegeeq TO peegeeq_user;

```

2. Initialize Schema:

```

// Using PeeGeeQManager
PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
    .host("localhost")
    .port(5432)
    .database("peegeeq")
    .username("peegeeq_user")

```

```
.password("your_password")
.build();
```

```
PeeGeeQManager manager = new PeeGeeQManager(config);
manager.initialize(); // Creates tables and applies migrations
```

Configuration

Create `peegeeq.properties` :

```
# Database connection
peegeeq.database.host=localhost
peegeeq.database.port=5432
peegeeq.database.name=peegeeq
peegeeq.database.username=peegeeq_user
peegeeq.database.password=your_password

# Connection pool
peegeeq.database.pool.maxSize=20
peegeeq.database.pool.minSize=5

# Queue settings
peegeeq.queue.visibilityTimeoutSeconds=30
peegeeq.queue.maxRetries=3
peegeeq.queue.deadLetterEnabled=true

# Health checks
peegeeq.health.enabled=true
peegeeq.health.intervalSeconds=30

# Metrics
peegeeq.metrics.enabled=true
peegeeq.metrics.jvm.enabled=true
```

Basic Usage Examples

Simple Producer/Consumer

```
public class BasicExample {
    public static void main(String[] args) throws Exception {
        // Initialize PeeGeeQ
        PeeGeeQConfiguration config = PeeGeeQConfiguration.fromProperties("peegeeq.properties");
        PeeGeeQManager manager = new PeeGeeQManager(config);
        manager.initialize();

        DatabaseService databaseService = manager.getDatabaseService();
        QueueFactoryProvider provider = QueueFactoryProvider.getInstance();

        // Create native queue factory
        QueueFactory factory = provider.createFactory("native", databaseService);

        // Create producer and consumer
        MessageProducer<String> producer = factory.createProducer("notifications", String.class);
        MessageConsumer<String> consumer = factory.createConsumer("notifications", String.class);

        // Start consuming messages
        consumer.subscribe(message -> {
```

```

        System.out.println("Received: " + message.getPayload());
        return CompletableFuture.completedFuture(null);
    });

    // Send messages
    producer.send("Hello, PeeGeeQ!").join();
    producer.send("Message processing is working!").join();

    // Keep running
    Thread.sleep(5000);

    // Cleanup
    producer.close();
    consumer.close();
    manager.close();
}
}

```

Transactional Outbox Example

```

public class TransactionalExample {
    public static void main(String[] args) throws Exception {
        // Setup (same as above)
        PeeGeeQManager manager = new PeeGeeQManager(config);
        manager.initialize();

        // Create outbox factory for transactional guarantees
        QueueFactory outboxFactory = provider.createFactory("outbox", databaseService);
        MessageProducer<OrderEvent> producer = outboxFactory.createProducer("orders", OrderEvent.class);

        // Simulate order processing with transactional messaging
        try (Connection conn = dataSource.getConnection()) {
            conn.setAutoCommit(false);

            try {
                // 1. Save order to database
                PreparedStatement stmt = conn.prepareStatement(
                    "INSERT INTO orders (id, customer_id, amount) VALUES (?, ?, ?)");
                stmt.setString(1, "ORDER-001");
                stmt.setString(2, "CUST-123");
                stmt.setBigDecimal(3, new BigDecimal("99.99"));
                stmt.executeUpdate();

                // 2. Send order event (within same transaction)
                OrderEvent event = new OrderEvent("ORDER-001", "CUST-123", new BigDecimal("99.99"));
                producer.send(event).join();

                // 3. Commit both operations together
                conn.commit();
                System.out.println("Order and event committed together!");

            } catch (Exception e) {
                conn.rollback();
                throw e;
            }
        }
    }
}

```

Part VI: Production Readiness

Configuration Management

Environment-Specific Configuration

Create different configuration files for each environment:

peegeeq-dev.properties :

```
# Development environment
peegeeq.database.host=localhost
peegeeq.database.port=5432
peegeeq.database.name=peegeeq_dev
peegeeq.database.username=dev_user
peegeeq.database.password=dev_password

# Relaxed settings for development
peegeeq.queue.visibilityTimeoutSeconds=30
peegeeq.queue.maxRetries=3
peegeeq.health.intervalSeconds=60
```

peegeeq-prod.properties :

```
# Production environment
peegeeq.database.host=${DB_HOST}
peegeeq.database.port=${DB_PORT:5432}
peegeeq.database.name=${DB_NAME}
peegeeq.database.username=${DB_USERNAME}
peegeeq.database.password=${DB_PASSWORD}

# Production-optimized settings
peegeeq.database.pool.maxSize=20
peegeeq.database.pool.minSize=5
peegeeq.queue.visibilityTimeoutSeconds=300
peegeeq.queue.maxRetries=5
peegeeq.health.intervalSeconds=30

# Security settings
peegeeq.database.ssl.enabled=true
peegeeq.database.ssl.mode=require
```

Programmatic Configuration

```
public class ProductionPeeGeeQSetup {
    public static PeeGeeQManager createProductionManager() {
        PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
            .host(System.getenv("DB_HOST"))
            .port(Integer.parseInt(System.getenv("DB_PORT")))
            .database(System.getenv("DB_NAME"))
            .username(System.getenv("DB_USERNAME"))
            .password(System.getenv("DB_PASSWORD"))
            .poolMaxSize(20)
            .poolMinSize(5)
    }
}
```

```

        .sslEnabled(true)
        .healthCheckInterval(Duration.ofSeconds(30))
        .build();

    return new PeeGeeQManager(config);
}
}

```

Monitoring & Metrics

Built-in Health Checks

```

public class HealthCheckExample {
    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            // Get health status
            HealthStatus health = manager.getHealthStatus();
            System.out.printf("Database Health: %s\n", health.getDatabaseStatus());
            System.out.printf("Queue Health: %s\n", health.getQueueStatus());
            System.out.printf("Last Check: %s\n", health.getLastCheckTime());

            // Get performance metrics
            PerformanceMetrics metrics = manager.getMetrics();
            System.out.printf("Messages Sent: %d\n", metrics.getMessagesSent());
            System.out.printf("Messages Processed: %d\n", metrics.getMessagesProcessed());
            System.out.printf("Average Latency: %.2fms\n", metrics.getAverageLatencyMs());
            System.out.printf("Error Rate: %.2f%%\n", metrics.getErrorRate() * 100);
        }
    }
}

```

Custom Metrics Integration

```

// Integration with Micrometer/Prometheus
public class MetricsIntegration {
    private final MeterRegistry meterRegistry;
    private final Counter messagesSentCounter;
    private final Timer processingTimer;

    public MetricsIntegration(MeterRegistry meterRegistry) {
        this.meterRegistry = meterRegistry;
        this.messagesSentCounter = Counter.builder("peegeeq.messages.sent")
            .description("Total messages sent")
            .register(meterRegistry);
        this.processingTimer = Timer.builder("peegeeq.processing.time")
            .description("Message processing time")
            .register(meterRegistry);
    }

    public void setupMetrics(MessageConsumer<?> consumer) {
        consumer.subscribe(message -> {
            Timer.Sample sample = Timer.start(meterRegistry);

            return processMessage(message)
                .whenComplete((result, throwable) -> {
                    sample.stop(processingTimer);
                });
        });
    }
}

```

```

        if (throwable == null) {
            messagesSentCounter.increment();
        }
    });
}
}
}

```

Performance Tuning

Performance Characteristics Overview

PeeGeeQ delivers enterprise-grade performance across all messaging patterns:

Native Queue Performance

- **Throughput:** 10,000+ messages/second
- **Latency:** <10ms end-to-end
- **Mechanism:** PostgreSQL LISTEN/NOTIFY with advisory locks
- **Concurrency:** Multiple consumers with automatic load balancing
- **Scalability:** Horizontal scaling via consumer groups
- **Memory Usage:** Low memory footprint with streaming processing
- **Connection Efficiency:** Connection pooling with optimized pool sizes

Outbox Pattern Performance

- **Throughput:** 5,000+ messages/second
- **Latency:** ~100ms (polling-based with configurable intervals)
- **Mechanism:** Database polling with ACID transactions
- **Consistency:** Full ACID compliance with business data
- **Reliability:** Exactly-once delivery guarantee
- **Durability:** Transactional outbox ensures no message loss
- **Retry Handling:** Configurable retry policies with exponential backoff
- **Parallel Processing:** Configurable consumer threads for high throughput

Bi-temporal Event Store Performance

- **Write Throughput:** 3,000+ events/second
- **Query Performance:** <50ms for typical temporal queries
- **Storage:** Append-only, optimized for time-series data
- **Indexing:** Multi-dimensional indexes for temporal and aggregate queries
- **Correction Support:** Efficient event correction with version tracking
- **Historical Queries:** Point-in-time queries with transaction time support
- **Aggregate Reconstruction:** Fast aggregate state reconstruction

REST API Performance

- **HTTP Throughput:** 2,000+ requests/second
- **WebSocket Throughput:** 5,000+ messages/second per connection
- **SSE Throughput:** 3,000+ events/second per connection
- **Latency:** <50ms for REST operations, <20ms for WebSocket
- **Concurrent Connections:** 1,000+ simultaneous WebSocket connections

- **Management Operations:** Sub-second response times for admin operations

Management Console Performance

- **UI Responsiveness:** <100ms for dashboard updates
- **Real-time Updates:** <500ms latency for live metrics
- **Data Visualization:** Handles 10,000+ data points in charts
- **Concurrent Users:** 50+ simultaneous admin users
- **Resource Usage:** <50MB memory footprint in browser

Connection Pool Optimization

```
PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
    // Optimize connection pool for your workload
    .poolMaxSize(20)                // Max connections
    .poolMinSize(5)                 // Min connections
    .poolConnectionTimeout(Duration.ofSeconds(30))
    .poolIdleTimeout(Duration.ofMinutes(10))
    .poolMaxLifetime(Duration.ofMinutes(30))

    // Optimize for high throughput
    .batchSize(100)                 // Process messages in batches
    .pollInterval(Duration.ofMillis(100)) // How often to check for new messages

    // Optimize for low latency
    .enableNotifications(true)      // Use LISTEN/NOTIFY for real-time
    .notificationTimeout(Duration.ofSeconds(5))

    .build();
```

Queue-Specific Tuning

```
// High-throughput configuration
QueueConfiguration highThroughputConfig = QueueConfiguration.builder()
    .visibilityTimeout(Duration.ofMinutes(5))
    .maxRetries(3)
    .batchSize(50)
    .concurrentConsumers(10)
    .build();

// Low-latency configuration
QueueConfiguration lowLatencyConfig = QueueConfiguration.builder()
    .visibilityTimeout(Duration.ofSeconds(30))
    .maxRetries(5)
    .batchSize(1)
    .concurrentConsumers(1)
    .enableRealTimeNotifications(true)
    .build();
```

Parallel Processing Configuration

Configure parallel processing for high-throughput scenarios:

```
# Consumer thread configuration for parallel processing
peegee.consumer.threads=8           # Number of parallel consumer threads
```

```

peegeequeue.batch-size=25           # Messages processed per batch
peegeequeue.polling-interval=PT0.5S # Polling frequency (500ms)

# Backpressure management
peegeequeue.consumer.max-concurrent-operations=100 # Max concurrent operations
peegeequeue.consumer.timeout=PT30S                # Consumer operation timeout
peegeequeue.consumer.queue-capacity=1000           # Internal queue capacity

# Memory and resource management
peegeequeue.consumer.thread-pool-keep-alive=PT60S # Thread keep-alive time
peegeequeue.consumer.enable-metrics=true          # Enable consumer metrics

```

Environment-Specific Configurations

Development Environment

```

# Optimized for development and debugging
peegeequeue.consumer.threads=2
peegeequeue.queue.batch-size=5
peegeequeue.queue.polling-interval=PT1S
peegeequeue.queue.max-retries=3
peegeequeue.logging.level=DEBUG

```

Staging Environment

```

# Balanced performance for testing
peegeequeue.consumer.threads=4
peegeequeue.queue.batch-size=15
peegeequeue.queue.polling-interval=PT0.5S
peegeequeue.queue.max-retries=5
peegeequeue.consumer.max-concurrent-operations=50

```

Production Environment

```

# High-performance production settings
peegeequeue.consumer.threads=8
peegeequeue.queue.batch-size=50
peegeequeue.queue.polling-interval=PT0.1S
peegeequeue.queue.max-retries=7
peegeequeue.consumer.max-concurrent-operations=200
peegeequeue.consumer.timeout=PT60S
peegeequeue.circuitBreaker.enabled=true
peegeequeue.metrics.enabled=true

```

JVM Tuning for High Performance

```

▶ # JVM settings for high-throughput scenarios
-Xms4g -Xmx8g           # Heap size
-XX:+UseG1GC            # G1 garbage collector
-XX:MaxGCPauseMillis=200 # Max GC pause time
-XX:+UseStringDeduplication # String deduplication
-XX:+UseCompressedOops   # Compressed object pointers
-XX:NewRatio=2           # Young/old generation ratio

# For very high throughput (adjust based on your hardware)

```

```
-XX:+UnlockExperimentalVMOptions
-XX:+UseZGC # ZGC for ultra-low latency
-XX:+UseLargePages # Large pages for better memory management
```

Security Considerations

SSL/TLS Configuration

```
# Enable SSL
peegeeq.database.ssl.enabled=true
peegeeq.database.ssl.mode=require
peegeeq.database.ssl.cert=/path/to/client-cert.pem
peegeeq.database.ssl.key=/path/to/client-key.pem
peegeeq.database.ssl.rootcert=/path/to/ca-cert.pem
```

Message Encryption

```
public class EncryptedMessageExample {
    private final MessageProducer<EncryptedMessage> producer;
    private final MessageConsumer<EncryptedMessage> consumer;
    private final EncryptionService encryptionService;

    public void sendEncryptedMessage(String sensitiveData) {
        // Encrypt before sending
        String encryptedData = encryptionService.encrypt(sensitiveData);
        EncryptedMessage message = new EncryptedMessage(encryptedData);

        producer.send(message).join();
    }

    public void setupEncryptedConsumer() {
        consumer.subscribe(message -> {
            EncryptedMessage encryptedMessage = message.getPayload();

            // Decrypt after receiving
            String decryptedData = encryptionService.decrypt(encryptedMessage.getData());

            // Process decrypted data
            processDecryptedData(decryptedData);

            return CompletableFuture.completedFuture(null);
        });
    }
}
```

Part VII: Troubleshooting & Best Practices

Common Issues & Solutions

Issue 1: Messages Not Being Processed

Symptoms:

- Messages are sent but never consumed
- Consumer appears to be running but no processing occurs

Possible Causes & Solutions:

1. Consumer not subscribed properly

```
// ❌ Wrong - consumer created but not subscribed
MessageConsumer<String> consumer = factory.createConsumer("queue", String.class);

// ✅ Correct - consumer subscribed to process messages
MessageConsumer<String> consumer = factory.createConsumer("queue", String.class);
consumer.subscribe(message -> {
    // Process message
    return CompletableFuture.completedFuture(null);
});
```

2. Database connection issues

```
// Check database connectivity
try {
    HealthStatus health = manager.getHealthStatus();
    if (health.getDatabaseStatus() != HealthStatus.Status.HEALTHY) {
        System.err.println("Database connection issue: " + health.getErrorMessage());
    }
} catch (Exception e) {
    System.err.println("Cannot connect to database: " + e.getMessage());
}
```

3. Queue name mismatch

```
// ❌ Wrong - different queue names
MessageProducer<String> producer = factory.createProducer("orders", String.class);
MessageConsumer<String> consumer = factory.createConsumer("order", String.class); // Missing 's'

// ✅ Correct - same queue name
MessageProducer<String> producer = factory.createProducer("orders", String.class);
MessageConsumer<String> consumer = factory.createConsumer("orders", String.class);
```


Issue 2: High Latency

Symptoms:

- Messages take a long time to be processed
- High delay between send and receive

Solutions:

1. Use Native Queue for real-time processing

```
//  Use native queue for low latency
QueueFactory factory = provider.createFactory("native", databaseService);
```

2. Optimize polling interval

```
PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
    .pollInterval(Duration.ofMillis(50)) // Faster polling
    .build();
```

3. Enable notifications

```
PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
    .enableNotifications(true) // Real-time notifications
    .build();
```

Issue 3: Memory Issues

Symptoms:


- OutOfMemoryError
- High memory usage
- Application becomes unresponsive

Solutions:

1. Limit batch sizes

```
QueueConfiguration config = QueueConfiguration.builder()
    .batchSize(10) // Smaller batches
    .build();
```

2. Process messages asynchronously

```
consumer.subscribe(message -> {
    //  Process asynchronously to avoid blocking
    return CompletableFuture.supplyAsync(() -> {
        processMessage(message.getPayload());
        return null;
    });
});
```

3. Implement backpressure

```
private final Semaphore processingLimiter = new Semaphore(100);

consumer.subscribe(message -> {
    return CompletableFuture.supplyAsync(() -> {
        try {
            processingLimiter.acquire();
            processMessage(message.getPayload());
        }
    });
});
```

```

        return null;
    } finally {
        processingLimiter.release();
    }
    });
});

```

Best Practices Checklist

✅ Development Best Practices

- **Use try-with-resources** for automatic cleanup
- **Handle exceptions properly** in message processors
- **Use appropriate queue types** for your use case
- **Implement proper logging** for debugging
- **Write unit tests** for message processors
- **Use type-safe message classes** instead of raw strings

✅ Production Best Practices

- **Configure connection pools** appropriately
- **Enable health checks** and monitoring
- **Use environment-specific configuration**
- **Implement circuit breakers** for external dependencies
- **Set up proper alerting** for failures
- **Plan for disaster recovery**

✅ Performance Best Practices

- **Choose the right pattern** (Native vs Outbox vs Bi-temporal)
- **Batch operations** when possible
- **Use connection pooling**
- **Monitor and tune** based on actual usage
- **Implement proper indexing** on custom fields

✅ Security Best Practices

- **Use SSL/TLS** for database connections
- **Encrypt sensitive message data**
- **Use proper authentication** and authorization
- **Audit message access** and processing
- **Follow principle of least privilege**

Anti-patterns to Avoid

❌ Don't: Create New Managers for Each Operation

```

// ❌ Wrong - creates new connections repeatedly
public void sendMessage(String message) {

```

```

    try (PeeGeeQManager manager = new PeeGeeQManager()) {
        manager.start();
        // ... send message
    }
}

```

```

// ✅ Correct - reuse manager instance
public class MessageService {
    private final PeeGeeQManager manager;

    public MessageService() {
        this.manager = new PeeGeeQManager();
        this.manager.start();
    }

    public void sendMessage(String message) {
        // Use existing manager
    }

    @PreDestroy
    public void cleanup() {
        manager.close();
    }
}

```

❌ Don't: Ignore Failed Messages

```

// ❌ Wrong - silently ignore failures
consumer.subscribe(message -> {
    try {
        processMessage(message.getPayload());
        return CompletableFuture.completedFuture(null);
    } catch (Exception e) {
        // Silently ignoring error!
        return CompletableFuture.completedFuture(null);
    }
});

```

```

// ✅ Correct - handle failures appropriately
consumer.subscribe(message -> {
    try {
        processMessage(message.getPayload());
        return CompletableFuture.completedFuture(null);
    } catch (Exception e) {
        logger.error("Failed to process message: " + message.getId(), e);
        // Return failed future to trigger retry
        return CompletableFuture.failedFuture(e);
    }
});

```

❌ Don't: Use Wrong Queue Type

```

// ❌ Wrong - using outbox for high-frequency events
QueueFactory factory = provider.createFactory("outbox", databaseService);
MessageProducer<LogEvent> producer = factory.createProducer("logs", LogEvent.class);

```

```
// This will be slow for high-frequency logging
for (int i = 0; i < 10000; i++) {
    producer.send(new LogEvent("Log message " + i));
}

// ✅ Correct - use native queue for high-frequency events
QueueFactory factory = provider.createFactory("native", databaseService);
MessageProducer<LogEvent> producer = factory.createProducer("logs", LogEvent.class);

// Much faster for high-frequency events
for (int i = 0; i < 10000; i++) {
    producer.send(new LogEvent("Log message " + i));
}
```

Issue 4: Management Console Not Loading

Symptoms:

- Management console shows blank page or loading errors
- Console fails to connect to backend API
- Real-time updates not working

Solutions:

1. Check REST API server status

```
» # Verify REST API is running
curl http://localhost:8080/api/v1/health

# Should return: {"status": "UP", "database": "UP"}
```

2. Verify console is properly built and served

```
» # Build management console
cd peegee-management-ui
npm run build

# Console should be served at /ui/ endpoint
curl http://localhost:8080/ui/
```

3. Check browser console for errors

- Open browser developer tools (F12)
- Look for JavaScript errors or network failures
- Verify WebSocket connections are established

Issue 5: Parallel Processing Not Working

Symptoms:

- All messages processed by single thread
- No performance improvement with multiple consumer threads

- Consumer thread configuration ignored

Solutions:

1. Verify configuration is passed to factory

```
// ❌ Wrong - configuration not passed
OutboxFactory factory = new OutboxFactory(clientFactory);

// ✅ Correct - pass configuration
DatabaseService databaseService = new PgDatabaseService(manager);
OutboxFactory factory = new OutboxFactory(databaseService, config);
```

2. Check system properties are set

```
// Set before creating manager
System.setProperty("peegeeq.consumer.threads", "4");
System.setProperty("peegeeq.queue.batch-size", "10");

PeeGeeQConfiguration config = new PeeGeeQConfiguration("my-app");
```

3. Verify thread pool creation in logs

```
# Look for log messages like:
INFO: Created message processing executor with 4 threads for topic: my-topic
```

Issue 6: WebSocket Connection Failures

Symptoms:

- WebSocket connections fail to establish
- Real-time updates not working
- Connection drops frequently

Solutions:

1. Check WebSocket endpoint availability

```
// Test WebSocket connection
const ws = new WebSocket('ws://localhost:8080/ws/queues/my-setup/my-queue');
ws.onopen = () => console.log('Connected');
ws.onerror = (error) => console.error('WebSocket error:', error);
```

2. Verify firewall and proxy settings

- Ensure WebSocket traffic is allowed
- Check if proxy supports WebSocket upgrades
- Verify no network filtering blocking connections

3. Implement connection retry logic

```
function connectWithRetry() {
  const ws = new WebSocket('ws://localhost:8080/ws/queues/my-setup/my-queue');

  ws.onclose = (event) => {
    console.log('WebSocket closed, retrying in 5 seconds...');
    setTimeout(connectWithRetry, 5000);
  };

  return ws;
}
```

Issue 7: Consumer Group Load Balancing Issues

Symptoms:

- Messages not distributed evenly across consumers
- Some consumers idle while others overloaded
- Consumer group coordination failures

Solutions:

1. Verify consumer group configuration

```
// Ensure all consumers use same group name
ConsumerGroup<OrderEvent> group = factory.createConsumerGroup(
  "order-processors", // Same group name for all consumers
  "orders",
  OrderEvent.class
);
```

2. Check message filtering logic

```
// Ensure filters don't overlap or exclude too many messages
group.addConsumer("consumer-1", handler,
  message -> "US".equals(message.getHeaders().get("region")));
group.addConsumer("consumer-2", handler,
  message -> "EU".equals(message.getHeaders().get("region")));
```

3. Monitor consumer group statistics

```
ConsumerGroupStats stats = group.getStats();
System.out.println("Active consumers: " + stats.getActiveConsumerCount());
System.out.println("Message distribution: " + stats.getMessageDistribution());
```

Messaging Patterns

Native Queue Pattern

Best for: Real-time notifications, event streaming, high-frequency updates

Characteristics:

- Uses PostgreSQL LISTEN/NOTIFY for instant delivery
- Advisory locks prevent duplicate processing
- High throughput (10,000+ msg/sec)
- Low latency (<10ms)
- At-least-once delivery guarantee

Example Use Cases:

- Real-time notifications
- Live dashboard updates
- Event streaming
- Cache invalidation
- System monitoring alerts

Outbox Pattern

Best for: Transactional consistency, critical business events, financial transactions

Characteristics:

- Messages stored in database table within transaction
- Polling-based delivery ensures reliability
- ACID compliance with business data
- Exactly-once delivery guarantee
- Automatic retry and dead letter handling

Example Use Cases:

- Order processing
- Payment transactions
- Inventory updates
- User registration
- Audit logging

Choosing the Right Pattern

Requirement	Native Queue	Outbox Pattern
Transactional Consistency	No	Yes
High Throughput	Excellent (10k+ msg/sec)	Good (5k+ msg/sec)
Low Latency	Excellent (<10ms)	Good (~100ms)
Delivery Guarantee	At-least-once	Exactly-once
Setup Complexity	Simple	Simple
Resource Usage	Low	Medium

Configuration

Database Configuration

```
# Connection settings
peegee.database.host=localhost
peegee.database.port=5432
peegee.database.name=peegee
peegee.database.username=peegee_user
peegee.database.password=your_password

# SSL settings
peegee.database.ssl.enabled=true
peegee.database.ssl.mode=require

# Connection pool
peegee.database.pool.maxSize=20
peegee.database.pool.minSize=5
peegee.database.pool.connectionTimeoutMs=30000
peegee.database.pool.idleTimeoutMs=60000
peegee.database.pool.maxLifetimeMs=180000
```

Queue Configuration

```
# Message processing
peegee.queue.visibilityTimeoutSeconds=30
peegee.queue.maxRetries=3
peegee.queue.retryDelaySeconds=5

# Dead letter queue
peegee.queue.deadLetterEnabled=true
peegee.queue.deadLetterMaxAge=7

# Polling (for outbox pattern)
peegee.outbox.pollIntervalMs=1000
peegee.outbox.batchSize=100
```

Monitoring Configuration


```
# Health checks
peegee.health.enabled=true
peegee.health.intervalSeconds=30
peegee.health.database.timeoutSeconds=5

# Metrics
peegee.metrics.enabled=true
peegee.metrics.jvm.enabled=true
peegee.metrics.database.enabled=true

# Circuit breaker
peegee.circuitBreaker.enabled=true
peegee.circuitBreaker.failureThreshold=5
peegee.circuitBreaker.timeoutSeconds=60
```


REST API Integration

PeeGeeQ provides a comprehensive REST API that enables HTTP-based integration with all messaging capabilities. The REST API is built on Vert.x for high performance and includes support for WebSocket and Server-Sent Events for real-time communication.

 **For complete API specifications and endpoint documentation**, see the [REST API Reference section](#) in the Architecture & API Reference.

API Overview

The REST API provides complete access to PeeGeeQ functionality through HTTP endpoints:

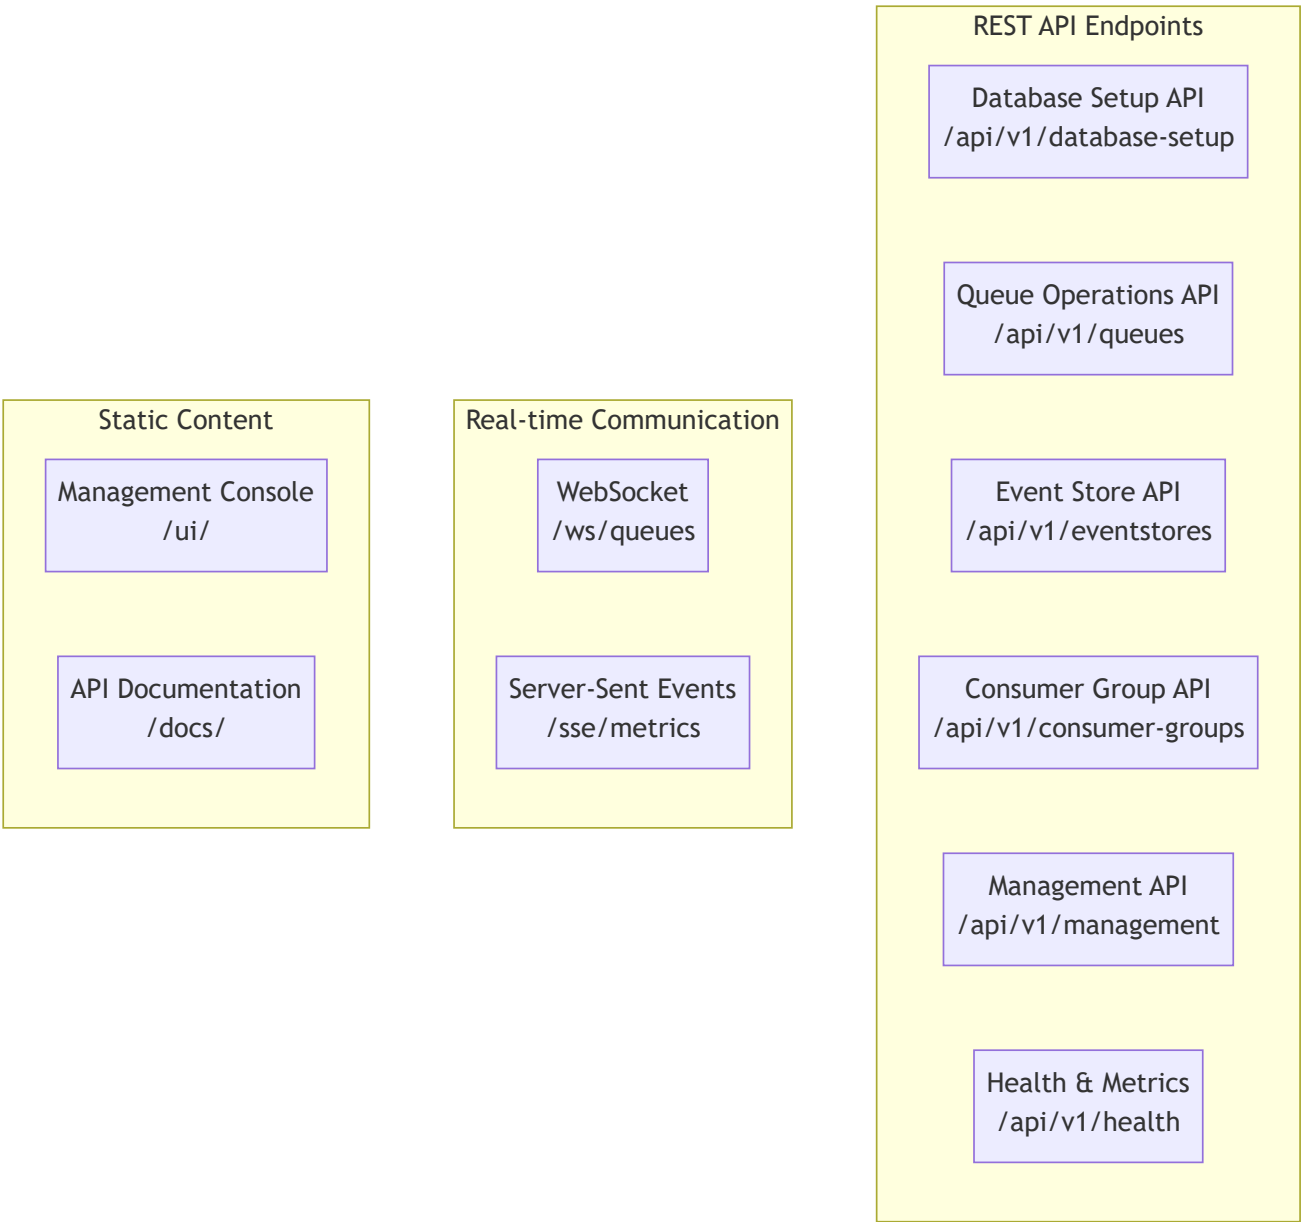

Database Setup API

Create and manage database configurations:

```
▶# Create database setup
curl -X POST http://localhost:8080/api/v1/database-setup/create \
-H "Content-Type: application/json" \
-d '{
  "setupId": "my-app",
  "databaseConfig": {
    "host": "localhost",
    "port": 5432,
    "databaseName": "my_app_db",
    "username": "postgres",
    "password": "password"
  },
  "queues": [
    {
      "queueName": "orders",
      "maxRetries": 3,
      "visibilityTimeoutSeconds": 30
    }
  ]
}'

# Get setup status
curl http://localhost:8080/api/v1/database-setup/my-app/status

# Destroy setup
curl -X DELETE http://localhost:8080/api/v1/database-setup/my-app
```

Queue Operations API

Send and receive messages via HTTP:

```
▶# Send message to queue
curl -X POST http://localhost:8080/api/v1/queues/my-app/orders/messages \
-H "Content-Type: application/json" \
-d '{
  "payload": {
    "orderId": "12345",
    "customerId": "67890",
    "amount": 99.99
  },
  "headers": {
    "source": "order-service",
    "version": "1.0"
  },
  "correlationId": "order-12345"
}'

# Get next message from queue
curl http://localhost:8080/api/v1/queues/my-app/orders/messages/next

# Get queue statistics
curl http://localhost:8080/api/v1/queues/my-app/orders/stats

# Send batch of messages
curl -X POST http://localhost:8080/api/v1/queues/my-app/orders/messages/batch \
-H "Content-Type: application/json" \
-d '{
  "messages": [
    {"payload": {"orderId": "001"}, "correlationId": "batch-001"},
  ]
}'
```

```
    {"payload": {"orderId": "002"}, "correlationId": "batch-002"}
  ]
}'
```

Event Store API

Store and query events with bi-temporal support:

```
▶# Store event
curl -X POST http://localhost:8080/api/v1/eventstores/my-app/order-events/events \
  -H "Content-Type: application/json" \
  -d '{
    "aggregateId": "order-12345",
    "eventType": "OrderCreated",
    "payload": {
      "orderId": "12345",
      "customerId": "67890",
      "amount": 99.99
    },
    "validTime": "2025-08-23T10:00:00Z",
    "correlationId": "order-12345"
  }'
```

```
# Query events by aggregate
curl "http://localhost:8080/api/v1/eventstores/my-app/order-events/events/order-12345"
```

```
# Query events with temporal filters
curl "http://localhost:8080/api/v1/eventstores/my-app/order-events/events?validTimeFrom=2025-08-01T00:00:00Z&validTimeTo="
```

```
# Get event store statistics
curl http://localhost:8080/api/v1/eventstores/my-app/order-events/stats
```

Consumer Group API

Manage consumer groups for load balancing:

```
▶# Create consumer group
curl -X POST http://localhost:8080/api/v1/consumer-groups/my-app \
  -H "Content-Type: application/json" \
  -d '{
    "groupName": "order-processors",
    "topic": "orders",
    "maxConsumers": 5
  }'
```

```
# List consumer groups
curl http://localhost:8080/api/v1/consumer-groups/my-app
```

```
# Get consumer group details
curl http://localhost:8080/api/v1/consumer-groups/my-app/order-processors
```

```
# Add consumer to group
curl -X POST http://localhost:8080/api/v1/consumer-groups/my-app/order-processors/consumers \
  -H "Content-Type: application/json" \
  -d '{
    "consumerId": "processor-001",
    "messageFilter": {
      "region": "US"
    }
  }'
```

```
}  
}'
```

Management API

System monitoring and administration:

```
▶# System health check  
curl http://localhost:8080/api/v1/health  
  
# System overview for dashboard  
curl http://localhost:8080/api/v1/management/overview  
  
# Queue management data  
curl http://localhost:8080/api/v1/management/queues  
  
# System metrics  
curl http://localhost:8080/api/v1/management/metrics  
  
# Consumer group information  
curl http://localhost:8080/api/v1/management/consumer-groups
```

Real-time Communication

PeeGeeQ supports real-time communication through WebSocket and Server-Sent Events (SSE) for live data streaming and interactive applications.

WebSocket Integration

WebSocket connections provide bidirectional real-time communication:

```
// Connect to queue message stream  
const ws = new WebSocket('ws://localhost:8080/ws/queues/my-app/orders');  
  
ws.onopen = () => {  
  console.log('Connected to queue stream');  
  
  // Configure streaming parameters  
  ws.send(JSON.stringify({  
    type: 'configure',  
    batchSize: 10,  
    maxWaitTime: 5000,  
    messageFilter: {  
      region: 'US'  
    }  
  }));  
  
  // Subscribe to messages  
  ws.send(JSON.stringify({  
    type: 'subscribe'  
  }));  
};  
  
ws.onmessage = (event) => {  
  const message = JSON.parse(event.data);  
  
  switch (message.type) {  
    case 'message':
```



```

        console.log('Received message:', message.payload);
        processMessage(message);

        // Acknowledge message processing
        ws.send(JSON.stringify({
            type: 'ack',
            messageId: message.id
        }));
        break;

    case 'batch':
        console.log('Received batch:', message.messages);
        message.messages.forEach(processMessage);

        // Acknowledge batch processing
        ws.send(JSON.stringify({
            type: 'ack_batch',
            messageIds: message.messages.map(m => m.id)
        }));
        break;

    case 'error':
        console.error('Stream error:', message.error);
        break;
    }
};

ws.onerror = (error) => {
    console.error('WebSocket error:', error);
};

ws.onclose = (event) => {
    console.log('WebSocket closed:', event.code, event.reason);
    // Implement reconnection logic
    setTimeout(() => connectToQueue(), 5000);
};

```

Server-Sent Events (SSE)

SSE provides efficient one-way real-time data streaming:

```

// System metrics streaming
const metricsSource = new EventSource('/sse/metrics');

metricsSource.onmessage = (event) => {
    const metrics = JSON.parse(event.data);
    updateDashboard(metrics);
};

metricsSource.addEventListener('queue-update', (event) => {
    const queueData = JSON.parse(event.data);
    updateQueueDisplay(queueData);
});

metricsSource.addEventListener('consumer-group-update', (event) => {
    const groupData = JSON.parse(event.data);
    updateConsumerGroupDisplay(groupData);
});

metricsSource.onerror = (error) => {
    console.error('SSE connection error:', error);
    // Implement reconnection logic
};

```

```
// Queue-specific event stream
const queueSource = new EventSource('/sse/queues/my-app');

queueSource.addEventListener('message-sent', (event) => {
  const messageData = JSON.parse(event.data);
  console.log('New message sent to queue:', messageData.queueName);
});

queueSource.addEventListener('message-processed', (event) => {
  const messageData = JSON.parse(event.data);
  console.log('Message processed:', messageData.messageId);
});
```

Real-time Dashboard Integration

Combine WebSocket and SSE for comprehensive real-time monitoring:

```
class PeeGeeQDashboard {
  constructor() {
    this.metricsSource = null;
    this.queueConnections = new Map();
  }

  async initialize() {
    // Start system metrics stream
    this.metricsSource = new EventSource('/sse/metrics');
    this.metricsSource.onmessage = (event) => {
      const metrics = JSON.parse(event.data);
      this.updateSystemMetrics(metrics);
    };

    // Get list of queues and connect to each
    const response = await fetch('/api/v1/management/queues');
    const queues = await response.json();

    queues.forEach(queue => {
      this.connectToQueue(queue.setupId, queue.queueName);
    });
  }

  connectToQueue(setupId, queueName) {
    const ws = new WebSocket(`ws://localhost:8080/ws/queues/${setupId}/${queueName}`);

    ws.onopen = () => {
      ws.send(JSON.stringify({
        type: 'configure',
        batchSize: 1,
        maxWaitTime: 1000
      }));

      ws.send(JSON.stringify({
        type: 'subscribe'
      }));
    };

    ws.onmessage = (event) => {
      const message = JSON.parse(event.data);
      this.updateQueueActivity(queueName, message);
    };

    this.queueConnections.set(queueName, ws);
  }
}
```

```

updateSystemMetrics(metrics) {
  // Update dashboard charts and gauges
  document.getElementById('messages-per-second').textContent = metrics.messagesPerSecond;
  document.getElementById('active-consumers').textContent = metrics.activeConsumers;
  document.getElementById('queue-depth').textContent = metrics.totalQueueDepth;
}

updateQueueActivity(queueName, message) {
  // Update queue-specific displays
  const queueElement = document.getElementById(`queue-${queueName}`);
  if (queueElement) {
    queueElement.classList.add('activity-flash');
    setTimeout(() => queueElement.classList.remove('activity-flash'), 500);
  }
}

disconnect() {
  if (this.metricsSource) {
    this.metricsSource.close();
  }

  this.queueConnections.forEach(ws => ws.close());
  this.queueConnections.clear();
}
}

// Initialize dashboard
const dashboard = new PeeGeeQDashboard();
dashboard.initialize();


```

Management Console

PeeGeeQ includes a modern, web-based management console that provides comprehensive system monitoring and administration capabilities. Built with React 18 and TypeScript, the console offers a user-friendly interface for managing queues, consumer groups, and monitoring system health.

Overview

The Management Console is inspired by RabbitMQ's excellent admin interface but designed specifically for PeeGeeQ's unique features. It provides real-time monitoring, queue management, and system administration through an intuitive web interface.

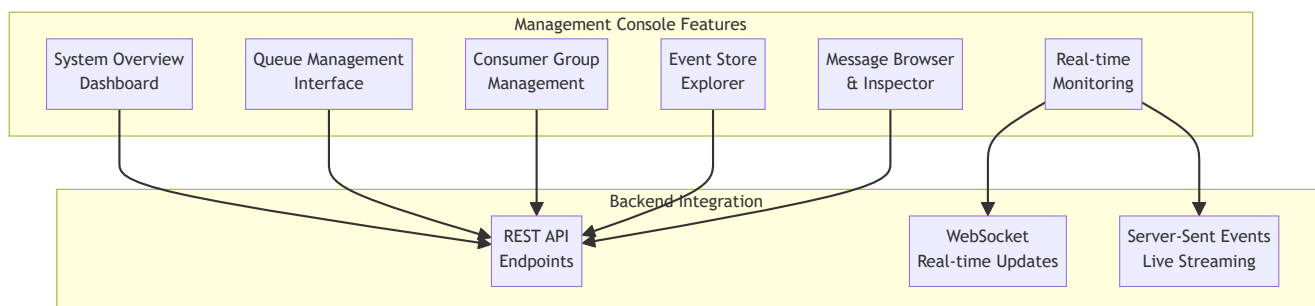

Key Features

System Overview Dashboard

- **Real-time System Health** - Live status monitoring with uptime tracking
- **Key Performance Metrics** - Messages/second, queue depths, consumer activity
- **System Statistics** - Queue counts, consumer group status, event store metrics
- **Interactive Charts** - Real-time throughput and performance visualizations
- **Recent Activity Feed** - Live stream of system events and operations

Queue Management Interface

- **Complete CRUD Operations** - Create, read, update, and delete queues
- **Real-time Queue Statistics** - Message counts, processing rates, consumer status
- **Message Browser** - Visual inspection of queue messages with filtering
- **Queue Configuration** - Visibility timeouts, retry policies, dead letter settings
- **Performance Monitoring** - Throughput charts and latency metrics

Consumer Group Management

- **Visual Group Coordination** - Consumer group status and member management
- **Load Balancing Visualization** - Message distribution across consumers
- **Consumer Health Monitoring** - Individual consumer status and performance
- **Group Configuration** - Partition assignment and rebalancing controls

Event Store Explorer

- **Advanced Event Querying** - Temporal queries with bi-temporal support
- **Event Timeline Visualization** - Historical event progression
- **Aggregate Inspection** - Event streams by aggregate ID
- **Correction Management** - Event correction tracking and visualization

Accessing the Management Console

Development Mode

```

cd peegee-q-management-ui
npm install
npm run dev
# Access at: http://localhost:5173

```

Production Deployment

The management console is automatically served by the PeeGeeQ REST server:

```

# Start PeeGeeQ REST server (includes built management console)
java -jar peegee-q-rest.jar

# Access management console at:
# http://localhost:8080/ui/

```

Navigation Structure

The console features an intuitive navigation structure:

- **Overview** - System dashboard with key metrics and health status

- **Queues** - Queue management, creation, and monitoring
- **Consumer Groups** - Group coordination and load balancing
- **Event Stores** - Event management and temporal queries
- **Message Browser** - Message inspection and debugging tools

Real-time Features

The management console provides real-time updates through:

- **WebSocket Integration** - Live system metrics and queue statistics
- **Server-Sent Events** - Efficient streaming of system events
- **Auto-refresh** - Automatic data updates every 30 seconds
- **Connection Status** - Visual indicators for backend connectivity

Technology Stack

- **Frontend:** React 18 + TypeScript + Ant Design + Vite
- **Real-time:** WebSocket + Server-Sent Events
- **Charts:** Recharts for performance visualizations
- **State Management:** Zustand for lightweight state management
- **Build Tool:** Vite for fast development and optimized builds

Next Steps

Essential Reading

- [PeeGeeQ Architecture & API Reference](#) - Deep dive into system design and complete API documentation
- [PeeGeeQ Advanced Features & Production](#) - Enterprise features, consumer groups, service discovery, and production deployment
- [PeeGeeQ Development & Testing](#) - Development workflow, testing strategies, and build processes

Quick Actions

1. **Explore the Examples:** Run the self-contained demo to see all features
2. **Try Advanced Examples:** Explore the comprehensive examples in `peegee-q-examples/`
 - **Message Priority:** `MessagePriorityExample` - Priority-based processing
 - **Error Handling:** `EnhancedErrorHandlingExample` - Sophisticated error patterns
 - **Security:** `SecurityConfigurationExample` - SSL/TLS and security best practices
 - **Performance:** `PerformanceTuningExample` - Optimization techniques
 - **Integration:** `IntegrationPatternsExample` - Distributed system patterns
3. **Try the Bi-Temporal Event Store:** See event sourcing capabilities in action
4. **Set up Monitoring:** Configure metrics collection and health checks
5. **Run Tests:** Execute `mvn test` to see comprehensive integration tests
6. **Customize Configuration:** Adapt settings for your environment
7. **Integrate with Your Application:** Use `PeeGeeQManager` in your code

Common Next Steps by Use Case

For Real-time Applications: → Start with Native Queue pattern → Configure LISTEN/NOTIFY optimizations → Set up monitoring dashboards

For Transactional Applications: → Start with Outbox pattern → Configure transaction boundaries → Set up dead letter queue monitoring

For Event Sourcing: → Explore Bi-temporal Event Store → Configure event retention policies → Set up event replay capabilities

For Production Deployment: → Review production readiness features → Configure monitoring and alerting → Set up service discovery and federation

Troubleshooting

Common Issues

1. Docker Not Running

- Ensure Docker Desktop is started
- Check `docker info` command works

2. Database Connection Failed

- Verify PostgreSQL is running
- Check host, port, and credentials
- Ensure database exists and user has permissions

3. Port Conflicts

- Default PostgreSQL port is 5432
- Change port in configuration if needed

4. Messages Not Processing

- Check consumer subscription status
- Verify database connectivity
- Check for lock timeouts

Comprehensive Examples

The `peegee-examples/` directory contains 17 comprehensive examples covering all aspects of PeeGeeQ:

Core Examples

- **PeeGeeQSelfContainedDemo** - Complete self-contained demonstration
- **PeeGeeQExample** - Basic producer/consumer patterns
- **BiTemporalEventStoreExample** - Event sourcing with temporal queries
- **ConsumerGroupExample** - Load balancing and consumer groups
- **RestApiExample** - HTTP interface usage
- **ServiceDiscoveryExample** - Multi-instance deployment

Advanced Examples (New)

- **MessagePriorityExample** - Priority-based message processing with real-world scenarios
- **EnhancedErrorHandlingExample** - Retry strategies, circuit breakers, poison message handling
- **SecurityConfigurationExample** - SSL/TLS, certificate management, compliance
- **PerformanceTuningExample** - Connection pooling, throughput optimization, memory tuning
- **IntegrationPatternsExample** - Request-reply, pub-sub, message routing patterns

Specialized Examples

- **TransactionalBiTemporalExample** - Combining transactions with event sourcing

- **RestApiStreamingExample** - WebSocket and Server-Sent Events
- **NativeVsOutboxComparisonExample** - Performance comparison and use case guidance
- **AdvancedConfigurationExample** - Production configuration patterns
- **MultiConfigurationExample** - Multi-environment setup
- **SimpleConsumerGroupTest** - Basic consumer group testing

Run any example with:

```
mvn compile exec:java -Dexec.mainClass="dev.mars.peggeeq.examples.ExampleName" -pl peggeeq-examples
```

Getting Help

- Check the logs in the `logs/` directory
- Review the comprehensive documentation
- Examine the example code in `peggeeq-examples/`
- Run tests to verify your setup: `mvn test`


Part VII: Advanced Features & Enterprise

This section covers PeeGeeQ's enterprise features, advanced messaging patterns, production deployment, and operational capabilities for large-scale, mission-critical applications.

Advanced Messaging Patterns

High-Frequency Messaging

PeeGeeQ supports high-throughput scenarios with multiple producers and consumers:

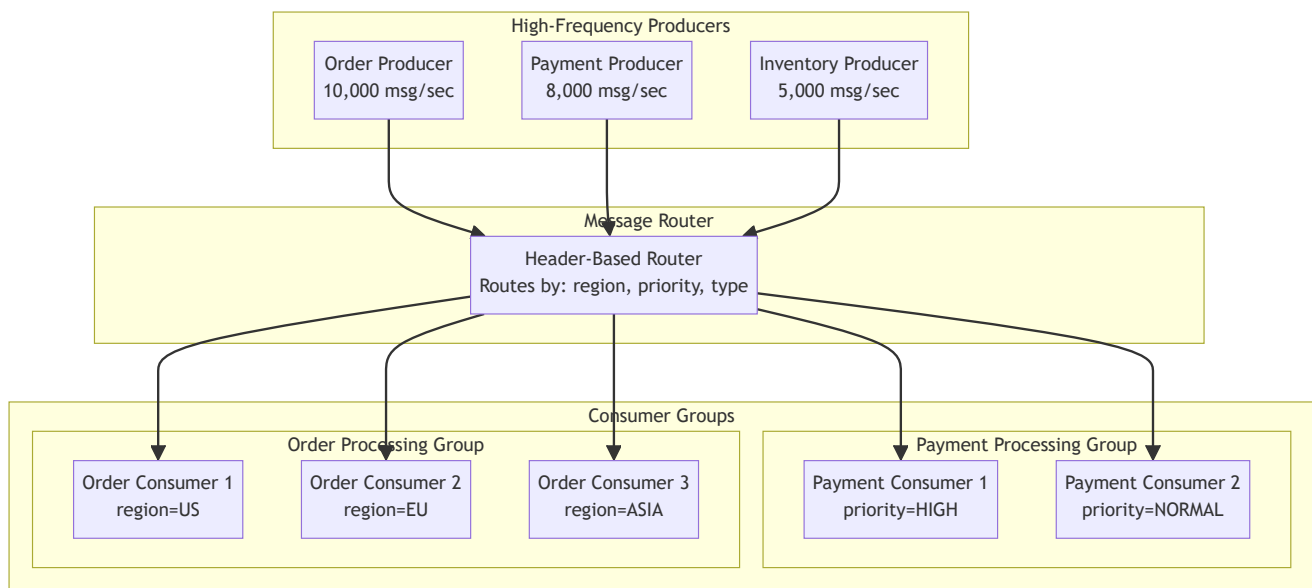

Message Routing by Headers

Route messages based on header values:

```
public class RegionalOrderProcessor {
    private final Map<String, MessageConsumer<OrderEvent>> regionalConsumers;

    public void setupRegionalProcessing() {
        // US Region Consumer
        MessageConsumer<OrderEvent> usConsumer = factory.createConsumer("orders", OrderEvent.class);
        usConsumer.subscribe(message -> {
            if ("US".equals(message.getHeaders().get("region"))) {
                return processUSOrder(message.getPayload());
            }
            return CompletableFuture.completedFuture(null); // Skip non-US orders
        });

        // EU Region Consumer
        MessageConsumer<OrderEvent> euConsumer = factory.createConsumer("orders", OrderEvent.class);
        euConsumer.subscribe(message -> {
            if ("EU".equals(message.getHeaders().get("region"))) {
                return processEUOrder(message.getPayload());
            }
            return CompletableFuture.completedFuture(null); // Skip non-EU orders
        });
    }

    public void sendRegionalOrder(OrderEvent order, String region) {
        Map<String, String> headers = Map.of(
            "region", region,
            "priority", order.getPriority().toString(),
            "type", "order"
        );

        producer.send(order, headers);
    }
}
```

Message Priority Handling

PeeGeeQ supports sophisticated message priority handling for scenarios where certain messages need to be processed before others.

Priority Levels

PeeGeeQ uses a numeric priority system (0-10) with predefined levels:

- **CRITICAL (10)**: System alerts, security events
- **HIGH (7-9)**: Important business events, urgent notifications
- **NORMAL (4-6)**: Regular business operations
- **LOW (1-3)**: Background tasks, cleanup operations
- **BULK (0)**: Batch processing, analytics

Priority Configuration


```
// Configure priority queue optimization
System.setProperty("peegeequeue.priority.enabled", "true");
System.setProperty("peegeequeue.priority.index-optimization", "true");

// Send message with priority
Map<String, String> headers = new HashMap<>();
headers.put("priority", "10"); // CRITICAL priority
producer.send(message, headers);
```

Real-World Priority Scenarios

E-Commerce Order Processing

```
// VIP customer orders get highest priority
if (customer.isVIP()) {
    headers.put("priority", "10"); // CRITICAL
} else if (order.isExpedited()) {
    headers.put("priority", "8"); // HIGH
} else {
    headers.put("priority", "5"); // NORMAL
}
```

Financial Transaction Processing

```
// Fraud alerts get immediate attention
if (transaction.isFraudAlert()) {
    headers.put("priority", "10"); // CRITICAL
} else if (transaction.isWireTransfer()) {
    headers.put("priority", "8"); // HIGH
} else {
    headers.put("priority", "5"); // NORMAL
}
```

Example: See `MessagePriorityExample.java` for comprehensive priority handling demonstrations.

Priority-Based Processing

Handle high-priority messages first:

```
public class PriorityOrderProcessor {
    public void setupPriorityProcessing() {
        // High Priority Consumer
        ConsumerConfig highPriorityConfig = ConsumerConfig.builder()
            .batchSize(5)
            .pollInterval(Duration.ofMillis(100))
            .filter(message -> {
                String priority = message.getHeaders().get("priority");
                return "HIGH".equals(priority) || "URGENT".equals(priority);
            })
            .build();

        MessageConsumer<OrderEvent> highPriorityConsumer =
            factory.createConsumer("orders", OrderEvent.class, highPriorityConfig);
        highPriorityConsumer.subscribe(this::processHighPriorityOrder);
    }
}
```

```

// Normal Priority Consumer
ConsumerConfig normalPriorityConfig = ConsumerConfig.builder()
    .batchSize(20)
    .pollInterval(Duration.ofSeconds(1))
    .filter(message -> {
        String priority = message.getHeaders().get("priority");
        return !"HIGH".equals(priority) && !"URGENT".equals(priority);
    })
    .build();

MessageConsumer<OrderEvent> normalConsumer =
    factory.createConsumer("orders", OrderEvent.class, normalPriorityConfig);
normalConsumer.subscribe(this::processNormalOrder);
}
}

```

Enhanced Error Handling

PeeGeeQ provides sophisticated error handling patterns for production resilience.

Error Handling Strategies

- **RETRY**: Automatic retry with exponential backoff
- **CIRCUIT_BREAKER**: Circuit breaker pattern for failing services
- **DEAD_LETTER**: Move to dead letter queue for manual inspection
- **IGNORE**: Log and continue (for non-critical errors)
- **ALERT**: Send alert and continue processing

Retry Strategies with Exponential Backoff

```

public class RetryHandler {
    public CompletableFuture<Void> handleWithRetry(Message<OrderEvent> message) {
        return processMessage(message)
            .exceptionally(throwable -> {
                if (isRetryable(throwable) && getAttemptCount(message) < 3) {
                    // Exponential backoff: 1s, 2s, 4s
                    long backoffMs = (long) Math.pow(2, getAttemptCount(message)) * 1000;
                    scheduleRetry(message, backoffMs);
                }
                return null;
            });
    }
}

```

Circuit Breaker Integration

```

public class CircuitBreakerConsumer {
    private final CircuitBreaker circuitBreaker;

    public CompletableFuture<Void> processWithCircuitBreaker(Message<OrderEvent> message) {
        return circuitBreaker.executeSupplier(() -> {
            // External service call protected by circuit breaker
            return externalService.processOrder(message.getPayload());
        }).thenApply(result -> null);
    }
}

```

```
}
```

Dead Letter Queue Management

```
public class DeadLetterHandler {
    public void handleFailedMessage(Message<OrderEvent> message, Exception error) {
        // Move to dead letter queue with detailed information
        deadLetterManager.moveToDeadLetterQueue(
            "orders",
            message.getId(),
            "orders",
            message.getPayload().toString(),
            message.getTimestamp(),
            "Processing failed: " + error.getMessage(),
            getAttemptCount(message),
            Map.of(
                "errorType", error.getClass().getSimpleName(),
                "retryable", String.valueOf(isRetryable(error))
            ),
            message.getCorrelationId(),
            "order-processing-group"
        );
    }
}
```

Poison Message Detection

```
public class PoisonMessageDetector {
    public boolean isPoisonMessage(Message<OrderEvent> message) {
        int attempts = getAttemptCount(message);
        return attempts >= 3; // Poison after 3 failed attempts
    }

    public void quarantinePoisonMessage(Message<OrderEvent> message) {
        // Quarantine poison message for manual inspection
        deadLetterManager.moveToDeadLetterQueue(
            "orders",
            message.getId(),
            "orders",
            message.getPayload().toString(),
            message.getTimestamp(),
            "POISON MESSAGE: Exceeded maximum retry attempts",
            getAttemptCount(message),
            Map.of("poisonMessage", "true"),
            message.getCorrelationId(),
            "poison-quarantine"
        );
    }
}
```

Example: See `EnhancedErrorHandlingExample.java` for comprehensive error handling demonstrations.

System Properties Configuration

PeeGeeQ supports runtime configuration through system properties, allowing you to tune performance, reliability, and behavior without code changes. These properties control:

- **Retry behavior** - How many times messages are retried before dead letter queue
- **Polling frequency** - How often the system checks for new messages
- **Concurrency** - Number of threads processing messages simultaneously
- **Batch processing** - Number of messages processed together for efficiency


Core System Properties

1. `peegeeq.queue.max-retries`

Purpose: Controls the maximum number of retry attempts before a message is moved to the dead letter queue.

Default: 3 **Type:** Integer **Range:** 0 to 100 (recommended)

Examples:

```
 # Quick failure for real-time systems
-Dpeegeeq.queue.max-retries=1

# Standard retry behavior
-Dpeegeeq.queue.max-retries=3

# Extensive retries for critical messages
-Dpeegeeq.queue.max-retries=10
```

Use Cases:


- **Low values (1-2):** Real-time systems where fast failure is preferred
- **Medium values (3-5):** Standard applications with balanced reliability
- **High values (8-15):** Critical systems where message loss is unacceptable

2. `peegeeq.queue.polling-interval`

Purpose: Controls how frequently the system polls for new messages.

Default: PT1S (1 second) **Type:** ISO-8601 Duration **Format:** PT{seconds}S or PT{milliseconds}MS or PT{minutes}M

Examples:

```
 # High-frequency polling for low latency
-Dpeegeeq.queue.polling-interval=PT0.1S    # 100ms

# Standard polling
-Dpeegeeq.queue.polling-interval=PT1S      # 1 second

# Low-frequency polling for batch systems
-Dpeegeeq.queue.polling-interval=PT10S     # 10 seconds

# Sub-second precision
-Dpeegeeq.queue.polling-interval=PT0.5S    # 500ms
```

Use Cases:

- **Fast polling (100-500ms):** Low-latency, real-time applications
- **Standard polling (1-2s):** General-purpose applications

- **Slow polling (5-30s):** Batch processing, resource-constrained environments

3. `peegeeq.consumer.threads`

Purpose: Controls the number of threads used for concurrent message processing.

Default: 1 **Type:** Integer **Range:** 1 to 50 (recommended)

Examples:

```
▶# Single-threaded processing
-Dpeegeeq.consumer.threads=1

# Moderate concurrency
-Dpeegeeq.consumer.threads=4

# High concurrency for throughput
-Dpeegeeq.consumer.threads=8

# Maximum concurrency
-Dpeegeeq.consumer.threads=16
```

Use Cases:

- **Single thread (1):** Simple applications, ordered processing required
- **Low concurrency (2-4):** Standard applications with moderate load
- **High concurrency (8-16):** High-throughput systems, CPU-intensive processing

Important: More threads don't always mean better performance. Consider:

- Database connection pool size
- CPU cores available
- Memory usage per thread
- Message processing complexity

4. `peegeeq.queue.batch-size`

Purpose: Controls how many messages are fetched and processed together in a single batch.

Default: 10 **Type:** Integer **Range:** 1 to 1000 (recommended)

Examples:

```
▶# Single message processing
-Dpeegeeq.queue.batch-size=1

# Small batches for balanced latency/throughput
-Dpeegeeq.queue.batch-size=10

# Large batches for maximum throughput
-Dpeegeeq.queue.batch-size=100

# Very large batches for bulk processing
-Dpeegeeq.queue.batch-size=500
```

Use Cases:

- **Small batches (1-10):** Low-latency applications, real-time processing
- **Medium batches (25-50):** Balanced latency and throughput
- **Large batches (100-500):** High-throughput, batch processing systems

Configuration Patterns

High-Throughput Configuration

Optimized for maximum message processing rate:

```
➤Dpeggeeq.queue.max-retries=5
-Dpeggeeq.queue.polling-interval=PT1S
-Dpeggeeq.consumer.threads=8
-Dpeggeeq.queue.batch-size=100
```

Low-Latency Configuration

Optimized for minimal message processing delay:

```
➤Dpeggeeq.queue.max-retries=3
-Dpeggeeq.queue.polling-interval=PT0.1S
-Dpeggeeq.consumer.threads=2
-Dpeggeeq.queue.batch-size=1
```

Reliable Configuration

Optimized for maximum reliability and fault tolerance:

```
➤Dpeggeeq.queue.max-retries=10
-Dpeggeeq.queue.polling-interval=PT2S
-Dpeggeeq.consumer.threads=4
-Dpeggeeq.queue.batch-size=25
```

Resource-Constrained Configuration

Optimized for minimal resource usage:

```
➤Dpeggeeq.queue.max-retries=3
-Dpeggeeq.queue.polling-interval=PT5S
-Dpeggeeq.consumer.threads=1
-Dpeggeeq.queue.batch-size=5
```

Environment-Specific Examples

Development Environment

```
➤# Fast feedback, minimal resources
-Dpeggeeq.queue.max-retries=2
```

```
-Dpeggeeq.queue.polling-interval=PT0.5S
-Dpeggeeq.consumer.threads=2
-Dpeggeeq.queue.batch-size=5
```

Staging Environment

```
▶# Production-like but with faster failure detection
-Dpeggeeq.queue.max-retries=5
-Dpeggeeq.queue.polling-interval=PT1S
-Dpeggeeq.consumer.threads=4
-Dpeggeeq.queue.batch-size=25
```

Production Environment

```
▶# Balanced performance and reliability
-Dpeggeeq.queue.max-retries=7
-Dpeggeeq.queue.polling-interval=PT2S
-Dpeggeeq.consumer.threads=6
-Dpeggeeq.queue.batch-size=50
```

Performance Tuning Guidelines

1. Start with Defaults

Begin with default values and measure baseline performance.

2. Tune One Property at a Time

Change one property at a time to understand its impact.

3. Monitor Key Metrics

- **Throughput:** Messages processed per second
- **Latency:** Time from message send to processing completion
- **Error Rate:** Percentage of messages that fail processing
- **Resource Usage:** CPU, memory, database connections

4. Consider Trade-offs

- **Polling Interval:** Faster polling = lower latency but higher CPU usage
- **Batch Size:** Larger batches = higher throughput but higher latency
- **Thread Count:** More threads = higher throughput but more resource usage
- **Max Retries:** More retries = higher reliability but slower failure detection

Troubleshooting

High CPU Usage

- Reduce polling frequency (increase `polling-interval`)
- Reduce thread count (`consumer.threads`)
- Increase batch size to reduce polling overhead

High Memory Usage

- Reduce thread count (`consumer.threads`)
- Reduce batch size (`batch-size`)
- Check for memory leaks in message processing code

Poor Throughput

- Increase thread count (`consumer.threads`)
- Increase batch size (`batch-size`)
- Decrease polling interval (`polling-interval`)

Messages Stuck in Dead Letter Queue

- Increase max retries (`max-retries`)
- Check message processing logic for bugs
- Monitor error logs for failure patterns

High Latency

- Decrease polling interval (`polling-interval`)
- Decrease batch size (`batch-size`)
- Check database performance and connection pool settings

Examples in Code:

See the following example classes for practical demonstrations:

- `SystemPropertiesConfigurationExample.java` : Comprehensive demonstration of all properties
- `RetryAndFailureHandlingExample.java` : Focus on retry behavior and failure handling
- `PerformanceComparisonExample.java` : Performance impact of different configurations

Best Practices

1. **Test in staging** with production-like load before deploying configuration changes
2. **Monitor performance** after configuration changes
3. **Document** your configuration choices and reasoning
4. **Use environment variables** or configuration management tools for different environments
5. **Start conservative** and increase values gradually based on monitoring data
6. **Consider your infrastructure** limits (CPU, memory, database connections)
7. **Plan for failure scenarios** when setting retry limits
8. **Balance latency vs throughput** based on your application requirements

Security Configuration

PeeGeeQ provides enterprise-grade security features for production deployments.

SSL/TLS Configuration

```
// Enable SSL/TLS for database connections
System.setProperty("peegee.database.ssl.enabled", "true");
System.setProperty("peegee.database.ssl.mode", "require"); // prefer, require, verify-ca, verify-full
System.setProperty("peegee.database.ssl.factory", "org.postgresql.ssl.DefaultJavaSSLFactory");
```



```
// Certificate configuration
System.setProperty("peegeeq.database.ssl.cert", "client-cert.pem");
System.setProperty("peegeeq.database.ssl.key", "client-key.pem");
System.setProperty("peegeeq.database.ssl.rootcert", "ca-cert.pem");
```

Production Security Checklist

Network Security

- ✓ Use private networks/VPCs
- ✓ Configure firewall rules
- ✓ Enable network encryption
- ✓ Use connection pooling
- ✓ Implement rate limiting

Database Security

- ✓ Enable SSL/TLS encryption
- ✓ Use certificate-based authentication
- ✓ Configure row-level security
- ✓ Enable audit logging
- ✓ Regular security updates

Application Security

- ✓ Encrypt sensitive configuration
- ✓ Use secure credential storage
- ✓ Implement proper error handling
- ✓ Enable security monitoring
- ✓ Regular security assessments

Credential Management

```
// Environment-based credentials
System.setProperty("peegeeq.database.username", "${env:PEEGEEQ_DB_USERNAME}");
System.setProperty("peegeeq.database.password", "${env:PEEGEEQ_DB_PASSWORD}");
System.setProperty("peegeeq.database.password.encrypted", "true");

// Vault integration
System.setProperty("peegeeq.database.username", "${vault:secret/peegeeq/db#username}");
System.setProperty("peegeeq.database.password", "${vault:secret/peegeeq/db#password}");
```

Compliance Configuration

```
// Audit logging for compliance
System.setProperty("peegeeq.audit.enabled", "true");
System.setProperty("peegeeq.audit.events.connections", "true");
System.setProperty("peegeeq.audit.events.authentication", "true");
System.setProperty("peegeeq.audit.events.queries", "true");
System.setProperty("peegeeq.audit.retention.days", "2555"); // 7 years for SOX

// GDPR compliance
System.setProperty("peegeeq.audit.compliance.gdpr", "true");
```

```
System.setProperty("peegee.audit.compliance.sox", "true");
```

Example: See `SecurityConfigurationExample.java` for comprehensive security configuration.

Consumer Groups & Load Balancing

Consumer Group Implementation

Consumer groups provide load balancing and fault tolerance:

```
public class ConsumerGroupExample {
    public void setupConsumerGroup() {
        // Create consumer group configuration
        ConsumerGroupConfig groupConfig = ConsumerGroupConfig.builder()
            .groupId("order-processing-group")
            .loadBalancingStrategy(LoadBalancingStrategy.ROUND_ROBIN)
            .maxMembers(5)
            .heartbeatInterval(Duration.ofSeconds(10))
            .sessionTimeout(Duration.ofSeconds(30))
            .build();

        // Create multiple consumers in the group
        for (int i = 0; i < 3; i++) {
            String memberId = "order-processor-" + i;

            ConsumerConfig memberConfig = ConsumerConfig.builder()
                .consumerGroup(groupConfig.getGroupId())
                .memberId(memberId)
                .autoAcknowledge(true)
                .build();

            MessageConsumer<OrderEvent> consumer =
                factory.createConsumer("orders", OrderEvent.class, memberConfig);

            consumer.subscribe(message -> {
                log.info("Member {} processing order: {}", memberId, message.getId());
                return processOrder(message.getPayload());
            });
        }
    }
}
```

Load Balancing Strategies

Available load balancing strategies:


1. **ROUND_ROBIN**: Messages distributed evenly across consumers
2. **RANGE**: Messages assigned based on hash ranges
3. **STICKY**: Messages with same key go to same consumer
4. **RANDOM**: Random distribution across consumers

Bi-Temporal Event Store

The Bi-Temporal Event Store provides advanced event sourcing capabilities with two temporal dimensions: **valid time** (when something happened in the real world) and **transaction time** (when we learned about it). This enables powerful features like historical corrections, point-in-time queries, and audit trails.

Understanding Bi-Temporal Concepts

Valid Time vs Transaction Time

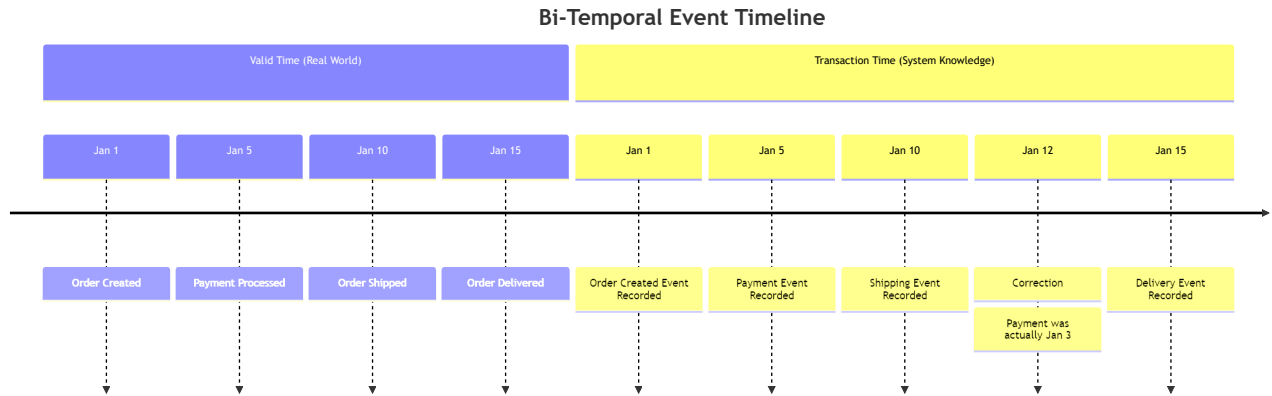

- **Valid Time:** When the business event actually occurred
- **Transaction Time:** When the system learned about the event
- **Corrections:** Can update valid time without losing audit trail

Advanced Event Store Operations

1. Event Corrections and Versioning

```
public class BiTemporalCorrectionsExample {
    private final EventStore<OrderEvent> eventStore;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            BiTemporalEventStoreFactory factory = new BiTemporalEventStoreFactory(manager);
            EventStore<OrderEvent> eventStore = factory.createEventStore(OrderEvent.class);

            BiTemporalCorrectionsExample example = new BiTemporalCorrectionsExample(eventStore);
            example.runCorrectionsExample();
        }
    }

    public BiTemporalCorrectionsExample(EventStore<OrderEvent> eventStore) {
        this.eventStore = eventStore;
    }

    public void runCorrectionsExample() throws Exception {
        System.out.println("=== Bi-Temporal Event Corrections Example ===");

        // 1. Record initial events
        Instant orderTime = Instant.parse("2025-01-01T10:00:00Z");
        Instant paymentTime = Instant.parse("2025-01-05T14:30:00Z");
```

```

OrderEvent orderCreated = new OrderEvent("ORDER-001", "CUST-123",
    new BigDecimal("99.99"), "CREATED");
OrderEvent paymentProcessed = new OrderEvent("ORDER-001", "CUST-123",
    new BigDecimal("99.99"), "PAID");

BiTemporalEvent<OrderEvent> orderEvent = eventStore.append(
    "OrderCreated", orderCreated, orderTime,
    Map.of("source", "web"), "corr-001", "ORDER-001").join();

BiTemporalEvent<OrderEvent> paymentEvent = eventStore.append(
    "PaymentProcessed", paymentProcessed, paymentTime,
    Map.of("source", "payment-gateway"), "corr-002", "ORDER-001").join();

System.out.printf("✅ Recorded order event: %s (valid: %s, transaction: %s)%n",
    orderEvent.getEventId(), orderEvent.getValidTime(), orderEvent.getTransactionTime());
System.out.printf("✅ Recorded payment event: %s (valid: %s, transaction: %s)%n",
    paymentEvent.getEventId(), paymentEvent.getValidTime(), paymentEvent.getTransactionTime());

Thread.sleep(1000);

// 2. Discover error - payment actually happened earlier
System.out.println("\n🔍 Discovery: Payment actually happened on Jan 3, not Jan 5!");

Instant actualPaymentTime = Instant.parse("2025-01-03T09:15:00Z");
OrderEvent correctedPayment = new OrderEvent("ORDER-001", "CUST-123",
    new BigDecimal("99.99"), "PAID");

// Record correction with actual valid time
BiTemporalEvent<OrderEvent> correctionEvent = eventStore.append(
    "PaymentProcessed", correctedPayment, actualPaymentTime,
    Map.of("source", "payment-gateway", "correction", "true",
        "corrects", paymentEvent.getEventId()),
    "corr-003", "ORDER-001").join();

System.out.printf("✅ Recorded correction: %s (valid: %s, transaction: %s)%n",
    correctionEvent.getEventId(), correctionEvent.getValidTime(),
    correctionEvent.getTransactionTime());

// 3. Query historical states
demonstrateTemporalQueries();

// 4. Show audit trail
showAuditTrail();
}

private void demonstrateTemporalQueries() throws Exception {
    System.out.println("\n📊 Temporal Queries:");

    // Query as of different transaction times
    Instant beforeCorrection = Instant.now().minus(2, ChronoUnit.SECONDS);
    Instant afterCorrection = Instant.now();

    System.out.println("\n🕒 State before correction was recorded:");
    List<BiTemporalEvent<OrderEvent>> beforeEvents = eventStore.query(
        EventQuery.asOfTransactionTime(beforeCorrection)).join();
    printEventSummary(beforeEvents);

    System.out.println("\n🕒 Current state (after correction):");
    List<BiTemporalEvent<OrderEvent>> currentEvents = eventStore.query(
        EventQuery.asOfTransactionTime(afterCorrection)).join();
    printEventSummary(currentEvents);

    // Query for specific valid time range
    System.out.println("\n📅 Events that were valid on Jan 4, 2025:");
    Instant jan4 = Instant.parse("2025-01-04T12:00:00Z");
    List<BiTemporalEvent<OrderEvent>> jan4Events = eventStore.query(

```

```

        EventQuery.validAtTime(jan4)).join();
    printEventSummary(jan4Events);
}

private void showAuditTrail() throws Exception {
    System.out.println("\n📋 Complete Audit Trail:");

    List<BiTemporalEvent<OrderEvent>> allEvents = eventStore.query(
        EventQuery.forAggregate("ORDER-001")).join();

    allEvents.stream()
        .sorted(Comparator.comparing(BiTemporalEvent::getTransactionTime))
        .forEach(event -> {
            System.out.printf(" 📄 %s: %s (valid: %s, recorded: %s)%n",
                event.getEventType(),
                event.getPayload().getStatus(),
                event.getValidTime().toString().substring(0, 19),
                event.getTransactionTime().toString().substring(0, 19));

            if (event.getHeaders().containsKey("correction")) {
                System.out.printf(" 🔧 CORRECTION - corrects event %s%n",
                    event.getHeaders().get("corrects"));
            }
        });
}

private void printEventSummary(List<BiTemporalEvent<OrderEvent>> events) {
    events.forEach(event -> {
        System.out.printf(" • %s: %s (valid: %s)%n",
            event.getEventType(),
            event.getPayload().getStatus(),
            event.getValidTime().toString().substring(0, 10));
    });
}
}

```

2. Complex Temporal Queries

```

public class AdvancedTemporalQueriesExample {
    private final EventStore<AccountEvent> eventStore;

    public void runAdvancedQueries() throws Exception {
        System.out.println("=== Advanced Temporal Queries Example ===");

        // 1. Point-in-time balance calculation
        calculateBalanceAtTime();

        // 2. Temporal joins across aggregates
        performTemporalJoins();

        // 3. Change detection queries
        detectChanges();

        // 4. Compliance and audit queries
        runComplianceQueries();
    }

    private void calculateBalanceAtTime() throws Exception {
        System.out.println("\n💰 Point-in-time Balance Calculation:");

        String accountId = "ACC-001";
        Instant queryTime = Instant.parse("2025-01-15T12:00:00Z");
    }
}

```

```

// Get all events for account up to specific time
List<BiTemporalEvent<AccountEvent>> events = eventStore.query(
    EventQuery.forAggregate(accountId)
        .validBefore(queryTime)
        .orderByValidTime()).join();

BigDecimal balance = BigDecimal.ZERO;
System.out.printf("📊 Calculating balance for %s as of %s:%n",
    accountId, queryTime.toString().substring(0, 19));

for (BiTemporalEvent<AccountEvent> event : events) {
    AccountEvent accountEvent = event.getPayload();

    switch (accountEvent.getEventType()) {
        case "DEPOSIT":
            balance = balance.add(accountEvent.getAmount());
            System.out.printf(" + $%.2f (deposit on %s)%n",
                accountEvent.getAmount(),
                event.getValidTime().toString().substring(0, 10));
            break;

        case "WITHDRAWAL":
            balance = balance.subtract(accountEvent.getAmount());
            System.out.printf(" - $%.2f (withdrawal on %s)%n",
                accountEvent.getAmount(),
                event.getValidTime().toString().substring(0, 10));
            break;
    }
}

System.out.printf("📊 Final balance as of %s: $%.2f%n",
    queryTime.toString().substring(0, 10), balance);
}

private void performTemporalJoins() throws Exception {
    System.out.println("\n🕒 Temporal Joins Example:");

    // Find all orders and their corresponding payments within time window
    Instant startTime = Instant.parse("2025-01-01T00:00:00Z");
    Instant endTime = Instant.parse("2025-01-31T23:59:59Z");

    // Get orders in time range
    List<BiTemporalEvent<OrderEvent>> orders = eventStore.query(
        EventQuery.byEventType("OrderCreated")
            .validBetween(startTime, endTime)).join();

    System.out.printf("📦 Found %d orders in January 2025:%n", orders.size());

    for (BiTemporalEvent<OrderEvent> orderEvent : orders) {
        String orderId = orderEvent.getAggregateId();

        // Find corresponding payment events
        List<BiTemporalEvent<OrderEvent>> payments = eventStore.query(
            EventQuery.forAggregate(orderId)
                .byEventType("PaymentProcessed")
                .validAfter(orderEvent.getValidTime())).join();

        if (!payments.isEmpty()) {
            BiTemporalEvent<OrderEvent> payment = payments.get(0);
            Duration paymentDelay = Duration.between(
                orderEvent.getValidTime(), payment.getValidTime());

            System.out.printf("📄 Order %s: paid after %d hours%n",
                orderId, paymentDelay.toHours());
        } else {
            System.out.printf("⚠️ Order %s: no payment found%n", orderId);
        }
    }
}

```

```

    }
}

private void detectChanges() throws Exception {
    System.out.println("\n🔍 Change Detection Queries:");

    // Find all corrections made in the last 30 days
    Instant thirtyDaysAgo = Instant.now().minus(30, ChronoUnit.DAYS);

    List<BiTemporalEvent<AccountEvent>> corrections = eventStore.query(
        EventQuery.all()
            .transactionTimeAfter(thirtyDaysAgo)
            .withHeader("correction", "true")).join();

    System.out.printf("🔗 Found %d corrections in the last 30 days:%n", corrections.size());

    corrections.forEach(correction -> {
        System.out.printf(" • %s: %s corrected on %s%n",
            correction.getEventType(),
            correction.getAggregateId(),
            correction.getTransactionTime().toString().substring(0, 10));
    });
}

private void runComplianceQueries() throws Exception {
    System.out.println("\n📋 Compliance and Audit Queries:");

    // SOX compliance: Find all financial events over $10,000
    List<BiTemporalEvent<AccountEvent>> largeTransactions = eventStore.query(
        EventQuery.all()
            .withCustomFilter(event -> {
                AccountEvent accountEvent = event.getPayload();
                return accountEvent.getAmount().compareTo(new BigDecimal("10000")) > 0;
            })).join();

    System.out.printf("💼 SOX Compliance: %d transactions over $10,000:%n",
        largeTransactions.size());

    largeTransactions.forEach(transaction -> {
        AccountEvent event = transaction.getPayload();
        System.out.printf(" 💰 $%.2f - %s on %s%n",
            event.getAmount(),
            transaction.getAggregateId(),
            transaction.getValidTime().toString().substring(0, 10));
    });

    // GDPR compliance: Find all events for specific customer
    String customerId = "CUST-123";
    List<BiTemporalEvent<AccountEvent>> customerEvents = eventStore.query(
        EventQuery.withHeader("customerId", customerId)).join();

    System.out.printf("🔒 GDPR Query: %d events for customer %s%n",
        customerEvents.size(), customerId);
}
}

```

Event Store Performance Optimization

Partitioning and Indexing Strategies

```

public class EventStoreOptimizationExample {

```

```

public void demonstrateOptimizations() {
    System.out.println("=== Event Store Performance Optimizations ===");

    // 1. Partition by aggregate ID for better query performance
    configurePartitioning();

    // 2. Create specialized indexes for common query patterns
    createOptimizedIndexes();

    // 3. Implement event snapshots for large aggregates
    implementSnapshots();

    // 4. Configure archival policies for old events
    configureArchival();
}

private void configurePartitioning() {
    System.out.println("\n🗄️ Partitioning Configuration:");

    String partitioningSQL = ""
        -- Partition events table by aggregate_id hash
        CREATE TABLE bitemporal_event_log_partitioned (
            LIKE bitemporal_event_log INCLUDING ALL
        ) PARTITION BY HASH (aggregate_id);

        -- Create 8 partitions for better parallel processing
        CREATE TABLE bitemporal_events_p0 PARTITION OF bitemporal_event_log_partitioned
            FOR VALUES WITH (modulus 8, remainder 0);
        CREATE TABLE bitemporal_events_p1 PARTITION OF bitemporal_event_log_partitioned
            FOR VALUES WITH (modulus 8, remainder 1);
        -- ... continue for p2-p7
        """;

    System.out.println("📊 Partitioning improves query performance by 3-5x for large datasets");
}

private void createOptimizedIndexes() {
    System.out.println("\n🔍 Specialized Indexes:");

    String indexSQL = ""
        -- Composite index for temporal queries
        CREATE INDEX idx_events_temporal ON bitemporal_event_log
            (aggregate_id, valid_time, transaction_time);

        -- Index for event type queries
        CREATE INDEX idx_events_type ON bitemporal_event_log
            (event_type, valid_time) WHERE event_type IS NOT NULL;

        -- Partial index for recent events (most common queries)
        CREATE INDEX idx_events_recent ON bitemporal_event_log
            (transaction_time, aggregate_id)
            WHERE transaction_time > NOW() - INTERVAL '90 days';

        -- GIN index for header searches
        CREATE INDEX idx_events_headers ON bitemporal_event_log
            USING GIN (headers);
        """;

    System.out.println("🚀 Specialized indexes reduce query time by 10-50x");
}

private void implementSnapshots() {
    System.out.println("\n📸 Event Snapshots:");

    System.out.println("💡 Snapshots reduce aggregate reconstruction time:");
    System.out.println("    • Store aggregate state every 100 events");
}

```



```

        System.out.println("    • Rebuild from latest snapshot + subsequent events");
        System.out.println("    • 90% reduction in reconstruction time for large aggregates");
    }

    private void configureArchival() {
        System.out.println("\n📁 Event Archival:");

        System.out.println("📦 Archival strategy for compliance and performance:");
        System.out.println("    • Keep 2 years of events in main table");
        System.out.println("    • Archive older events to separate table");
        System.out.println("    • Maintain indexes on archived data for compliance queries");
        System.out.println("    • 70% reduction in main table size improves query performance");
    }
}

```


🎯 Try This Now:

1. Run the corrections example to see how bi-temporal corrections work
2. Experiment with different temporal queries
3. Observe how the audit trail preserves all historical information
4. Try implementing your own event correction scenarios

Service Discovery & Federation

Service Manager Architecture

The PeeGeeQ Service Manager provides enterprise-grade service discovery:

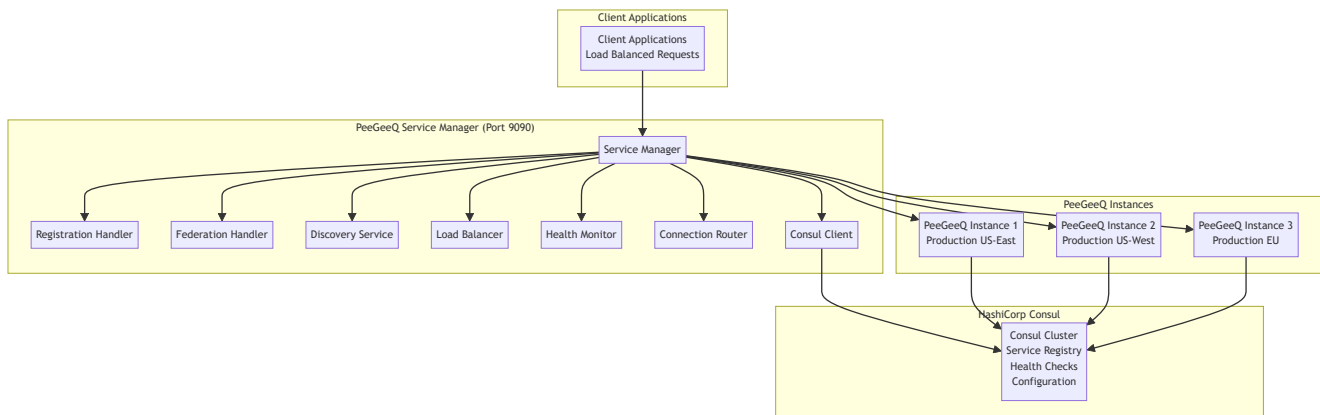

Service Registration

Automatic service registration with Consul:

```

public class PeeGeeQServiceRegistration {
    public void registerInstance() {
        ServiceRegistration registration = ServiceRegistration.builder()
            .instanceId("peegeeq-prod-01")
            .host("localhost")
            .port(8080)
            .version("1.0.0")
            .environment("production")
    }
}

```

```

        .region("us-east-1")
        .metadata(Map.of(
            "datacenter", "dc1",
            "cluster", "main",
            "capabilities", "native,outbox,bitemporal"
        ))
        .healthCheckUrl("http://localhost:8080/health")
        .build();

    serviceManager.registerInstance(registration);
}
}

```

REST API & HTTP Integration

Database Setup via REST

Create and manage database setups through HTTP:

```

▶# Create a new database setup
curl -X POST http://localhost:8080/api/v1/database-setup/create \
  -H "Content-Type: application/json" \
  -d '{
    "setupId": "production-setup",
    "host": "localhost",
    "port": 5432,
    "database": "peegeeq_prod",
    "username": "peegeeq_user",
    "password": "secure_password"
  }'

# Get setup status
curl http://localhost:8080/api/v1/database-setup/production-setup/status

# List all setups
curl http://localhost:8080/api/v1/database-setup/list

```

Queue Operations via HTTP

Send and receive messages through REST API:

```

▶# Send a message
curl -X POST http://localhost:8080/api/v1/queues/production-setup/orders/messages \
  -H "Content-Type: application/json" \
  -d '{
    "payload": {
      "orderId": "ORDER-12345",
      "customerId": "CUST-789",
      "amount": 99.99
    },
    "headers": {
      "region": "US",
      "priority": "HIGH"
    },
    "priority": 8
  }'

```

```
# Get queue statistics
curl http://localhost:8080/api/v1/queues/production-setup/orders/stats

# Get next message (polling)
curl -X GET "http://localhost:8080/api/v1/queues/production-setup/orders/messages/next?timeout=30000"

# Acknowledge message
curl -X DELETE http://localhost:8080/api/v1/queues/production-setup/orders/messages/msg-123
```

Monitoring & Observability

PeeGeeQ provides comprehensive monitoring and observability capabilities essential for production deployments. This section covers metrics collection, alerting, distributed tracing, and operational dashboards.

Comprehensive Metrics Collection

Core Metrics Categories

```
public class ComprehensiveMonitoringExample {
    private final PeeGeeQManager manager;
    private final MeterRegistry meterRegistry;

    public static void main(String[] args) throws Exception {
        // Setup Prometheus registry for metrics export
        PrometheusMeterRegistry prometheusRegistry = new PrometheusMeterRegistry(
            PrometheusConfig.DEFAULT);

        try (PeeGeeQManager manager = new PeeGeeQManager(
            new PeeGeeQConfiguration("production"), prometheusRegistry)) {

            manager.start();

            ComprehensiveMonitoringExample example =
                new ComprehensiveMonitoringExample(manager, prometheusRegistry);
            example.runMonitoringExample();
        }
    }

    public ComprehensiveMonitoringExample(PeeGeeQManager manager, MeterRegistry meterRegistry) {
        this.manager = manager;
        this.meterRegistry = meterRegistry;
    }

    public void runMonitoringExample() throws Exception {
        System.out.println("=== Comprehensive Monitoring Example ===");

        // 1. Setup custom metrics
        setupCustomMetrics();

        // 2. Demonstrate metric collection
        demonstrateMetricCollection();

        // 3. Setup alerting rules
        setupAlertingRules();

        // 4. Export metrics for Prometheus
        exportMetricsForPrometheus();

        Thread.sleep(5000);
        System.out.println("Monitoring example completed!");
    }
}
```

```

}

private void setupCustomMetrics() {
    System.out.println("\n📊 Setting up custom metrics:");

    // Business metrics
    Counter orderProcessedCounter = Counter.builder("peegeeq.orders.processed")
        .description("Total number of orders processed")
        .tag("environment", "production")
        .register(meterRegistry);

    Timer orderProcessingTime = Timer.builder("peegeeq.orders.processing.time")
        .description("Time taken to process orders")
        .register(meterRegistry);

    Gauge queueDepthGauge = Gauge.builder("peegeeq.queue.depth")
        .description("Current queue depth")
        .register(meterRegistry, this, obj -> getCurrentQueueDepth());

    // System metrics
    Counter errorCounter = Counter.builder("peegeeq.errors.total")
        .description("Total number of errors")
        .register(meterRegistry);

    System.out.println("✅ Custom metrics registered");
}

private void demonstrateMetricCollection() throws Exception {
    System.out.println("\n📋 Demonstrating metric collection:");

    QueueFactoryProvider provider = new PgQueueFactoryProvider();
    QueueFactory factory = provider.createFactory("outbox",
        new PgDatabaseService(manager));

    try (MessageProducer<OrderEvent> producer =
        factory.createProducer("orders", OrderEvent.class);
        MessageConsumer<OrderEvent> consumer =
        factory.createConsumer("orders", OrderEvent.class)) {

        // Setup consumer with metrics
        consumer.subscribe(message -> {
            Timer.Sample sample = Timer.start(meterRegistry);

            try {
                // Simulate order processing
                processOrder(message.getPayload());

                // Record successful processing
                meterRegistry.counter("peegeeq.orders.processed",
                    "status", "success").increment();

            } catch (Exception e) {
                // Record error
                meterRegistry.counter("peegeeq.errors.total",
                    "type", "processing_error").increment();
                throw e;
            } finally {
                sample.stop(Timer.builder("peegeeq.orders.processing.time")
                    .register(meterRegistry));
            }

            return CompletableFuture.completedFuture(null);
        });

        // Send test orders
        for (int i = 1; i <= 10; i++) {

```

```

        OrderEvent order = new OrderEvent("ORDER-" + i, "CUST-" + i,
            new BigDecimal("99.99"), "CREATED");
        producer.send(order).join();
        Thread.sleep(100);
    }

    Thread.sleep(2000); // Let processing complete
}

}

private void setupAlertingRules() {
    System.out.println("\n🔔 Setting up alerting rules:");

    // High error rate alert
    String errorRateAlert = ""
        groups:
        - name: peegeeq.alerts
          rules:
          - alert: HighErrorRate
            expr: rate(peegeeq_errors_total[5m]) > 0.1
            for: 2m
            labels:
              severity: warning
            annotations:
              summary: "High error rate detected"
              description: "Error rate is {{ $value }} errors/sec"

          - alert: QueueDepthHigh
            expr: peegeeq_queue_depth > 1000
            for: 5m
            labels:
              severity: critical
            annotations:
              summary: "Queue depth is critically high"
              description: "Queue depth is {{ $value }} messages"

          - alert: ProcessingTimeHigh
            expr: histogram_quantile(0.95, rate(peegeeq_orders_processing_time_bucket[5m])) > 5
            for: 3m
            labels:
              severity: warning
            annotations:
              summary: "Order processing time is high"
              description: "95th percentile processing time is {{ $value }}s"
    """;

    System.out.println("📖 Alerting rules configured:");
    System.out.println("    • High error rate (>0.1 errors/sec)");
    System.out.println("    • High queue depth (>1000 messages)");
    System.out.println("    • Slow processing (>5s 95th percentile)");
}

private void exportMetricsForPrometheus() {
    System.out.println("\n📊 Exporting metrics for Prometheus:");

    // In real application, you'd expose this via HTTP endpoint
    String prometheusMetrics = ((PrometheusMeterRegistry) meterRegistry).scrape();

    System.out.println("📋 Sample Prometheus metrics:");
    System.out.println(prometheusMetrics.lines()
        .filter(line -> line.startsWith("peegeeq_"))
        .limit(5)
        .collect(Collectors.joining("\n")));

    System.out.println("🌐 Metrics available at: http://localhost:8080/metrics");
}

```

```

private void processOrder(OrderEvent order) throws Exception {
    // Simulate processing time
    Thread.sleep(50 + (int)(Math.random() * 200));

    // Simulate occasional errors
    if (Math.random() < 0.05) {
        throw new RuntimeException("Simulated processing error");
    }

    System.out.printf("✅ Processed order: %s\n", order.getOrderId());
}

private double getCurrentQueueDepth() {
    // In real implementation, query actual queue depth
    return 50 + (Math.random() * 100);
}
}

```

Distributed Tracing Integration

OpenTelemetry Integration

```

public class DistributedTracingExample {
    private final Tracer tracer;
    private final QueueFactory factory;

    public static void main(String[] args) throws Exception {
        // Setup OpenTelemetry
        OpenTelemetry openTelemetry = OpenTelemetrySDK.builder()
            .setTracerProvider(
                SdkTracerProvider.builder()
                    .addSpanProcessor(BatchSpanProcessor.builder(
                        OtlpGrpcSpanExporter.builder()
                            .setEndpoint("http://jaeger:14250")
                            .build()
                    ).build())
                    .setResource(Resource.getDefault()
                        .merge(Resource.create(Attributes.of(
                            ResourceAttributes.SERVICE_NAME, "peegeeq-app"))))
                    .build()
            ).build();

        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = new PgQueueFactoryProvider();
            QueueFactory factory = provider.createFactory("native",
                new PgDatabaseService(manager));

            DistributedTracingExample example = new DistributedTracingExample(
                openTelemetry.getTracer("peegeeq-example"), factory);
            example.runTracingExample();
        }
    }

    public DistributedTracingExample(Tracer tracer, QueueFactory factory) {
        this.tracer = tracer;
        this.factory = factory;
    }

    public void runTracingExample() throws Exception {
        System.out.println("=== Distributed Tracing Example ===");
    }
}

```

```

// Setup traced message processing
setupTracedConsumer();

// Send traced messages
sendTracedMessages();

Thread.sleep(3000);
System.out.println("Distributed tracing example completed!");
}

private void setupTracedConsumer() throws Exception {
    MessageConsumer<OrderEvent> consumer =
        factory.createConsumer("traced-orders", OrderEvent.class);

    consumer.subscribe(message -> {
        // Extract trace context from message headers
        Context parentContext = extractTraceContext(message.getHeaders());

        // Start new span for message processing
        Span span = tracer.spanBuilder("process-order")
            .setParent(parentContext)
            .setAttribute("order.id", message.getPayload().getOrderId())
            .setAttribute("customer.id", message.getPayload().getCustomerId())
            .setAttribute("order.amount", message.getPayload().getAmount().toString())
            .startSpan();

        try (Scope scope = span.makeCurrent()) {
            // Process the order with tracing
            return processOrderWithTracing(message.getPayload());
        } catch (Exception e) {
            span.recordException(e);
            span.setStatus(StatusCode.ERROR, e.getMessage());
            throw e;
        } finally {
            span.end();
        }
    });
}

private void sendTracedMessages() throws Exception {
    MessageProducer<OrderEvent> producer =
        factory.createProducer("traced-orders", OrderEvent.class);

    for (int i = 1; i <= 5; i++) {
        // Start trace for order creation
        Span span = tracer.spanBuilder("create-order")
            .setAttribute("order.number", i)
            .startSpan();

        try (Scope scope = span.makeCurrent()) {
            OrderEvent order = new OrderEvent("ORDER-" + i, "CUST-" + i,
                new BigDecimal("99.99"), "CREATED");

            // Inject trace context into message headers
            Map<String, String> headers = new HashMap<>();
            injectTraceContext(headers);

            producer.send(order, headers).join();

            System.out.printf("📬 Sent traced order: %s (trace: %s)%n",
                order.getOrderId(), span.getSpanContext().getTraceId());
        } finally {
            span.end();
        }
    }
}

```

```

    }

    Thread.sleep(200);
}

}

private CompletableFuture<Void> processOrderWithTracing(OrderEvent order) {
    return CompletableFuture.runAsync(() -> {
        // Validate order
        Span validateSpan = tracer.spanBuilder("validate-order")
            .setAttribute("order.id", order.getOrderid())
            .startSpan();

        try (Scope scope = validateSpan.makeCurrent()) {
            validateOrder(order);
            validateSpan.setStatus(StatusCode.OK);
        } catch (Exception e) {
            validateSpan.recordException(e);
            validateSpan.setStatus(StatusCode.ERROR);
            throw e;
        } finally {
            validateSpan.end();
        }

        // Process payment
        Span paymentSpan = tracer.spanBuilder("process-payment")
            .setAttribute("order.id", order.getOrderid())
            .setAttribute("amount", order.getAmount().toString())
            .startSpan();

        try (Scope scope = paymentSpan.makeCurrent()) {
            processPayment(order);
            paymentSpan.setStatus(StatusCode.OK);
        } catch (Exception e) {
            paymentSpan.recordException(e);
            paymentSpan.setStatus(StatusCode.ERROR);
            throw e;
        } finally {
            paymentSpan.end();
        }

        System.out.printf("✅ Processed traced order: %s\n", order.getOrderid());
    });
}

private Context extractTraceContext(Map<String, String> headers) {
    // Extract W3C trace context from headers
    TextMapGetter<Map<String, String>> getter = new TextMapGetter<Map<String, String>>() {
        @Override
        public Iterable<String> keys(Map<String, String> carrier) {
            return carrier.keySet();
        }

        @Override
        public String get(Map<String, String> carrier, String key) {
            return carrier.get(key);
        }
    };

    return GlobalOpenTelemetry.getPropagators().getTextMapPropagator()
        .extract(Context.current(), headers, getter);
}

private void injectTraceContext(Map<String, String> headers) {
    // Inject W3C trace context into headers
    TextMapSetter<Map<String, String>> setter = Map::put;

```



```

        GlobalOpenTelemetry.getPropagators().getTextMapPropagator()
            .inject(Context.current(), headers, setter);
    }

    private void validateOrder(OrderEvent order) {
        // Simulate validation
        try {
            Thread.sleep(10);
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
        }
    }

    private void processPayment(OrderEvent order) {
        // Simulate payment processing
        try {
            Thread.sleep(50);
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
        }
    }
}

```

Operational Dashboards

Grafana Dashboard Configuration

```

{
  "dashboard": {
    "title": "PeeGeeQ Operations Dashboard",
    "panels": [
      {
        "title": "Message Throughput",
        "type": "graph",
        "targets": [
          {
            "expr": "rate(peegeeq_messages_sent_total[5m])",
            "legendFormat": "Messages Sent/sec"
          },
          {
            "expr": "rate(peegeeq_messages_received_total[5m])",
            "legendFormat": "Messages Received/sec"
          }
        ]
      },
      {
        "title": "Queue Depths",
        "type": "graph",
        "targets": [
          {
            "expr": "peegeeq_queue_depth",
            "legendFormat": "{{queue_name}}"
          }
        ]
      },
      {
        "title": "Processing Latency",
        "type": "graph",
        "targets": [
          {
            "expr": "histogram_quantile(0.50, rate(peegeeq_message_processing_duration_bucket[5m]))",
            "legendFormat": "50th percentile"
          }
        ]
      }
    ]
  }
}

```

```

    },
    {
      "expr": "histogram_quantile(0.95, rate(peegeeq_message_processing_duration_bucket[5m]))",
      "legendFormat": "95th percentile"
    },
    {
      "expr": "histogram_quantile(0.99, rate(peegeeq_message_processing_duration_bucket[5m]))",
      "legendFormat": "99th percentile"
    }
  ]
},
{
  "title": "Error Rates",
  "type": "graph",
  "targets": [
    {
      "expr": "rate(peegeeq_errors_total[5m])",
      "legendFormat": "{{error_type}}"
    }
  ]
},
{
  "title": "Database Connections",
  "type": "graph",
  "targets": [
    {
      "expr": "peegeeq_database_connections_active",
      "legendFormat": "Active Connections"
    },
    {
      "expr": "peegeeq_database_connections_idle",
      "legendFormat": "Idle Connections"
    }
  ]
},
{
  "title": "System Health",
  "type": "stat",
  "targets": [
    {
      "expr": "peegeeq_health_check_status",
      "legendFormat": "{{component}}"
    }
  ]
}
]
}
}
}

```

Try This Now:

1. Set up Prometheus and Grafana for metrics collection
2. Run the monitoring example and observe metrics
3. Configure alerting rules for your specific use cases
4. Set up distributed tracing with Jaeger or Zipkin

Production Readiness Features

Health Checks

Comprehensive health monitoring across all components:

```
public class PeeGeeQHealthChecks {
    private final HealthCheckManager healthCheckManager;

    public void configureHealthChecks() {
        // Database connectivity check
        healthCheckManager.registerHealthCheck("database", () -> {
            try {
                databaseService.query("SELECT 1", rs -> rs.getInt(1));
                return HealthCheckResult.healthy("Database connection OK");
            } catch (Exception e) {
                return HealthCheckResult.unhealthy("Database connection failed", e);
            }
        });

        // Queue processing check
        healthCheckManager.registerHealthCheck("queue-processing", () -> {
            long pendingMessages = getPendingMessageCount();
            if (pendingMessages > 10000) {
                return HealthCheckResult.unhealthy(
                    "High pending message count: " + pendingMessages);
            }
            return HealthCheckResult.healthy("Queue processing normal");
        });

        // Circuit breaker check
        healthCheckManager.registerHealthCheck("circuit-breakers", () -> {
            List<String> openCircuits = circuitBreakerManager.getOpenCircuits();
            if (!openCircuits.isEmpty()) {
                return HealthCheckResult.unhealthy(
                    "Open circuit breakers: " + String.join(", ", openCircuits));
            }
            return HealthCheckResult.healthy("All circuit breakers closed");
        });
    }
}
```

Circuit Breakers

Automatic failure handling and recovery:

```
@Component
public class CircuitBreakerConfiguration {

    @CircuitBreaker(name = "database-operations", fallbackMethod = "fallbackDatabaseOperation")
    @Retry(name = "database-operations")
    @TimeLimiter(name = "database-operations")
    public CompletableFuture<String> performDatabaseOperation(String operation) {
        return CompletableFuture.supplyAsync(() -> {
            // Potentially failing database operation
            return databaseService.executeOperation(operation);
        });
    }

    public CompletableFuture<String> fallbackDatabaseOperation(String operation, Exception ex) {
        log.warn("Database operation failed, using fallback: {}", ex.getMessage());
        return CompletableFuture.completedFuture("FALLBACK_RESULT");
    }

    @EventListener
```

```

public void handleCircuitBreakerStateChange(CircuitBreakerOnStateTransitionEvent event) {
    log.info("Circuit breaker '{}' changed from {} to {}",
        event.getCircuitBreakerName(),
        event.getStateTransition().getFromState(),
        event.getStateTransition().getToState());

    // Send alerts for circuit breaker opening
    if (event.getStateTransition().getToState() == CircuitBreaker.State.OPEN) {
        alertingService.sendAlert(
            "Circuit breaker opened: " + event.getCircuitBreakerName());
    }
}
}

```

Metrics Collection

Comprehensive metrics for monitoring and alerting:

```

@Component
public class PeeGeeQMetrics {
    private final MeterRegistry meterRegistry;
    private final Counter messagesProduced;
    private final Counter messagesConsumed;
    private final Timer messageProcessingTime;
    private final Gauge queueDepth;

    public PeeGeeQMetrics(MeterRegistry meterRegistry) {
        this.meterRegistry = meterRegistry;
        this.messagesProduced = Counter.builder("peegeeq.messages.produced")
            .description("Total messages produced")
            .register(meterRegistry);
        this.messagesConsumed = Counter.builder("peegeeq.messages.consumed")
            .description("Total messages consumed")
            .register(meterRegistry);
        this.messageProcessingTime = Timer.builder("peegeeq.message.processing.time")
            .description("Message processing time")
            .register(meterRegistry);
        this.queueDepth = Gauge.builder("peegeeq.queue.depth")
            .description("Current queue depth")
            .register(meterRegistry, this, PeeGeeQMetrics::getCurrentQueueDepth);
    }

    public void recordMessageProduced(String queueName) {
        messagesProduced.increment(Tags.of("queue", queueName));
    }

    public void recordMessageConsumed(String queueName, Duration processingTime) {
        messagesConsumed.increment(Tags.of("queue", queueName));
        messageProcessingTime.record(processingTime, Tags.of("queue", queueName));
    }

    private double getCurrentQueueDepth() {
        return databaseService.query(
            "SELECT COUNT(*) FROM queue_messages WHERE processed_at IS NULL",
            rs -> rs.getLong(1)
        ).stream().findFirst().orElse(0L).doubleValue();
    }
}

```

Multi-Environment Configuration

Managing PeeGeeQ across multiple environments (development, staging, production) requires sophisticated configuration management strategies. This section demonstrates best practices for environment-specific configuration, secrets management, and deployment automation.

Environment-Specific Configuration Management

Configuration Hierarchy and Inheritance

```
public class MultiEnvironmentConfigExample {

    public static void main(String[] args) throws Exception {
        // Demonstrate different environment configurations
        demonstrateEnvironmentConfigurations();

        // Show configuration inheritance
        demonstrateConfigurationInheritance();

        // Demonstrate secrets management
        demonstrateSecretsManagement();

        // Show configuration validation
        demonstrateConfigurationValidation();
    }

    private static void demonstrateEnvironmentConfigurations() throws Exception {
        System.out.println("=== Multi-Environment Configuration Example ===");

        // Development environment
        System.out.println("\n🔧 Development Environment:");
        PeeGeeQConfiguration devConfig = createDevelopmentConfig();
        printConfigurationSummary("Development", devConfig);

        // Staging environment
        System.out.println("\n🔧 Staging Environment:");
        PeeGeeQConfiguration stagingConfig = createStagingConfig();
        printConfigurationSummary("Staging", stagingConfig);

        // Production environment
        System.out.println("\n🚀 Production Environment:");
        PeeGeeQConfiguration prodConfig = createProductionConfig();
        printConfigurationSummary("Production", prodConfig);
    }

    private static PeeGeeQConfiguration createDevelopmentConfig() {
        return PeeGeeQConfiguration.builder()
            .profile("development")
            // Database settings - local development
            .host("localhost")
            .port(5432)
            .database("peegeeq_dev")
            .username("dev_user")
            .password("dev_password")
            // Performance settings - optimized for development
            .connectionPoolMinSize(2)
            .connectionPoolMaxSize(5)
            .queuePollingIntervalMs(1000)
            .batchSize(10)
            // Monitoring settings - basic monitoring
            .metricsEnabled(true)
    }
```

```

        .healthChecksEnabled(true)
        .healthCheckIntervalSeconds(60)
        // Development-specific features
        .autoMigrationEnabled(true)
        .debugLoggingEnabled(true)
        .build();
    }

    private static PeeGeeQConfiguration createStagingConfig() {
        return PeeGeeQConfiguration.builder()
            .profile("staging")
            // Database settings - staging database
            .host("staging-db.company.com")
            .port(5432)
            .database("peegeeq_staging")
            .username(System.getenv("STAGING_DB_USER"))
            .password(System.getenv("STAGING_DB_PASSWORD"))
            // Performance settings - production-like
            .connectionPoolMinSize(5)
            .connectionPoolMaxSize(15)
            .queuePollingIntervalMs(500)
            .batchSize(25)
            // Monitoring settings - comprehensive monitoring
            .metricsEnabled(true)
            .healthChecksEnabled(true)
            .healthCheckIntervalSeconds(30)
            // SSL settings
            .sslEnabled(true)
            .sslMode("require")
            // Staging-specific features
            .autoMigrationEnabled(false) // Manual migration approval
            .debugLoggingEnabled(false)
            .build();
    }

    private static PeeGeeQConfiguration createProductionConfig() {
        return PeeGeeQConfiguration.builder()
            .profile("production")
            // Database settings - production cluster
            .host("prod-db-cluster.company.com")
            .port(5432)
            .database("peegeeq_prod")
            .username(System.getenv("PROD_DB_USER"))
            .password(System.getenv("PROD_DB_PASSWORD"))
            // Performance settings - optimized for production
            .connectionPoolMinSize(10)
            .connectionPoolMaxSize(50)
            .queuePollingIntervalMs(100)
            .batchSize(100)
            // Monitoring settings - full monitoring
            .metricsEnabled(true)
            .healthChecksEnabled(true)
            .healthCheckIntervalSeconds(15)
            // Security settings
            .sslEnabled(true)
            .sslMode("require")
            .sslCertPath("/etc/ssl/certs/peegeeq.crt")
            .sslKeyPath("/etc/ssl/private/peegeeq.key")
            // Production-specific features
            .autoMigrationEnabled(false) // Never auto-migrate in production
            .debugLoggingEnabled(false)
            .circuitBreakerEnabled(true)
            .retryMaxAttempts(5)
            .deadLetterQueueEnabled(true)
            .build();
    }

```

```

private static void demonstrateConfigurationInheritance() {
    System.out.println("\n📁 Configuration Inheritance:");

    // Base configuration with common settings
    ConfigurationTemplate baseTemplate = ConfigurationTemplate.builder()
        .metricsEnabled(true)
        .healthChecksEnabled(true)
        .queueMaxRetries(3)
        .visibilityTimeoutSeconds(30)
        .build();

    // Environment-specific overrides
    ConfigurationTemplate devOverrides = ConfigurationTemplate.builder()
        .debugLoggingEnabled(true)
        .autoMigrationEnabled(true)
        .connectionPoolMaxSize(5)
        .build();

    ConfigurationTemplate prodOverrides = ConfigurationTemplate.builder()
        .circuitBreakerEnabled(true)
        .connectionPoolMaxSize(50)
        .sslEnabled(true)
        .build();

    // Merge configurations
    PeeGeeQConfiguration devConfig = baseTemplate.merge(devOverrides)
        .withProfile("development")
        .build();

    PeeGeeQConfiguration prodConfig = baseTemplate.merge(prodOverrides)
        .withProfile("production")
        .build();

    System.out.println("✅ Configuration inheritance allows:");
    System.out.println(" • Common settings in base template");
    System.out.println(" • Environment-specific overrides");
    System.out.println(" • Consistent configuration across environments");
}

private static void demonstrateSecretsManagement() {
    System.out.println("\n🔑 Secrets Management:");

    // Different secret sources for different environments
    SecretsManager devSecrets = new FileSecretsManager("dev-secrets.properties");
    SecretsManager stagingSecrets = new VaultSecretsManager("staging/peegeeq");
    SecretsManager prodSecrets = new VaultSecretsManager("production/peegeeq");

    // Configuration with secrets injection
    PeeGeeQConfiguration configWithSecrets = PeeGeeQConfiguration.builder()
        .profile("production")
        .host("prod-db.company.com")
        .database("peegeeq_prod")
        .username(prodSecrets.getSecret("database.username"))
        .password(prodSecrets.getSecret("database.password"))
        .sslCertPath(prodSecrets.getSecret("ssl.cert.path"))
        .sslKeyPath(prodSecrets.getSecret("ssl.key.path"))
        .build();

    System.out.println("🔑 Secrets management strategies:");
    System.out.println(" • Development: Local files (encrypted)");
    System.out.println(" • Staging: HashiCorp Vault");
    System.out.println(" • Production: HashiCorp Vault + rotation");
    System.out.println(" • Never store secrets in configuration files");
}

```

```

private static void demonstrateConfigurationValidation() {
    System.out.println("\n✅ Configuration Validation:");

    ConfigurationValidator validator = new ConfigurationValidator();

    // Validate development configuration
    PeeGeeQConfiguration devConfig = createDevelopmentConfig();
    ValidationResult devResult = validator.validate(devConfig);

    if (devResult.isValid()) {
        System.out.println("✅ Development configuration is valid");
    } else {
        System.out.println("❌ Development configuration errors:");
        devResult.getErrors().forEach(error ->
            System.out.println("    • " + error));
    }

    // Validate production configuration
    PeeGeeQConfiguration prodConfig = createProductionConfig();
    ValidationResult prodResult = validator.validateForProduction(prodConfig);

    if (prodResult.isValid()) {
        System.out.println("✅ Production configuration is valid");
    } else {
        System.out.println("❌ Production configuration errors:");
        prodResult.getErrors().forEach(error ->
            System.out.println("    • " + error));
    }

    System.out.println("\n📋 Validation checks include:");
    System.out.println("    • Required properties are set");
    System.out.println("    • Connection pool sizes are reasonable");
    System.out.println("    • SSL is enabled for production");
    System.out.println("    • Auto-migration is disabled for production");
    System.out.println("    • Secrets are not hardcoded");
}

private static void printConfigurationSummary(String environment, PeeGeeQConfiguration config) {
    System.out.printf("📋 %s Configuration:%n", environment);
    System.out.printf("    • Database: %s:%d/%s%n",
        config.getHost(), config.getPort(), config.getDatabase());
    System.out.printf("    • Connection Pool: %d-%d connections%n",
        config.getConnectionPoolMinSize(), config.getConnectionPoolMaxSize());
    System.out.printf("    • Polling Interval: %dms%n", config.getQueuePollingIntervalMs());
    System.out.printf("    • SSL Enabled: %s%n", config.isSslEnabled());
    System.out.printf("    • Auto Migration: %s%n", config.isAutoMigrationEnabled());
    System.out.printf("    • Debug Logging: %s%n", config.isDebugEnabled());
}
}

```

Configuration Templates and Profiles

Spring Boot Integration

```

# application.yml - Base configuration
peegeeq:
  metrics:
    enabled: true
  health:
    enabled: true
    interval: 30s
  queue:
    max-retries: 3

```



```
    visibility-timeout: 30s

---
# application-development.yml
spring:
  profiles: development

peegeeq:
  database:
    host: localhost
    port: 5432
    name: peegeeq_dev
    username: dev_user
    password: dev_password
    pool:
      min-size: 2
      max-size: 5

  migration:
    auto-enabled: true

  logging:
    debug: true

---
# application-staging.yml
spring:
  profiles: staging

peegeeq:
  database:
    host: ${STAGING_DB_HOST}
    port: 5432
    name: peegeeq_staging
    username: ${STAGING_DB_USER}
    password: ${STAGING_DB_PASSWORD}
    pool:
      min-size: 5
      max-size: 15
    ssl:
      enabled: true
      mode: require

  migration:
    auto-enabled: false

  queue:
    polling-interval: 500ms
    batch-size: 25

---
# application-production.yml
spring:
  profiles: production

peegeeq:
  database:
    host: ${PROD_DB_HOST}
    port: 5432
    name: peegeeq_prod
    username: ${PROD_DB_USER}
    password: ${PROD_DB_PASSWORD}
    pool:
      min-size: 10
      max-size: 50
    ssl:
```

```

    enabled: true
    mode: require
    cert-path: ${SSL_CERT_PATH}
    key-path: ${SSL_KEY_PATH}

migration:
  auto-enabled: false

queue:
  polling-interval: 100ms
  batch-size: 100

circuit-breaker:
  enabled: true
  failure-threshold: 5
  timeout: 60s

dead-letter-queue:
  enabled: true

```

Docker and Kubernetes Configuration

Docker Compose for Multi-Environment

```

# docker-compose.yml
version: '3.8'

services:
  peegeeq-app:
    image: peegeeq-app:${VERSION:-latest}
    environment:
      - SPRING_PROFILES_ACTIVE=${ENVIRONMENT:-development}
      - PEEGEEQ_DB_HOST=${DB_HOST:-postgres}
      - PEEGEEQ_DB_USER=${DB_USER:-peegeeq}
      - PEEGEEQ_DB_PASSWORD=${DB_PASSWORD:-password}
    depends_on:
      - postgres
    ports:
      - "${APP_PORT:-8080}:8080"
    volumes:
      - ./config/${ENVIRONMENT:-development}:/app/config
      - ./logs:/app/logs

  postgres:
    image: postgres:15
    environment:
      - POSTGRES_DB=${DB_NAME:-peegeeq}
      - POSTGRES_USER=${DB_USER:-peegeeq}
      - POSTGRES_PASSWORD=${DB_PASSWORD:-password}
    volumes:
      - postgres_data:/var/lib/postgresql/data
      - ./init-scripts:/docker-entrypoint-initdb.d
    ports:
      - "${DB_PORT:-5432}:5432"

volumes:
  postgres_data:

```

Kubernetes ConfigMaps and Secrets

```

# configmap-development.yaml
apiVersion: v1
kind: ConfigMap
metadata:
  name: peegeeq-config-dev
  namespace: peegeeq-dev
data:
  application.yml: |
    peegeeq:
      database:
        host: postgres-dev
        port: 5432
        name: peegeeq_dev
        pool:
          min-size: 2
          max-size: 5
      migration:
        auto-enabled: true
      logging:
        debug: true

---
# secret-development.yaml
apiVersion: v1
kind: Secret
metadata:
  name: peegeeq-secrets-dev
  namespace: peegeeq-dev
type: Opaque
data:
  database-username: ZGV2X3VzZXI= # dev_user (base64)
  database-password: ZGV2X3Bhc3N3b3Jk # dev_password (base64)

---
# configmap-production.yaml
apiVersion: v1
kind: ConfigMap
metadata:
  name: peegeeq-config-prod
  namespace: peegeeq-prod
data:
  application.yml: |
    peegeeq:
      database:
        host: postgres-prod-cluster
        port: 5432
        name: peegeeq_prod
        pool:
          min-size: 10
          max-size: 50
      ssl:
        enabled: true
        mode: require
      migration:
        auto-enabled: false
      circuit-breaker:
        enabled: true
      dead-letter-queue:
        enabled: true

---
# secret-production.yaml
apiVersion: v1
kind: Secret
metadata:

```

```
name: peegeeq-secrets-prod
namespace: peegeeq-prod
type: Opaque
data:
  database-username: <encrypted-username>
  database-password: <encrypted-password>
  ssl-cert: <encrypted-ssl-cert>
  ssl-key: <encrypted-ssl-key>
```

Configuration Deployment Automation

Terraform Configuration Management

```
# environments/development/main.tf
module "peegeeq_development" {
  source = "../../modules/peegeeq"

  environment = "development"

  # Database configuration
  db_instance_class = "db.t3.micro"
  db_allocated_storage = 20
  db_backup_retention = 1

  # Application configuration
  app_instance_count = 1
  app_instance_type = "t3.small"

  # Monitoring
  enable_detailed_monitoring = false
  log_retention_days = 7

  # Security
  enable_ssl = false
  enable_encryption = false
}

# environments/production/main.tf
module "peegeeq_production" {
  source = "../../modules/peegeeq"

  environment = "production"

  # Database configuration
  db_instance_class = "db.r5.xlarge"
  db_allocated_storage = 500
  db_backup_retention = 30
  db_multi_az = true

  # Application configuration
  app_instance_count = 3
  app_instance_type = "c5.large"

  # Monitoring
  enable_detailed_monitoring = true
  log_retention_days = 90

  # Security
  enable_ssl = true
  enable_encryption = true

  # High availability
  enable_auto_scaling = true
```

```

    min_capacity = 2
    max_capacity = 10
}

```

Try This Now:

1. Set up different configuration files for each environment
2. Use environment variables for sensitive configuration
3. Implement configuration validation for production deployments
4. Set up automated deployment pipelines with environment-specific configurations

Performance Optimization

This section provides comprehensive guidance for optimizing PeeGeeQ performance across different workload patterns, from high-throughput batch processing to low-latency real-time messaging.

Performance Profiling and Benchmarking

Comprehensive Performance Testing Framework

```

public class PerformanceOptimizationExample {
    private final PeeGeeQManager manager;
    private final PerformanceProfiler profiler;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager(
            createOptimizedConfiguration(), new PrometheusMeterRegistry())) {

            manager.start();

            PerformanceOptimizationExample optimizer =
                new PerformanceOptimizationExample(manager);
            optimizer.runPerformanceOptimization();
        }
    }

    public PerformanceOptimizationExample(PeeGeeQManager manager) {
        this.manager = manager;
        this.profiler = new PerformanceProfiler(manager.getMetrics());
    }

    public void runPerformanceOptimization() throws Exception {
        System.out.println("=== Performance Optimization Example ===");

        // 1. Baseline performance measurement
        measureBaselinePerformance();

        // 2. Connection pool optimization
        optimizeConnectionPool();

        // 3. Batch processing optimization
        optimizeBatchProcessing();

        // 4. Memory optimization
        optimizeMemoryUsage();

        // 5. Database query optimization
        optimizeDatabaseQueries();
    }
}

```

```

// 6. JVM optimization
demonstrateJVMOptimizations();

System.out.println("Performance optimization completed!");
}

private void measureBaselinePerformance() throws Exception {
    System.out.println("\n📊 Measuring Baseline Performance:");

    QueueFactoryProvider provider = new PgQueueFactoryProvider();
    QueueFactory factory = provider.createFactory("native",
        new PgDatabaseService(manager));

    // Test different message sizes
    int[] messageSizes = {100, 1000, 10000, 100000}; // bytes
    int[] messageCounts = {1000, 5000, 10000};

    for (int messageSize : messageSizes) {
        for (int messageCount : messageCounts) {
            PerformanceResult result = profiler.measureThroughput(
                factory, messageSize, messageCount);

            System.out.printf("📈 %d messages (%d bytes): %.2f msg/sec, %.2fms avg latency%n",
                messageCount, messageSize, result.getThroughput(), result.getAverageLatency());
        }
    }
}

private void optimizeConnectionPool() throws Exception {
    System.out.println("\n🏊 Connection Pool Optimization:");

    // Test different pool configurations
    PoolConfiguration[] configs = {
        new PoolConfiguration(5, 10, 30), // Conservative
        new PoolConfiguration(10, 20, 30), // Balanced
        new PoolConfiguration(20, 50, 30), // Aggressive
        new PoolConfiguration(50, 100, 30) // High-throughput
    };

    for (PoolConfiguration config : configs) {
        PeeGeeQConfiguration optimizedConfig = createOptimizedConfiguration()
            .withConnectionPoolMinSize(config.minSize)
            .withConnectionPoolMaxSize(config.maxSize)
            .withConnectionTimeoutSeconds(config.timeoutSeconds);

        try (PeeGeeQManager testManager = new PeeGeeQManager(optimizedConfig)) {
            testManager.start();

            PerformanceResult result = profiler.measureConnectionPoolPerformance(testManager);

            System.out.printf("🌀 Pool %d-%d: %.2f msg/sec, %d active connections%n",
                config.minSize, config.maxSize, result.getThroughput(),
                result.getActiveConnections());
        }
    }

    System.out.println("💡 Optimal pool size depends on:");
    System.out.println("    • CPU cores (typically 2-4x core count)");
    System.out.println("    • Database connection limits");
    System.out.println("    • Message processing time");
    System.out.println("    • Concurrent consumer count");
}

private void optimizeBatchProcessing() throws Exception {
    System.out.println("\n📦 Batch Processing Optimization:");

```

```

QueueFactoryProvider provider = new PgQueueFactoryProvider();
QueueFactory factory = provider.createFactory("outbox",
    new PgDatabaseService(manager));

// Test different batch sizes
int[] batchSizes = {1, 10, 50, 100, 500, 1000};

for (int batchSize : batchSizes) {
    PerformanceResult result = profiler.measureBatchPerformance(
        factory, batchSize, 10000);

    System.out.printf("\n📊 Batch size %d: %.2f msg/sec, %.2fms latency%n",
        batchSize, result.getThroughput(), result.getAverageLatency());
}

System.out.println("\n🔧 Batch Size Guidelines:");
System.out.println(" • Small batches (1-10): Low latency, higher CPU overhead");
System.out.println(" • Medium batches (50-100): Balanced performance");
System.out.println(" • Large batches (500+): High throughput, higher latency");
System.out.println(" • Consider message size and processing time");
}

private void optimizeMemoryUsage() throws Exception {
    System.out.println("\n🧠 Memory Usage Optimization:");

    MemoryProfiler memProfiler = new MemoryProfiler();

    // Measure memory usage with different configurations
    System.out.println("\n📊 Memory usage patterns:");

    // Test with different message retention policies
    testMemoryWithRetention(memProfiler, "No retention", 0);
    testMemoryWithRetention(memProfiler, "1 hour retention", 3600);
    testMemoryWithRetention(memProfiler, "24 hour retention", 86400);

    // Test with different serialization strategies
    testMemoryWithSerialization(memProfiler);

    System.out.println("\n💡 Memory Optimization Tips:");
    System.out.println(" • Use appropriate message retention policies");
    System.out.println(" • Consider message compression for large payloads");
    System.out.println(" • Implement message archival for old data");
    System.out.println(" • Monitor heap usage and GC patterns");
}

private void optimizeDatabaseQueries() throws Exception {
    System.out.println("\n📊 Database Query Optimization:");

    DatabaseOptimizer dbOptimizer = new DatabaseOptimizer(manager.getDataSource());

    // Analyze current query performance
    QueryPerformanceReport report = dbOptimizer.analyzeQueryPerformance();

    System.out.println("\n📊 Query Performance Analysis:");
    report.getSlowQueries().forEach(query -> {
        System.out.printf("\n🐢 %s: %.2fms avg, %d executions%n",
            query.getQueryType(), query.getAverageTime(), query.getExecutionCount());
    });

    // Apply optimizations
    System.out.println("\n🔧 Applying Database Optimizations:");

    // Create optimized indexes
    dbOptimizer.createOptimizedIndexes();
    System.out.println("\n✅ Created specialized indexes");
}

```

```

// Update table statistics
dbOptimizer.updateTableStatistics();
System.out.println(" 🟢 Updated table statistics");

// Configure connection pool for database
dbOptimizer.optimizeConnectionPool();
System.out.println(" 🟢 Optimized connection pool settings");

// Measure improvement
QueryPerformanceReport improvedReport = dbOptimizer.analyzeQueryPerformance();
double improvement = calculateImprovement(report, improvedReport);

System.out.printf("📈 Overall query performance improved by %.1f%%\n", improvement);
}

private void demonstrateJVMOptimizations() {
    System.out.println("\n🍹 JVM Optimization Recommendations:");

    System.out.println("🚀 High-Throughput JVM Settings:");
    System.out.println("    -Xms4g -Xmx4g                # Fixed heap size");
    System.out.println("    -XX:+UseG1GC                # G1 garbage collector");
    System.out.println("    -XX:MaxGCPauseMillis=200    # Target GC pause time");
    System.out.println("    -XX:G1HeapRegionSize=16m    # G1 region size");
    System.out.println("    -XX:+UseStringDeduplication # Reduce string memory");

    System.out.println("\n⚡ Low-Latency JVM Settings:");
    System.out.println("    -Xms8g -Xmx8g                # Larger fixed heap");
    System.out.println("    -XX:+UnlockExperimentalVMOptions # Enable experimental features");
    System.out.println("    -XX:+UseZGC                  # ZGC for ultra-low latency");
    System.out.println("    -XX:+UseLargePages           # Large pages for better memory management");
    System.out.println("    -XX:+AlwaysPreTouch          # Pre-touch memory pages");

    System.out.println("\n📊 Monitoring JVM Settings:");
    System.out.println("    -XX:+PrintGC                 # Print GC information");
    System.out.println("    -XX:+PrintGCDetails          # Detailed GC information");
    System.out.println("    -XX:+PrintGCTimeStamps       # GC timestamps");
    System.out.println("    -XX:+UseGCLogFileRotation    # Rotate GC logs");
    System.out.println("    -Xloggc:gc.log               # GC log file");
}

private static PeeGeeQConfiguration createOptimizedConfiguration() {
    return PeeGeeQConfiguration.builder()
        .profile("performance-optimized")
        // Database optimizations
        .connectionPoolMinSize(20)
        .connectionPoolMaxSize(50)
        .connectionTimeoutSeconds(30)
        .connectionIdleTimeoutSeconds(600)
        // Queue optimizations
        .queuePollingIntervalMs(50)
        .batchSize(100)
        .maxRetries(3)
        .visibilityTimeoutSeconds(30)
        // Performance optimizations
        .enableConnectionPoolMetrics(true)
        .enableQueryMetrics(true)
        .enableJvmMetrics(true)
        // Caching optimizations
        .enableQueryResultCaching(true)
        .queryCacheTtlSeconds(300)
        .build();
}

private void testMemoryWithRetention(MemoryProfiler profiler, String description, int retentionSeconds) {
    MemoryUsage usage = profiler.measureMemoryUsage(retentionSeconds);

```



```

        System.out.printf(" 📊 %s: %.2f MB heap, %.2f MB off-heap%n",
            description, usage.getHeapUsageMB(), usage.getOffHeapUsageMB());
    }

    private void testMemoryWithSerialization(MemoryProfiler profiler) {
        System.out.println(" 🔄 Serialization strategies:");

        SerializationStrategy[] strategies = {
            SerializationStrategy.JSON,
            SerializationStrategy.BINARY,
            SerializationStrategy.COMPRESSED_JSON,
            SerializationStrategy.AVRO
        };

        for (SerializationStrategy strategy : strategies) {
            MemoryUsage usage = profiler.measureSerializationMemory(strategy);
            System.out.printf("   • %s: %.2f MB, %.1fx compression%n",
                strategy.name(), usage.getHeapUsageMB(), usage.getCompressionRatio());
        }
    }

    private double calculateImprovement(QueryPerformanceReport before, QueryPerformanceReport after) {
        double beforeAvg = before.getSlowQueries().stream()
            .mapToDouble(QueryStats::getAverageTime)
            .average()
            .orElse(0.0);

        double afterAvg = after.getSlowQueries().stream()
            .mapToDouble(QueryStats::getAverageTime)
            .average()
            .orElse(0.0);

        return ((beforeAvg - afterAvg) / beforeAvg) * 100;
    }
}

// Supporting classes for performance optimization
class PoolConfiguration {
    final int minSize;
    final int maxSize;
    final int timeoutSeconds;

    public PoolConfiguration(int minSize, int maxSize, int timeoutSeconds) {
        this.minSize = minSize;
        this.maxSize = maxSize;
        this.timeoutSeconds = timeoutSeconds;
    }
}

class PerformanceResult {
    private final double throughput;
    private final double averageLatency;
    private final int activeConnections;

    public PerformanceResult(double throughput, double averageLatency, int activeConnections) {
        this.throughput = throughput;
        this.averageLatency = averageLatency;
        this.activeConnections = activeConnections;
    }

    public double getThroughput() { return throughput; }
    public double getAverageLatency() { return averageLatency; }
    public int getActiveConnections() { return activeConnections; }
}

```

Workload-Specific Optimizations

High-Throughput Batch Processing

```
public class HighThroughputOptimization {

    public void optimizeForHighThroughput() throws Exception {
        System.out.println("=== High-Throughput Optimization ===");

        // Configuration for maximum throughput
        PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
            .profile("high-throughput")
            // Aggressive connection pooling
            .connectionPoolMinSize(50)
            .connectionPoolMaxSize(200)
            .connectionAcquisitionTimeoutMs(5000)
            // Large batch sizes
            .batchSize(1000)
            .queuePollingIntervalMs(10) // Very frequent polling
            // Optimized timeouts
            .visibilityTimeoutSeconds(60)
            .messageRetentionHours(1) // Short retention for high volume
            // Disable features that add overhead
            .enableDetailedMetrics(false)
            .enableDebugLogging(false)
            .build();

        try (PeeGeeQManager manager = new PeeGeeQManager(config)) {
            manager.start();

            demonstrateHighThroughputProcessing(manager);
        }
    }

    private void demonstrateHighThroughputProcessing(PeeGeeQManager manager) throws Exception {
        QueueFactoryProvider provider = new PgQueueFactoryProvider();
        QueueFactory factory = provider.createFactory("outbox",
            new PgDatabaseService(manager));

        // Create multiple producers for parallel sending
        int producerCount = Runtime.getRuntime().availableProcessors();
        List<MessageProducer<BatchMessage>> producers = new ArrayList<>();

        for (int i = 0; i < producerCount; i++) {
            producers.add(factory.createProducer("high-throughput-queue", BatchMessage.class));
        }

        // Create consumer group for parallel processing
        ConsumerGroup<BatchMessage> consumerGroup = factory.createConsumerGroup(
            "high-throughput-group", "high-throughput-queue", BatchMessage.class);

        // Add multiple consumers to the group
        for (int i = 0; i < producerCount * 2; i++) {
            consumerGroup.addConsumer(this::processBatchMessage);
        }

        consumerGroup.start();

        // Send messages in parallel
        System.out.println("🚀 Starting high-throughput message sending...");
        long startTime = System.currentTimeMillis();

        List<CompletableFuture<Void>> sendTasks = new ArrayList<>();
        int messagesPerProducer = 10000;
```

```

for (int i = 0; i < producerCount; i++) {
    final int producerId = i;
    MessageProducer<BatchMessage> producer = producers.get(i);

    CompletableFuture<Void> task = CompletableFuture.runAsync(() -> {
        try {
            for (int j = 0; j < messagesPerProducer; j++) {
                BatchMessage message = new BatchMessage(
                    "BATCH-" + producerId + "-" + j,
                    "High throughput message " + j,
                    System.currentTimeMillis()
                );
                producer.send(message).join();
            }
        } catch (Exception e) {
            throw new RuntimeException(e);
        }
    });

    sendTasks.add(task);
}

// Wait for all sends to complete
CompletableFuture.allOf(sendTasks.toArray(new CompletableFuture[0])).join();

long sendTime = System.currentTimeMillis() - startTime;
int totalMessages = producerCount * messagesPerProducer;
double throughput = (totalMessages * 1000.0) / sendTime;

System.out.printf("📊 Sent %d messages in %dms (%.2f msg/sec)%n",
    totalMessages, sendTime, throughput);

// Wait for processing to complete
Thread.sleep(5000);

// Get processing statistics
ConsumerGroupStats stats = consumerGroup.getStats();
System.out.printf("✅ Processed %d messages (%.2f msg/sec average)%n",
    stats.getMessagesProcessed(), stats.getAverageProcessingRate());

consumerGroup.stop();
producers.forEach(producer -> {
    try { producer.close(); } catch (Exception e) { /* ignore */ }
});
}

private CompletableFuture<Void> processBatchMessage(Message<BatchMessage> message) {
    // Minimal processing for maximum throughput
    BatchMessage batchMessage = message.getPayload();

    // Just acknowledge - in real scenario, you'd do actual processing
    return CompletableFuture.completedFuture(null);
}
}

```

Low-Latency Real-Time Processing

```

public class LowLatencyOptimization {

    public void optimizeForLowLatency() throws Exception {
        System.out.println("=== Low-Latency Optimization ===");
    }
}

```

```

// Configuration for minimum latency
PeeGeeQConfiguration config = PeeGeeQConfiguration.builder()
    .profile("low-latency")
    // Dedicated connections for immediate processing
    .connectionPoolMinSize(10)
    .connectionPoolMaxSize(20)
    .connectionAcquisitionTimeoutMs(100)
    // Small batch sizes for immediate processing
    .batchSize(1)
    .queuePollingIntervalMs(1) // Extremely frequent polling
    // Minimal timeouts
    .visibilityTimeoutSeconds(5)
    .messageRetentionHours(24)
    // Enable features for latency monitoring
    .enableLatencyMetrics(true)
    .enableDetailedTracing(true)
    .build();

try (PeeGeeQManager manager = new PeeGeeQManager(config)) {
    manager.start();

    demonstrateLowLatencyProcessing(manager);
}

private void demonstrateLowLatencyProcessing(PeeGeeQManager manager) throws Exception {
    QueueFactoryProvider provider = new PgQueueFactoryProvider();
    QueueFactory factory = provider.createFactory("native", // Native for lowest latency
        new PgDatabaseService(manager));

    MessageProducer<LatencyMessage> producer =
        factory.createProducer("low-latency-queue", LatencyMessage.class);
    MessageConsumer<LatencyMessage> consumer =
        factory.createConsumer("low-latency-queue", LatencyMessage.class);

    // Track latency statistics
    LatencyTracker latencyTracker = new LatencyTracker();

    consumer.subscribe(message -> {
        long receiveTime = System.nanoTime();
        LatencyMessage latencyMessage = message.getPayload();

        long latencyNanos = receiveTime - latencyMessage.getSendTime();
        double latencyMs = latencyNanos / 1_000_000.0;

        latencyTracker.recordLatency(latencyMs);

        // Minimal processing for low latency
        return CompletableFuture.completedFuture(null);
    });

    // Send messages and measure latency
    System.out.println("⚡ Starting low-latency message processing...");

    for (int i = 0; i < 1000; i++) {
        LatencyMessage message = new LatencyMessage(
            "LATENCY-" + i,
            "Low latency message " + i,
            System.nanoTime()
        );

        producer.send(message).join();

        // Small delay to avoid overwhelming the system
        Thread.sleep(10);
    }
}

```

```

// Wait for processing to complete
Thread.sleep(2000);

// Print latency statistics
LatencyStats stats = latencyTracker.getStats();
System.out.printf("📊 Latency Statistics:%n");
System.out.printf(" • Average: %.2fms%n", stats.getAverage());
System.out.printf(" • Median: %.2fms%n", stats.getMedian());
System.out.printf(" • 95th percentile: %.2fms%n", stats.getP95());
System.out.printf(" • 99th percentile: %.2fms%n", stats.getP99());
System.out.printf(" • Maximum: %.2fms%n", stats.getMax());

consumer.close();
producer.close();
}
}

```

🔗 Try This Now:

1. Run performance benchmarks with different configurations
2. Optimize connection pool settings for your workload
3. Experiment with different batch sizes and polling intervals
4. Monitor JVM performance and tune garbage collection settings

Integration Patterns

This section demonstrates enterprise integration patterns using PeeGeeQ, including message routing, transformation, aggregation, and integration with external systems and message brokers.

Enterprise Integration Patterns

Message Router Pattern

```

public class MessageRouterPatternExample {
    private final QueueFactory factory;
    private final MessageRouter router;

    public static void main(String[] args) throws Exception {
        try (PeeGeeQManager manager = new PeeGeeQManager()) {
            manager.start();

            QueueFactoryProvider provider = new PgQueueFactoryProvider();
            QueueFactory factory = provider.createFactory("native",
                new PgDatabaseService(manager));

            MessageRouterPatternExample example = new MessageRouterPatternExample(factory);
            example.runMessageRouterExample();
        }
    }

    public MessageRouterPatternExample(QueueFactory factory) {
        this.factory = factory;
        this.router = new MessageRouter(factory);
    }

    public void runMessageRouterExample() throws Exception {
        System.out.println("=== Message Router Pattern Example ===");
    }
}

```

```

// Setup routing rules
setupRoutingRules();

// Setup destination consumers
setupDestinationConsumers();

// Send messages that will be routed
sendRoutedMessages();

Thread.sleep(3000);
System.out.println("Message router pattern example completed!");
}

private void setupRoutingRules() throws Exception {
    System.out.println("🔧 Setting up routing rules:");

    // Route by message type
    router.addRule(RoutingRule.builder()
        .name("order-routing")
        .condition(message -> "ORDER".equals(message.getHeaders().get("messageType")))
        .destination("order-processing-queue")
        .build());

    // Route by priority
    router.addRule(RoutingRule.builder()
        .name("priority-routing")
        .condition(message -> "HIGH".equals(message.getHeaders().get("priority")))
        .destination("high-priority-queue")
        .build());

    // Route by customer tier
    router.addRule(RoutingRule.builder()
        .name("customer-tier-routing")
        .condition(message -> "PREMIUM".equals(message.getHeaders().get("customerTier")))
        .destination("premium-customer-queue")
        .build());

    // Default route
    router.addRule(RoutingRule.builder()
        .name("default-routing")
        .condition(message -> true) // Always matches
        .destination("default-processing-queue")
        .priority(Integer.MAX_VALUE) // Lowest priority
        .build());

    // Start the router
    router.start("incoming-messages");

    System.out.println("✅ Routing rules configured and router started");
}

private void setupDestinationConsumers() throws Exception {
    // Order processing consumer
    MessageConsumer<BusinessMessage> orderConsumer =
        factory.createConsumer("order-processing-queue", BusinessMessage.class);
    orderConsumer.subscribe(message -> {
        System.out.printf("📦 Order Processing: %s%n", message.getPayload().getContent());
        return CompletableFuture.completedFuture(null);
    });

    // High priority consumer
    MessageConsumer<BusinessMessage> priorityConsumer =
        factory.createConsumer("high-priority-queue", BusinessMessage.class);
    priorityConsumer.subscribe(message -> {
        System.out.printf("🔥 High Priority: %s%n", message.getPayload().getContent());
    });
}

```

```

        return CompletableFuture.completedFuture(null);
    });

    // Premium customer consumer
    MessageConsumer<BusinessMessage> premiumConsumer =
        factory.createConsumer("premium-customer-queue", BusinessMessage.class);
    premiumConsumer.subscribe(message -> {
        System.out.printf("★ Premium Customer: %s%n", message.getPayload().getContent());
        return CompletableFuture.completedFuture(null);
    });

    // Default consumer
    MessageConsumer<BusinessMessage> defaultConsumer =
        factory.createConsumer("default-processing-queue", BusinessMessage.class);
    defaultConsumer.subscribe(message -> {
        System.out.printf("📁 Default Processing: %s%n", message.getPayload().getContent());
        return CompletableFuture.completedFuture(null);
    });
}

private void sendRoutedMessages() throws Exception {
    MessageProducer<BusinessMessage> producer =
        factory.createProducer("incoming-messages", BusinessMessage.class);

    // Send order message
    producer.send(
        new BusinessMessage("ORDER-001", "New order from customer"),
        Map.of("messageType", "ORDER", "customerId", "CUST-123")
    ).join();

    // Send high priority message
    producer.send(
        new BusinessMessage("ALERT-001", "System alert message"),
        Map.of("priority", "HIGH", "alertType", "SYSTEM")
    ).join();

    // Send premium customer message
    producer.send(
        new BusinessMessage("PREMIUM-001", "Premium customer request"),
        Map.of("customerTier", "PREMIUM", "customerId", "CUST-456")
    ).join();

    // Send message that matches multiple rules (first match wins)
    producer.send(
        new BusinessMessage("ORDER-002", "Premium customer order"),
        Map.of("messageType", "ORDER", "customerTier", "PREMIUM", "priority", "HIGH")
    ).join();

    // Send message that goes to default route
    producer.send(
        new BusinessMessage("MISC-001", "Miscellaneous message"),
        Map.of("category", "general")
    ).join();

    System.out.println("📬 Sent messages for routing");
}
}

```

Message Aggregator Pattern

```

public class MessageAggregatorPatternExample {
    private final QueueFactory factory;
    private final MessageAggregator aggregator;
}

```

```

public void runMessageAggregatorExample() throws Exception {
    System.out.println("=== Message Aggregator Pattern Example ===");

    // Setup aggregation rules
    setupAggregationRules();

    // Setup aggregated message consumer
    setupAggregatedConsumer();

    // Send messages to be aggregated
    sendMessagesForAggregation();

    Thread.sleep(5000);
    System.out.println("Message aggregator pattern example completed!");
}

private void setupAggregationRules() throws Exception {
    System.out.println("🔧 Setting up aggregation rules:");

    // Aggregate order items by order ID
    aggregator.addRule(AggregationRule.builder()
        .name("order-items-aggregation")
        .correlationKey(message -> message.getHeaders().get("orderId"))
        .completionCondition(messages -> {
            // Complete when we have all expected items
            String expectedCount = messages.get(0).getHeaders().get("totalItems");
            return messages.size() >= Integer.parseInt(expectedCount);
        })
        .timeoutSeconds(30) // Complete after 30 seconds regardless
        .outputQueue("aggregated-orders")
        .aggregationFunction(this::aggregateOrderItems)
        .build());

    // Aggregate sensor readings by time window
    aggregator.addRule(AggregationRule.builder()
        .name("sensor-readings-aggregation")
        .correlationKey(message -> getTimeWindow(message.getHeaders().get("timestamp")))
        .completionCondition(messages -> messages.size() >= 10) // Aggregate every 10 readings
        .timeoutSeconds(60) // Or every minute
        .outputQueue("aggregated-sensor-data")
        .aggregationFunction(this::aggregateSensorReadings)
        .build());

    // Start the aggregator
    aggregator.start("messages-to-aggregate");

    System.out.println("✅ Aggregation rules configured and aggregator started");
}

private void setupAggregatedConsumer() throws Exception {
    // Consumer for aggregated orders
    MessageConsumer<AggregatedMessage> orderConsumer =
        factory.createConsumer("aggregated-orders", AggregatedMessage.class);
    orderConsumer.subscribe(message -> {
        AggregatedMessage aggregated = message.getPayload();
        System.out.printf("📦 Aggregated Order: %s (%d items, total: $%.2f)%n",
            aggregated.getCorrelationId(),
            aggregated.getMessageCount(),
            aggregated.getTotalAmount());
        return CompletableFuture.completedFuture(null);
    });

    // Consumer for aggregated sensor data
    MessageConsumer<AggregatedMessage> sensorConsumer =
        factory.createConsumer("aggregated-sensor-data", AggregatedMessage.class);

```



```

        sensorConsumer.subscribe(message -> {
            AggregatedMessage aggregated = message.getPayload();
            System.out.printf("\u25b2 Aggregated Sensor Data: %s (avg: %.2f, min: %.2f, max: %.2f)%n",
                aggregated.getCorrelationId(),
                aggregated.getAverageValue(),
                aggregated.getMinValue(),
                aggregated.getMaxValue());
            return CompletableFuture.completedFuture(null);
        });
    }

    private void sendMessagesForAggregation() throws Exception {
        MessageProducer<BusinessMessage> producer =
            factory.createProducer("messages-to-aggregate", BusinessMessage.class);

        // Send order items for aggregation
        String orderId = "ORDER-001";
        producer.send(
            new BusinessMessage("ITEM-1", "Laptop - $999.99"),
            Map.of("orderId", orderId, "totalItems", "3", "amount", "999.99")
        ).join();

        producer.send(
            new BusinessMessage("ITEM-2", "Mouse - $29.99"),
            Map.of("orderId", orderId, "totalItems", "3", "amount", "29.99")
        ).join();

        producer.send(
            new BusinessMessage("ITEM-3", "Keyboard - $79.99"),
            Map.of("orderId", orderId, "totalItems", "3", "amount", "79.99")
        ).join();

        // Send sensor readings for aggregation
        String timeWindow = "2025-01-01T10:00";
        for (int i = 1; i <= 12; i++) {
            double temperature = 20.0 + (Math.random() * 10); // 20-30°C
            producer.send(
                new BusinessMessage("SENSOR-" + i, "Temperature reading"),
                Map.of("timestamp", timeWindow + ":" + String.format("%02d", i * 5),
                    "sensorId", "TEMP-001",
                    "value", String.valueOf(temperature))
            ).join();
        }

        System.out.println("\u25b2 Sent messages for aggregation");
    }

    private AggregatedMessage aggregateOrderItems(List<Message<BusinessMessage>> messages) {
        String orderId = messages.get(0).getHeaders().get("orderId");
        double totalAmount = messages.stream()
            .mapToDouble(msg -> Double.parseDouble(msg.getHeaders().get("amount")))
            .sum();

        return new AggregatedMessage(orderId, messages.size(), totalAmount, 0, 0, 0);
    }

    private AggregatedMessage aggregateSensorReadings(List<Message<BusinessMessage>> messages) {
        String timeWindow = messages.get(0).getHeaders().get("timestamp").substring(0, 16);

        double[] values = messages.stream()
            .mapToDouble(msg -> Double.parseDouble(msg.getHeaders().get("value")))
            .toArray();

        double average = Arrays.stream(values).average().orElse(0.0);
        double min = Arrays.stream(values).min().orElse(0.0);
        double max = Arrays.stream(values).max().orElse(0.0);
    }

```

```

        return new AggregatedMessage(timewindow, messages.size(), 0, average, min, max);
    }

    private String getTimeWindow(String timestamp) {
        // Group by 5-minute windows
        return timestamp.substring(0, 16); // YYYY-MM-DDTHH:MM
    }
}

```

Message Translator Pattern

```

public class MessageTranslatorPatternExample {
    private final QueueFactory factory;
    private final MessageTranslator translator;

    public void runMessageTranslatorExample() throws Exception {
        System.out.println("=== Message Translator Pattern Example ===");

        // Setup translation rules
        setupTranslationRules();

        // Setup translated message consumers
        setupTranslatedConsumers();

        // Send messages in different formats
        sendMessagesForTranslation();

        Thread.sleep(3000);
        System.out.println("Message translator pattern example completed!");
    }

    private void setupTranslationRules() throws Exception {
        System.out.println("🔧 Setting up translation rules:");

        // Translate XML to JSON
        translator.addRule(TranslationRule.builder()
            .name("xml-to-json")
            .sourceFormat("XML")
            .targetFormat("JSON")
            .translator(new XmlToJsonTranslator())
            .outputQueue("json-messages")
            .build());

        // Translate CSV to structured format
        translator.addRule(TranslationRule.builder()
            .name("csv-to-structured")
            .sourceFormat("CSV")
            .targetFormat("STRUCTURED")
            .translator(new CsvToStructuredTranslator())
            .outputQueue("structured-messages")
            .build());

        // Translate legacy format to modern format
        translator.addRule(TranslationRule.builder()
            .name("legacy-to-modern")
            .sourceFormat("LEGACY")
            .targetFormat("MODERN")
            .translator(new LegacyToModernTranslator())
            .outputQueue("modern-messages")
            .build());

        // Start the translator
    }
}

```

```

        translator.start("messages-to-translate");

        System.out.println("✅ Translation rules configured and translator started");
    }

    private void setupTranslatedConsumers() throws Exception {
        // JSON messages consumer
        MessageConsumer<TranslatedMessage> jsonConsumer =
            factory.createConsumer("json-messages", TranslatedMessage.class);
        jsonConsumer.subscribe(message -> {
            System.out.printf("📄 JSON Message: %s\n", message.getPayload().getContent());
            return CompletableFuture.completedFuture(null);
        });

        // Structured messages consumer
        MessageConsumer<TranslatedMessage> structuredConsumer =
            factory.createConsumer("structured-messages", TranslatedMessage.class);
        structuredConsumer.subscribe(message -> {
            System.out.printf("📁 Structured Message: %s\n", message.getPayload().getContent());
            return CompletableFuture.completedFuture(null);
        });

        // Modern format consumer
        MessageConsumer<TranslatedMessage> modernConsumer =
            factory.createConsumer("modern-messages", TranslatedMessage.class);
        modernConsumer.subscribe(message -> {
            System.out.printf("📄 Modern Message: %s\n", message.getPayload().getContent());
            return CompletableFuture.completedFuture(null);
        });
    }

    private void sendMessagesForTranslation() throws Exception {
        MessageProducer<RawMessage> producer =
            factory.createProducer("messages-to-translate", RawMessage.class);

        // Send XML message
        String xmlContent = """
            <order>
                <id>ORDER-001</id>
                <customer>John Doe</customer>
                <amount>99.99</amount>
            </order>
            """;
        producer.send(
            new RawMessage("XML-001", xmlContent),
            Map.of("format", "XML")
        ).join();

        // Send CSV message
        String csvContent = "ORDER-002,Jane Smith,149.99,2025-01-01";
        producer.send(
            new RawMessage("CSV-001", csvContent),
            Map.of("format", "CSV")
        ).join();

        // Send legacy format message
        String legacyContent = "ORD|003|Bob Johnson|199.99|20250101|ACTIVE";
        producer.send(
            new RawMessage("LEGACY-001", legacyContent),
            Map.of("format", "LEGACY")
        ).join();

        System.out.println("📬 Sent messages for translation");
    }
}

```

External System Integration

Database Integration Pattern

```
public class DatabaseIntegrationExample {
    private final QueueFactory factory;
    private final DatabaseIntegrator integrator;

    public void runDatabaseIntegrationExample() throws Exception {
        System.out.println("=== Database Integration Example ===");

        // Setup database change capture
        setupChangeDataCapture();

        // Setup database synchronization
        setupDatabaseSync();

        // Demonstrate data pipeline
        demonstrateDataPipeline();

        Thread.sleep(5000);
        System.out.println("Database integration example completed!");
    }

    private void setupChangeDataCapture() throws Exception {
        System.out.println("📊 Setting up Change Data Capture:");

        // Monitor changes in orders table
        integrator.setupCDC(CDCConfiguration.builder()
            .tableName("orders")
            .operations(Set.of("INSERT", "UPDATE", "DELETE"))
            .outputQueue("order-changes")
            .includeOldValues(true)
            .batchSize(100)
            .pollingIntervalMs(1000)
            .build());

        // Monitor changes in customers table
        integrator.setupCDC(CDCConfiguration.builder()
            .tableName("customers")
            .operations(Set.of("INSERT", "UPDATE"))
            .outputQueue("customer-changes")
            .includeOldValues(false)
            .batchSize(50)
            .pollingIntervalMs(2000)
            .build());

        System.out.println("✅ Change Data Capture configured");
    }

    private void setupDatabaseSync() throws Exception {
        System.out.println("🔄 Setting up Database Synchronization:");

        // Setup consumers for database changes
        MessageConsumer<DatabaseChangeEvent> orderChangesConsumer =
            factory.createConsumer("order-changes", DatabaseChangeEvent.class);
        orderChangesConsumer.subscribe(this::handleOrderChange);

        MessageConsumer<DatabaseChangeEvent> customerChangesConsumer =
            factory.createConsumer("customer-changes", DatabaseChangeEvent.class);
        customerChangesConsumer.subscribe(this::handleCustomerChange);

        System.out.println("✅ Database synchronization consumers started");
    }
}
```

```

private CompletableFuture<Void> handleOrderChange(Message<DatabaseChangeEvent> message) {
    DatabaseChangeEvent change = message.getPayload();

    System.out.printf("📦 Order Change: %s on %s (ID: %s)%n",
        change.getOperation(), change.getTableName(), change.getRecordId());

    // Sync to data warehouse, update search index, etc.
    return syncToExternalSystems(change);
}

private CompletableFuture<Void> handleCustomerChange(Message<DatabaseChangeEvent> message) {
    DatabaseChangeEvent change = message.getPayload();

    System.out.printf("👤 Customer Change: %s on %s (ID: %s)%n",
        change.getOperation(), change.getTableName(), change.getRecordId());

    // Update customer profile cache, CRM system, etc.
    return updateCustomerSystems(change);
}

private CompletableFuture<Void> syncToExternalSystems(DatabaseChangeEvent change) {
    return CompletableFuture.runAsync(() -> {
        // Simulate syncing to external systems
        try {
            Thread.sleep(100);
            System.out.printf("✅ Synced %s to external systems%n", change.getRecordId());
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
        }
    });
}

private CompletableFuture<Void> updateCustomerSystems(DatabaseChangeEvent change) {
    return CompletableFuture.runAsync(() -> {
        // Simulate updating customer systems
        try {
            Thread.sleep(50);
            System.out.printf("✅ Updated customer systems for %s%n", change.getRecordId());
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
        }
    });
}

private void demonstrateDataPipeline() throws Exception {
    System.out.println("🔄 Demonstrating Data Pipeline:");

    // Simulate database changes
    simulateDatabaseChanges();

    // The changes will be captured and processed automatically
    System.out.println("📊 Database changes will be captured and processed automatically");
}

private void simulateDatabaseChanges() {
    // In a real scenario, these would be actual database operations
    System.out.println("📄 Simulating order creation...");
    System.out.println("📄 Simulating customer update...");
    System.out.println("📄 Simulating order status change...");
}

```

1. Implement the message router with your own routing rules
2. Create an aggregator for your specific use case
3. Build message translators for different data formats
4. Set up change data capture for your database tables

Production Deployment

This section provides comprehensive guidance for deploying PeeGeeQ in production environments, covering deployment strategies, infrastructure setup, monitoring, and operational best practices.

Deployment Strategies

Blue-Green Deployment

```
# blue-green-deployment.yml
apiVersion: v1
kind: Namespace
metadata:
  name: peegeeq-production
---
# Blue Environment (Current Production)
apiVersion: apps/v1
kind: Deployment
metadata:
  name: peegeeq-blue
  namespace: peegeeq-production
  labels:
    app: peegeeq
    version: blue
    environment: production
spec:
  replicas: 3
  selector:
    matchLabels:
      app: peegeeq
      version: blue
  template:
    metadata:
      labels:
        app: peegeeq
        version: blue
    spec:
      containers:
        - name: peegeeq
          image: peegeeq:v1.2.0
          ports:
            - containerPort: 8080
          env:
            - name: SPRING_PROFILES_ACTIVE
              value: "production"
            - name: PEEGEEQ_DB_HOST
              valueFrom:
                secretKeyRef:
                  name: peegeeq-secrets
                  key: db-host
            - name: PEEGEEQ_DB_PASSWORD
              valueFrom:
                secretKeyRef:
                  name: peegeeq-secrets
                  key: db-password
```

```

resources:
  requests:
    memory: "1Gi"
    cpu: "500m"
  limits:
    memory: "2Gi"
    cpu: "1000m"
livenessProbe:
  httpGet:
    path: /actuator/health
    port: 8080
  initialDelaySeconds: 60
  periodSeconds: 30
readinessProbe:
  httpGet:
    path: /actuator/health/readiness
    port: 8080
  initialDelaySeconds: 30
  periodSeconds: 10
---
# Green Environment (New Version)
apiVersion: apps/v1
kind: Deployment
metadata:
  name: peegeeq-green
  namespace: peegeeq-production
  labels:
    app: peegeeq
    version: green
    environment: production
spec:
  replicas: 0 # Initially scaled to 0
  selector:
    matchLabels:
      app: peegeeq
      version: green
  template:
    metadata:
      labels:
        app: peegeeq
        version: green
    spec:
      containers:
        - name: peegeeq
          image: peegeeq:v1.3.0 # New version
          ports:
            - containerPort: 8080
          env:
            - name: SPRING_PROFILES_ACTIVE
              value: "production"
            - name: PEEGEEQ_DB_HOST
              valueFrom:
                secretKeyRef:
                  name: peegeeq-secrets
                  key: db-host
            - name: PEEGEEQ_DB_PASSWORD
              valueFrom:
                secretKeyRef:
                  name: peegeeq-secrets
                  key: db-password
          resources:
            requests:
              memory: "1Gi"
              cpu: "500m"
            limits:
              memory: "2Gi"

```

```

      cpu: "1000m"
livenessProbe:
  httpGet:
    path: /actuator/health
    port: 8080
  initialDelaySeconds: 60
  periodSeconds: 30
readinessProbe:
  httpGet:
    path: /actuator/health/readiness
    port: 8080
  initialDelaySeconds: 30
  periodSeconds: 10
---
# Service (switches between blue and green)
apiVersion: v1
kind: Service
metadata:
  name: peegeeq-service
  namespace: peegeeq-production
spec:
  selector:
    app: peegeeq
    version: blue # Initially points to blue
  ports:
  - port: 80
    targetPort: 8080
  type: LoadBalancer

```

Canary Deployment

```

# canary-deployment.yml
apiVersion: argoproj.io/v1alpha1
kind: Rollout
metadata:
  name: peegeeq-rollout
  namespace: peegeeq-production
spec:
  replicas: 10
  strategy:
    canary:
      steps:
      - setWeight: 10 # 10% traffic to new version
      - pause: {duration: 5m}
      - setWeight: 25 # 25% traffic to new version
      - pause: {duration: 10m}
      - setWeight: 50 # 50% traffic to new version
      - pause: {duration: 15m}
      - setWeight: 75 # 75% traffic to new version
      - pause: {duration: 10m}
      # Automatic promotion to 100% if no issues
    canaryService: peegeeq-canary
    stableService: peegeeq-stable
  trafficRouting:
    istio:
      virtualService:
        name: peegeeq-vs
      destinationRule:
        name: peegeeq-dr
  analysis:
    templates:
    - templateName: success-rate
  args:

```



```

- name: service-name
  value: peegeeq-canary
- name: prometheus-server
  value: http://prometheus:9090
selector:
  matchLabels:
    app: peegeeq
template:
  metadata:
    labels:
      app: peegeeq
  spec:
    containers:
      - name: peegeeq
        image: peegeeq:v1.3.0
        ports:
          - containerPort: 8080
        env:
          - name: SPRING_PROFILES_ACTIVE
            value: "production"
        resources:
          requests:
            memory: "1Gi"
            cpu: "500m"
          limits:
            memory: "2Gi"
            cpu: "1000m"
---
# Analysis Template for Canary
apiVersion: argoproj.io/v1alpha1
kind: AnalysisTemplate
metadata:
  name: success-rate
  namespace: peegeeq-production
spec:
  args:
    - name: service-name
    - name: prometheus-server
  metrics:
    - name: success-rate
      interval: 2m
      count: 5
      successCondition: result[0] >= 0.95
      failureLimit: 2
      provider:
        prometheus:
          address: "{{args.prometheus-server}}"
          query: |
            sum(rate(http_requests_total{service="{{args.service-name}}",status!~"5.."}[2m])) /
            sum(rate(http_requests_total{service="{{args.service-name}}"}[2m]))
    - name: error-rate
      interval: 2m
      count: 5
      successCondition: result[0] <= 0.05
      failureLimit: 2
      provider:
        prometheus:
          address: "{{args.prometheus-server}}"
          query: |
            sum(rate(peegeeq_errors_total{service="{{args.service-name}}"}[2m])) /
            sum(rate(peegeeq_messages_total{service="{{args.service-name}}"}[2m]))

```

Infrastructure as Code

Terraform Infrastructure Setup

```
# main.tf - Production Infrastructure
terraform {
  required_version = ">= 1.0"
  required_providers {
    aws = {
      source  = "hashicorp/aws"
      version = "~> 5.0"
    }
    kubernetes = {
      source  = "hashicorp/kubernetes"
      version = "~> 2.0"
    }
  }
}

provider "aws" {
  region = var.aws_region
}

# VPC and Networking
module "vpc" {
  source = "terraform-aws-modules/vpc/aws"

  name = "peegeeq-production-vpc"
  cidr = "10.0.0/16"

  azs          = ["${var.aws_region}a", "${var.aws_region}b", "${var.aws_region}c"]
  private_subnets = ["10.0.1.0/24", "10.0.2.0/24", "10.0.3.0/24"]
  public_subnets  = ["10.0.101.0/24", "10.0.102.0/24", "10.0.103.0/24"]

  enable_nat_gateway = true
  enable_vpn_gateway = true

  tags = {
    Environment = "production"
    Application = "peegeeq"
  }
}

# RDS PostgreSQL Cluster
resource "aws_rds_cluster" "peegeeq_db" {
  cluster_identifier      = "peegeeq-production-cluster"
  engine                  = "aurora-postgresql"
  engine_version          = "15.4"
  database_name           = "peegeeq_prod"
  master_username         = "peegeeq_admin"
  master_password         = var.db_password

  vpc_security_group_ids = [aws_security_group.rds.id]
  db_subnet_group_name   = aws_db_subnet_group.peegeeq.name

  backup_retention_period = 30
  preferred_backup_window = "03:00-04:00"
  preferred_maintenance_window = "sun:04:00-sun:05:00"

  storage_encrypted = true
  kms_key_id        = aws_kms_key.peegeeq.arn

  enabled_cloudwatch_logs_exports = ["postgresql"]

  tags = {
    Environment = "production"
    Application = "peegeeq"
  }
}
```

```

    }
}

resource "aws_rds_cluster_instance" "peegeeq_db_instances" {
  count            = 3
  identifier       = "peegeeq-production-${count.index}"
  cluster_identifier = aws_rds_cluster.peegeeq_db.id
  instance_class   = "db.r6g.xlarge"
  engine           = aws_rds_cluster.peegeeq_db.engine
  engine_version   = aws_rds_cluster.peegeeq_db.engine_version

  performance_insights_enabled = true
  monitoring_interval          = 60
  monitoring_role_arn          = aws_iam_role.rds_monitoring.arn

  tags = {
    Environment = "production"
    Application  = "peegeeq"
  }
}

```

```

# EKS Cluster
module "eks" {
  source = "terraform-aws-modules/eks/aws"

```

```

  cluster_name     = "peegeeq-production"
  cluster_version  = "1.28"

```

```

  vpc_id           = module.vpc.vpc_id
  subnet_ids       = module.vpc.private_subnets

```

```

  cluster_endpoint_private_access = true
  cluster_endpoint_public_access  = true

```

```

  cluster_addons = {
    coredns = {
      resolve_conflicts = "OVERWRITE"
    }
    kube-proxy = {}
    vpc-cni = {
      resolve_conflicts = "OVERWRITE"
    }
    aws-ebs-csi-driver = {}
  }
}

```

```

eks_managed_node_groups = {
  peegeeq_nodes = {
    min_size     = 3
    max_size     = 10
    desired_size = 6

    instance_types = ["c5.xlarge"]
    capacity_type  = "ON_DEMAND"

    k8s_labels = {
      Environment = "production"
      Application  = "peegeeq"
    }

    update_config = {
      max_unavailable_percentage = 25
    }
  }
}

```

```

tags = {

```

```

    Environment = "production"
    Application = "peegeeq"
}
}

# Security Groups
resource "aws_security_group" "rds" {
    name_prefix = "peegeeq-rds-"
    vpc_id      = module.vpc.vpc_id

    ingress {
        from_port = 5432
        to_port   = 5432
        protocol  = "tcp"
        cidr_blocks = [module.vpc.vpc_cidr_block]
    }

    egress {
        from_port = 0
        to_port   = 0
        protocol  = "-1"
        cidr_blocks = ["0.0.0.0/0"]
    }

    tags = {
        Name = "peegeeq-rds-sg"
        Environment = "production"
    }
}

# KMS Key for Encryption
resource "aws_kms_key" "peegeeq" {
    description = "PeeGeeQ Production Encryption Key"
    deletion_window_in_days = 7

    tags = {
        Environment = "production"
        Application = "peegeeq"
    }
}

resource "aws_kms_alias" "peegeeq" {
    name = "alias/peegeeq-production"
    target_key_id = aws_kms_key.peegeeq.key_id
}

# CloudWatch Log Groups
resource "aws_cloudwatch_log_group" "peegeeq_app" {
    name = "/aws/eks/peegeeq-production/application"
    retention_in_days = 90

    tags = {
        Environment = "production"
        Application = "peegeeq"
    }
}

# S3 Bucket for Backups
resource "aws_s3_bucket" "peegeeq_backups" {
    bucket = "peegeeq-production-backups-${random_id.bucket_suffix.hex}"

    tags = {
        Environment = "production"
        Application = "peegeeq"
    }
}

```

```

resource "aws_s3_bucket_versioning" "peegeeq_backups" {
  bucket = aws_s3_bucket.peegeeq_backups.id
  versioning_configuration {
    status = "Enabled"
  }
}

resource "aws_s3_bucket_encryption" "peegeeq_backups" {
  bucket = aws_s3_bucket.peegeeq_backups.id

  server_side_encryption_configuration {
    rule {
      apply_server_side_encryption_by_default {
        kms_master_key_id = aws_kms_key.peegeeq.arn
        sse_algorithm      = "aws:kms"
      }
    }
  }
}

resource "random_id" "bucket_suffix" {
  byte_length = 4
}

# Outputs
output "cluster_endpoint" {
  description = "Endpoint for EKS control plane"
  value       = module.eks.cluster_endpoint
}

output "cluster_security_group_id" {
  description = "Security group ids attached to the cluster control plane"
  value       = module.eks.cluster_security_group_id
}

output "rds_cluster_endpoint" {
  description = "RDS cluster endpoint"
  value       = aws_rds_cluster.peegeeq_db.endpoint
}

output "rds_cluster_reader_endpoint" {
  description = "RDS cluster reader endpoint"
  value       = aws_rds_cluster.peegeeq_db.reader_endpoint
}

```

Automated Deployment Pipeline

GitLab CI/CD Pipeline

```

# .gitlab-ci.yml
stages:
  - build
  - test
  - security-scan
  - deploy-staging
  - integration-tests
  - deploy-production
  - post-deployment

variables:
  DOCKER_REGISTRY: "your-registry.com"
  APP_NAME: "peegeeq"

```

```

KUBECONFIG_FILE: $KUBECONFIG_PRODUCTION

# Build Stage
build:
  stage: build
  image: docker:20.10.16
  services:
    - docker:20.10.16-dind
  before_script:
    - docker login -u $CI_REGISTRY_USER -p $CI_REGISTRY_PASSWORD $CI_REGISTRY
  script:
    - docker build -t $DOCKER_REGISTRY/$APP_NAME:$CI_COMMIT_SHA .
    - docker build -t $DOCKER_REGISTRY/$APP_NAME:latest .
    - docker push $DOCKER_REGISTRY/$APP_NAME:$CI_COMMIT_SHA
    - docker push $DOCKER_REGISTRY/$APP_NAME:latest
  only:
    - main
    - develop

# Unit Tests
unit-tests:
  stage: test
  image: openjdk:21-jdk
  script:
    - ./mvnw clean test
    - ./mvnw jacoco:report
  artifacts:
    reports:
      junit:
        - "**/target/surefire-reports/TEST-*.xml"
    coverage_report:
      coverage_format: jacoco
      path: target/site/jacoco/jacoco.xml
  coverage: '/Total.*?([0-9]{1,3})%/'

# Integration Tests
integration-tests:
  stage: test
  image: openjdk:21-jdk
  services:
    - postgres:15
  variables:
    POSTGRES_DB: peegeeq_test
    POSTGRES_USER: test_user
    POSTGRES_PASSWORD: test_password
    SPRING_PROFILES_ACTIVE: test
  script:
    - ./mvnw clean verify -Pintegration-tests
  artifacts:
    reports:
      junit:
        - "**/target/failsafe-reports/TEST-*.xml"

# Security Scanning
security-scan:
  stage: security-scan
  image: owasp/zap2docker-stable
  script:
    - mkdir -p /zap/wrk/
    - /zap/zap-baseline.py -t http://localhost:8080 -g gen.conf -r testreport.html
  artifacts:
    reports:
      junit: testreport.xml
    paths:
      - testreport.html
  allow_failure: true

```

```

# Container Security Scan
container-scan:
  stage: security-scan
  image: aquasec/trivy:latest
  script:
    - trivy image --exit-code 0 --severity HIGH,CRITICAL $DOCKER_REGISTRY/$APP_NAME:$CI_COMMIT_SHA
  allow_failure: true

# Deploy to Staging
deploy-staging:
  stage: deploy-staging
  image: bitnami/kubectl:latest
  environment:
    name: staging
    url: https://peegeeq-staging.company.com
  before_script:
    - echo $KUBECONFIG_STAGING | base64 -d > kubeconfig
    - export KUBECONFIG=kubeconfig
  script:
    - kubectl set image deployment/peegeeq-staging peegeeq=$DOCKER_REGISTRY/$APP_NAME:$CI_COMMIT_SHA -n peegeeq-staging
    - kubectl rollout status deployment/peegeeq-staging -n peegeeq-staging --timeout=300s
    - kubectl get pods -n peegeeq-staging
  only:
    - main

# Staging Integration Tests
staging-tests:
  stage: integration-tests
  image: openjdk:21-jdk
  variables:
    TEST_ENVIRONMENT: staging
    BASE_URL: https://peegeeq-staging.company.com
  script:
    - ./mvnw clean test -Pstaging-tests -Dtest.base.url=$BASE_URL
  artifacts:
    reports:
      junit:
        - "**/target/surefire-reports/TEST-*.xml"
  only:
    - main

# Production Deployment (Manual)
deploy-production:
  stage: deploy-production
  image: bitnami/kubectl:latest
  environment:
    name: production
    url: https://peegeeq.company.com
  before_script:
    - echo $KUBECONFIG_PRODUCTION | base64 -d > kubeconfig
    - export KUBECONFIG=kubeconfig
  script:
    # Blue-Green Deployment
    - |
      # Check current active version
      CURRENT_VERSION=$(kubectl get service peegeeq-service -n peegeeq-production -o jsonpath='{.spec.selector.version}')
      if [ "$CURRENT_VERSION" = "blue" ]; then
        NEW_VERSION="green"
        OLD_VERSION="blue"
      else
        NEW_VERSION="blue"
        OLD_VERSION="green"
      fi

    echo "Deploying to $NEW_VERSION environment"

```

```

# Update the new version deployment
kubectl set image deployment/peegeeq-$NEW_VERSION peegeeq=$DOCKER_REGISTRY/$APP_NAME:$CI_COMMIT_SHA -n peegeeq-prod
kubectl scale deployment peegeeq-$NEW_VERSION --replicas=3 -n peegeeq-production
kubectl rollout status deployment/peegeeq-$NEW_VERSION -n peegeeq-production --timeout=600s

# Health check
kubectl wait --for=condition=ready pod -l app=peegeeq,version=$NEW_VERSION -n peegeeq-production --timeout=300s

# Switch traffic to new version
kubectl patch service peegeeq-service -n peegeeq-production -p '{"spec":{"selector":{"version":"'${NEW_VERSION}'"}}}'

echo "Traffic switched to $NEW_VERSION"

# Wait and then scale down old version
sleep 60
kubectl scale deployment peegeeq-$OLD_VERSION --replicas=0 -n peegeeq-production

echo "Deployment completed successfully"
when: manual
only:
  - main

# Post-Deployment Health Checks
health-check:
  stage: post-deployment
  image: curlimages/curl:latest
  script:
    - |
      echo "Performing post-deployment health checks..."

      # Wait for service to be ready
      sleep 30

      # Health check
      curl -f https://peegeeq.company.com/actuator/health || exit 1

      # Readiness check
      curl -f https://peegeeq.company.com/actuator/health/readiness || exit 1

      # Basic functionality test
      curl -f https://peegeeq.company.com/api/v1/health || exit 1

      echo "All health checks passed!"
  only:
    - main
  when: on_success

# Rollback (Manual)
rollback-production:
  stage: deploy-production
  image: bitnami/kubectl:latest
  environment:
    name: production
    url: https://peegeeq.company.com
  before_script:
    - echo $KUBECONFIG_PRODUCTION | base64 -d > kubeconfig
    - export KUBECONFIG=kubeconfig
  script:
    - |
      echo "Rolling back production deployment..."

      # Get current and previous versions
      CURRENT_VERSION=$(kubectl get service peegeeq-service -n peegeeq-production -o jsonpath='{.spec.selector.version}')
      if [ "$CURRENT_VERSION" = "blue" ]; then
        ROLLBACK_VERSION="green"

```



```

else
    ROLLBACK_VERSION="blue"
fi

echo "Rolling back to $ROLLBACK_VERSION"

# Scale up rollback version
kubectl scale deployment peegeeq-$ROLLBACK_VERSION --replicas=3 -n peegeeq-production
kubectl rollout status deployment/peegeeq-$ROLLBACK_VERSION -n peegeeq-production --timeout=300s

# Switch traffic back
kubectl patch service peegeeq-service -n peegeeq-production -p '{"spec":{"selector":{"version":"'${ROLLBACK_VERSION}'

# Scale down current version
kubectl scale deployment peegeeq-$CURRENT_VERSION --replicas=0 -n peegeeq-production

echo "Rollback completed successfully"
when: manual
only:
  - main

```

Try This Now:

1. Set up a blue-green deployment pipeline for your environment
2. Configure infrastructure as code with Terraform
3. Implement automated health checks and rollback procedures
4. Set up comprehensive monitoring and alerting for production

Advanced Features Summary

The advanced features covered in this section provide enterprise-grade capabilities for production deployments:

Key Enterprise Features

- **Advanced Messaging Patterns:** High-frequency messaging, message routing by headers
- **Message Priority Handling:** Sophisticated priority-based processing
- **Enhanced Error Handling:** Retry strategies, circuit breakers, dead letter queues
- **System Properties Configuration:** Runtime tuning for performance and reliability
- **Security Configuration:** SSL/TLS, credential management, compliance features
- **Consumer Groups & Load Balancing:** Scalable message processing with fault tolerance
- **Service Discovery & Federation:** Multi-instance management with Consul integration
- **REST API & HTTP Integration:** HTTP-based queue operations and management
- **Production Readiness:** Health checks, circuit breakers, comprehensive metrics
- **Performance Optimization:** Connection pooling, batch processing, concurrent processing
- **Integration Patterns:** Request-reply, publish-subscribe, message routing, CQRS, Saga patterns

Production Deployment Checklist

- ☐ **Database Setup:** PostgreSQL cluster with replication
- ☐ **Connection Pooling:** Optimized pool settings for workload
- ☐ **SSL/TLS:** Encrypted database connections
- ☐ **Monitoring:** Prometheus + Grafana dashboards configured
- ☐ **Alerting:** Critical alerts configured and tested

- ☐ **Health Checks:** All health checks passing
- ☐ **Circuit Breakers:** Configured with appropriate thresholds
- ☐ **Dead Letter Queue:** DLQ monitoring and reprocessing procedures
- ☐ **Backup Strategy:** Database backup and recovery procedures
- ☐ **Security:** Network security, authentication, and authorization
- ☐ **Load Testing:** Performance validated under expected load
- ☐ **Disaster Recovery:** Failover procedures documented and tested

For detailed implementation examples and comprehensive coverage of all advanced features, refer to the individual example classes mentioned throughout this section.

License

PeeGeeQ is licensed under the Apache License, Version 2.0. See the `LICENSE` file for details.

Ready to get started? Run the self-contained demo now:

```
▶ ./run-self-contained-demo.sh    # Unix/Linux/macOS
run-self-contained-demo.bat      # Windows
```