


provar

Started	24 Jan 2025, 14:07:03
Ended	24 Jan 2025, 14:07:48
Duration (mm:ss)	00:45.375


Passed	1
Failed	0
Skipped	0

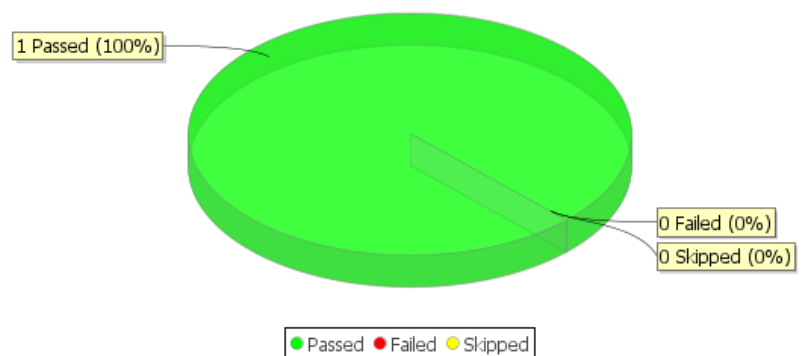

tests	successful
API	successful
Demo Utterance Intent Match API.testcase	successful
Iteration 1	successful
Iteration 2	successful
Iteration 3	successful
Iteration 4	successful
Iteration 5	successful
Iteration 6	successful
Iteration 7	successful
Iteration 8	successful
Iteration 9	successful
Iteration 10	successful


## Iteration 1


### Summary

Started 24 Jan 2025, 14:07:03  
Ended 24 Jan 2025, 14:07:09  
Duration (mm:ss) 00:06.017  
Outcome  successful

### Output

#### Salesforce Connect: Admin (Test)

 14:07:03(00:00.455)

 Connection details. Connection name: Admin, result name: Admin, result scope:

Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callbackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

 Create object id log file.

Absolute path: C:\Users\mrda\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

 Access Token refreshed successfully.

 Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

 Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

 Opening SOAP connection


Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

 Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

 Successfully connected to Salesforce as Admin


#### Create Object: OpenAI\_Test\_\_c=>OpenAITestId


 14:07:06(00:03.406)


 Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

 Setting fields:


 =Field=> Intent\_\_c = Password Reset

 =Field=> Utterance\_\_c = I forgot my password; can you help me reset it?


 OpenAI Test created successfully. Object Id: a05d2000004K2mXAAS, Result Name: OpenAITestId

 Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2mXAAS


#### Call Callable Utterance Intent Match


 14:07:08(00:05.017)


##### Callable Utterance Intent Match

 14:07:08(00:05.018)


##### Set Values: Prompt\_Template


 14:07:08(00:05.019)

 Configuration: ValueScope:Test

 Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

##### Set Values: Prompt

 14:07:08(00:05.035)

 Configuration: ValueScope:Test

① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I forgot my password; can you help me reset it? Input Intent: Password Reset

## ● Set Values: OpenAI\_Chat\_Request\_Body\_Template

④ 14:07:08(00:05.046)

⚙ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "%PROMPT %"}], "temperature":0.7}

## ● Set Values: OpenAI\_Chat\_Request\_Body

④ 14:07:08(00:05.054)

⚙ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I forgot my password; can you help me reset it? Input Intent: Password Reset"}], "temperature":0.7}

## ● Web Connect: OpenAI\_Platform\_Connection

④ 14:07:08(00:05.062)

① Connecting to restservice. Address: https://api.openai.com/v1

① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1:authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1

① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test

## ● Web Request (REST): ⇒OpenAI\_Chat\_Response

④ 14:07:08(00:05.078)

① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: https://api.openai.com/v1/chat/completions

① Sending body. Length: 688

① Reading response. Content Type: application/json, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: OpenAI\_Chat\_Response

① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status

## ● Set Values: Response\_Status\_Code

④ 14:07:09(00:06.121)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Code to 200

## ● Set Values: Response\_Status\_Message

④ 14:07:09(00:06.129)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Message to OK

## ● Set Values: Utterance\_Intent\_Match

④ 14:07:09(00:06.134)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to <null>

## ● Set Values: Response\_Error\_Message

④ 14:07:09(00:06.140)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Error\_Message to <null>

## ● If: {Response\_Status\_Code = 200}

④ 14:07:09(00:06.146)

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2mXAAS

⚙ Object deleted successfully. Id: a05d2000004K2mXAAS

## ● Then

④ 14:07:09(00:06.149)

### ● Set Values: Utterance\_Intent\_Match

④ 14:07:09(00:06.151)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to True

✳ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

ℹ RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection

✳ Closing Salesforce Connection because it is no longer being used. Name: Admin

✳ Shutting down Soap Connections. logFilePath: Admin-objectids.log

✳ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2mXAAS

✳ Object deleted successfully. Id: a05d2000004K2mXAAS

ℹ Salesforce Connection handled successfully. Name: Admin

ℹ Processing row number 2 from the Parameter Value Source.

✳ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

✳ Closing Salesforce Connection because it is no longer being used. Name: Admin

✳ Shutting down Soap Connections. logFilePath: Admin-objectids.log

✳ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2mXAAS

✳ Object deleted successfully. Id: a05d2000004K2mXAAS

## ● Update Object: OpenAI\_Test\_\_c = a05d2000004K2mXAAS

⌚ 14:07:09(00:06.165)

ℹ Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2mXAAS, field count: 4

ℹ Setting fields:

ℹ =Field=> Utterance\_Intent\_Match\_\_c = True

ℹ =Field=> Response\_Status\_Code\_\_c = 200

ℹ =Field=> Response\_Status\_Message\_\_c = OK

ℹ =Field=> Response\_Error\_Message\_\_c = <null>

📋 OpenAI Test updated successfully. Object Id: a05d2000004K2mXAAS

## 📁 Iteration 2

### Summary

Started	24 Jan 2025, 14:07:12
Ended	24 Jan 2025, 14:07:16
Duration (mm:ss)	00:03.757
Outcome	● successful

### Output

#### ● Salesforce Connect: Admin (Test)

⌚ 14:07:12(00:09.608)

✳ Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf.environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIE/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callbackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

✳ Create object id log file.

Absolute path: C:\Users\mrda\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

✳ Access Token refreshed successfully.

✳ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

✳ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

✳ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

✦ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

① Successfully connected to Salesforce as Admin

● Create Object: OpenAI\_Test\_\_c=>OpenAITestId ① 14:07:14(00:11.583)

① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

① Setting fields:

① =Field=> Intent\_\_c = Password Reset

① =Field=> Utterance\_\_c = I'm really frustrated with this password issue. Help! #

📋 OpenAI Test created successfully. Object Id: a05d2000004K2pIAAC, Result Name: OpenAITestId

① Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2pIAAC

● Call Callable Utterance Intent Match ① 14:07:15(00:12.104)

● Callable Utterance Intent Match ① 14:07:15(00:12.105)

● Set Values: Prompt\_Template ① 14:07:15(00:12.105)

✦ Configuration: ValueScope:Test

① Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

● Set Values: Prompt ① 14:07:15(00:12.116)

✦ Configuration: ValueScope:Test

① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I'm really frustrated with this password issue. Help! # Input Intent: Password Reset

● Set Values: OpenAI\_Chat\_Request\_Body\_Template ① 14:07:15(00:12.131)

✦ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}

● Set Values: OpenAI\_Chat\_Request\_Body ① 14:07:15(00:12.139)

✦ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I'm really frustrated with this password issue. Help! # Input Intent: Password Reset"}], "temperature": 0.7}

● Web Connect: OpenAI\_Platform\_Connection ① 14:07:15(00:12.148)

① Connecting to restservice. Address: https://api.openai.com/v1

① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1

① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test

● Web Request (REST): =>OpenAI\_Chat\_Response ① 14:07:15(00:12.157)

① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: https://api.openai.com/v1/chat/completions

① Sending body. Length: 697

① Reading response. Content Type: application/json, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: OpenAI\_Chat\_Response

① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status

- Set Values: Response\_Status\_Code 14:07:15(00:12.693)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Code to 200
- Set Values: Response\_Status\_Message 14:07:15(00:12.701)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Message to OK
- Set Values: Utterance\_Intent\_Match 14:07:15(00:12.706)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to <null>
- Set Values: Response\_Error\_Message 14:07:15(00:12.714)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Error\_Message to <null>
- If: {Response\_Status\_Code = 200} 14:07:15(00:12.720)
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2pIAAC
  - ⚙ Object deleted successfully. Id: a05d2000004K2pIAAC
- Then 14:07:15(00:12.723)
  - Set Values: Utterance\_Intent\_Match 14:07:15(00:12.724)
    - ⚙ Configuration: ValueScope:Test
    - ① Successfully set Utterance\_Intent\_Match to True
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
    - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
    - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2pIAAC
    - ⚙ Object deleted successfully. Id: a05d2000004K2pIAAC
  - ① Salesforce Connection handled successfully. Name: Admin
  - ① Processing row number 3 from the Parameter Value Source.
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
    - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
    - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2pIAAC
    - ⚙ Object deleted successfully. Id: a05d2000004K2pIAAC
- Update Object: OpenAI\_Test\_\_c = a05d2000004K2pIAAC 14:07:15(00:12.738)
  - ① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2pIAAC, field count: 4
  - ① Setting fields:
    - ① =Field=> Utterance\_Intent\_Match\_\_c = True
    - ① =Field=> Response\_Status\_Code\_\_c = 200
    - ① =Field=> Response\_Status\_Message\_\_c = OK
    - ① =Field=> Response\_Error\_Message\_\_c = <null>
  - 📋 OpenAI Test updated successfully. Object Id: a05d2000004K2pIAAC

## Summary

Started 24 Jan 2025, 14:07:17  
Ended 24 Jan 2025, 14:07:21  
Duration (mm:ss) 00:03.876  
Outcome ● successful

## Output

### ● Salesforce Connect: Admin (Test)

🕒 14:07:17(00:14.020)

⚙️ Connection details. Connection name: Admin, result name: Admin, result scope:

Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

⚙️ Create object id log file.

Absolute path: C:\Users\mrdai\AppData\Local\Temp\ProvarTestArtifacts\11560950187299776217763940171097300\Admin-objectids.log

⚙️ Access Token refreshed successfully.

⚙️ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

⚙️ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

⚙️ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

⚙️ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

🔔 Successfully connected to Salesforce as Admin

### ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

🕒 14:07:19(00:16.204)

🔔 Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

🔔 Setting fields:

🔔 =Field=> Intent\_\_c = Password Reset

🔔 =Field=> Utterance\_\_c = Could you guide me through the password reset process?

📋 OpenAI Test created successfully. Object Id: a05d2000004K1QhAAK, Result Name: OpenAITestId

🔔 Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K1QhAAK

### ● Call Callable Utterance Intent Match

🕒 14:07:19(00:16.765)

#### ● Callable Utterance Intent Match

🕒 14:07:19(00:16.767)

#### ● Set Values: Prompt\_Template

🕒 14:07:19(00:16.768)

⚙️ Configuration: ValueScope:Test

🔔 Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

#### ● Set Values: Prompt

🕒 14:07:19(00:16.780)

⚙️ Configuration: ValueScope:Test

🔔 Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Could you guide me through the password reset process? Input Intent: Password Reset



- **Set Values: OpenAI\_Chat\_Request\_Body\_Template** ⌚ 14:07:19(00:16.792)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}
- **Set Values: OpenAI\_Chat\_Request\_Body** ⌚ 14:07:19(00:16.799)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Could you guide me through the password reset process? Input Intent: Password Reset"}], "temperature": 0.7}
- **Web Connect: OpenAI\_Platform\_Connection** ⌚ 14:07:19(00:16.808)
  - ① Connecting to restservice. Address: https://api.openai.com/v1
  - ① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1
  - ① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test
- **Web Request (REST): ⇒ OpenAI\_Chat\_Response** ⌚ 14:07:19(00:16.815)
  - ① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON
  - ① Connecting to website. Address: https://api.openai.com/v1/chat/completions
  - ① Sending body. Length: 695
  - ① Reading response. Content Type: application/json, Encoding: null
  - ① Parsing JSON response.
  - ① REST Response stored successfully. Name: OpenAI\_Chat\_Response
  - ① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status
- **Set Values: Response\_Status\_Code** ⌚ 14:07:20(00:17.184)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Code to 200
- **Set Values: Response\_Status\_Message** ⌚ 14:07:20(00:17.192)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Message to OK
- **Set Values: Utterance\_Intent\_Match** ⌚ 14:07:20(00:17.200)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to <null>
- **Set Values: Response\_Error\_Message** ⌚ 14:07:20(00:17.206)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Error\_Message to <null>
- **If: {Response\_Status\_Code = 200}** ⌚ 14:07:20(00:17.213)
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1QhAAK
  - ⚙ Object deleted successfully. Id: a05d2000004K1QhAAK
- **Then** ⌚ 14:07:20(00:17.216)
  - **Set Values: Utterance\_Intent\_Match** ⌚ 14:07:20(00:17.217)
    - ⚙ Configuration: ValueScope:Test
    - ① Successfully set Utterance\_Intent\_Match to True
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin



✳ Shutting down Soap Connections. logFilePath: Admin-objectids.log

✳ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1QhAAK

✳ Object deleted successfully. Id: a05d2000004K1QhAAK

① Salesforce Connection handled successfully. Name: Admin

① Processing row number 4 from the Parameter Value Source.

✳ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

✳ Closing Salesforce Connection because it is no longer being used. Name: Admin

✳ Shutting down Soap Connections. logFilePath: Admin-objectids.log

✳ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1QhAAK

✳ Object deleted successfully. Id: a05d2000004K1QhAAK

## ● Update Object: OpenAI\_Test\_\_c = a05d2000004K1QhAAK

🕒 14:07:20(00:17.232)

① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K1QhAAK, field count: 4

① Setting fields:

① =Field=> Utterance\_Intent\_Match\_\_c = True

① =Field=> Response\_Status\_Code\_\_c = 200

① =Field=> Response\_Status\_Message\_\_c = OK

① =Field=> Response\_Error\_Message\_\_c = <null>

📋 OpenAI Test updated successfully. Object Id: a05d2000004K1QhAAK

## 📁 Iteration 4

### Summary

Started	24 Jan 2025, 14:07:21
Ended	24 Jan 2025, 14:07:24
Duration (mm:ss)	00:03.257
Outcome	● successful

### Output

## ● Salesforce Connect: Admin (Test)

🕒 14:07:21(00:18.457)

✳ Connection details. Connection name: Admin, result name: Admin, result scope:

Test, urlString: sf.environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-

dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/

id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl}

environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

✳ Create object id log file.

Absolute path: C:\Users\mrdai\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

✳ Access Token refreshed successfully.

✳ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

✳ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

✳ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

✳ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

① Successfully connected to Salesforce as Admin

## ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

⌚ 14:07:23(00:20.463)

① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

① Setting fields:

① =Field=> Intent\_\_c = Password Reset

① =Field=> Utterance\_\_c = I'm excited to finally reset my password! #

📋 OpenAI Test created successfully. Object Id: a05d2000004K2rNAAS, Result Name: OpenAITestId

① Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2rNAAS

## ● Call Callable Utterance Intent Match

⌚ 14:07:24(00:20.976)

### ● Callable Utterance Intent Match

⌚ 14:07:24(00:20.977)

#### ● Set Values: Prompt\_Template

⌚ 14:07:24(00:20.977)

⚙ Configuration: ValueScope:Test

① Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

#### ● Set Values: Prompt

⌚ 14:07:24(00:20.988)

⚙ Configuration: ValueScope:Test

① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I'm excited to finally reset my password! # Input Intent: Password Reset

#### ● Set Values: OpenAI\_Chat\_Request\_Body\_Template

⌚ 14:07:24(00:21.002)

⚙ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "%PROMPT %"}], "temperature":0.7}

#### ● Set Values: OpenAI\_Chat\_Request\_Body

⌚ 14:07:24(00:21.010)

⚙ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I'm excited to finally reset my password! # Input Intent: Password Reset"}], "temperature":0.7}

#### ● Web Connect: OpenAI\_Platform\_Connection

⌚ 14:07:24(00:21.020)

① Connecting to restservice. Address: https://api.openai.com/v1

① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1

① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test

#### ● Web Request (REST): =>OpenAI\_Chat\_Response

⌚ 14:07:24(00:21.028)

① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: https://api.openai.com/v1/chat/completions

① Sending body. Length: 685

① Reading response. Content Type: application/json, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: OpenAI\_Chat\_Response

① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status

#### ● Set Values: Response\_Status\_Code

⌚ 14:07:24(00:21.411)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Code to 200

- Set Values: Response\_Status\_Message ⌚ 14:07:24(00:21.417)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Message to OK
- Set Values: Utterance\_Intent\_Match ⌚ 14:07:24(00:21.422)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to <null>
- Set Values: Response\_Error\_Message ⌚ 14:07:24(00:21.427)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Error\_Message to <null>
- If: {Response\_Status\_Code = 200} ⌚ 14:07:24(00:21.433)
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2rNAAS
  - ⚙ Object deleted successfully. Id: a05d2000004K2rNAAS
- Then ⌚ 14:07:24(00:21.436)
  - Set Values: Utterance\_Intent\_Match ⌚ 14:07:24(00:21.437)
    - ⚙ Configuration: ValueScope:Test
    - ① Successfully set Utterance\_Intent\_Match to True
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
    - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
    - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2rNAAS
    - ⚙ Object deleted successfully. Id: a05d2000004K2rNAAS
  - ① Salesforce Connection handled successfully. Name: Admin
  - ① Processing row number 5 from the Parameter Value Source.
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
    - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
    - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2rNAAS
    - ⚙ Object deleted successfully. Id: a05d2000004K2rNAAS
- Update Object: OpenAI\_Test\_\_c = a05d2000004K2rNAAS ⌚ 14:07:24(00:21.450)
  - ① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2rNAAS, field count: 4
  - ① Setting fields:
    - ① =Field=> Utterance\_Intent\_Match\_\_c = True
    - ① =Field=> Response\_Status\_Code\_\_c = 200
    - ① =Field=> Response\_Status\_Message\_\_c = OK
    - ① =Field=> Response\_Error\_Message\_\_c = <null>
  - 📋 OpenAI Test updated successfully. Object Id: a05d2000004K2rNAAS

## Iteration 5

### Summary

Started	24 Jan 2025, 14:07:25
Ended	24 Jan 2025, 14:07:28

Duration (mm:ss) 00:03.556  
Outcome ● successful

## Output

### ● Salesforce Connect: Admin (Test)

🕒 14:07:25(00:22.236)

⚙️ Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

⚙️ Create object id log file.

Absolute path: C:\Users\mrda\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

⚙️ Access Token refreshed successfully.

⚙️ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

⚙️ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

⚙️ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

⚙️ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

🔔 Successfully connected to Salesforce as Admin

### ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

🕒 14:07:27(00:24.187)

🔔 Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

🔔 Setting fields:

🔔 =Field=> Intent\_\_c = Password Reset

🔔 =Field=> Utterance\_\_c = I've been locked out for too long. Please assist with a reset.

📋 OpenAI Test created successfully. Object Id: a05d2000004K2szAAC, Result Name: OpenAITestId

🔔 Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2szAAC

### ● Call Callable Utterance Intent Match

🕒 14:07:28(00:25.066)

#### ● Callable Utterance Intent Match

🕒 14:07:28(00:25.068)

#### ● Set Values: Prompt\_Template

🕒 14:07:28(00:25.069)

⚙️ Configuration: ValueScope:Test

🔔 Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

#### ● Set Values: Prompt

🕒 14:07:28(00:25.078)

⚙️ Configuration: ValueScope:Test

🔔 Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I've been locked out for too long. Please assist with a reset. Input Intent: Password Reset

#### ● Set Values: OpenAI\_Chat\_Request\_Body\_Template

🕒 14:07:28(00:25.088)

⚙️ Configuration: ValueScope:Test

🔔 Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}

- **Set Values: OpenAI\_Chat\_Request\_Body** ⌚ 14:07:28(00:25.095)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I've been locked out for too long. Please assist with a reset. Input Intent: Password Reset"}], "temperature": 0.7}
- **Web Connect: OpenAI\_Platform\_Connection** ⌚ 14:07:28(00:25.106)
  - ① Connecting to restservice. Address: https://api.openai.com/v1
  - ① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1
  - ① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test
- **Web Request (REST): ⇒ OpenAI\_Chat\_Response** ⌚ 14:07:28(00:25.114)
  - ① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON
  - ① Connecting to website. Address: https://api.openai.com/v1/chat/completions
  - ① Sending body. Length: 703
  - ① Reading response. Content Type: application/json, Encoding: null
  - ① Parsing JSON response.
  - ① REST Response stored successfully. Name: OpenAI\_Chat\_Response
  - ① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status
- **Set Values: Response\_Status\_Code** ⌚ 14:07:28(00:25.525)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Code to 200
- **Set Values: Response\_Status\_Message** ⌚ 14:07:28(00:25.530)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Message to OK
- **Set Values: Utterance\_Intent\_Match** ⌚ 14:07:28(00:25.538)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to <null>
- **Set Values: Response\_Error\_Message** ⌚ 14:07:28(00:25.544)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Error\_Message to <null>
- **If: {Response\_Status\_Code = 200}** ⌚ 14:07:28(00:25.552)
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2szAAC
  - ⚙ Object deleted successfully. Id: a05d2000004K2szAAC
- **Then** ⌚ 14:07:28(00:25.557)
  - **Set Values: Utterance\_Intent\_Match** ⌚ 14:07:28(00:25.558)
    - ⚙ Configuration: ValueScope:Test
    - ① Successfully set Utterance\_Intent\_Match to True
    - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection
    - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
    - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
    - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2szAAC
    - ⚙ Object deleted successfully. Id: a05d2000004K2szAAC

📘 Salesforce Connection handled successfully. Name: Admin

📘 Processing row number 6 from the Parameter Value Source.

🔧 Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

🔧 Closing Salesforce Connection because it is no longer being used. Name: Admin

🔧 Shutting down Soap Connections. logFilePath: Admin-objectids.log

🔧 Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2szAAC

🔧 Object deleted successfully. Id: a05d2000004K2szAAC

## ● Update Object: OpenAI\_Test\_\_c = a05d2000004K2szAAC

🕒 14:07:28(00:25.572)

📘 Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2szAAC, field count: 4

📘 Setting fields:

📘 =Field=> Utterance\_Intent\_Match\_\_c = True

📘 =Field=> Response\_Status\_Code\_\_c = 200

📘 =Field=> Response\_Status\_Message\_\_c = OK

📘 =Field=> Response\_Error\_Message\_\_c = <null>

📋 OpenAI Test updated successfully. Object Id: a05d2000004K2szAAC

## 📁 Iteration 6

### Summary

Started	24 Jan 2025, 14:07:29
Ended	24 Jan 2025, 14:07:32
Duration (mm:ss)	00:03.391
Outcome	● successful

### Output

## ● Salesforce Connect: Admin (Test)

🕒 14:07:29(00:26.489)

🔧 Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf.environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callbackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

🔧 Create object id log file.

Absolute path: C:\Users\mrdai\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

🔧 Access Token refreshed successfully.

🔧 Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

🔧 Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

🔧 Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

🔧 Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

📘 Successfully connected to Salesforce as Admin

## ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

🕒 14:07:31(00:28.527)

① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

① Setting fields:

① =Field=> Intent\_\_c = Password Reset

① =Field=> Utterance\_\_c = I need to reset my password ASAP! #

📋 OpenAI Test created successfully. Object Id: a05d2000004K0T1AAK, Result Name: OpenAITestId

① Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K0T1AAK

- Call Callable Utterance Intent Match 14:07:32(00:29.039)
  - Callable Utterance Intent Match 14:07:32(00:29.040)
    - Set Values: Prompt\_Template 14:07:32(00:29.041)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%
    - Set Values: Prompt 14:07:32(00:29.049)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I need to reset my password ASAP! # Input Intent: Password Reset
    - Set Values: OpenAI\_Chat\_Request\_Body\_Template 14:07:32(00:29.061)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT %"}], "temperature": 0.7}
    - Set Values: OpenAI\_Chat\_Request\_Body 14:07:32(00:29.069)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I need to reset my password ASAP! # Input Intent: Password Reset"}], "temperature": 0.7}
    - Web Connect: OpenAI\_Platform\_Connection 14:07:32(00:29.077)
      - ① Connecting to restservice. Address: https://api.openai.com/v1
      - ① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1
      - ① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test
    - Web Request (REST): =>OpenAI\_Chat\_Response 14:07:32(00:29.085)
      - ① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON
      - ① Connecting to website. Address: https://api.openai.com/v1/chat/completions
      - ① Sending body. Length: 677
      - ① Reading response. Content Type: application/json, Encoding: null
      - ① Parsing JSON response.
      - ① REST Response stored successfully. Name: OpenAI\_Chat\_Response
      - ① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status
    - Set Values: Response\_Status\_Code 14:07:32(00:29.571)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set Response\_Status\_Code to 200
    - Set Values: Response\_Status\_Message 14:07:32(00:29.575)
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set Response\_Status\_Message to OK
    - Set Values: Utterance\_Intent\_Match 14:07:32(00:29.581)



⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to <null>

● Set Values: Response\_Error\_Message

⌚ 14:07:32(00:29.588)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Error\_Message to <null>

● If: {Response\_Status\_Code = 200}

⌚ 14:07:32(00:29.593)

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0T1AAK

⚙ Object deleted successfully. Id: a05d2000004K0T1AAK

● Then

⌚ 14:07:32(00:29.596)

● Set Values: Utterance\_Intent\_Match

⌚ 14:07:32(00:29.598)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to True

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0T1AAK

⚙ Object deleted successfully. Id: a05d2000004K0T1AAK

① Salesforce Connection handled successfully. Name: Admin

① Processing row number 7 from the Parameter Value Source.

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0T1AAK

⚙ Object deleted successfully. Id: a05d2000004K0T1AAK

● Update Object: OpenAI\_Test\_\_c = a05d2000004K0T1AAK

⌚ 14:07:32(00:29.612)

① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K0T1AAK, field count: 4

① Setting fields:

① =Field=> Utterance\_Intent\_Match\_\_c = True

① =Field=> Response\_Status\_Code\_\_c = 200

① =Field=> Response\_Status\_Message\_\_c = OK

① =Field=> Response\_Error\_Message\_\_c = <null>

📋 OpenAI Test updated successfully. Object Id: a05d2000004K0T1AAK

## 📅 Iteration 7

### Summary

Started	24 Jan 2025, 14:07:33
Ended	24 Jan 2025, 14:07:36
Duration (mm:ss)	00:03.464
Outcome	● successful

### Output

## ● Salesforce Connect: Admin (Test)

🕒 14:07:33(00:30.223)

⚙️ Connection details. Connection name: Admin, result name: Admin, result scope:

Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-

dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/

id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

⚙️ Create object id log file.

Absolute path: C:\Users\mrda\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

⚙️ Access Token refreshed successfully.

⚙️ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

⚙️ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

⚙️ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

⚙️ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

📄 Successfully connected to Salesforce as Admin

## ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

🕒 14:07:35(00:32.164)

📄 Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

📄 Setting fields:

📄 =Field=> Intent\_\_c = Password Reset

📄 =Field=> Utterance\_\_c = Why is resetting my password so complicated? Ugh!

📄 OpenAI Test created successfully. Object Id: a05d2000004K0rCAAS, Result Name: OpenAITestId

📄 Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K0rCAAS

## ● Call Callable Utterance Intent Match

🕒 14:07:36(00:33.048)

### ● Callable Utterance Intent Match

🕒 14:07:36(00:33.048)

#### ● Set Values: Prompt\_Template

🕒 14:07:36(00:33.049)

⚙️ Configuration: ValueScope:Test

📄 Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

#### ● Set Values: Prompt

🕒 14:07:36(00:33.060)

⚙️ Configuration: ValueScope:Test

📄 Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Why is resetting my password so complicated? Ugh! Input Intent: Password Reset

#### ● Set Values: OpenAI\_Chat\_Request\_Body\_Template

🕒 14:07:36(00:33.070)

⚙️ Configuration: ValueScope:Test

📄 Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}

#### ● Set Values: OpenAI\_Chat\_Request\_Body

🕒 14:07:36(00:33.077)

⚙️ Configuration: ValueScope:Test

📄 Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match

the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Why is resetting my password so complicated? Ugh!  
Input Intent: Password Reset"}], "temperature":0.7}

### ● Web Connect: OpenAI\_Platform\_Connection

⌚ 14:07:36(00:33.083)

① Connecting to restservice. Address: https://api.openai.com/v1

① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1

① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test

### ● Web Request (REST): ⇒OpenAI\_Chat\_Response

⌚ 14:07:36(00:33.093)

① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: https://api.openai.com/v1/chat/completions

① Sending body. Length: 690

① Reading response. Content Type: application/json, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: OpenAI\_Chat\_Response

① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status

### ● Set Values: Response\_Status\_Code

⌚ 14:07:36(00:33.431)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Code to 200

### ● Set Values: Response\_Status\_Message

⌚ 14:07:36(00:33.437)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Message to OK

### ● Set Values: Utterance\_Intent\_Match

⌚ 14:07:36(00:33.443)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to <null>

### ● Set Values: Response\_Error\_Message

⌚ 14:07:36(00:33.447)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Error\_Message to <null>

### ● If: {Response\_Status\_Code = 200}

⌚ 14:07:36(00:33.452)

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0rCAAS

⚙ Object deleted successfully. Id: a05d2000004K0rCAAS

### ● Then

⌚ 14:07:36(00:33.460)

#### ● Set Values: Utterance\_Intent\_Match

⌚ 14:07:36(00:33.461)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to True

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0rCAAS

⚙ Object deleted successfully. Id: a05d2000004K0rCAAS

① Salesforce Connection handled successfully. Name: Admin

① Processing row number 8 from the Parameter Value Source.

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

- ✦ Shutting down Soap Connections. logFilePath: Admin-objectids.log
- ✦ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K0rCAAS
- ✦ Object deleted successfully. Id: a05d2000004K0rCAAS

## ● Update Object: OpenAI\_Test\_\_c = a05d2000004K0rCAAS ⌚ 14:07:36(00:33.475)

① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K0rCAAS, field count: 4

① Setting fields:

① =Field=> Utterance\_Intent\_Match\_\_c = True

① =Field=> Response\_Status\_Code\_\_c = 200

① =Field=> Response\_Status\_Message\_\_c = OK

① =Field=> Response\_Error\_Message\_\_c = <null>

■ OpenAI Test updated successfully. Object Id: a05d2000004K0rCAAS

## Iteration 8

### Summary

Started	24 Jan 2025, 14:07:37
Ended	24 Jan 2025, 14:07:40
Duration (mm:ss)	00:03.385
Outcome	● successful

### Output

## ● Salesforce Connect: Admin (Test) ⌚ 14:07:37(00:33.960)

✦ Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

✦ Create object id log file.

Absolute path: C:\Users\mrda\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

✦ Access Token refreshed successfully.

✦ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

✦ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

✦ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

✦ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

① Successfully connected to Salesforce as Admin

## ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId ⌚ 14:07:39(00:36.016)

① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

① Setting fields:

① =Field=> Intent\_\_c = Password Reset

① =Field=> Utterance\_\_c = How do I change my password? I'm a bit confused.

OpenAI Test created successfully. Object Id: a05d2000004K2ubAAC, Result Name: OpenAITestId

Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2ubAAC

- Call Callable Utterance Intent Match 14:07:39(00:36.629)
  - Callable Utterance Intent Match 14:07:39(00:36.630)
    - Set Values: Prompt\_Template 14:07:39(00:36.631)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%
    - Set Values: Prompt 14:07:39(00:36.641)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: How do I change my password? I'm a bit confused. Input Intent: Password Reset
    - Set Values: OpenAI\_Chat\_Request\_Body\_Template 14:07:39(00:36.650)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}
    - Set Values: OpenAI\_Chat\_Request\_Body 14:07:39(00:36.659)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: How do I change my password? I'm a bit confused. Input Intent: Password Reset"}], "temperature": 0.7}
    - Web Connect: OpenAI\_Platform\_Connection 14:07:39(00:36.668)
      - ℹ Connecting to restservice. Address: https://api.openai.com/v1
      - ℹ Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1
      - ℹ Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test
    - Web Request (REST): ⇒ OpenAI\_Chat\_Response 14:07:39(00:36.675)
      - ℹ Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON
      - ℹ Connecting to website. Address: https://api.openai.com/v1/chat/completions
      - ℹ Sending body. Length: 689
      - ℹ Reading response. Content Type: application/json, Encoding: null
      - ℹ Parsing JSON response.
      - ℹ REST Response stored successfully. Name: OpenAI\_Chat\_Response
      - ℹ Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status
    - Set Values: Response\_Status\_Code 14:07:40(00:37.048)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set Response\_Status\_Code to 200
    - Set Values: Response\_Status\_Message 14:07:40(00:37.056)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set Response\_Status\_Message to OK
    - Set Values: Utterance\_Intent\_Match 14:07:40(00:37.062)
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set Utterance\_Intent\_Match to <null>
    - Set Values: Response\_Error\_Message 14:07:40(00:37.067)
      - ⚙ Configuration: ValueScope:Test

① Successfully set Response\_Error\_Message to <null>

● If: {Response\_Status\_Code = 200}

⌚ 14:07:40(00:37.072)

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2ubAAC

⚙ Object deleted successfully. Id: a05d2000004K2ubAAC

● Then

⌚ 14:07:40(00:37.077)

● Set Values: Utterance\_Intent\_Match

⌚ 14:07:40(00:37.078)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to True

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2ubAAC

⚙ Object deleted successfully. Id: a05d2000004K2ubAAC

① Salesforce Connection handled successfully. Name: Admin

① Processing row number 9 from the Parameter Value Source.

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2ubAAC

⚙ Object deleted successfully. Id: a05d2000004K2ubAAC

● Update Object: OpenAI\_Test\_\_c = a05d2000004K2ubAAC

⌚ 14:07:40(00:37.094)

① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2ubAAC, field count: 4

① Setting fields:

① =Field=> Utterance\_Intent\_Match\_\_c = True

① =Field=> Response\_Status\_Code\_\_c = 200

① =Field=> Response\_Status\_Message\_\_c = OK

① =Field=> Response\_Error\_Message\_\_c = <null>

📋 OpenAI Test updated successfully. Object Id: a05d2000004K2ubAAC

## 📅 Iteration 9

### Summary

Started	24 Jan 2025, 14:07:41
Ended	24 Jan 2025, 14:07:44
Duration (mm:ss)	00:03.330
Outcome	● successful

### Output

● Salesforce Connect: Admin (Test)

⌚ 14:07:41(00:37.918)

⚙ Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf:environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]

✦ Create object id log file.

Absolute path: C:\Users\mrdai\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log

✦ Access Token refreshed successfully.

✦ Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI

✦ Opening Partner connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI

✦ Opening SOAP connection

Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0

✦ Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI

① Successfully connected to Salesforce as Admin

## ● Create Object: OpenAI\_Test\_\_c=>OpenAITestId

⌚ 14:07:42(00:39.843)

① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2

① Setting fields:

① =Field=> Intent\_\_c = Password Reset

① =Field=> Utterance\_\_c = Eager to get back into my account; I need a reset link!

📋 OpenAI Test created successfully. Object Id: a05d2000004K1P4AAK, Result Name: OpenAITestId

① Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K1P4AAK

## ● Call Callable Utterance Intent Match

⌚ 14:07:43(00:40.291)

### ● Callable Utterance Intent Match

⌚ 14:07:43(00:40.293)

#### ● Set Values: Prompt\_Template

⌚ 14:07:43(00:40.294)

✦ Configuration: ValueScope:Test

① Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%

#### ● Set Values: Prompt

⌚ 14:07:43(00:40.303)

✦ Configuration: ValueScope:Test

① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Eager to get back into my account; I need a reset link! Input Intent: Password Reset

#### ● Set Values: OpenAI\_Chat\_Request\_Body\_Template

⌚ 14:07:43(00:40.312)

✦ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "%PROMPT %"}], "temperature":0.7}

#### ● Set Values: OpenAI\_Chat\_Request\_Body

⌚ 14:07:43(00:40.319)

✦ Configuration: ValueScope:Test

① Successfully set OpenAI\_Chat\_Request\_Body to {"model":"gpt-4o-mini", "messages":[{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: Eager to get back into my account; I need a reset link! Input Intent: Password Reset"}], "temperature":0.7}

#### ● Web Connect: OpenAI\_Platform\_Connection

⌚ 14:07:43(00:40.327)

① Connecting to restservice. Address: https://api.openai.com/v1



① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1

① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test

● Web Request (REST): ⇒ OpenAI\_Chat\_Response ① 14:07:43(00:40.334)

① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON

① Connecting to website. Address: https://api.openai.com/v1/chat/completions

① Sending body. Length: 696

① Reading response. Content Type: application/json, Encoding: null

① Parsing JSON response.

① REST Response stored successfully. Name: OpenAI\_Chat\_Response

① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status

● Set Values: Response\_Status\_Code ① 14:07:43(00:40.607)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Code to 200

● Set Values: Response\_Status\_Message ① 14:07:43(00:40.614)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Status\_Message to OK

● Set Values: Utterance\_Intent\_Match ① 14:07:43(00:40.619)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to <null>

● Set Values: Response\_Error\_Message ① 14:07:43(00:40.625)

⚙ Configuration: ValueScope:Test

① Successfully set Response\_Error\_Message to <null>

● If: {Response\_Status\_Code = 200} ① 14:07:43(00:40.630)

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1P4AAK

⚙ Object deleted successfully. Id: a05d2000004K1P4AAK

● Then ① 14:07:43(00:40.634)

● Set Values: Utterance\_Intent\_Match ① 14:07:43(00:40.635)

⚙ Configuration: ValueScope:Test

① Successfully set Utterance\_Intent\_Match to True

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1P4AAK

⚙ Object deleted successfully. Id: a05d2000004K1P4AAK

① Salesforce Connection handled successfully. Name: Admin

① Processing row number 10 from the Parameter Value Source.

⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection

⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log

⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K1P4AAK

⚙ Object deleted successfully. Id: a05d2000004K1P4AAK

● Update Object: OpenAI\_Test\_\_c = a05d2000004K1P4AAK ① 14:07:43(00:40.650)

- ① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K1P4AAK, field count: 4
- ① Setting fields:
- ① =Field=> Utterance\_Intent\_Match\_\_c = True
- ① =Field=> Response\_Status\_Code\_\_c = 200
- ① =Field=> Response\_Status\_Message\_\_c = OK
- ① =Field=> Response\_Error\_Message\_\_c = <null>
- 📋 OpenAI Test updated successfully. Object Id: a05d2000004K1P4AAK

## Iteration 10

### Summary

Started 24 Jan 2025, 14:07:44  
Ended 24 Jan 2025, 14:07:48  
Duration (mm:ss) 00:03.565  
Outcome ● successful

### Output

- Salesforce Connect: Admin (Test) ⌚ 14:07:44(00:41.516)
  - 🔗 Connection details. Connection name: Admin, result name: Admin, result scope: Test, urlString: sf.environment=PROD\_DEV;apiLoginUrl=https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00Dd20000074CUIEA2/005d2000004E6zJAAS;clientId={clientId};clientSecret={clientSecret};lightningMode=true;authenticationType=OAUTH;callbackUrl={callbackUrl};environment: <default>, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
  - 🔗 Create object id log file.  
Absolute path: C:\Users\mrdai\AppData\Local\Temp\ProvarTestArtifacts11560950187299776217763940171097300\Admin-objectids.log
  - 🔗 Access Token refreshed successfully.
  - 🔗 Identity Service successful. ToolingEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/T/62.0/00Dd20000074CUI, ToolingRestEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/data/v62.0/tooling/, PartnerEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI, MetadataEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI, EnterpriseEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/c/62.0/00Dd20000074CUI
  - 🔗 Opening Partner connection  
Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0/00Dd20000074CUI
  - 🔗 Opening SOAP connection  
Connection configurations: userName: epic.e4a41737563621181@orgfarm.th, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0
  - 🔗 Opening Metadata connection  
Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/u/62.0, serviceEndpoint: https://orgfarm-565ee321c1-dev-ed.develop.my.salesforce.com/services/Soap/m/62.0/00Dd20000074CUI
  - ① Successfully connected to Salesforce as Admin
- Create Object: OpenAI\_Test\_\_c=>OpenAITestId ⌚ 14:07:46(00:43.568)
  - ① Creating a new Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, field count: 2
  - ① Setting fields:
  - ① =Field=> Intent\_\_c = Password Reset
  - ① =Field=> Utterance\_\_c = I feel so lost trying to reset my password; what do I do? #
  - 📋 OpenAI Test created successfully. Object Id: a05d2000004K2wDAAS, Result Name: OpenAITestId
  - ① Logging Salesforce Object Id for clean up. Object Name: OpenAI\_Test\_\_c, id: a05d2000004K2wDAAS
- Call Callable Utterance Intent Match ⌚ 14:07:47(00:44.046)
  - Callable Utterance Intent Match ⌚ 14:07:47(00:44.048)

- **Set Values: Prompt\_Template** ⌚ 14:07:47(00:44.049)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Prompt\_Template to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: %UTTERANCE% Input Intent: %INTENT%
- **Set Values: Prompt** ⌚ 14:07:47(00:44.060)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Prompt to You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I feel so lost trying to reset my password; what do I do? # Input Intent: Password Reset
- **Set Values: OpenAI\_Chat\_Request\_Body\_Template** ⌚ 14:07:47(00:44.070)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set OpenAI\_Chat\_Request\_Body\_Template to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "%PROMPT%"}], "temperature": 0.7}
- **Set Values: OpenAI\_Chat\_Request\_Body** ⌚ 14:07:47(00:44.078)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set OpenAI\_Chat\_Request\_Body to {"model": "gpt-4o-mini", "messages": [{"role": "user", "content": "You are an intent verification assistant. Your task is to determine whether a given utterance matches a specific intent. Your response must be concise and one of the following True, False or Unknown values: True: The utterance clearly matches the intent. False: The utterance clearly does not match the intent. Unknown: It is unclear or ambiguous whether the utterance matches the intent based on the given information. Provide only the response (True, False, or Unknown) and do not include explanations. Input Utterance: I feel so lost trying to reset my password; what do I do? # Input Intent: Password Reset"}], "temperature": 0.7}
- **Web Connect: OpenAI\_Platform\_Connection** ⌚ 14:07:47(00:44.086)
  - ① Connecting to restservice. Address: https://api.openai.com/v1
  - ① Connection details. Connection name: OpenAI\_API, urlString: restservice:url=https://api.openai.com/v1;authenticationType=NO\_AUTHENTICATION, url: https://api.openai.com/v1
  - ① Connection name: OpenAI\_API, ResultName: OpenAI\_Platform\_Connection, resultScope: Test
- **Web Request (REST): ⇒ OpenAI\_Chat\_Response** ⌚ 14:07:47(00:44.094)
  - ① Calling a Web Service. Connection Name: OpenAI\_Platform\_Connection, target: rest:untyped?method=POST&bodyStyle=JSON
  - ① Connecting to website. Address: https://api.openai.com/v1/chat/completions
  - ① Sending body. Length: 701
  - ① Reading response. Content Type: application/json, Encoding: null
  - ① Parsing JSON response.
  - ① REST Response stored successfully. Name: OpenAI\_Chat\_Response
  - ① Web Response Status stored successfully. Name: OpenAI\_Chat\_Response\_Status
- **Set Values: Response\_Status\_Code** ⌚ 14:07:47(00:44.412)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Code to 200
- **Set Values: Response\_Status\_Message** ⌚ 14:07:47(00:44.419)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Status\_Message to OK
- **Set Values: Utterance\_Intent\_Match** ⌚ 14:07:47(00:44.424)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to <null>
- **Set Values: Response\_Error\_Message** ⌚ 14:07:47(00:44.429)
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Response\_Error\_Message to <null>
- **If: {Response\_Status\_Code = 200}** ⌚ 14:07:47(00:44.435)
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin

- ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
- ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2wDAAS
- ⚙ Object deleted successfully. Id: a05d2000004K2wDAAS

## ● Then

⌚ 14:07:47(00:44.439)

### ● Set Values: Utterance\_Intent\_Match

⌚ 14:07:47(00:44.441)

- ⚙ Configuration: ValueScope:Test
  - ① Successfully set Utterance\_Intent\_Match to True
- ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
- ① RestServiceConnection handled successfully. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2wDAAS
  - ⚙ Object deleted successfully. Id: a05d2000004K2wDAAS
- ① Salesforce Connection handled successfully. Name: Admin
  - ⚙ Closing RestServiceConnection because it is no longer being used. Name: OpenAI\_Platform\_Connection
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: Admin
  - ⚙ Shutting down Soap Connections. logFilePath: Admin-objectids.log
  - ⚙ Deleting object. Object: OpenAI\_Test\_\_c, Id: a05d2000004K2wDAAS
  - ⚙ Object deleted successfully. Id: a05d2000004K2wDAAS

## ● Update Object: OpenAI\_Test\_\_c = a05d2000004K2wDAAS

⌚ 14:07:47(00:44.451)

- ① Updating an existing Salesforce object. Connection Name: Admin, Name: OpenAI\_Test\_\_c, Id: a05d2000004K2wDAAS, field count: 4
- ① Setting fields:
  - ① =Field=> Utterance\_Intent\_Match\_\_c = True
  - ① =Field=> Response\_Status\_Code\_\_c = 200
  - ① =Field=> Response\_Status\_Message\_\_c = OK
  - ① =Field=> Response\_Error\_Message\_\_c = <null>
- 📄 OpenAI Test updated successfully. Object Id: a05d2000004K2wDAAS