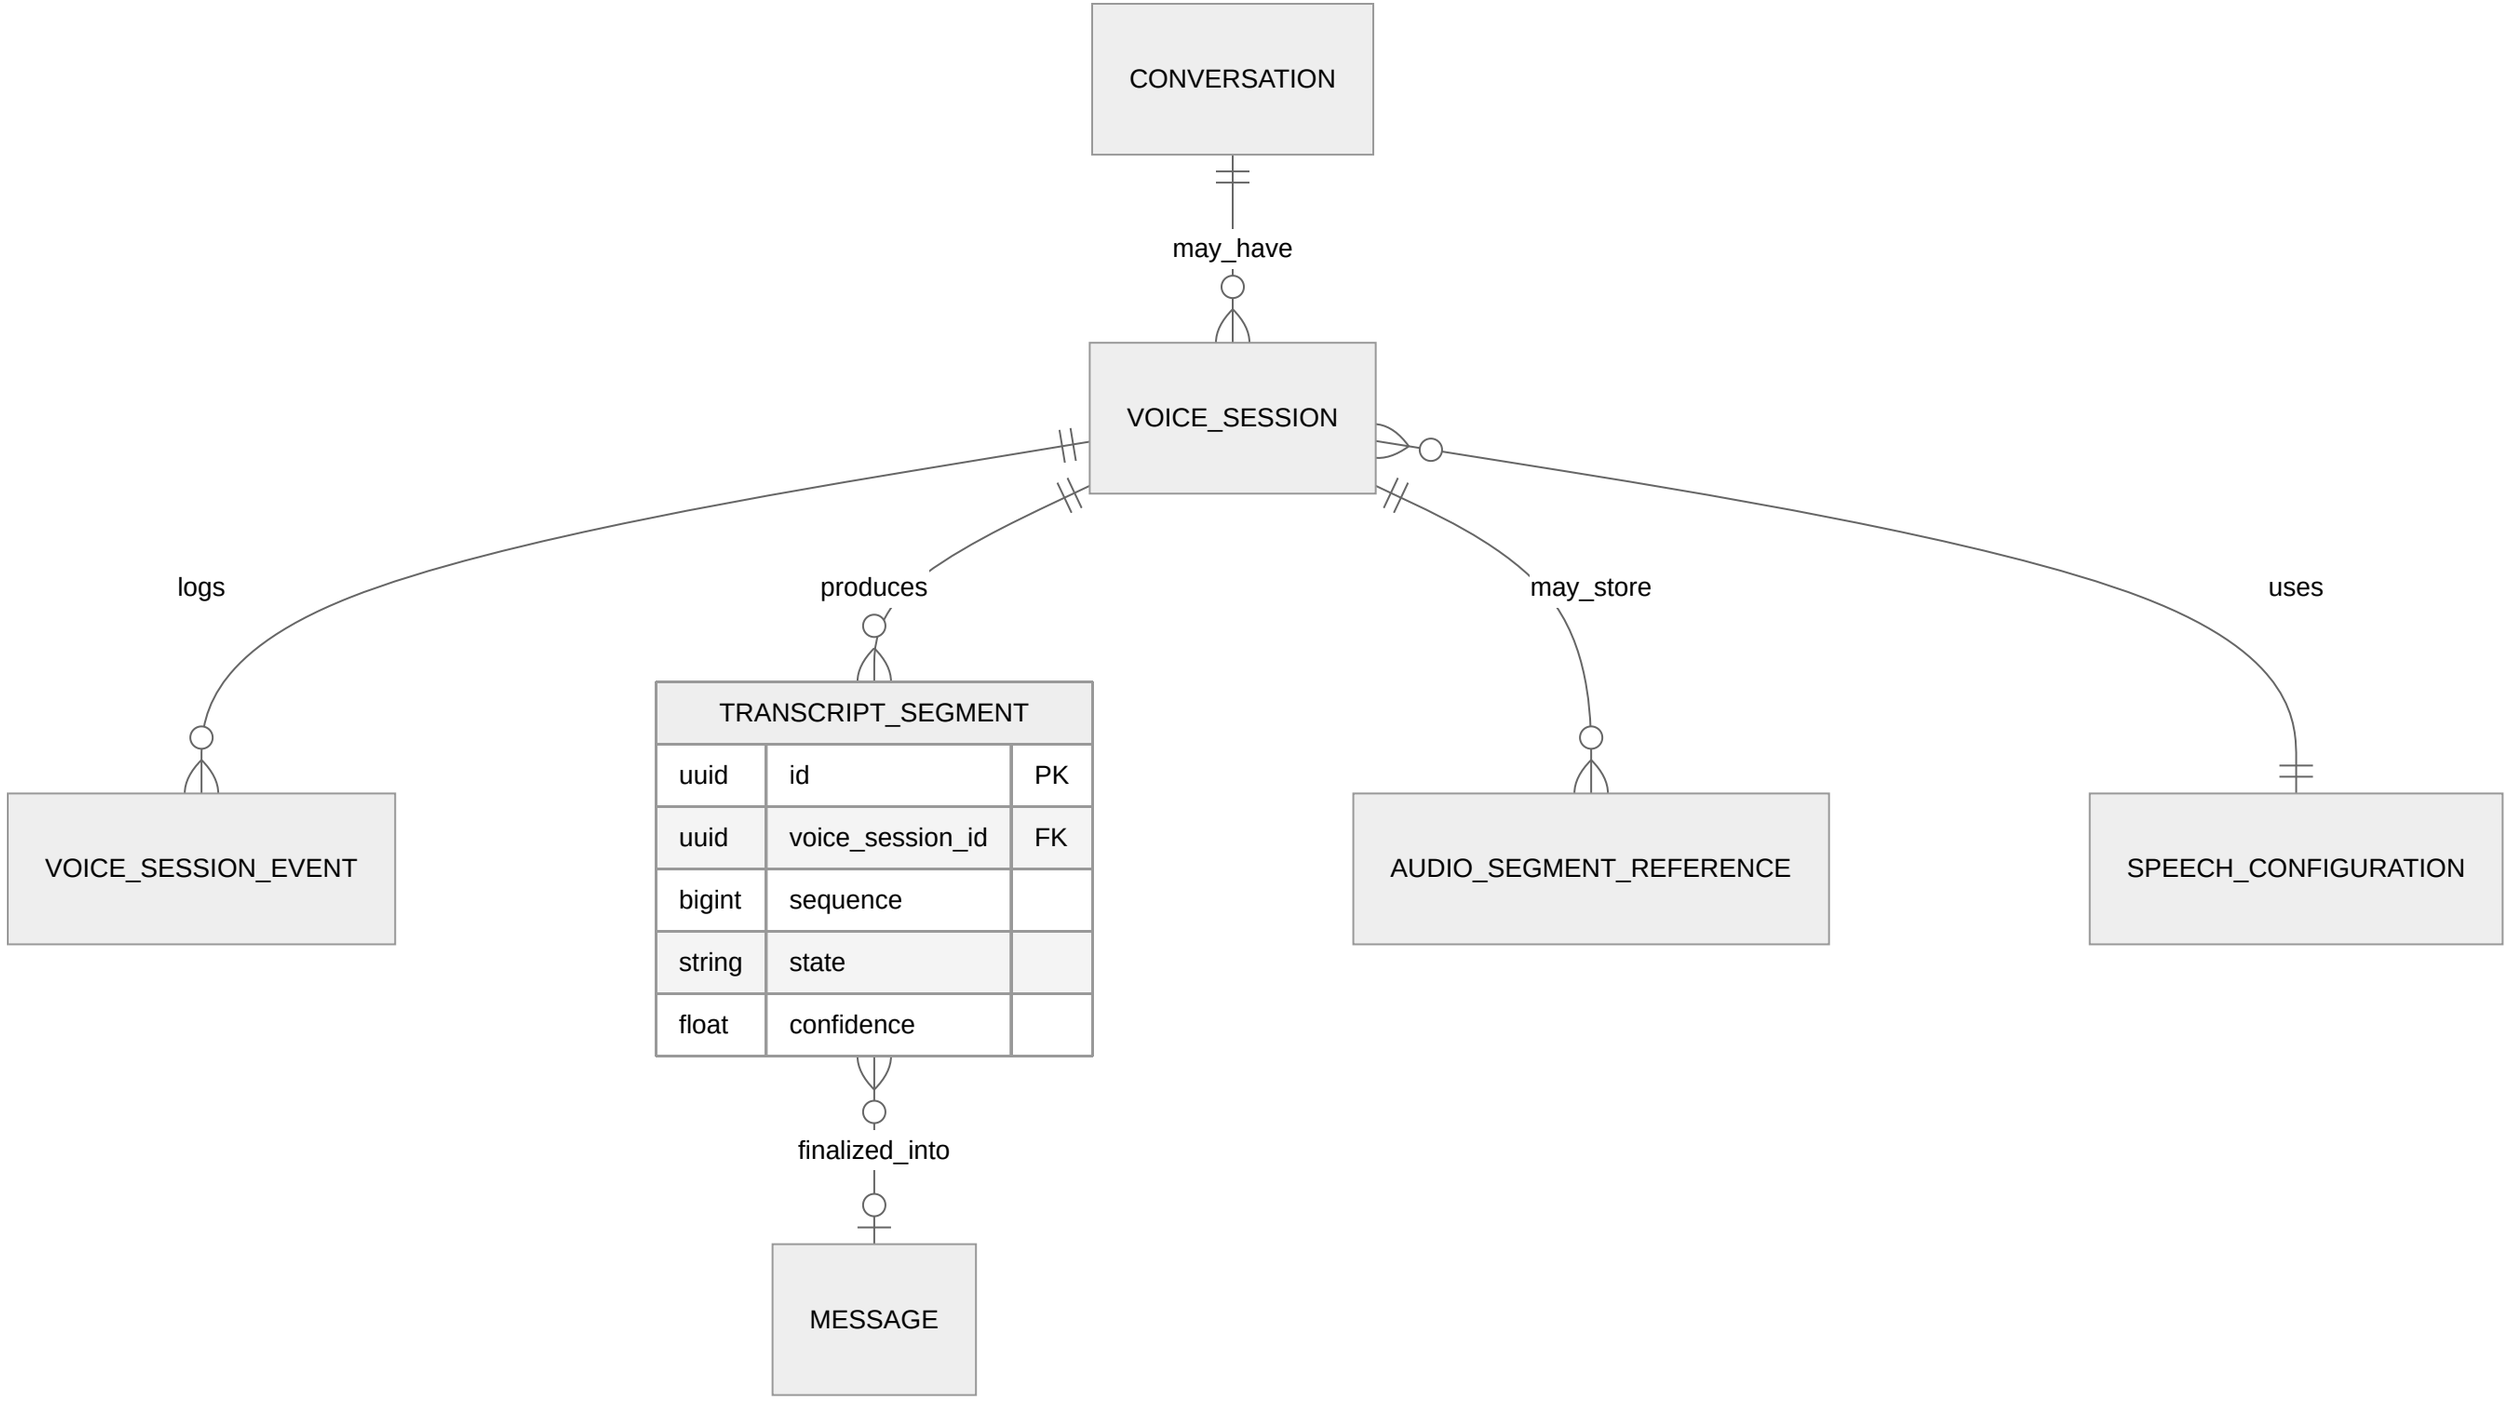
CONVERSATION
may_have
VOICE_SESSION
logs
produces
may_store
uses
VOICE_SESSION_EVENT
TRANSCRIPT_SEGMENT
uuid
id
PK
uuid
voice_session_id
FK
bigint
sequence
string
state
float
confidence
AUDIO_SEGMENT_REFERENCE
SPEECH_CONFIGURATION
finalized_into
MESSAGE