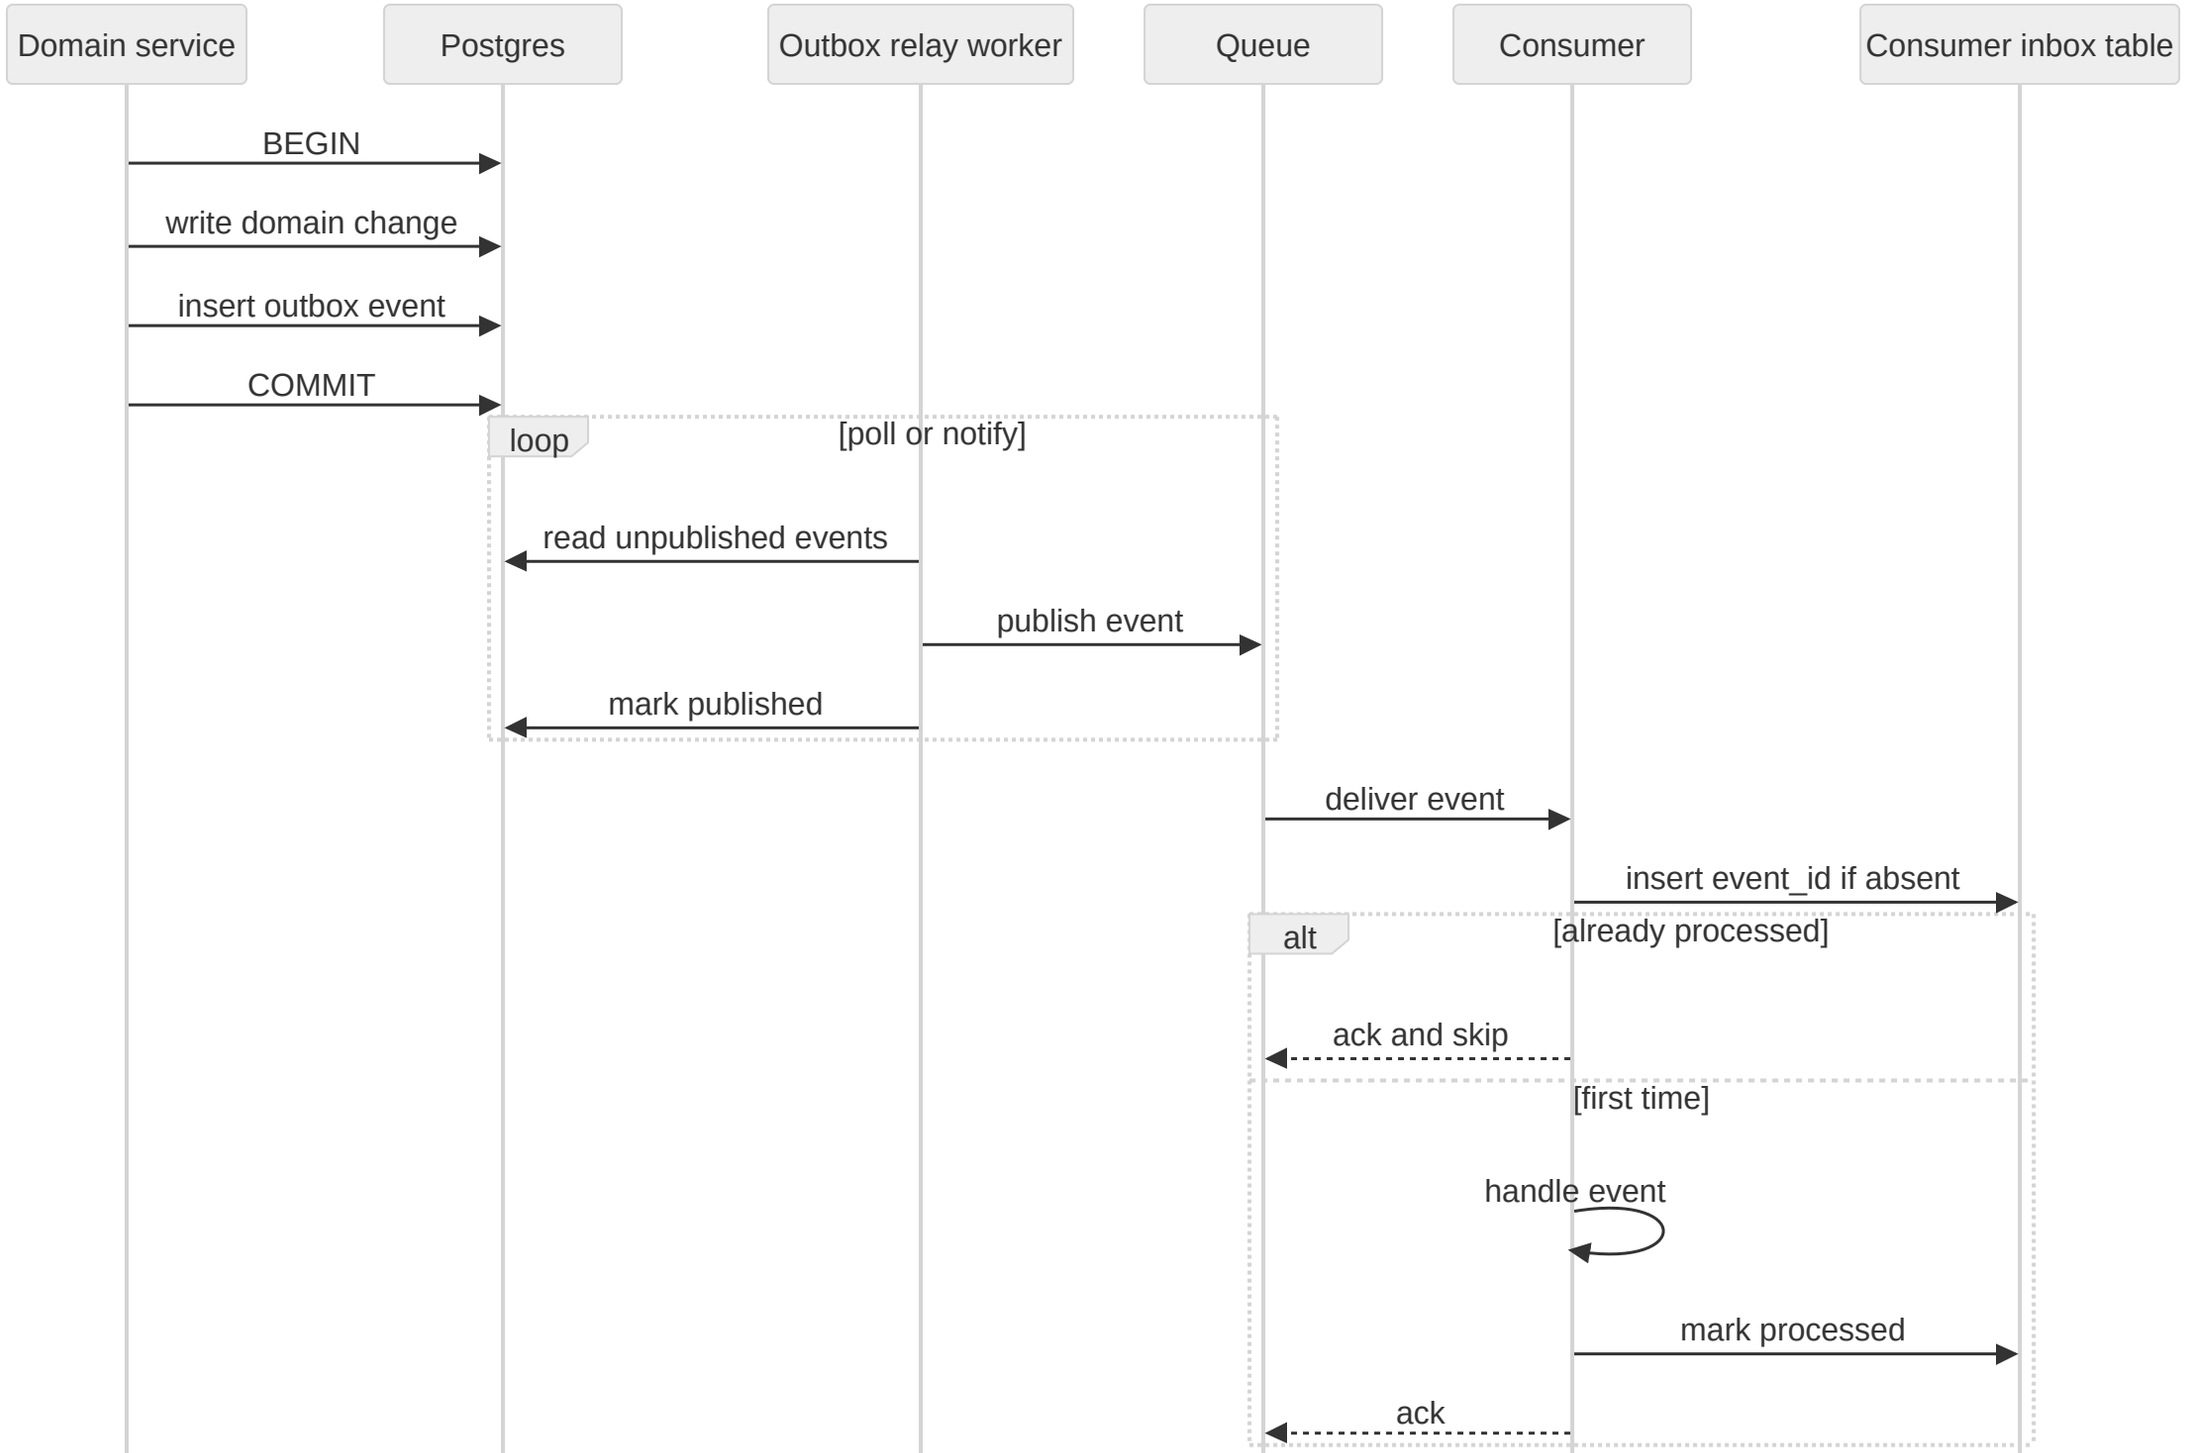
Domain service
Postgres
Outbox relay worker
Queue
Consumer
Consumer inbox table
BEGIN
write domain change
insert outbox event
COMMIT
loop
[poll or notify]
read unpublished events
publish event
mark published
deliver event
insert event_id if absent
alt
[already processed]
ack and skip
[first time]
handle event
mark processed
ack