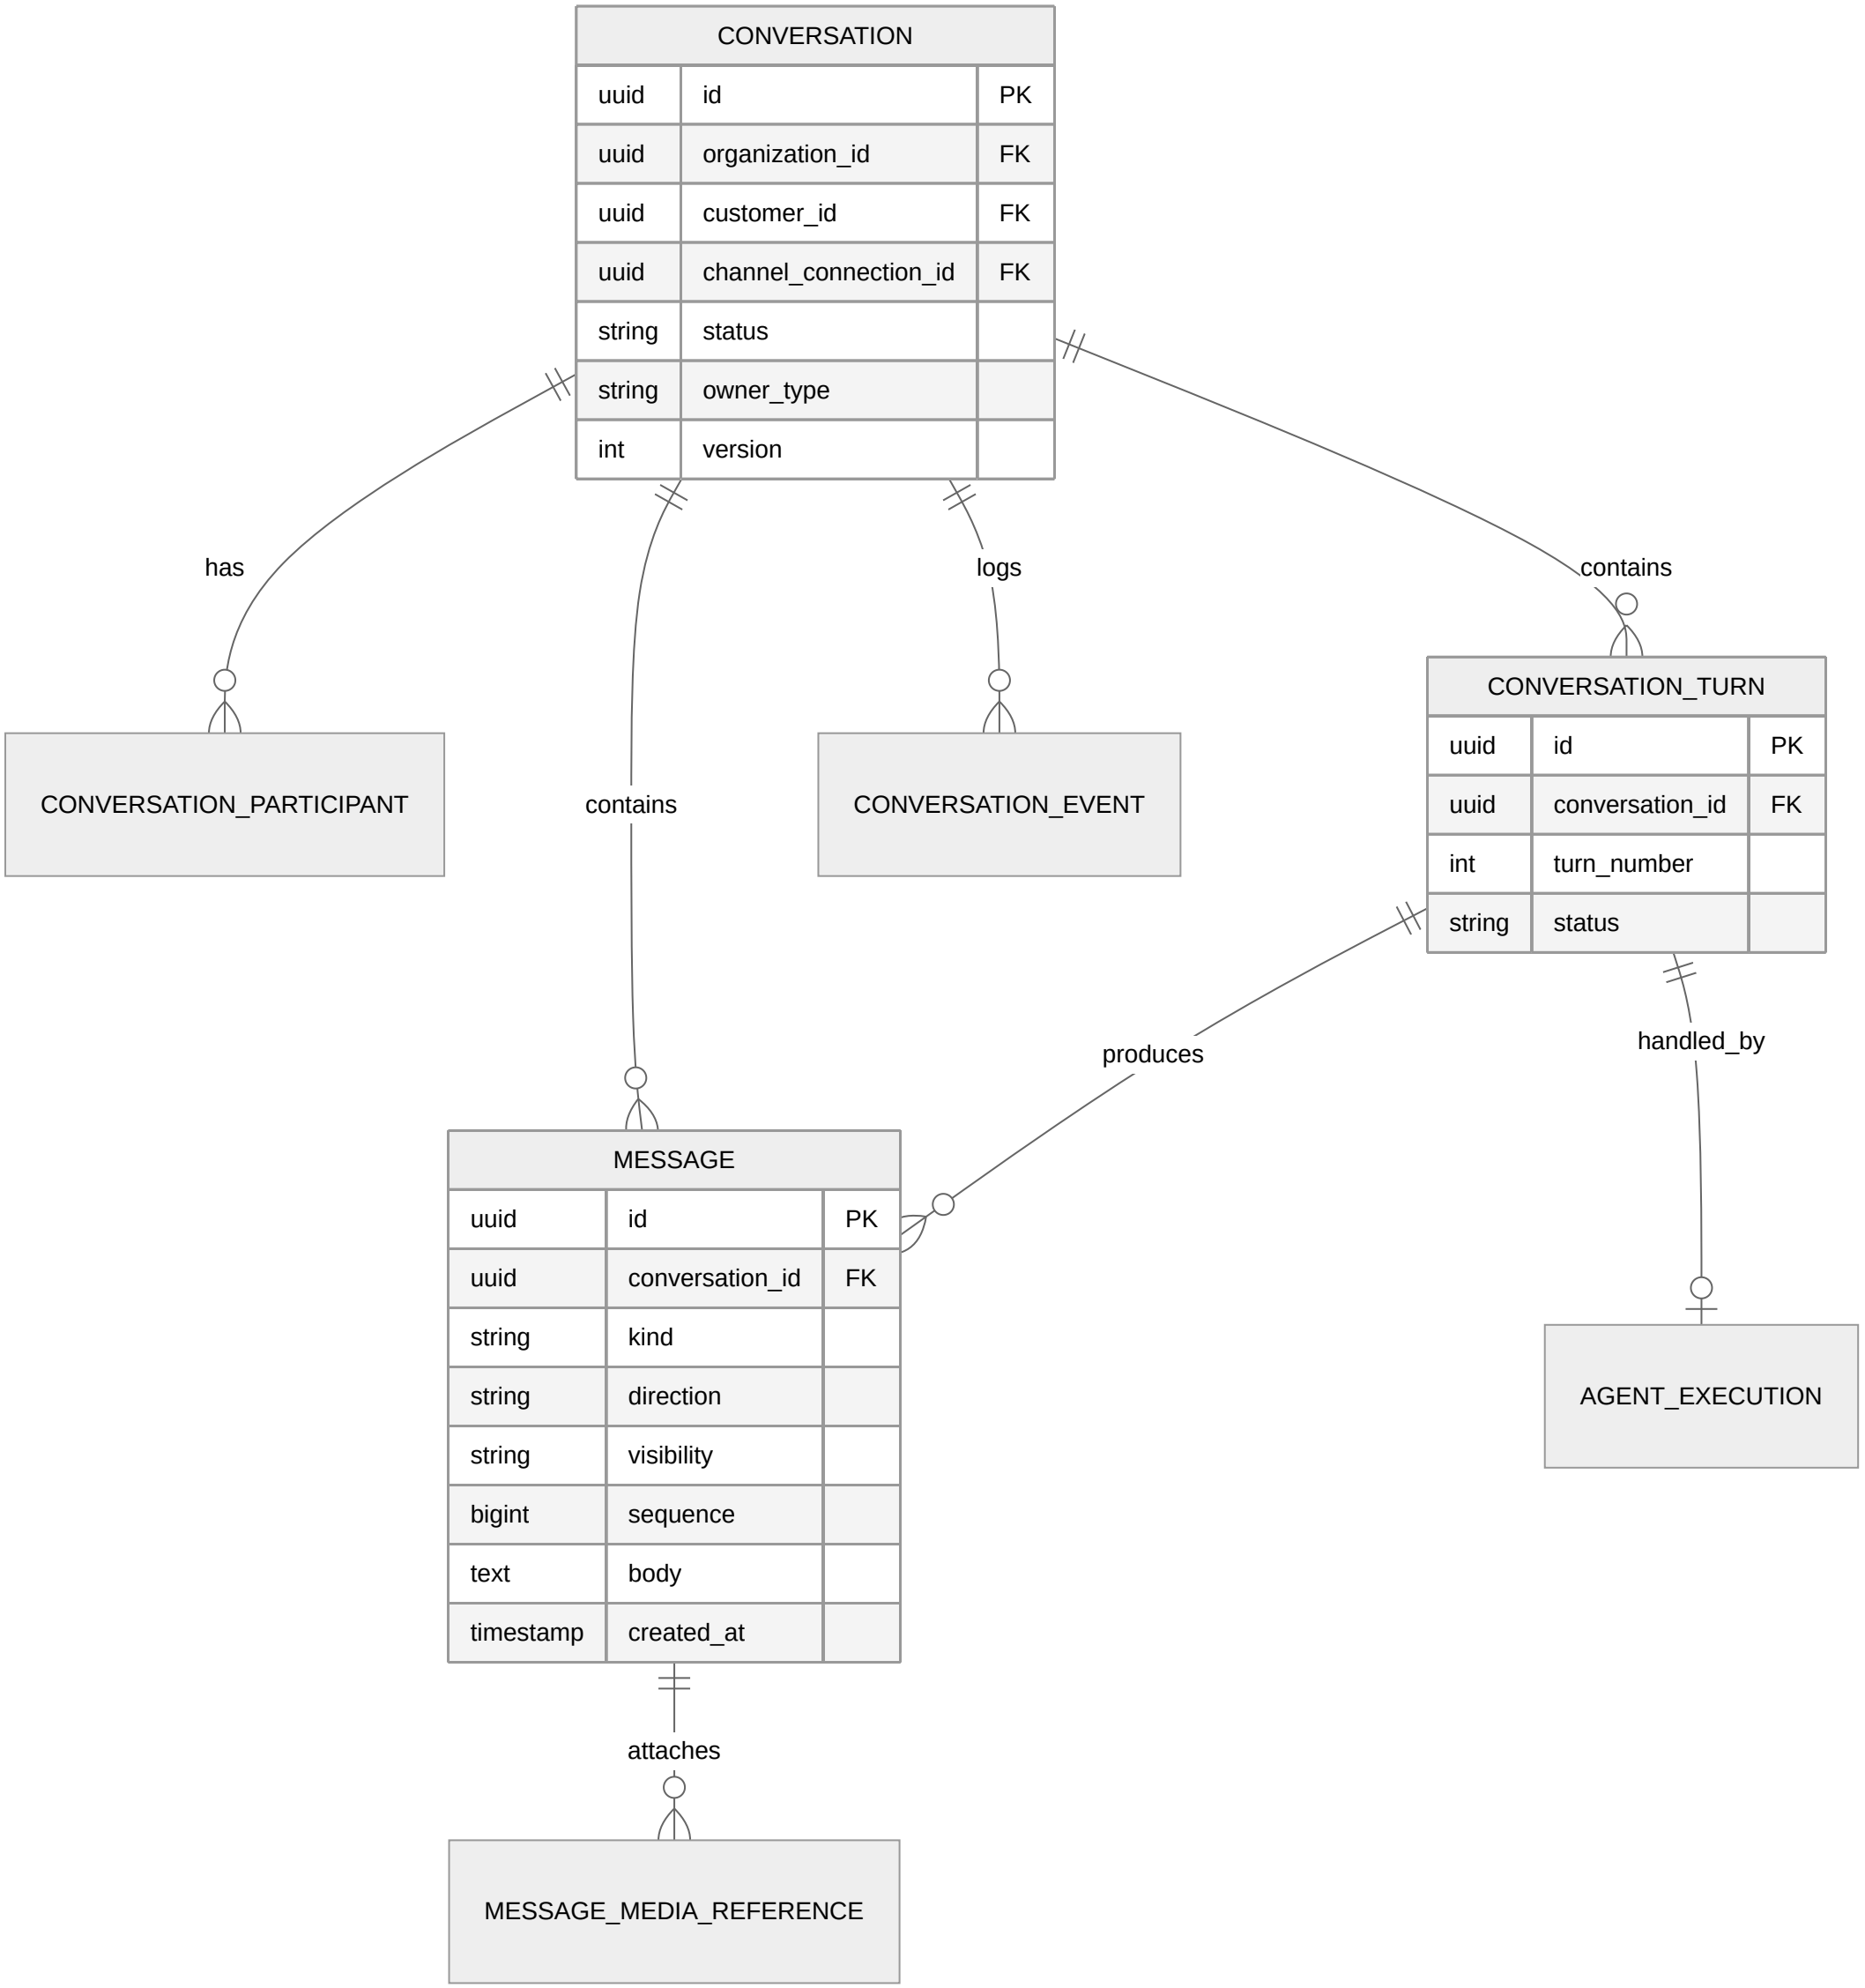
CONVERSATION
uuid id PK
uuid organization_id FK
uuid customer_id FK
uuid channel_connection_id FK
string status
string owner_type
int version
has
logs
contains
CONVERSATION_PARTICIPANT
contains
CONVERSATION_EVENT
CONVERSATION_TURN
uuid id PK
uuid conversation_id FK
int turn_number
string status
produces
handled_by
MESSAGE
uuid id PK
uuid conversation_id FK
string kind
string direction
string visibility
bigint sequence
text body
timestamp created_at
AGENT_EXECUTION
attaches
MESSAGE_MEDIA_REFERENCE