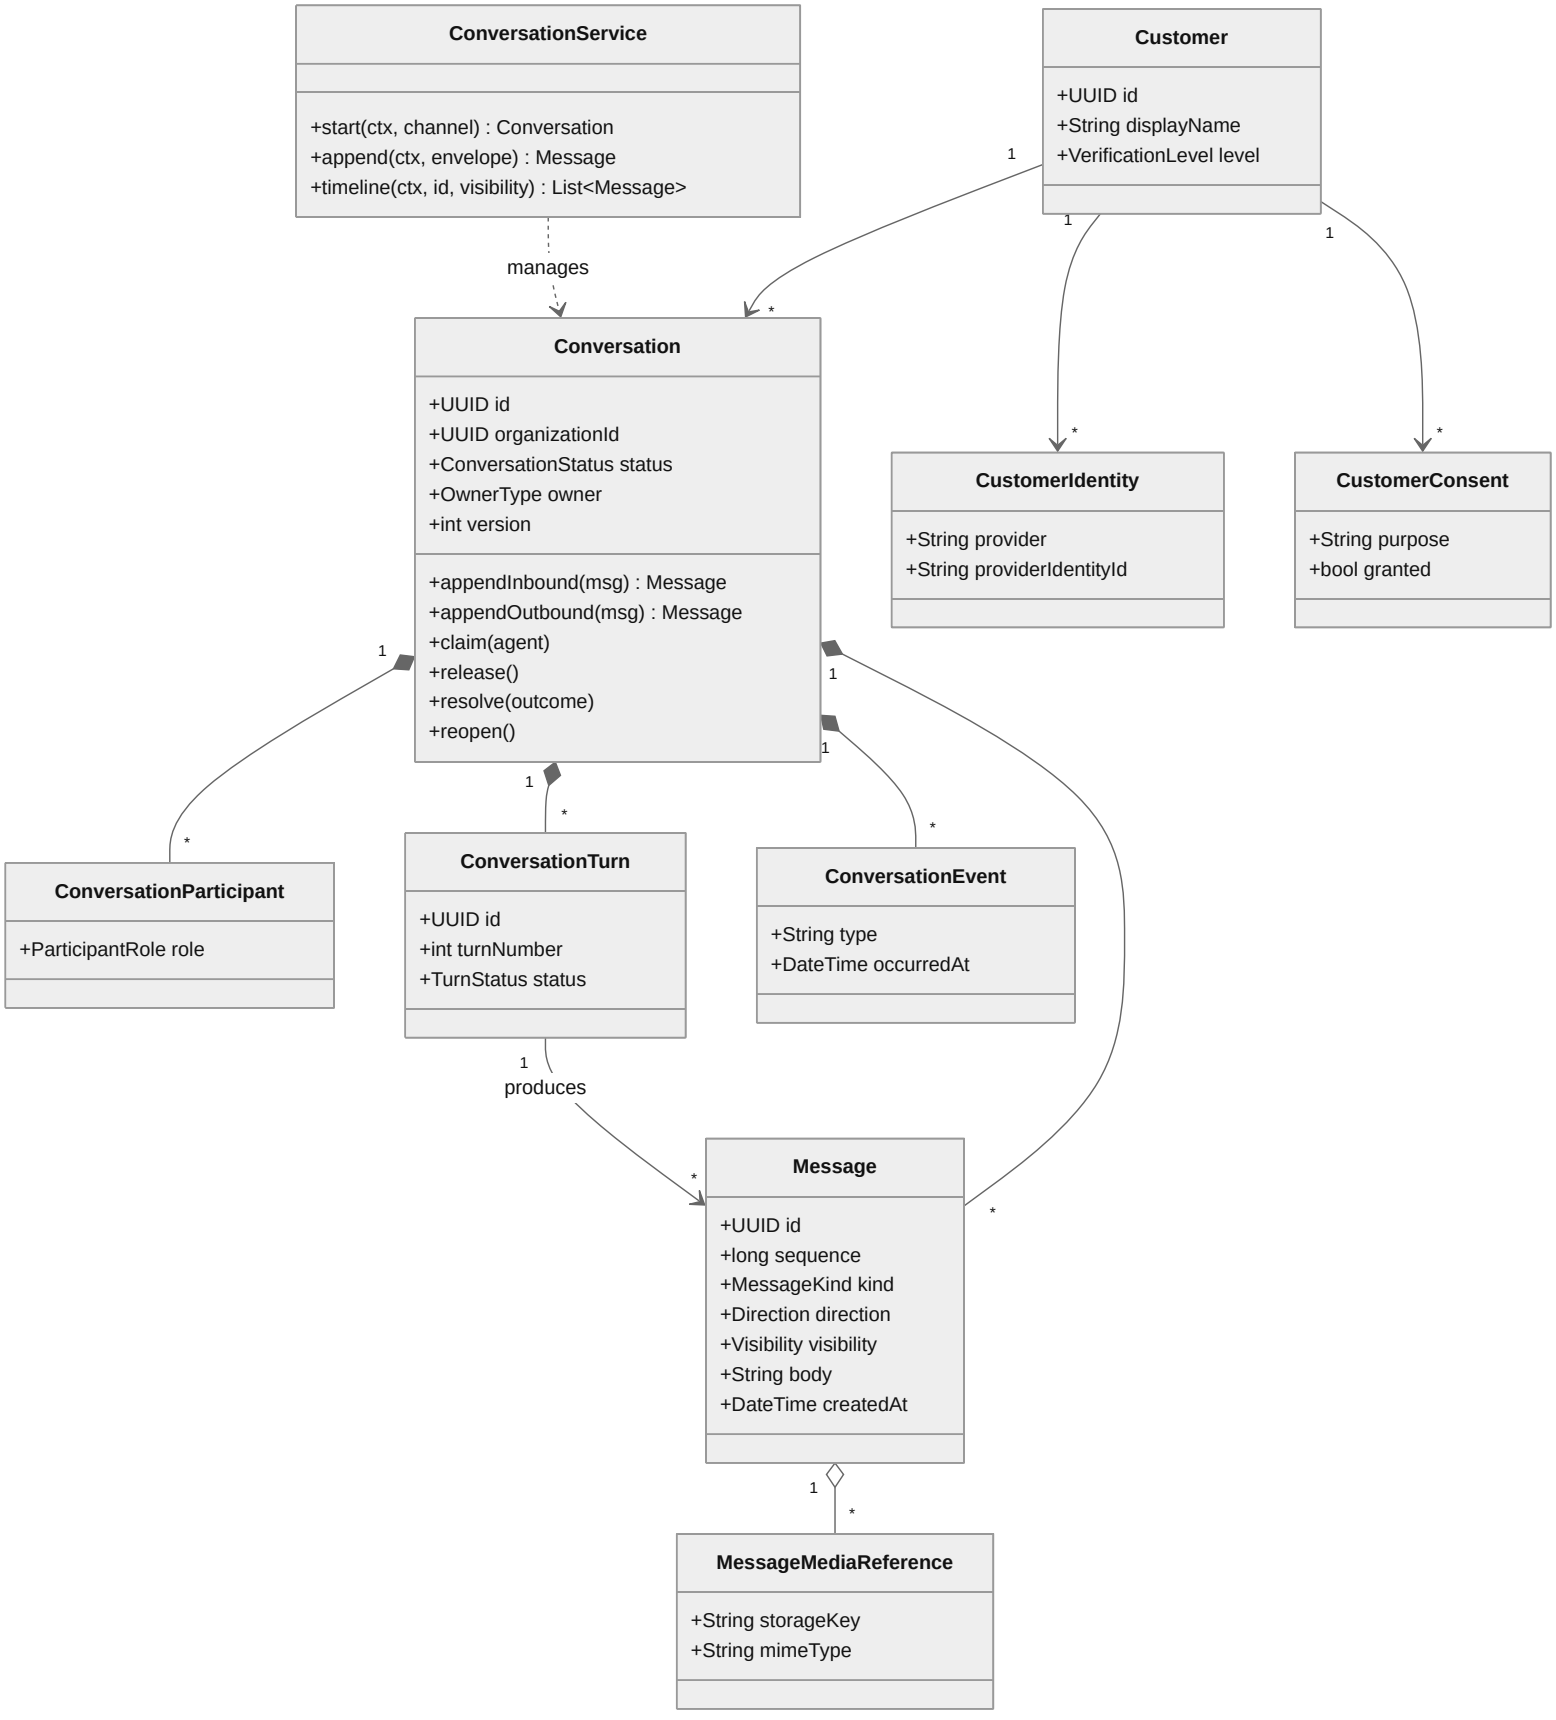
ConversationService
+start(ctx, channel) : Conversation
+append(ctx, envelope) : Message
+timeline(ctx, id, visibility) : List<Message>
manages
Customer
+UUID id
+String displayName
+VerificationLevel level
Conversation
+UUID id
+UUID organizationId
+ConversationStatus status
+OwnerType owner
+int version
+appendInbound(msg) : Message
+appendOutbound(msg) : Message
+claim(agent)
+release()
+resolve(outcome)
+reopen()
CustomerIdentity
+String provider
+String providerIdentityId
CustomerConsent
+String purpose
+bool granted
ConversationParticipant
+ParticipantRole role
ConversationTurn
+UUID id
+int turnNumber
+TurnStatus status
ConversationEvent
+String type
+DateTime occurredAt
produces
Message
+UUID id
+long sequence
+MessageKind kind
+Direction direction
+Visibility visibility
+String body
+DateTime createdAt
MessageMediaReference
+String storageKey
+String mimeType
1
*