Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Intelligent Systems

Excersice 9 – Quantification

Simon Reichhuber, Ingo Thomsen

February 10, 2021

University of Kiel, Winter Term 2021

Table of Content

Quantifying self-organised systems

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

A. compute the static degree of self-organisation

B. categorise the static degree of self-organisation

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Compute the static degree of self-organisation

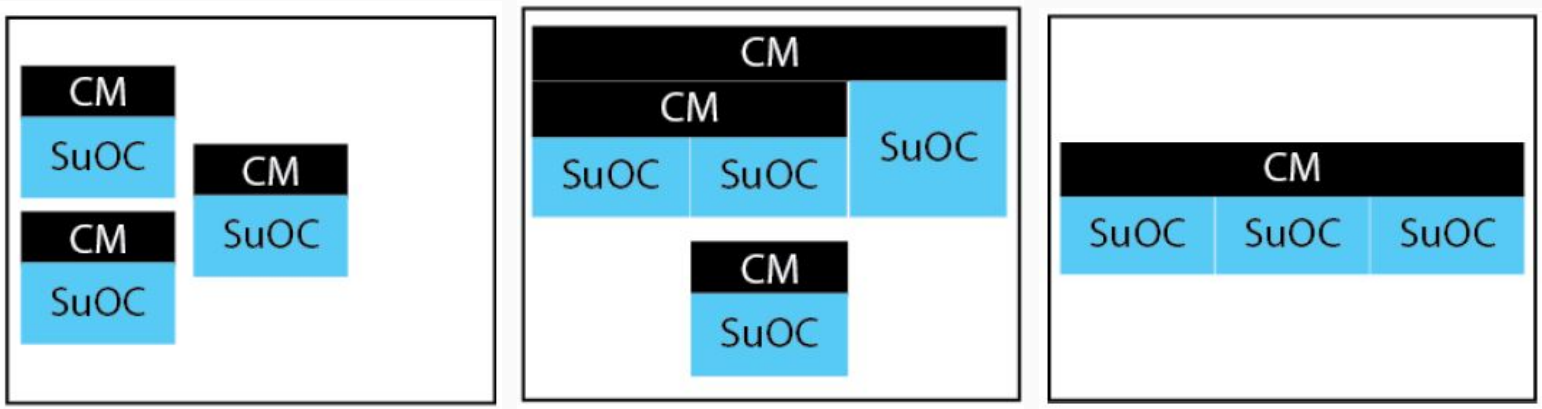

System 1 System 2 System 3

Three different self-organised systems.

1. A System 1

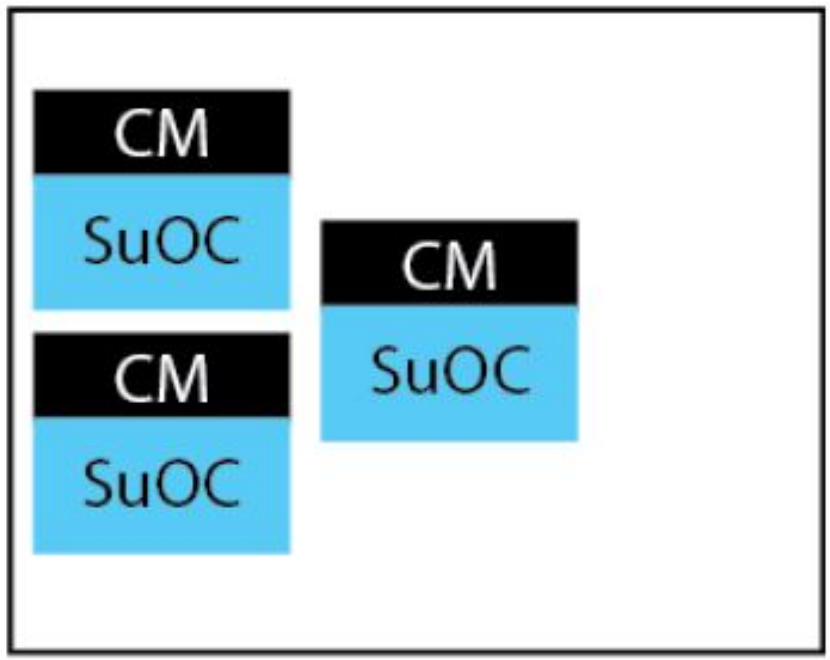

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Strongly self-organised
$k = 3$
$m = 3$
$(3 : 3)$

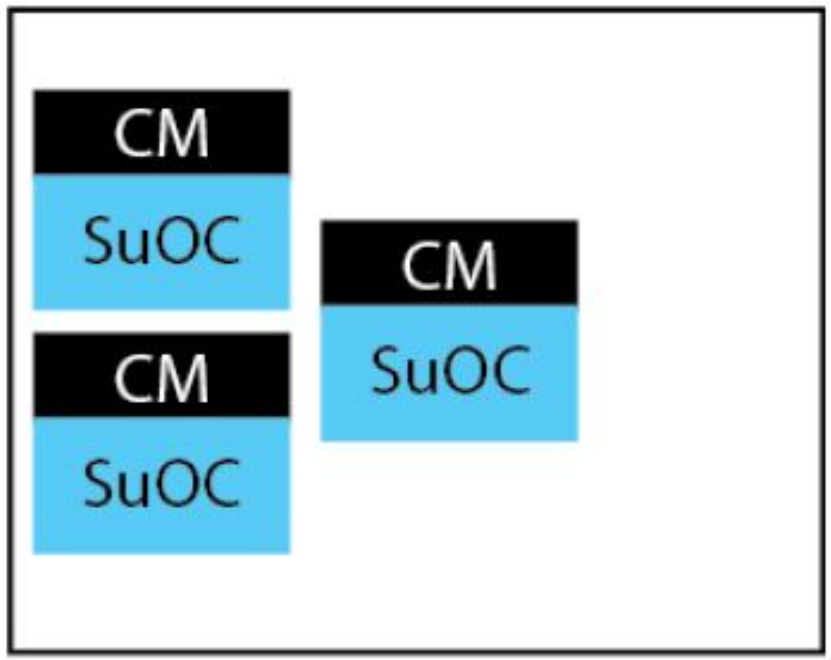

1. A System 2

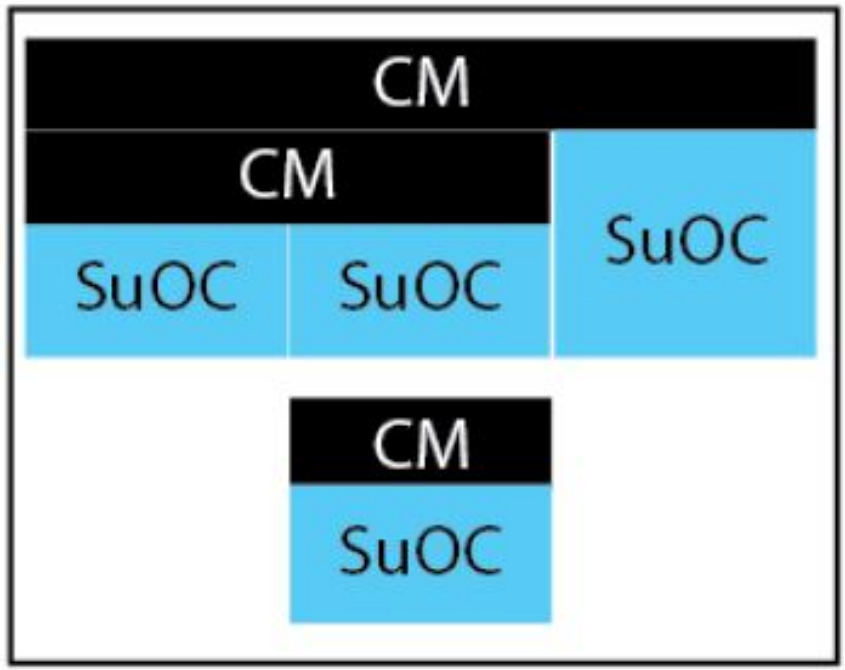

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Self-organised
$k = 2$
$m = 4$
$(2 : 4)$

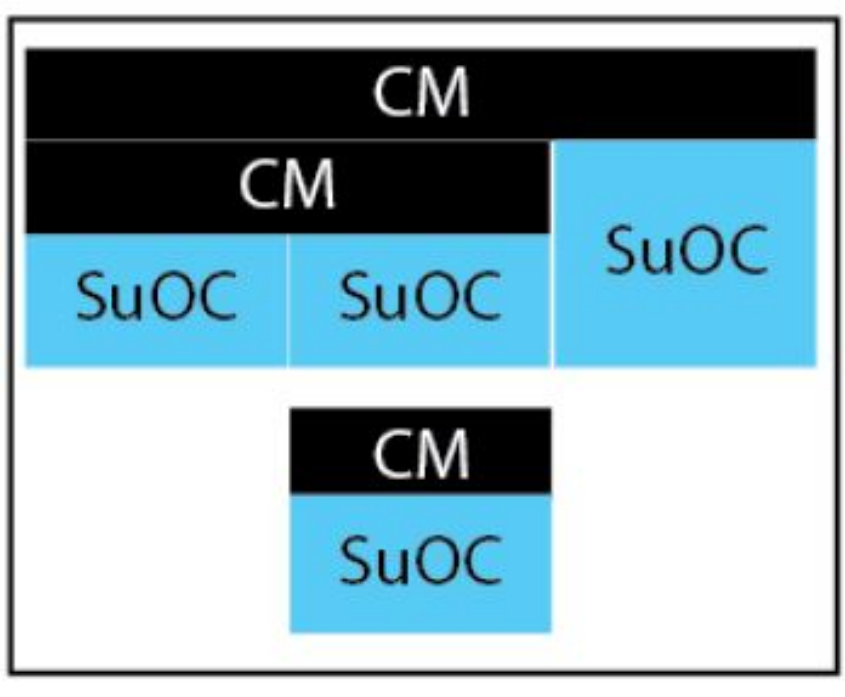

1. A System 3

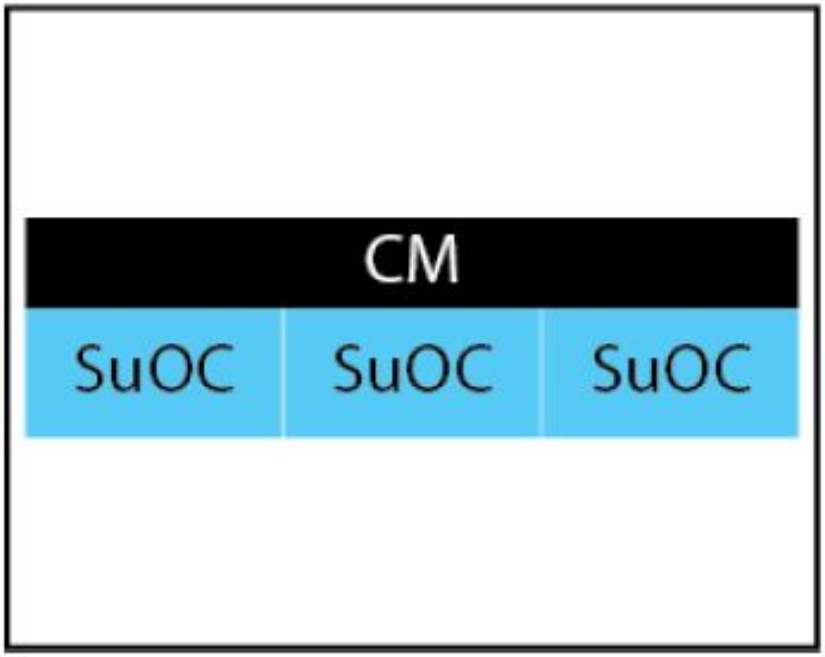

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Weakly self-organised
$k = 1$
$m = 3$
$(1 : 3)$

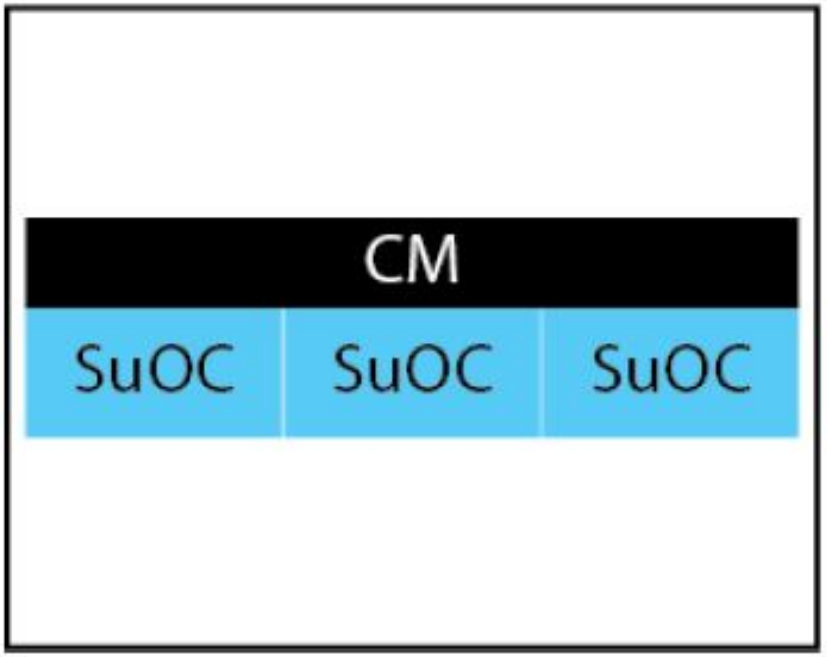

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

A. compute the static degree of self-organisation

B. categorise the static degree of self-organisation

C|A|U
Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Let S be an adaptive system consisting of m elements ($m > 1$) und and k fully or partially distributed control mechanisms CM ($k \geq 1$). Then, the static degree of self-organisation is given as ($k : m$), which is categorised under one of the following categories:

C|A|U
Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Strongly self-organised system

A system with $k = m$ and a static degree of self-organisation $(m : m)$ is named **strongly self-organised**

Self-organised

A system with $m > k > 1$ and a static degree of self-organisation $(k : m)$ is named **self-organised**.

Weakly self-organised

A system with $k = 1$ and a static degree of self-organisation $(1 : m)$ is named **weakly self-organised**.

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

categorise the static degree of self-organisation

System 1	System 2	System 3
$k = 3$	$k = 2$	$k = 1$
$m = 3$	$m = 4$	$m = 3$
$(3 : 3)$	$(2 : 4)$	$(1 : 3)$
$\Rightarrow$ **strongly s.-o.**	$\Rightarrow$ **s.-o.**	$\Rightarrow$ **weakly s.-o.**

Remark:

s.-o. $=$ self-organised

Dynamic degree of self-organisation

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

A. **Build two graphs of the system for each observation**
B. Quantify the self-organization of the process between the two observations

Build two graphs of the system for each observation

Observation$_1$

- Request message of size 10-packets using TCP protocol from router ID-102 to router ID-101
- Request message of size 12-packets using UDP protocol from router ID-101 to router ID-203
- Request message of size 03-packets using UDP protocol from router ID-203 to router ID-100
- Request message of size 06-packets using TCP protocol from router ID-100 to router ID-203
- Request message of size 01-packets using TCP protocol from router ID-007 to router ID-101
- Request message of size 05-packets using TCP protocol from router ID-101 to router ID-102

2. A Observation 2 (1)

Two new routers of ID-301 and ID-311 added.

Observation$_2$

- Request message of size 05-packets using TCP protocol from router ID-102 to router ID-101
- Request message of size 03-packets (each) using UDP protocol from router ID-101 to routers ID-100 and ID-007
- Request message of size 12-packets (each) using UDP protocol from router ID-100 to routers ID-301 and ID-311
- Request message of size 01-packets using TCP protocol from router ID-301 to router ID-203
- Request message of size 10-packets using TCP protocol from router ID-100 to router ID-203

. . .

Observation$_2$

...

- Request message of size 06-packets using UDP protocol from router ID-203 to router ID-101
- Request message of size 02-packets using TCP protocol from router ID-007 to router ID-101
- Request message of size 05-packets using TCP protocol from router ID-101 to router ID-102

C | A | U
Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

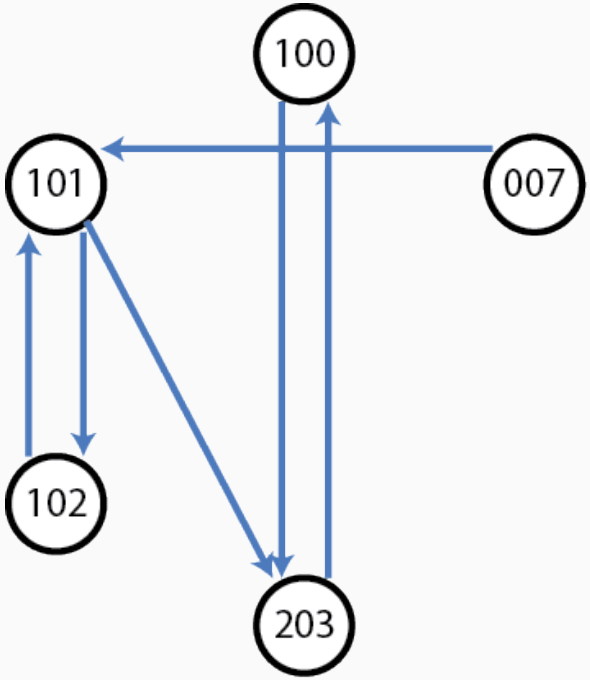

Observation 0

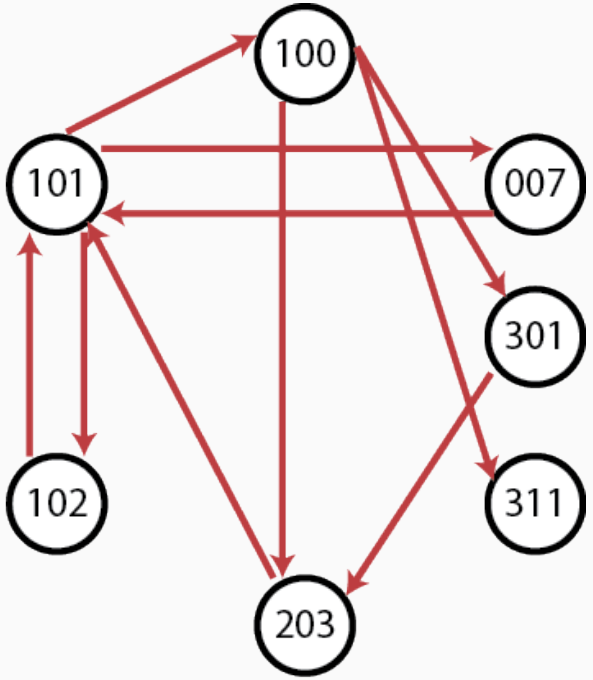

Observation 1

A. Build two graphs of the system for each observation

B. Quantify the self-organization of the process between the two observations

Kiel University
Christian-Albrechts-Universität zu Kiel
Faculty of Engineering

Quantify the self-organization of the process between the two observations

Formula given from the lecture:

$$\Delta(G_1, G_2) = \frac{|\{e_{ij} : e_{if} \in E_1 \oplus e_{ij} \in E_2\}|}{0.5 * (|V_1| + |V_2|)}$$

$$\Delta(G_1,\ G_2) = \frac{8}{0.5\ *\ (5\ +\ 7)}\ \approx$$

1.33