Learning Degree-Generalizable Distributed Graph Coloring

Research manuscript — authors to be specified

October 2026 — preregistered experimental study

Abstract

Can a learned distributed algorithm operate at graph degrees and palette sizes absent from training? We study synchronous $(\Delta + 1)$-coloring using a shared node–color network, Universal Color GNN (UCGNN). Its parameter count is independent of the palette, while its local computation and communication costs grow with it. Historical experiments with five networks trained only on degree-three, 40-node graphs recorded 8,629 successful extreme-study executions, with unequal coverage across degrees. These observations motivate a preregistered mechanism study rather than a universal-correctness claim. We isolate prefix normalization at fixed tensor shapes and initialization, compare MAX with SUM and MEAN, and implement prefix-free DeepSets and local palette attention. Across five new training seeds per primary architecture, NORMALIZED, DeepSets and local palette attention each completed all 1,520 held-out graph–tape evaluations, including degree 200 and 640-node graphs. Thus the original ordered prefixes are not necessary in this experiment. The isolated raw-endpoint control lost progress in 346 evaluations; SUM stalled in 1,196, while MEAN produced 839 improper final colorings. A finite-type reduction and interval certificates characterize the MAX COMMIT channel. A separate diffuse-component condition yields a conditional progress bound even when some colors have large probability. Neither finite success nor local safety certifies universal termination of a learned policy. A separate frozen-weight extension using only local-degree palettes recorded normalized 760/760, deepsets 760/760, transformer 760/760 proper completions. Conditional-law tests distinguish pointwise fidelity from candidate-distribution similarity. A subsequent complete-coloring-law study used fifteen frozen policies on 53 fixed graph entries and rejected 183/795 graph–checkpoint equality hypotheses after Holm correction. Exact teacher laws are nonuniform on small paths and cycles, whereas vertex symmetry forces uniform conditional solution laws on cliques for ideal equivariant protocols. Nonrejection alone is not evidence of equivalence. An independently validated honest omnibus then addressed localized power failures of Hamming MMD and rejected 340/795 hypotheses on fresh complete-coloring banks, versus 239/795 for the old test at the same total sample budget. Its verified sensitivity has explicit higher-order and rare-event limits. A subsequent size–degree factorial study uses three new regular graphs in each of sixteen cells, unchanged checkpoints and 500 testing attempts per generator. The smallest priority-case E1 TV lower bound from two preregistered events over three new 512-node degree-100 graphs and five checkpoints is 0.078. Simultaneous event contrasts separate structural changes from rejection rates, including a reduction of at least 0.138 in E1's absolute top-color appearance difference from 128 to 1,024 vertices at degree 50. Size effects therefore depend on the regime; degree remains confounded with palette size.

1 Introduction

Classical distributed algorithms specify computations that apply to whole families of graphs. A learned implementation must additionally select a representation whose behavior remains meaningful when neighborhood size changes. Neural algorithmic reasoning investigates learning executable

computations and their transfer across inputs [17]; the CLRS benchmark makes this challenge experimentally accessible [18]. Architectural alignment can affect extrapolation, but expressivity and training success do not by themselves establish out-of-distribution correctness [19].

We ask: *Which architectural mechanisms enable learned distributed algorithms to generalize beyond the graph degrees and palette sizes observed during training?* Our case study uses anonymous synchronous nodes, private randomness, two neighbor communications per protocol round, and permanent color decisions. We study a valid coloring with a prescribed palette, rather than optimizing the chromatic number. Local neural computations are simulated on a GPU; we do not claim a network-deployed distributed implementation.

The historical UCGNN result is striking but insufficient to identify causes: five networks trained with four colors produced proper colorings at much larger palettes, while exact candidate imitation degraded. A historical raw prefix variant concentrated proposals and stalled, but also changed the scorer dimension and initialization. Its failure cannot isolate normalization. Similarly, correct ordinary rollouts can hide an unsafe authorization rule when candidate selection rarely exposes conflicts.

Our contribution is an auditable mechanism study: (i) tensor-, data- and tape-matched endpoint interventions, (ii) five-seed aggregation and palette controls, including successful prefix-free attention, (iii) independent graph evaluation with shared-instance statistical accounting, and (iv) separate conditional arguments for safety and progress. The outcomes support normalization and multiplicity control for this training procedure, while refuting a need for the original prefix mechanism within the tested family. We make no claim that UCGNN is inherently superior to attention, or that these architectural ingredients are necessary for every learnable coloring policy.

Related work. Message-passing GNNs and distributed local algorithms share locality constraints, although identifiers, message sizes, synchrony and stopping rules matter [7, 11, 15]. Flood and Echo Net aligns propagation with a distributed execution pattern [8]; work on asynchronous GNN inference emphasizes that synchronous performance does not imply asynchronous robustness [14]. Distributed scheduling with learned embeddings followed by a greedy solver is a different interface from learning the entire local decision policy [21]. GNN coloring work has studied decision classification and extraction of constructive solutions [6]; this does not constitute anonymous synchronous protocol execution under our observation constraints. Transformer length generalization depends on the learned computation and input representation [5, 22]. Finally, imitation learning faces policy-induced distribution shift [10]; targeted intervention can expose confounded decision rules [2]. Our counterfactual proposal supervision is specified below and should not be equated with either of these algorithms.

2 Problem and Distributed Model

Let $G = (V, E)$ be a finite simple undirected graph, $N = |V|$, with maximum degree at most a declared Δ. Nodes share the palette $\{0, \dots, K-1\}$, $K = \Delta + 1$, and maintain $q_v \in \{-1, 0, \dots, K-1\}$, where -1 is pending. No unique node identifier enters the policy. Colors have common names and an order, so color permutation invariance is not assumed. Each round draws independent $r_v^p, r_v^c \sim U[0, 1)$ even for fixed nodes. After a first neighbor communication the node selects participation B_v and a candidate C_v. A second communication permits a learned COMMIT decision J_v. Participating pending nodes with $J_v = 1$ fix C_v permanently.

The teacher's available set and decisions are

$$A_v = \{c : \forall u \in N(v), q_u \neq c\}, \qquad k_v = |A_v|, \tag{1}$$

$$B_v^* = \mathbf{1}[q_v = -1]\mathbf{1}[r_v^p < 1/2], \qquad C_v^* = A_v[\lfloor r_v^c k_v \rfloor], \tag{2}$$

where A_v is sorted. The teacher confirms only if no fixed neighbor has the candidate and no participating pending neighbor proposes it. We call this the random-trial teacher; historical code sometimes uses "Luby" as shorthand. Exact availability and conflict checks supply labels or observe completed model decisions; they never enter learned inference as a shield.

3 Supervised Learning of Distributed Coloring

Each training example is a round from a teacher trajectory, including the current partial coloring and its two private draws. The loss is

$$\mathcal{L} = \mathcal{L}_{\text{participate}} + \mathcal{L}_{\text{candidate}} + \tfrac{1}{2}\mathcal{L}_{\text{commit,own}} + \tfrac{1}{2}\mathcal{L}_{\text{commit,cf}}.$$

Participation and COMMIT use binary cross-entropy; the candidate uses cross-entropy over the public palette. During ten warmup epochs COMMIT sees teacher proposals. Thereafter it sees hard own proposals and intervened proposals with recomputed exact authorization labels. Interventions include proposing a fixed neighbor's color and equal simultaneous neighboring offers; their frozen probabilities are 0.17 and 0.04. Only proposals are intervened upon: permanent colors and the observation interface remain unchanged. Hard proposals prevent the COMMIT losses from updating candidate or participation modules. Own-only replaces the counterfactual half by own proposals, preserving the total loss weighting.

M6B uses the earlier M4B neural architecture specialized to a fixed palette. With its reference dimensions it has $385K + 7427$ parameters. Changing K changes input and output matrices, so these checkpoints are evaluated only at compatible degrees, without undocumented padding or adaptation.

4 Universal Color GNN

For every pair (v, c) define $u_v = \mathbf{1}[q_v = -1]$ and $o_{vc} = \mathbf{1}[q_v = c]$. Shared learned MLPs construct the first message and state:

$$m_{vc}^1 = \phi_1([u_v, o_{vc}]), \qquad h_{vc} = \psi_1([u_v, \text{MAX}_{w \in N(v)}\, m_{wc}^1]).$$

Both have 32-dimensional nonnegative outputs. Empty-neighborhood aggregation is zero. Learned availability and ordered endpoints are

$$\alpha_{vc} = \sigma(a^\top h_{vc} + b), \qquad S_{vc} = \sum_{j<c} \alpha_{vj}, \qquad D_v = \max(\sum_j \alpha_{vj}, 0.5), \tag{3}$$

$$L_{vc} = S_{vc}/D_v, \qquad U_{vc} = (S_{vc} + \alpha_{vc})/D_v, \tag{4}$$

$$s_{vc} = F([h_{vc}, \alpha_{vc}, L_{vc}, U_{vc}, r_v^c]). \tag{5}$$

The candidate is the maximizing palette slot; there is no exact mask of occupied colors. The availability scores need not be calibrated probabilities or an integer count. Prefix accumulation and normalization are incorporated operations, while availability, scoring and authorization are learned.

For the second communication let

$$f_{vc} = [u_v, o_{vc}, B_v, \mathbf{1}[C_v = c]], \qquad z_{vc} = \psi_2([f_{vc}, \mathrm{MAX}_{w \in N(v)}\, \phi_2(f_{wc})]).$$

The COMMIT head reads only z_{vC_v} and the own participation/pending/offer bits. The original model has 16,035 trainable parameters independent of K. The implemented messages contain $32K$ floats per directed edge per stage; constant parameter count is not constant communication or memory cost.

5 Prospective Experimental Protocol

The protocol was locally committed as `023deaf` before new training or confirmatory test generation. Primary treatments are NORMALIZED, raw endpoints, SUM, MEAN, DeepSets and LocalPaletteTransformer. The raw-endpoint control changes only (L, U) to $(S, S + \alpha)$ in the same four extra scorer inputs. It shares every initial tensor, example, minibatch order, counterfactual tape, optimizer and update count with NORMALIZED within a training seed. SUM and MEAN replace the neighbor reduction in both stages, without extra scaling for SUM; MEAN uses actual in-degree and zero for an isolated node.

Training uses 800 regular graphs with $N = 40$, $\Delta = 3$, three tapes, Adam learning rate 10^{-3}, batch size 128 and 120 epochs. New training seeds are 41000–41004. Seed 41000 is the full-budget pilot and counts as the first replicate. Promotion requires final training-degree validation accuracies of at least 0.98 participation, 0.90 candidate and 0.95 own-COMMIT, with finite training throughout. Failed pilots are retained without repeated tuning. Promotion decisions precede the confirmatory test. Epoch 120 is primary; validation-best is a separately labeled selection policy.

The independent namespace 202610210211 fixes 304 graph–tape cases per model: degrees 3,5,10,15,20,50,100,200, regular/irregular/heterogeneous families, $N = 160$ (400 at degree 200), size checks at $N = 640$, cliques and circulant bipartite stress graphs. Each random core cell contains eight graphs; size cells contain four. A clique's three tapes are not three independent graphs. Every paired model uses the same instances and tapes, with a 256-round cap. Failures do not stop other evaluations or truncate a rollout at its first unsafe action. Technical OOM and timeout remain distinct from wrong coloring.

We report fixed-network Clopper–Pearson intervals per random-graph stratum, all seed rates, and paired hierarchical bootstrap differences across training seeds and graph identities. Correlated executions on shared graphs are not pooled as independent Bernoulli trials. Computational limits are an 8 GiB RTX 4060, one GPU worker, a 4 GiB allocator cap, and 36 accumulated active GPU-process hours. Source hashes, optimizer/RNG checkpoints and atomic per-case records support recovery. The full preregistration specifies the remaining metrics and resource rules. All 157 scheduled tasks completed in 6.172 accumulated GPU-process hours, well below the 36-hour ceiling. The release contains 32 new training runs, 85 checkpoint views, 18,363 graph evaluations and 3,520 controlled progress rollouts. There were no evaluation OOMs, timeouts or unexecuted planned cells. The 32 runs comprise 30 primary networks and two one-seed auxiliary pilots; validation-selected views do not count as additional independent networks. At eight random graphs per core stratum, an all-success fixed-network cell still has a Clopper–Pearson lower bound of only about 0.631. Empirical bootstrap intervals can be degenerate when all observed differences agree; this does not establish population certainty or equivalence.

Model	Networks	Executions	Successes	Graphs	Unsafe
A1	1	400	357	400	0
C1	1	400	400	400	0
E1	5	8629	8629	1765	0
E2	5	2000	2000	400	0
E3	5	2000	2000	400	0

Table 1: Historical extreme-study counts. Coverage differs between experiments; shared graphs do not become independent by evaluating more networks.

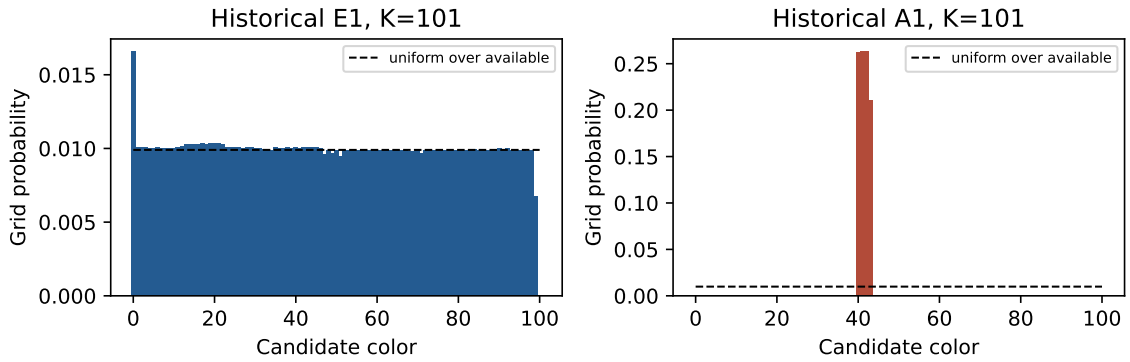


Figure 1: Historical candidate distributions, generated from saved per-color CSVs. These descriptive observations do not isolate the effect of normalization.

6 Degree and Size Generalization: Historical Evidence

Five historical E1 networks trained solely at degree three recorded 8,629/8,629 successes in the extreme study, on 1,765 distinct graphs with unequal coverage across degree, size and seed. The maximum degree 500 was exploratory with sparse coverage, not a balanced five-network test at that degree. Historical E2 and E3 each had five independent training networks; A1 and C1 each had one. These already observed cohorts are motivation and historical evidence, not untouched architecture-selection tests.

E1-0's exact candidate fidelity can collapse while valid coloring remains successful. In a historical all-free $K = 201$ controlled sweep it agreed with the teacher at only 5/1,001 uniform-grid draws while using 199 colors. Thus candidate identity and diversity are different endpoints. Historical A1's all-free $K = 101$ law placed mass on only four colors. Reconstructed failures showed extremely slow progress with no unsafe commits, localizing a functional failure without isolating which architectural change caused it.

Independent new cohort. Each of five new NORMALIZED, DeepSets and Transformer networks completed 304/304 evaluations with no exact-rule-violating COMMIT, across all three random families, size checks and structured graphs. Historical E1 also completed 1,520/1,520 new-cohort executions. The 15 M6B specialists, five at each compatible degree 3, 5 and 10, completed

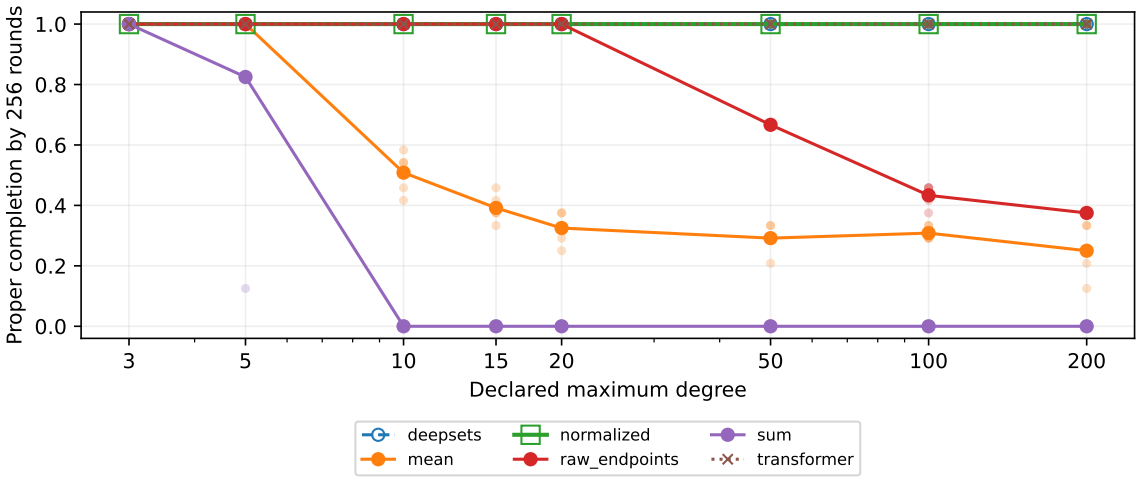


Figure 2: Core-tier proper completion by 256 rounds. Lines average five independently trained networks; individual seed rates are overlaid. All architectures use the same graphs and tapes.

Model	Networks	Proper / executions	Seed rate range	Unfinished	Unsafe COMMIT
normalized	5	1520/1520	1.000–1.000	0	0
raw_endpoints	5	1174/1520	0.766–0.780	346	0
sum	5	324/1520	0.145–0.230	1196	0
mean	5	681/1520	0.411–0.487	0	57340
deepsets	5	1520/1520	1.000–1.000	0	0
transformer	5	1520/1520	1.000–1.000	0	0

Table 2: Primary epoch-120 algorithmic outcomes across all strata. Totals are descriptive: networks share 288 graph identities and 304 graph–tape cases. Technical failures are reported separately. Unsafe denotes violation of the exact rejection rule; final improper coloring is assessed separately.

555/555 compatible tests; their fixed-palette heads were not evaluated at unseen degrees. They were trained at their evaluation degree, unlike the universal models' degree-transfer setting.

7 Architectural Ablations

All five normalization pairs passed the complete tensor, data, minibatch, counterfactual-tape and update-count audit. Raw endpoints completed 1,174/1,520 executions, with five-network rates ranging from 0.766 to 0.780, and left nodes pending in 346 capped runs. No unsafe COMMIT was observed. At all-free $K = 201$, its effective support was only 4.00–4.05 colors, versus 193.1–199.5 for NORMALIZED. This isolated intervention supports a beneficial normalization effect under the fixed procedure; it does not establish that all raw parameterizations must fail.

SUM completed 324/1,520 tests, with no completion at any tested degree at least 10. Its 1,196 failures reached the round cap without an unsafe COMMIT. The multiplicity probe showed rejection of conflict-free proposals after duplicating an ordinary neighbor type eight times, for all five networks. MEAN completed 681/1,520; every node eventually fixed a color, but 839 final states were improper. Its COMMIT heads missed single conflict messages diluted by eight ordinary messages in all five networks. Both aggregations learned the degree-three teacher well. These observations

Model	Networks	3	5	10	15	20	50	100	200
cyclic_teacher	1	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
deepsets	5	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
mean	5	1.0000	1.0000	0.5083	0.3917	0.3250	0.2917	0.3083	0.2500
normalized	5	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
own_only	1	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
raw_endpoints	5	1.0000	1.0000	1.0000	1.0000	1.0000	0.6667	0.4333	0.3750
sum	5	1.0000	0.8250	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
transformer	5	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000

Table 3: Core-tier proper completion, means across independent training networks (columns are degrees). Every network uses shared graphs. Seed ranges, paired intervals and coverage are in the accompanying CSVs.

separate over-rejection from unsafe acceptance and support the importance of multiplicity control in these models. Since both communication stages were changed together, the graph ablation alone does not identify which stage caused every error.

The separately selected validation-best checkpoints retain the same qualitative pattern on 960 core executions per primary treatment: NORMALIZED, DeepSets and Transformer each 960/960, raw 799/960, SUM 255/960 and MEAN 494/960. Selection did not use held-out degrees.

8 Transformer and Other Baselines

LocalPaletteTransformer keeps shared local graph communication and the COMMIT pathway, replacing the prefix scorer by a 16-dimensional, two-head within-node self-attention block with feedforward width 32 and zero dropout [16]. It receives functional positions $c/\max(K-1,1)$ and $1/K$, not learned absolute position embeddings or original prefixes. Its parameter count is 16,995. The DeepSets control uses a shared 16-dimensional mean-pooled palette context [20], functional positions and 17,907 parameters. Attention can have quadratic palette cost; a technical resource limit must not be called a coloring failure. All six seed-41000 pilots reached epoch 120 and passed the prespecified local learning gate. Candidate validation fidelity was 0.9971 for NORMALIZED, 0.9850 for raw endpoints, 0.9983 for SUM and MEAN, 0.9948 for DeepSets and 0.9957 for the Transformer; own-proposal COMMIT fidelity was 1.0 for each. These are in-degree validation measurements, not degree-transfer results. In a separate inference-only resource check, all six models fit at $N = 640$, $\Delta = 200$ and $K = 201$. The Transformer used approximately 532 MiB of peak allocated CUDA memory for one round; this establishes technical feasibility for this configuration only. Both prefix-free controls also completed all 205 degree-200 evaluations across five seeds and all strata. This directly answers the palette transfer question affirmatively for $K = 11, 21, 51, 101, 201$ on the stated cohort. However, attention was less uniform and slower on large cliques: at all-free $K = 201$ its effective support ranged from 57.3 to 112.9 colors, with largest grid masses 0.126–0.243. On the degree-200 clique its mean termination time was 30 rounds, versus 14.33 for NORMALIZED and 21.47 for DeepSets (five networks, three shared tapes each; descriptive means). DeepSets' effective support was 128.6–174.2. Exact teacher-candidate fidelity was low for these successful policies; fidelity is not a coloring guarantee. Small numbers of forbidden proposals occurred for two Transformer seeds and one DeepSets seed, but their certified COMMIT channels rejected them.

These are architectural controls, not a claim that the only possible prefix-free model has been tested. Without positions or another symmetry breaker, identical available slots receive identical

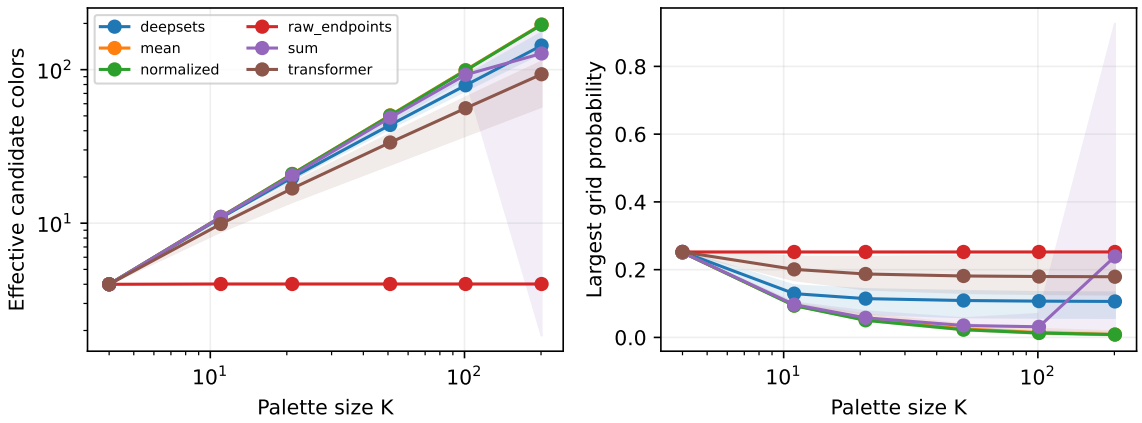


Figure 3: All-free candidate laws from 2,049 midpoint draws. Lines are five-network means; shaded bands show seed ranges, not confidence intervals. The largest atom alone does not capture the diffuse tail.

Model	Params	Dense GFLOPs	Allocated MiB	Round ms
deepsets	17907	2.4126	269.5396	46.0643
mean	16035	2.1168	471.8867	76.5871
raw_endpoints	16035	2.1168	269.1333	45.6381
transformer	16995	3.2797	345.3462	49.9987
sum	16035	2.1168	471.8867	76.0992
normalized	16035	2.1168	269.1333	45.3488

Table 4: One-round resource probe at N=400, degree 200, K=201 (one prespecified seed per model). FLOPs are approximate; neighbor reductions, nonlinearities and overhead are itemized separately in CSV. CUDA allocated memory excludes driver/reserved memory.

scores under an invariant pooled context, preventing general ordered-teacher imitation.

9 Understanding Learned Policies

9.1 Selection and held-out prediction

The prospective diagnostic freezes a monotone rank calibration of historical E1-0 on all-free $K = 101$ before evaluating $K = 17, 63, 251, 997$ and low, high, scattered, alternating and extreme availability patterns. It reports rank errors, forbidden proposals, total variation from uniform, entropy, effective colors, maximum mass and pair collisions. Boundary-neighbor float32 probes are separate from the midpoint grid used for distribution estimates. The CPU float32 diagnostic, prospectively authorized in addendum `8c69168`, evaluated 120 configured states with 2,049 midpoint draws each. Equivalent all-free configurations occur under multiple pattern names; these are not 120 independent random states. No forbidden candidate was observed on these grids. The frozen empirical predictor's mean per-state rank error was 0.569; 10 configurations at $K = 997$ exceeded two, with a worst per-state mean of 4.761. Thus its approximation deteriorates at the largest palette despite a small pooled

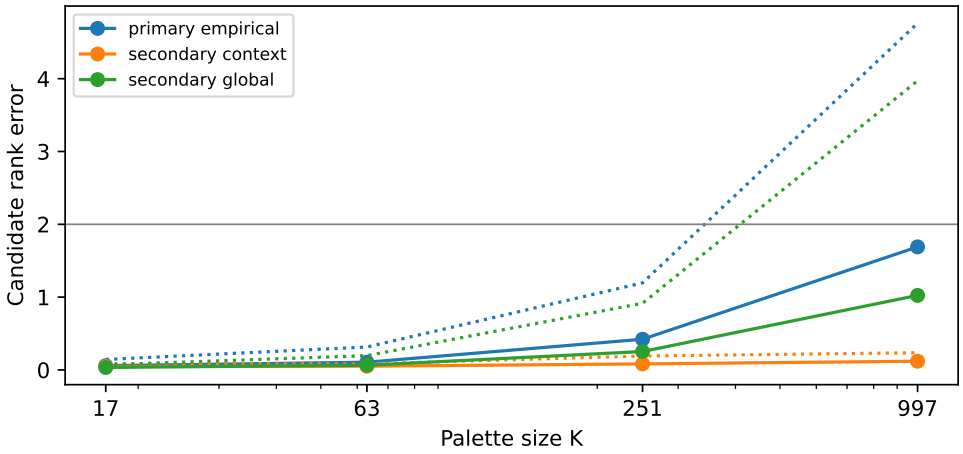


Figure 4: Frozen E1-0 candidate predictions from saved CSVs. Solid lines show mean per-state rank error; dotted lines show the worst per-state mean. Primary and secondary predictors remain separately identified.

mean. We retain these negative cases.

Two secondary analytic predictors were also frozen before held-out inspection. The context-conditioned predictor uses a finite catalog of neighbor-type contexts calibrated at $K = 101$. It achieved mean rank error 0.075 and worst per-state mean 0.236, with individual grid rank error at most one. This is finite empirical evidence for a context-dependent deformed quantile, not an exact algorithmic identity or a guarantee over all availability patterns. Specifically, fix the learned free-color context h_s, α_s and set both endpoints to a continuous coordinate t. The one-hidden-layer scorer becomes

$$f_s(t, r) = b_0 + \sum_j v_j \,\mathrm{ReLU}(B_{sj} + A_j t + R_j r).$$

Its smallest continuous maximizer $g_s(r)$ is found among $0, 1$ and the in-range breakpoints $-(B_{sj} + R_j r)/A_j$ for $A_j \neq 0$. Predicting rank $\lfloor k g_s(r) \rfloor$, clipped to the available range, removes the empirical calibration grid's quantization. The four contexts encode presence of pending and fixed neighbors. This is a weight-derived predictor, evaluated numerically in float64; replacing finite-width intervals and neglecting forbidden-color availability mass are approximations, not a convergence theorem. The single global-context predictor remains separately reported.

9.2 A sufficient condition for progress

Condition on a proper state. Let U_v be the pending neighbors. With private independent participation/candidate draws within and across nodes, and exact conflict rejection,

$$\Pr(v \text{ confirms} \mid \text{state}) = p_v \sum_{c \in A_v} q_v(c) \prod_{u \in U_v} (1 - p_u q_u(c)). \tag{6}$$

Confirmation events of neighboring nodes need not be independent.

Proposition 1. *Suppose* $0 < p_{\min} \le p_u \le p_{\max} < 1$, *exact conflict rejection and the independence assumptions of (6) hold. If* $\mathrm{supp}(q_v) \subseteq A_v$ *and* $\max_c q_v(c) \le \beta/k_v$, *then*

$$\Pr(v \textit{ confirms} \mid \textit{state}) \ge p_v (1 - p_{\max})^{\beta |U_v|/k_v} \ge p_{\min} (1 - p_{\max})^{\beta}.$$

Proof. Properness and $K \geq \Delta + 1$ imply $k_v \geq |U_v| + 1$. For $0 \leq x \leq p_{\max}$, concavity gives $\log(1-x) \geq x \log(1-p_{\max})/p_{\max}$. Set $\Lambda_c = \sum_{u \in U_v} p_u q_u(c)$ and $a = \log(1-p_{\max})/p_{\max} < 0$. The product in (6) is at least $\exp(a\Lambda_c)$. Jensen's inequality gives $\sum_c q_v(c) e^{a\Lambda_c} \geq e^{a \sum_c q_v(c)\Lambda_c}$. Moreover, $\sum_c q_v(c)\Lambda_c \leq (\beta/k_v) \sum_u p_u \leq \beta p_{\max}|U_v|/k_v$. Since $a < 0$, substitution proves the first bound; $|U_v|/k_v \leq 1$ proves the second. □

If these hypotheses hold uniformly at every reachable state for every pending node, $\rho = p_{\min}(1-p_{\max})^{\beta}$ gives $\Pr(T > t) \leq \min\{1, N(1-\rho)^t\}$ by conditional iteration and union bound. We have not established the uniform candidate hypotheses for any learned checkpoint. In contrast, proposing one common deterministic color on an all-free K-clique with independent participation $1/2$ is safe but has mean time $2^K/K$ until the first confirmation. Uniform *marginals* with a shared candidate draw have the same failure of progress, showing why conditional independence matters.

Corollary 1 (A diffuse allowed component)**.** *Retain properness, exact rejection, independent private draws and the participation bounds. If $S_v \subseteq A_v$ has mass $\eta_v = \sum_{c \in S_v} q_v(c) > 0$ and $q_v(c) \leq \beta/k_v$ on S_v, then*

$$\Pr(v \text{ confirms} \mid \text{state}) \geq p_v \eta_v (1-p_{\max})^{\beta|U_v|/(\eta_v k_v)}.$$

If $\eta_v \geq \eta > 0$ uniformly, this is at least $p_{\min}\eta(1-p_{\max})^{\beta/\eta}$.

Proof. Drop terms outside S_v in (6) and normalize the retained weights to $q_v(c)/\eta_v$. The same log-chord and Jensen inequalities give $p_v \eta_v \exp(a \sum_{c \in S_v} q_v(c)\Lambda_c/\eta_v)$. Its averaged load is at most $\beta p_{\max}|U_v|/(\eta_v k_v)$, proving the first inequality. Use $|U_v|/k_v \leq 1$ and monotonicity of $x(1-p_{\max})^{\beta/x}$ for $x > 0$ for the second. □

This post-result mathematical extension permits a heavy atom outside S_v, and even forbidden mass rejected by COMMIT. It helps distinguish a concentrated policy with a diffuse tail from one supported on four colors. It remains a sufficient condition; grid measurements do not establish it uniformly for a learned network.

Controlled states. Eleven prespecified representative checkpoints underwent 20 proper partial states with 16 common tapes each. NORMALIZED, DeepSets and Transformer each completed 320/320, versus raw 224/320 and SUM 64/320. MEAN completed 152/320 properly; historical A1 completed all 320 but needed up to 159 rounds. First-round safe proposal counts tracked the independent-choice expression, while SUM could reject abundant safe proposals and MEAN could confirm unsafe ones. These distinguish candidate quality from learned authorization.

9.3 Finite-type safety of COMMIT

Proposition 2. *For a legal uncolored participating center with candidate c, nonnegative shared messages and MAX aggregation, the UCGNN COMMIT logit depends only on the set of six legal neighbor types in slot c. Correct strict signs on all 64 type sets imply exact local conflict rejection for arbitrary degree and palette in real arithmetic.*

Proof. The legal types $[u, o, B, \text{offer}]$ are

$$(0,0,0,0), (0,1,0,0), (1,0,0,0), (1,0,0,1), (1,0,1,0), (1,0,1,1).$$

Colored neighbors cannot participate or offer; pending neighbors do not own a fixed color. MAX is idempotent, so multiplicities disappear. The own candidate gather reads one slot, whose own

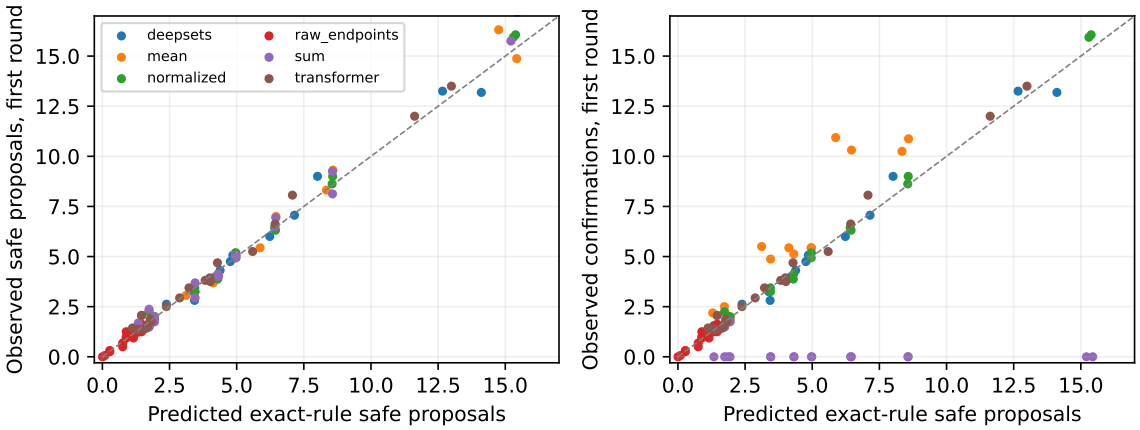


Figure 5: Controlled first-round predictions, using midpoint-grid estimates of p, q, versus 16-tape averages. Safe proposals and actual confirmations coincide only for an exact COMMIT channel. States within a network are descriptive probes, not independent trained networks.

features are $(1, 0, 1, 1)$; other colors cannot alter that logit. Fixed and simultaneous conflicts correspond precisely to the second and sixth types. The 64 strict sign conditions therefore suffice. Other own states are prevented from execution by explicit protocol gating. All subsets are realizable by proper star states with a palette of at least seven colors. □

Induction then preserves properness, without proving progress or termination. All five historical E1 checkpoints now have interval-certified strict signs on all 64 sets, both for real weights and under the stated float32 affine-error model. Their real-arithmetic minimum signed margins range from 9.706 to 13.547. Historical C1 and the new own-only seed-41000 checkpoint each have 16 certified unsafe type sets. The new NORMALIZED, raw-endpoint, DeepSets and Transformer seed-41000 COMMIT channels also satisfy the certificate; this does not certify their candidate selection. SUM and MEAN lack this 64-set reduction, which is an applicability limitation rather than evidence of unsafe decisions. Complete arithmetic assumptions, per-mask intervals and checkpoint hashes accompany the certificate CSV and JSON records. The completed audit covers 39 checkpoints: 27 satisfy the real and conditional float32 exact-rule certificate, two own-only checkpoints fail, and ten SUM/MEAN checkpoints are outside its scope. Actual star-forward decisions agree with the type reduction in all 2,496 tests. All 1,856 applicable float32 logits lie within their error enclosures. The 27 certified models also preserve signs under the sampled $\pm 10^{-6}$ pooled-message perturbations in float32 and float64; conservative real-arithmetic input radii are positive. This certifies a local rejection rule under the stated assumptions, without a global progress guarantee.

The new own-only pilot and historical C1 each completed 304/304 ordinary graph tests and 320/320 controlled progress rollouts despite their 16 unsafe type sets. Their proposals did not expose these errors. Counterfactual supervision therefore improves the learned off-trajectory COMMIT rule in these comparisons; ordinary successful execution alone cannot certify it.

A structural limitation of MEAN. Fix the active center's own features. Let m_o, m_f be degree-independent messages for an ordinary neighbor and a fixed-color conflict, respectively, and F the continuous post-aggregation COMMIT logit with no separate degree or palette input. This is the implemented per-slot interface.

treatment	Networks	Applicable	Certified	Unsafe_masks	Margin_min
A1	1	1	1	0	11.7952
C1	1	1	0	16	-15.3640
E1	5	5	5	0	9.7060
cyclic_teacher	1	1	1	0	10.7750
deepsets	5	5	5	0	8.6519
mean	5	0	0	0	NaN
normalized	5	5	5	0	8.6298
own_only	1	1	0	16	-19.3702
raw_endpoints	5	5	5	0	8.6507
sum	5	0	0	0	NaN
transformer	5	5	5	0	8.6784

Table 5: Finite-type real-arithmetic certificates, with explicit arithmetic assumptions. Unsafe mask totals across networks are descriptive. SUM/MEAN are outside this certificate's scope.

Proposition 3. *If $F(m_o) = \gamma > 0$, MEAN accepts a conflicting legal star at some finite degree. Thus it cannot reproduce exact conflict rejection at all degrees while strictly accepting that conflict-free state.*

Proof. With d ordinary leaves and one conflicting fixed leaf, the received mean is $x_d = (dm_o + m_f)/(d+1) \to m_o$. The center is pending and the fixed leaves are nonadjacent, so the partial state is proper with $K = d + 2$. Continuity implies $F(x_d) \to \gamma > 0$, hence eventual unsafe acceptance. For an L-Lipschitz classifier, it suffices that $d + 1 > L\|m_f - m_o\|_\infty/\gamma$. □

This is a local expressivity result under the stated interface, not a claim that the model reaches every such state. SUM has a contrasting construction: on legal types, $b(u, o, p, a) = o + \mathrm{ReLU}(p + a - 1)$ is exactly the conflict bit, so $1/2 - \sum_w b_w$ implements exact rejection. Its observed failure is therefore not an impossibility of representing this rule.

10 Removing Global Degree Knowledge

The preceding experiments prescribe a common palette using the graph's maximum degree. That information need not be locally available. We now replace it by the exact number of neighbors, using the individual list $L_v = \{0, \ldots, d(v)\}$. A node may count its neighbors; no global maximum is supplied as a learned feature. Common color names remain necessary: different nodes may have different lists but agree about equality of overlapping colors.

Exact protocol. Let t_v count pending neighbors of a pending node in a proper partial coloring, and let A_v be its list after removing fixed-neighbor colors. There are at most $d(v) - t_v$ excluded colors, so

$$|A_v| \geq d(v) + 1 - (d(v) - t_v) = t_v + 1. \tag{7}$$

A fixed neighbor whose color is outside L_v excludes nothing. Consider the exact teacher with independent private participation of probability $1/2$, uniform proposals from A_v, and exact rejection of fixed or simultaneous conflicts. List membership and properness are invariant: old edges remain

proper, new–old conflicts are explicitly rejected, and adjacent equal simultaneous offers are both rejected. Fixed colors never change.

Proposition 4 (Exact local-list progress)**.** *Under these hypotheses every pending vertex confirms in the next round with conditional probability at least* $1/4$*. For a graph on* n *vertices and any proper partial starting coloring,* $\Pr(T_{\text{final}} > t) \le \min\{1, n(3/4)^t\}$.

Proof. Writing $k_v = |A_v|$ and $q_u(c) = 0$ outside a neighbor's available list, private independence gives

$$P_v = \frac{1}{2k_v} \sum_{c \in A_v} \prod_{u \in N(v) \text{ pending}} (1 - \tfrac{1}{2} q_u(c)).$$

The inequality $\prod_i (1 - x_i) \ge 1 - \sum_i x_i$ yields $P_v \ge 1/2 - (4k_v)^{-1} \sum_u \sum_{c \in A_v} q_u(c) \ge 1/2 - t_v/(4k_v) \ge 1/4$ by (7). Each pending node's conditional survival probability is thus at most $3/4$ per round. Iterated conditioning and then a union bound give the tail, without assuming independent survival events across vertices. □

These are guarantees of the exact teacher. They do not follow for neural availability or neural COMMIT merely because sampled rollouts are proper.

Frozen architecture extension. All thirty epoch-120 checkpoints are reused without retraining. The receiver evaluates its valid colors using the same shared message, state and scorer modules. A sender's pending and participation bits remain defined at a receiver color outside the sender's list, while its own-color and offer bits are zero there. Deleting that message would change the learned protocol. A fixed sender's color outside the receiver's list is represented as a fixed node with own-bit zero at every queried receiver color.

The implementation groups receivers by their own K_v. Palette reductions and attention operate at exactly that length; padding is only output storage. The second communication is evaluated at the receiver's candidate, the only slot read by the historical COMMIT head. These are algebraic restrictions of the original modules, not additional masks of exact availability or a safety shield. A finite-alphabet reduction accelerates MAX first messages without changing the message function. Floating-point action equivalence, padding, node permutation, disjoint batch composition and isolated nodes are tested separately. Real-arithmetic equivalence does not imply bitwise equivalence between differently shaped GPU kernels.

The six legal selected-color neighbor types of the MAX COMMIT channel remain the same for heterogeneous lists: excluding a color from a neighbor's list can only force its own and offer bits to zero. No K or position enters COMMIT. Consequently a verified negative logit for every conflicting one of the 64 type sets transfers to arbitrary local lists in real arithmetic. We matched the twenty primary MAX checkpoint hashes to their previous interval certificates and additionally tested 1,280 legal local-list witnesses, placing the center's candidate at its last local color. Float32 transfer retains the affine-error and no-TF32/overflow assumptions of those certificates. This is a safety argument, with no neural termination conclusion. 5/5 frozen gates have a certified error in the degree-8 all-pending-other local-star intervention. 5/5 frozen gates have a certified error in the degree-8 one-fixed-same local-star intervention. 5/5 frozen gates have a certified error in the degree-16 one-pending-same local-star intervention. These are exploratory counterexamples selected from the recorded degree-probe grid, with unchanged checkpoints. They establish errors of these learned gates in real arithmetic; they do not establish an expressivity impossibility for SUM.

The prefix-free baselines contain explicit functional position $c/\max(K_v - 1, 1)$ and inverse size $1/K_v$. These are based on a node's own list. They distinguish free colors even when all neighborhood

states h_{vc} are identical. Thus their successful historical extrapolation does not show that color order was absent or that the architectures learned a fully permutation-equivariant palette policy.

Prospective comparison. The local-palette protocol was committed before confirmatory evaluation, with 30 checkpoint hashes, independent graph seeds and separate pilot seeds. It prescribes 76 graph specifications, two tapes and four regimes: GLOBAL ($K_v = \Delta+1$), LOCAL ($K_v = d(v)+1$), and common oversized lists with $K_v = \lceil a\Delta \rceil + 1$ for $a \in \{1.5, 2\}$. The eight families include regular controls, irregular and preferential-attachment graphs, stars, bipartite graphs, hubs, dense graphs and hub–low-degree mixtures, with target degrees 3, 10, 50 and 200 and additional 640-node graphs. Actual degrees are recorded. Deterministic structured graphs are descriptive controls, not independent random-graph draws. Every network/regime uses the same graph and random tape. A 256-round cutoff is an algorithmic progress limit, whereas OOM and wall-clock limits are technical failures. Unsafe authorizations, final edge conflicts and forbidden proposals are separate outcomes.

deepsets completed 760/760 local-list evaluations, with 0 exact-rule-violating authorizations. mean completed 431/760 local-list evaluations, with 18,727 exact-rule-violating authorizations. normalized completed 760/760 local-list evaluations, with 0 exact-rule-violating authorizations. raw_endpoints completed 637/760 local-list evaluations, with 0 exact-rule-violating authorizations. sum completed 160/760 local-list evaluations, with 0 exact-rule-violating authorizations. transformer completed 760/760 local-list evaluations, with 0 exact-rule-violating authorizations. These are finite-cohort outcomes; shared graphs and five networks do not create independent graph samples. 5 specifications (4 distinct structures) are previously examined controls; 45 fresh random specifications are reported separately.

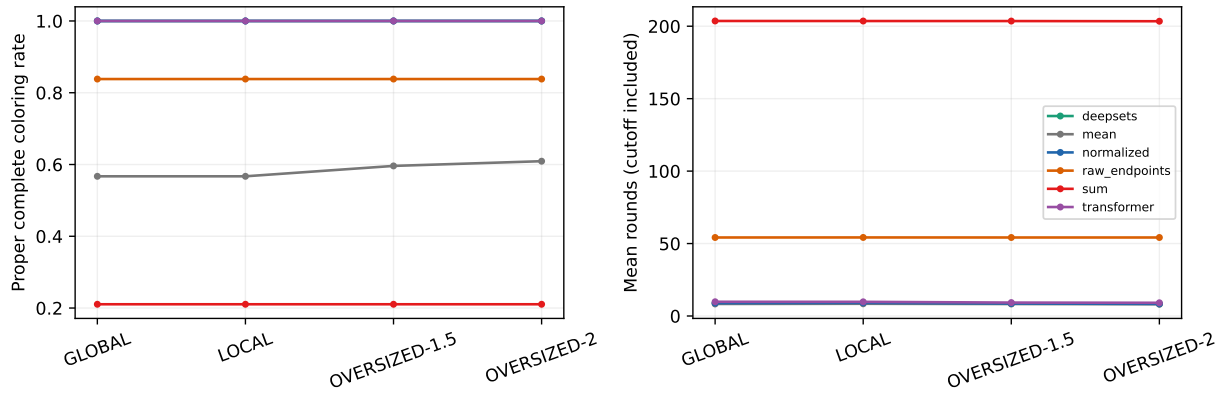


Figure 6: Success and capped rounds for the new palette regimes. Comparisons are paired by graph and private random tape.

11 Statistical Distinguishability of Learned Coloring Policies

Successful coloring does not require exact teacher imitation. To characterize what was learned, fix the *same* local state S before comparing policies. The observer knows S, the list and the available set, observes IID candidate colors, and does not observe random draws, logits or internal activations. This differs from identifying models from their autonomously visited states.

Treatment	Regime	Success / cases	Mean rounds
deepsets	GLOBAL	760/760	9.02
deepsets	LOCAL	760/760	9.17
deepsets	OVERSIZED-1.5	760/760	8.62
deepsets	OVERSIZED-2	760/760	8.47
mean	GLOBAL	431/760	8.31
mean	LOCAL	431/760	8.43
mean	OVERSIZED-1.5	453/760	8.27
mean	OVERSIZED-2	463/760	8.10
normalized	GLOBAL	760/760	8.86
normalized	LOCAL	760/760	9.03
normalized	OVERSIZED-1.5	760/760	8.60
normalized	OVERSIZED-2	760/760	8.35
raw_endpoints	GLOBAL	637/760	54.18
raw_endpoints	LOCAL	637/760	54.21
raw_endpoints	OVERSIZED-1.5	637/760	54.18
raw_endpoints	OVERSIZED-2	637/760	54.18
sum	GLOBAL	160/760	203.62
sum	LOCAL	160/760	203.58
sum	OVERSIZED-1.5	160/760	203.56
sum	OVERSIZED-2	160/760	203.43
teacher	GLOBAL	152/152	8.97
teacher	LOCAL	152/152	8.97
teacher	OVERSIZED-1.5	152/152	8.56
teacher	OVERSIZED-2	152/152	8.33
transformer	GLOBAL	760/760	9.82
transformer	LOCAL	760/760	9.78
transformer	OVERSIZED-1.5	760/760	9.26
transformer	OVERSIZED-2	760/760	9.12

Table 6: Frozen-checkpoint evaluation by palette regime. Counts include all five network seeds on shared graph–tape cases; they are not independent graph replicates. Rounds include the 256-round cutoff and improper completions; MEAN's termination time is not a speed comparison for successful proper coloring.

Three distinct comparisons. Shared-randomness fidelity is $F_M(S) = \Pr[f_M(S, r_c) = f_L(S, r_c)]$. Candidate-law comparison instead concerns $q_M(c \mid S) = \Pr[f_M(S, r_c) = c]$ and the uniform teacher law on A_v. For finite-sample identification, the hypotheses are q_L^m versus q_M^m. Participation, candidates conditional on participation, and final confirmed colors must not be pooled. In these actual implementations participation sees only (r_p, u_v) and the candidate pathway sees r_c and deterministic state, so private independent draws imply conditional independence. COMMIT and confirmation additionally depend on neighboring offers.

Proposition 5 (Fidelity need not determine a candidate law)**.** *For any state with $k \geq 2$ available colors there exist two candidate maps with zero shared-r fidelity and identical uniform candidate laws.*

Proof. For sorted colors $a_0, \ldots, a_{k-1}$ take $f_L(r) = a_{\lfloor kr \rfloor}$ and $f_M(r) = a_{(\lfloor kr \rfloor + 1) \bmod k}$. They disagree everywhere on $[0, 1)$, and each color has a preimage of length $1/k$ for either map. □

Consequently no candidate-only classifier can distinguish these two laws at this state, regardless of sample size. Their equality at one state does not establish equality over every reachable state.

Transition-law equivalence. If policies share the conditional *joint* law of all relevant actions at every state and use the same update function, their next-state laws are the same pushforward of that action law. With identical initialization, induction then gives identical trajectory laws. Equality of candidate marginals alone does not suffice: two adjacent always-participating nodes with identical shared uniform candidates always collide, whereas independent uniform binary candidates collide with probability 1/2. Coupling participation to the candidate can likewise change transition laws without changing either marginal.

Distances and optimal classification. For known laws P, Q and equal priors, optimal balanced accuracy is $(1+\mathrm{TV}(P^m, Q^m))/2$: choosing Q on event D yields accuracy $1/2+(Q^m(D)-P^m(D))/2$, maximized by the likelihood-ratio event. Writing $\delta = \mathrm{TV}(P, Q)$ and $\rho = \sum_c \sqrt{P(c)Q(c)}$, we use

$$\max\{\delta, 1-\rho^m\} \le \mathrm{TV}(P^m, Q^m) \le \min\{1-(1-\delta)^m, \sqrt{1-\rho^{2m}}\}.$$

The first upper bound follows by independent maximal couplings; the affinity factorizes, giving the Hellinger bounds by Cauchy–Schwarz. The lower bound δ follows by projection to one coordinate. These are exact inequalities for known laws, not certificates obtained by inserting uncertain estimates.

Sampling and uncertainty. The prespecified states use $K = 4, 11, 51, 101, 201, 501$, with all-free, singleton, two/three-color, contiguous, alternating and scattered available sets. Legal local-list witnesses extend high-color fixed neighbors with private pending leaves. Additional frozen autonomous states retain their generator and graph provenance and are secondary analyses. Every policy is queried on the same frozen state. We report deterministic midpoint and boundary probes separately from IID Monte Carlo; quadrature does not receive binomial intervals.

Each network/state has 32,768 distribution-estimation draws and 8,192 independent shared-r fidelity/test draws. For six prespecified contexts and all thirty primary networks, candidate-only likelihood-ratio tests use independent fresh candidate samples at $m = 1, 5, 20, 100, 500, 2000$, 256 test trials per source, and 1,024 independent teacher calibration trials. Test trials use nested prefixes over m, so points on a curve are paired. The plug-in alternative uses pseudocount 1/2 per palette color: an unobserved category is not declared impossible. Teacher support is known exactly. Equal-prior accuracy uses threshold zero with randomized ties; level-0.05 power uses a separately calibrated conservative threshold. Neither is an exact Bayes classifier for an unknown network law.

For N IID draws on K categories, the subset characterization of TV and Hoeffding's inequality give $\Pr(\mathrm{TV}(\widehat{q}, q) \ge \epsilon) \le 2^K \exp(-2N\epsilon^2)$. This provides a conservative pointwise uncertainty radius for distances from the known teacher law. Approximate equivalence requires an upper confidence bound at most the prespecified TV tolerance 0.05; failure to reject is not equivalence. We also report JS, Hellinger, entropy, inverse collision probability, largest mass, forbidden mass and shared-r rank error, before aggregation by network/state. Float64 teacher inputs and clipped float32 model inputs are compared explicitly at boundaries. The primary shared-r fidelity supplies the same clipped float32 draw to both candidate functions; a separate column uses the unconverted float64 teacher draw. This prevents input-precision differences from being described as a learned candidate mechanism.

For all-free $K = 201$, normalized had mean estimated TV 0.046, shared-r fidelity 0.053, and 194.6 effective colors (inverse collision probability). For all-free $K = 201$, deepsets had mean estimated TV 0.164, shared-r fidelity 0.021, and 63.2 effective colors (inverse collision probability). For all-free $K = 201$, transformer had mean estimated TV 0.291, shared-r fidelity 0.020, and 23.7 effective colors (inverse collision probability). For all-free $K = 201$, e1-original had mean

estimated TV 0.064, shared-r fidelity 0.038, and 173.2 effective colors (inverse collision probability). The original E1 networks are a separate historical cohort, not the new NORMALIZED replicas. 13/465 model–state estimates for deepsets contain forbidden proposals; the largest observed mass is 0.152 in k501-SINGLE-first. These are proposal errors; the MAX COMMIT certificate rejects the corresponding fixed-color conflicts. 13/465 model–state estimates for transformer contain forbidden proposals; the largest observed mass is 0.559 in k501-SINGLE-last. These are proposal errors; the MAX COMMIT certificate rejects the corresponding fixed-color conflicts. Estimation uncertainty and per-state sample-based classification curves are reported separately; low power is not a proof of equality.

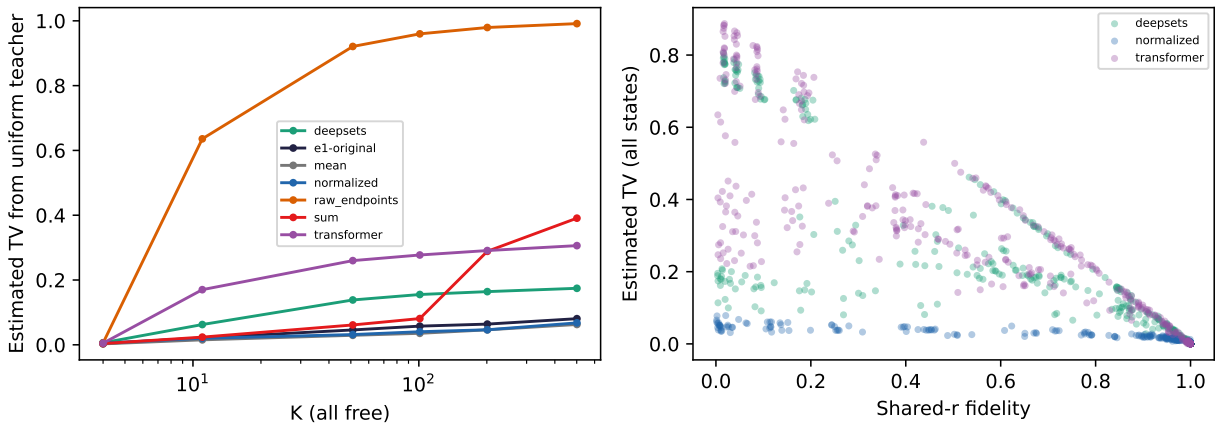


Figure 7: Conditional candidate-law distance versus palette size, and shared-r fidelity versus law distance. Each point derives from a fixed state; quadrature and Monte Carlo are stored separately.

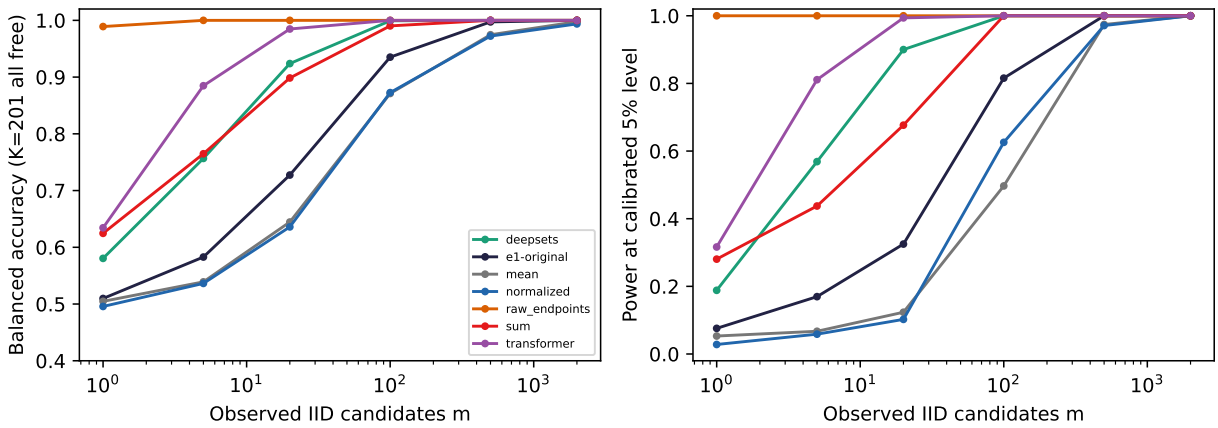


Figure 8: Independent candidate-only test performance for all-free $K = 201$. The curves summarize fixed checkpoints, not learned-law Bayes certificates.

Proposition 6 (Singleton teacher product laws)**.** *If* $A_v = \{a\}$ *and* $\epsilon = 1 - q_M(a \mid S)$*, then* $\mathrm{TV}(q_L^m, q_M^m) = 1 - (1-\epsilon)^m$*. Declaring the model exactly when any observed candidate differs from* a *has FPR zero, power* $1 - (1-\epsilon)^m$*, and optimal equal-prior balanced accuracy* $1 - \frac{1}{2}(1-\epsilon)^m$*.*

Proof. The null product law is a point mass at $(a, \dots, a)$, whose alternative mass is $(1-\epsilon)^m$. TV from a point mass is one minus that mass. All other sequences have null probability zero; at the all-a sequence the null likelihood is at least the alternative likelihood. The stated rule is therefore optimal, including the identical-law tie case. □

An exploratory analytic readout of singleton states illustrates the effect. Transformer seed 41002 proposed a forbidden color with estimated probability 0.460 when only the last color at $K = 201$ was free. For five IID candidates, the support test has estimated power 0.954, with simultaneous lower/upper bounds [0.949,0.959] and exact null FPR zero. The formula is exact in the unknown true mass; these numerical values are estimates. Bonferroni Clopper–Pearson intervals cover all 1,015 recorded singleton model–state laws; this readout does not add empirical five-sample test trials.

A prospectively committed supplement applies the same design to the five original E1 checkpoints, producing 35 networks in the conditional-law diagnostics.

Distribution and progress. For exact COMMIT and conditionally private independent actions, formula (1) in the accompanying theory document applies even to heterogeneous lists. A useful TV perturbation consequence is the following: if q_v is supported on L_v, $\epsilon_v = \mathrm{TV}(q_v, \mathrm{Unif}(A_v))$ and $p_u \le p_{\max}$,

$$P_v \ge p_v \max\{0, 1 - p_{\max} t_v / k_v - \epsilon_v\}.$$

Indeed the probability of surviving neighbors' offers is a function of the candidate in $[0, 1]$; changing its expectation from uniform costs at most TV. Thus at $p = 1/2$ sufficiently small nonuniformity retains a positive constant bound, even if statistically detectable. Conversely, deterministic proposals on an all-free clique have the same one-node TV and entropy whether every node proposes a common color or different mutually compatible colors; their confirmation probabilities can be 2^{-K} or $1/2$. These marginal distances do not identify which vertices' proposals overlap. The distinct deterministic candidates here form a mathematical per-vertex distribution family; this is not claimed implementable by initially identical anonymous deterministic nodes. Marginal distance alone therefore cannot universally rank speed. The controlled experiments substitute uniform/learned/mixture candidate laws at the same state and exact COMMIT; autonomous round-count correlations remain descriptive. normalized, learned-estimated: mean exact-COMMIT probability 0.2994. normalized, half-uniform-mixture: mean exact-COMMIT probability 0.3028. deepsets, learned-estimated: mean exact-COMMIT probability 0.2709. deepsets, half-uniform-mixture: mean exact-COMMIT probability 0.2893. transformer, learned-estimated: mean exact-COMMIT probability 0.2380. transformer, half-uniform-mixture: mean exact-COMMIT probability 0.2758. These are controlled plug-in predictions from estimated laws, with fixed participation $1/2$; the heterogeneous-state experiment independently checks one-round confirmations. The largest original heterogeneous-state residual triggered a post-hoc independent replication, which predicted 165.48 versus 164.83 confirmations (observation-only standard error 0.29, 1,024 trials). Prediction uncertainty is additional; the original 256-trial results remain unchanged.

12 Are Learned Distributed Coloring Algorithms Distributionally Equivalent to Their Teacher?

Proposal imitation concerns $q_\theta(c \mid s)$, whereas the present question concerns the complete labeled vector $X_G = (c_1, \dots, c_n)$ obtained after all rounds. On a fixed labeled graph with lists $C_v = \{0, \dots, d(v)\}$, write P_L^G and P_θ^G for the teacher and frozen-policy output laws, conditional on valid

completion by the preregistered 128-round cutoff. Different proposal laws need not imply different absorbing laws, and correct coloring by two procedures does not establish equality of those laws.

We reused the fifteen recent epoch-120 checkpoints (five independent trainings each of NORMALIZED, DeepSets and LocalPaletteTransformer), keeping policies separate and using the verified receiver-local palette adapter. No new training or safety shield was introduced. Private execution uniforms were independent between complete runs and generators; no global degree was supplied as an input feature. The teacher used float64 uniforms and networks their explicit float32 conversion, with TF32 disabled.

A standard vertex-symmetry argument gives the following consequence for our setting.

Proposition 7 (Clique symmetry)**.** *On K_n with local lists $\{0, \dots, n-1\}$, any vertex-equivariant randomized protocol with iid private node randomness has the uniform output law on the $n!$ proper colorings, conditional on positive-probability valid completion (including completion by a fixed cutoff).*

Proof. The uncolored initial state and private-randomness law are invariant under all vertex permutations. Equivariance preserves this invariance through every round. Conditioning on the invariant event of proper completion preserves invariance. Vertex permutations act transitively on proper colorings, which are bijections to the n colors, so their probabilities are equal and sum to one. □

The selected shared-weight architectures are vertex-equivariant in real arithmetic, even though their proposal heads can prefer some color labels. Thus identical conditional clique laws can coexist with different proposal laws and different success or termination-time laws. This is an ideal symmetry argument; numerical equivariance is tested on finite probes, not certified for every hardware input. It establishes no uniformity on general graphs and no equality of unconditional laws when failure probabilities differ.

Seven small labeled graphs permit exact rational computation of the teacher's absorbing law. For the three-vertex path with palettes $(2, 3, 2)$, its six valid colorings have masses 343/1628, 205/1628 and 133/814, each twice. They are not uniform. Separate 2,000-run estimation banks quantify neural TV distances to these exact laws with conservative finite-support intervals.

The confirmatory battery contains 53 fixed graph entries (51 unique labeled graphs; two prespecified family aliases), including regular graphs at $n = 256, 512$ and each $\Delta \in \{2, 3, 5, 10, 20, 50, 100, 200\}$, plus paths, cycles, stars, trees, random irregular graphs, irregular bipartite graphs, wheels and cliques. Each graph–checkpoint contrast uses 250 complete runs per generator, a fixed characteristic kernel

$$k_G(x, y) = \exp(-d_H(x, y)/|V|),$$

an unbiased MMD statistic [3] and 19,999 fixed-size label permutations. Its finite-product Gram matrix is strictly positive definite: each coordinate matrix is $(1-a)I + a\mathbf{1}\mathbf{1}^\top$ with $a = e^{-1/|V|} \in (0, 1)$; Kronecker products and restriction to valid colorings preserve strict positivity. Holm correction controls familywise error at 0.05 across all 795 planned hypotheses, allowing dependence from shared teacher banks.

The primary family rejected 183 of 795 hypotheses. NORMALIZED (E1): 10/265; DeepSets: 46/265; LocalPaletteTransformer: 127/265. The audited queued runs had status totals (valid, invalid, cutoff, technical) $(937600, 0, 0, 0)$. Zero observed failures does not establish zero failure probability.

Architecture	Contrasts	Holm rejections
NORMALIZED (E1)	265	10
DeepSets	265	46
LocalPaletteTransformer	265	127

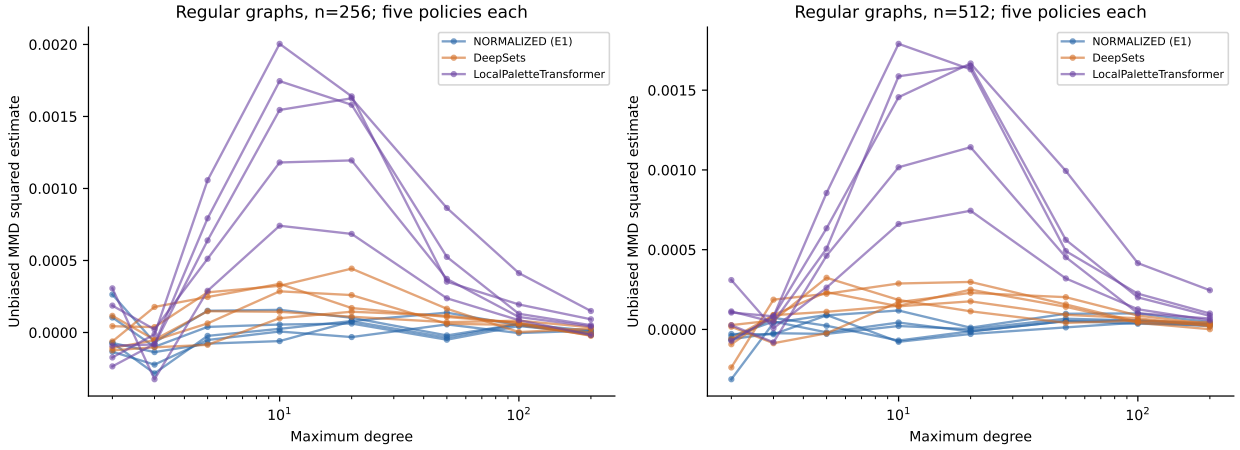


Figure 9: Complete-vector unbiased MMD-squared estimates on the two fixed-size regular grids. Each curve is one frozen training checkpoint; unbiased estimates may be negative. These effects are graph-specific; the normalized Hamming kernel does not make different graph spaces universally comparable. One graph per grid cell limits graph-seed generalization.

All per-graph, checkpoint, raw and Holm-adjusted p-values are archived in `primary.csv` in the study results; the accompanying `rejected.csv` identifies exactly the cells supporting rejection. Five-policy plots retain training variability separately from within-policy Monte Carlo uncertainty. Structural diagnostics describe color usage, class sizes, degree-conditioned color frequencies, co-color probabilities and induced partitions; none substitutes for the labeled-vector hypothesis. Secondary classifiers use independent training, validation and test banks. A separately prospective supplement measures population power on the three-vertex path using twenty disjoint experiments at each sample size and seed 41000 of each architecture; an additional 100/250 subgrid covers the star and regular power graphs. Binomial intervals retain finite-trial uncertainty. A known-law supplementary star alternative has global TV 99/199 while its kernel effect is attenuated by $1 - e^{-1/201}$; its independent detection trials document finite-power limitations despite characteristicness. Separate resampling power curves over 100–2,000 observations use empirical banks for three prespecified graphs and seed 41000. Their intervals are conditional on those banks and omit uncertainty in their population laws; they describe nominal, not Holm-adjusted, detection rates.

Nonrejection means insufficient evidence at this sample size and correction, not equality. Conservative pointwise population-MMD intervals do not establish approximate equivalence at the preregistered tolerance 0.02. Rejection supports different solution laws only for its specified graph and frozen policy. No universal monotone degree trend, population effect over training seeds or graph families, or universal learned termination theorem follows. The preregistration, exact-law proof, complete negative results and reproducible figure sources accompany this provisional section.

13 Robust Testing of Complete Coloring Laws

The previous 183 rejections concern a calibrated but potentially insensitive instrument. We audited all 795 historical results and reproduced all 100 known-star control p-values exactly. The original 19,999 permutations give $p_{\min} = 0.00005 < 0.05/795$; Holm resolution was sufficient. Characteristicness of the Hamming kernel does not imply useful finite-sample power.

On the 201-vertex star, let leaves be independent uniform binary colors and let the independent center be uniform on 199 high colors under P, versus a 100-color subset under Q. Every vector is a proper local-list coloring. Writing $a = e^{-1/201}$ and $b = (1+a)/2$ gives

$$\mathrm{TV}(P,Q) = 99/199, \qquad \mathrm{MMD}^2 = b^{200}(1-a)(1/100 - 1/199) \simeq 1.5021\,10^{-5}.$$

Under $P = P$, the kernel row mean is constant. If $\zeta_2 = \mathbb{E}[k^2] - (\mathbb{E}k)^2$, then the equal-size unbiased statistic has exact variance $[4/(m(m-1)) + 4/m^2]\zeta_2$. At $m = 250$, its null standard deviation is $2.4129\,10^{-4}$: the population signal is only 0.0623 null standard deviations. The named event that the center is at most 101 has probability gap 99/199 and discards irrelevant leaves.

An honestly selected omnibus. We split each independent sample into selection and evaluation halves. Selection learns local categorical/threshold witnesses, pair and triple features, structural summaries, a dense marginal score, and empirical kernel witnesses at $\gamma \in \{.25, 1, 4, 16\}$. An all-pair covariance search on selection data extends fixed interaction regions. Evaluation uses the maximum of pooled-standardized mean differences and an always-retained characteristic full-vector MMD component. Selection never sees evaluation labels; vertex and color labels are preserved.

Proposition 8 (Conditional level of the honest maximum)**.** *Under equality of the two output laws, conditioning on selection data and pooled evaluation observations makes source labels uniformly exchangeable. Recomputing the entire maximum under fixed-size label permutations, using inclusive ties and the plus-one rule, yields a superuniform p-value.*

Proof. The selected functions and pooled scales are fixed under this conditioning. Uniform allocations therefore give the statistic's conditional null law. The inclusive upper rank of the observed allocation among uniformly drawn allocations is superuniform; averaging over the conditioning variables preserves this inequality. Maximization is included in every allocation, so it introduces no additional uncorrected search. □

Full finite-space arguments, consistency and computational-futility bounds are given in the accompanying theory. Our global multiscale max/softmax benchmarks are explicit adaptations inspired by MMDAgg and MMD-FUSE [1, 12]; we do not transfer their continuous Sobolev minimax claims to discrete coloring spaces. Conditional random-rank calibration follows the finite permutation framework [4, 9].

Independent instrument validation. Proper-coloring controls cover localized marginal changes, equal-marginal dependence, higher-order parity, structural shifts, diffuse bias, rare mass and huge supports. Null laws include point masses, uniform/discrete laws, noisy stars, clique symmetry, Luby/Luby and actual checkpoint/self draws. Each null law has 400 independent trials. Alternative grids use 30 trials at $m = 100, 250, 500, 1000, 2000$, counting selection observations in m. The first version missed relocated pairs; a training-only pair search was then validated with fresh second-round data before neural confirmation. The final instrument passed its prespecified calibration and power gate. The known-star alternative was detected in 30/30 independent trials

at both $m = 250$ and 500, even at 0.05/795 with 19,999 permutations; the pointwise Wilson lower power bound is 0.886. Unknown remote triples and sufficiently rare events remain sensitivity limitations, preserved in the reported curves. No universal finite-sample power is claimed.

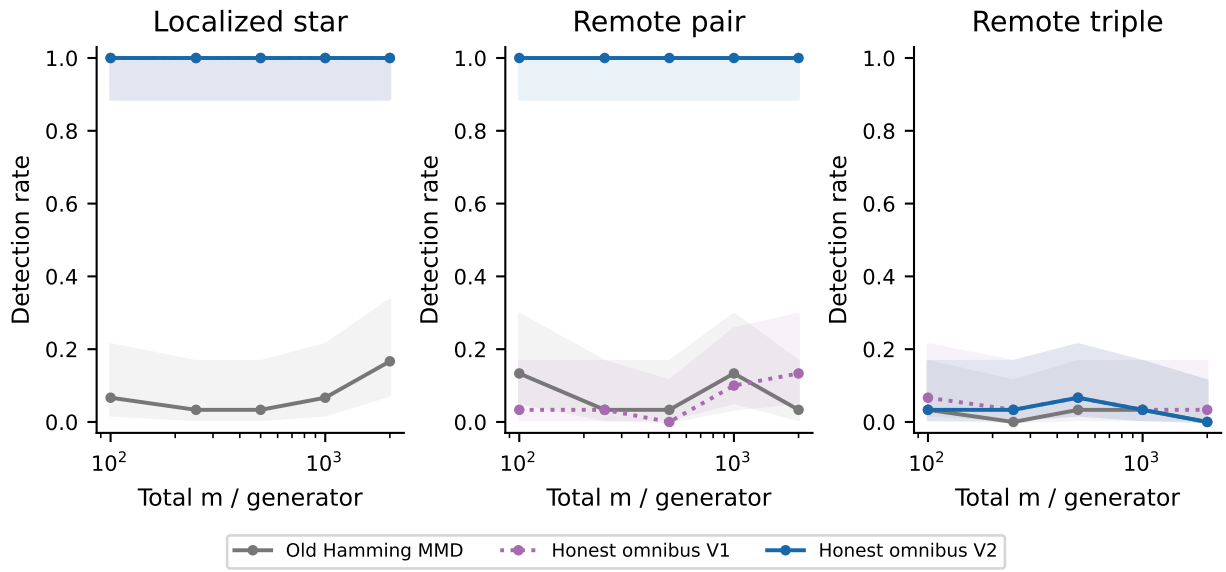


Figure 10: Selected independent second-round controls. Each total sample budget includes the selection half. Bands are pointwise Wilson 95% intervals over thirty independent trials. Remote higher-order alternatives retain failures; the known TV alone does not determine power.

An independently prespecified post-freeze replication investigated the noisy-star null after its original 32/400 rejections. The unchanged omnibus rejected 202/4000 independent null trials (rate 0.0505; pointwise Wilson 95% interval [0.0441,0.0577]). This diagnostic neither replaced the original gate nor selected a new procedure.

Fresh frozen-policy confirmation. The final protocol was committed after instrument validation and before generating new comparison banks. It retains the same 53 historical graph entries (51 unique labeled graphs), all fifteen recent epoch-120 policies, local lists and independent execution streams. Primary tests use 500 runs per generator: 250 selection and 250 evaluation when all runs complete. Conditional tests use only proper completions in that fixed prefix and record their effective selection/evaluation counts if a cutoff occurs. The old MMD uses all proper completions in the same fresh prefix. Holm controls each planned 795-test family at 0.05. The historical 250-run result is preserved separately.

The robust primary family rejected 340/795 hypotheses; the old test on the same fresh 500-run banks rejected 239/795. Of E1's 255 historical nonrejections, 42 reject under the new procedure. Changes from history combine method, sample budget and fresh sampling; matched-budget comparisons and independent controls are needed to assess sensitivity. The matched primary comparison contains 104 new-only and 3 old-only rejections. The new instrument does not dominate every alternative: in the auxiliary Transformer cohort at total m=2000 it rejected 20/45 cells versus 24/45 for the old MMD. These are nested-sample decisions, not estimates of alternative-specific power. The full fresh confirmation allocation recorded 2,867,996 valid completions, 0 invalid complete outputs, 4 cutoffs and 0 technical errors. Cutoffs are retained as operational outcomes; they are not replaced by additional draws. Conditional clique symmetry does not imply identical termination

probabilities.

Architecture	Historical 250	Old, fresh 500	New, total 500
NORMALIZED (E1)	10	21	52
DeepSets	46	71	107
LocalPaletteTransformer	127	147	181

All counts are rejections among 265 fixed graph–checkpoint cells, not distributional distances. Complete negative results and checkpoint-specific effects are archived. Auxiliary sample-size comparisons use a separate 405-hypothesis family on nine prespecified entries. Conditional success frequencies, all invalid outputs, cutoffs and technical errors remain separate outcomes.

Independent witnesses and small-space inference. After primary selection, the last 250 separately reserved runs per generator estimate one binary event per cell. Simultaneous Clopper–Pearson intervals cover all 1,590 event probabilities, and explanatory Fisher tests have their own Holm family. They identify predictive observables rather than causal mechanisms. Small graphs additionally use rational teacher laws, permutation-calibrated categorical likelihood ratios and simultaneous TV intervals from 20,000 runs per generator, including the teacher cutoff/eventual-law discrepancy and a conservative float64 rank bound. The prospective TV tolerance 0.05 was supported in 78/105 small-graph policy cells. This is approximate conditional equivalence at a stated tolerance, not exact equality or a claim for large graphs. All 35/35 small E1 cells met this criterion (largest simultaneous upper TV bound 0.0437), versus 31/35 for DeepSets and 12/35 for Transformer. For a contrasting large-graph E1 example, normalized-s41000 on regular-n512-d100 has a selected event that the number of used colors is at most 100. Its independent probabilities are 0.008 under Luby and 1.000 under E1; the simultaneous difference interval is [0.894,1.000]. Hence complete-vector conditional TV is at least 0.894 at the simultaneous coverage level. These selected predictive witnesses are not causal explanations, and no localized E1 witness passed the independent explanatory criterion.

What remains unknown. Clique equality follows from ideal vertex symmetry conditional on success; finite hardware probes do not prove bitwise equivariance. Other neural laws generally remain algebraically unknown. Nonrejection does not establish equality, and a small MMD does not imply a useful TV bound without an appropriate quantitative inequality. Rare-event coupling and large-support mixtures supply explicit finite-sample lower bounds in the theory document. The new instrument mitigates verified power failures for named alternatives; its uncovered interactions are retained as limitations. No universal degree trend or population statement over graph seeds or training procedures follows.

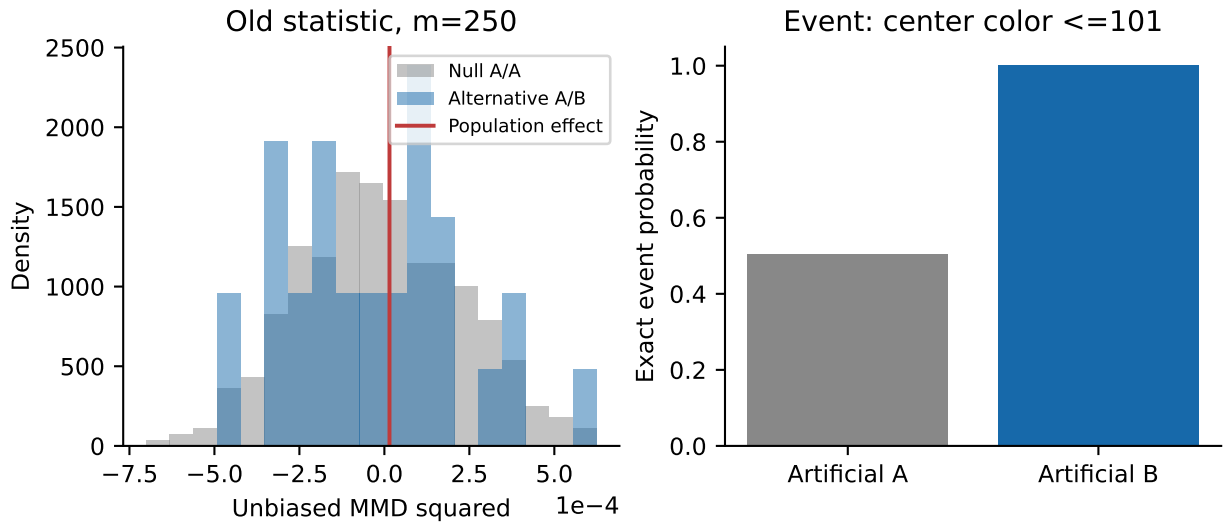


Figure 11: Why large TV can coexist with weak old-MMD power. Left: the old statistic under independent known-null and known-alternative draws, and its tiny population effect. Right: the exact localized event probability gap that an honestly selected witness can preserve.

14 How Graph Size and Degree Affect Distributional Generalization

Motivation and controlled design. The preceding robust study found an occupancy-event TV lower bound of .894 on one 512-node degree-100 regular graph, while supporting approximate conditional equivalence in seven small graphs. To separate observed size and degree effects, we preregistered a new factorial study with all fifteen historical epoch-120 checkpoints, without further training. The primary grid crosses $n \in \{128, 256, 512, 1024\}$ and $d \in \{3, 10, 50, 100\}$, with three independent connected labeled regular realizations in each cell. Exact vertex counts, all degrees, simplicity, connectivity, seeds and distinct labeled edge hashes were audited. The generator is not assumed exactly uniform over all regular graphs, and three realizations cannot characterize that population.

Cost pilots fixed 500 fresh testing attempts per generator and a separate 125-attempt explanatory holdout. The secondary cohort has one heterogeneous graph per cell of $n \in \{128, 1024\}$ crossed with all four degrees, including low-degree vertices, intermediate degrees and a small hub group. Degree and palette histograms are archived. A third stratum replicates the exact historical edge list using new independent seeds. Every local palette remains $\{0, \dots, d(v)\}$; no global-degree input or new action shield is introduced.

Complete-law tests and estimands. An observation is a complete labeled coloring vector, not a vertex. The principal law conditions on proper completion by round 128; improper completion, cutoff and technical error remain separate outcomes. We reuse the frozen omnibus V2, its honest selection/evaluation split, local and pair/triple witnesses, structural features and characteristic full-vector kernel unchanged. Joint label permutations number 19,999, with inclusive ties and plus-one p-values. Holm controls the 720 primary graph–checkpoint hypotheses at .05. The 120 irregular and 15 historical-replication hypotheses have separate families. The old Hamming MMD is evaluated on exactly the same new bank in its own method family. Event, completion and independent witness analyses also have separate families; no .05 FWER is asserted over their union.

The primary structural events are

$$A_{n,d} = \{U(X) \le d\}, \qquad T_{n,d} = \{\text{color } d \text{ occurs}\}.$$

The first means that at least one palette color is absent, which need not be the top color. A saturated stratified binomial model has one event probability per fixed graph/generator bank, conditional on its valid count. Architecture summaries average the three graphs and five fixed checkpoints equally, counting the shared teacher bank once. We preregistered 1,800 cell, adjacent-size, adjacent-degree and probability-scale interaction contrasts. Elementary exact binomial intervals and weighted independent-run Hoeffding intervals receive .025 error budgets each; their intersections cover all contrasts simultaneously with probability at least .95. These are fixed-cohort intervals, rather than population intervals assuming many independent graphs or trained networks.

An event-difference interval $[l, u]$ yields a same-graph lower bound $\mathrm{TV}(P_L, P_M) \ge \max(0, l, -u)$. Lower bounds do not order the unknown true TV distances. Across sizes the vector spaces also differ, so we compare consistently defined functions and events, rather than computing cross-dimensional TV. Small MMD or a nonrejection supplies no useful TV upper bound without an additional quantitative argument.

Results across size and degree. Table 7 retains all gains and losses of V2 on the same new samples. Counts are not distance estimates and cannot be directly ranked against the earlier 265-comparison architecture cohorts.

Architecture	V2	Old MMD	V2 only	MMD only
E1 NORMALIZED	115/240	49/240	66	0
DeepSets	170/240	121/240	49	0
LocalPaletteTransformer	180/240	174/240	6	0

Table 7: Regular factorial cohort: 240 comparisons per architecture; Holm is applied across all 720 hypotheses separately for each method.

Architecture	Four-corner interaction for A	Simultaneous interval
E1 NORMALIZED	+0.603	[+0.479, +0.699]
DeepSets	+0.001	[-0.094, +0.097]
LocalPaletteTransformer	+0.201	[+0.093, +0.299]

Table 8: Extreme-level difference-in-differences of event risk differences. All adjacent interactions and individual-checkpoint contrasts are archived. This is a probability-scale fixed-cohort interaction, not causal identification.

Figures 13–15 give the full event-effect matrix and its slices with simultaneous intervals. These are measured changes in occupancy probability, not merely changes in test power. Top-color appearance is separately reported in Figure 16, including regimes where $U \leq d$ is nearly certain under both generators. We impose no monotone full-law TV interpretation.

For E1 at degree 50, the top-appearance risk difference is -0.239 [-0.307, -0.170] at 128 vertices and -0.004 [-0.031, +0.023] at 1,024 vertices. Thus this observable discrepancy attenuates in that regime. At degree 100, the adjacent 256-to-512 change in the missing-color risk difference is +0.481 [+0.384, +0.579]. Already at $n = 128, d = 100$, the top-appearance difference is -0.610 [-0.679, -0.541], despite a missing-color risk difference of +0.000 [-0.024, +0.024]. The two observables therefore supply different information; an uninformative missing-color event is not evidence of equal complete laws. The simultaneous cell bands imply a reduction of at least 0.138 in the absolute top-appearance risk difference between 128 and 1,024 vertices at degree 50. This conservative deduction orders that fixed-cohort observable, not the unknown complete-law TV distances.

Independent replication and checkpoint variation. Archived historical data exactly reproduce .008 versus 1.000 for $U \leq 100$ in `normalized-s41000` on the original graph. They are never pooled with new outcomes. Across the three new $n = 512, d = 100$ graphs and five E1 checkpoints, the smallest simultaneous event-TV lower bound is 0.023. Using both preregistered events, every one of these fifteen pairs has TV at least 0.078; maximizing two bounds from their same simultaneous family preserves its coverage. The effect is heterogeneous across checkpoints. Figures 17–19 retain occupancy distributions, all five training replicas and the independent replication on the original edge list. Leave-one-graph/checkpoint ranges are sensitivity analyses rather than population confidence intervals.

Architecture-level missing-color differences at $n = 512, d = 100$ are E1 NORMALIZED: +0.639 [+0.570, +0.703]; DeepSets: +0.038 [-0.031, +0.107]; LocalPaletteTransformer: +0.294 [+0.225, +0.363]. These contrasts retain a common probability scale and are not rankings by rejection frequency.

Mechanistic evidence. Read-only observers record proposals, participation, exact availability references, accepted colors and terminal classes on eight fresh trajectories per generator and selected

graph. Every checkpoint is also probed on identical teacher states with midpoint grids of 1,024 and 4,096 private uniforms. A grid zero is not a proof of zero operational mass. Candidate biases and independent terminal event estimates are related in Figure 20; the proposal/COMMIT accounting remains descriptive, not an intervention or causal mediation estimate.

At an all-uncolored nonisolated vertex, MAX returns the same finite message type regardless of neighbor multiplicity. Thus at fixed K, the initial candidate function is independent of n and the particular regular edge realization. This does not imply invariance of subsequent states or terminal laws. With independent initial candidates of law q, independent participation of probability p and the exact conflict COMMIT rule, the unconditional first-round reference is

$$\Pr(v \text{ confirms } c) = pq_c(1 - pq_c)^d.$$

Every neighbor must avoid participating with candidate c. This nonlinear relation does not make different vertices' confirmations independent, and we do not assume the learned COMMIT head always equals that exact rule. The ideal teacher has $p = 1/2$, $q_c = 1/(d + 1)$. Ideal continuous teacher randomness also has global color-permutation symmetry on regular graphs, implying a uniform single-vertex marginal and $E_L[U] = KP_L(T)$ conditional on the invariant completion event. It does not imply uniformity over proper colorings on arbitrary regular graphs. The ideal argument is distinct from a bitwise floating-point certificate.

The earlier clique result instead uses transitivity of vertex permutations on the proper bijective colorings. Conditional uniformity there can coexist with nonuniform candidate proposals. General regular graphs admit multiple color-class profiles and lack that transitivity, so clique equality does not establish general complete-law transfer beyond those symmetry conditions.

Exploration and limitations. Six binomial predictor forms—size, degree/palette, n/K, density, additive and interaction—are compared with checkpoint intercepts and whole-graph replicate holdouts. Their predictive ranking is not claimed as confirmatory causal variable selection. Structural projections, per-color profiles and MMD effects retain their stated scale and uncertainty limitations. Selected events are validated on the independent explanation bank; prospectively measuring every color permits simultaneous rather than naive selected-color intervals. A small normalized occupancy-mean difference can coexist with a large discrepancy of an occupancy-tail event.

The distinction between initial proposals and terminal laws is quantitative: for E1 checkpoint 41004, the initial 4,096-point top-color mass at $K = 101$ is 0.000000, yet the mean final top-color appearance across the three new priority graphs is 0.813. Availability changes along a trajectory; a zero initial grid mass cannot certify absence in every later state.

For an illustrative E1 NORMALIZED checkpoint `normalized-s41000` on $n = 1024, d = 100$, the held-out event `used_colors`≤ 100 has probabilities 0.000 versus 1.000, risk difference +1.000 with simultaneous interval [+0.830,+1.000], giving TV at least 0.830.

For an illustrative DeepSets checkpoint `deepsets-s41004` on $n = 1024, d = 100$, the held-out event `mean_color`$\leq$ 48.975586 has probabilities 0.032 versus 0.968, risk difference +0.936 with simultaneous interval [+0.697,+0.998], giving TV at least 0.697.

For an illustrative LocalPaletteTransformer checkpoint `transformer-s41000` on $n = 1024, d = 10$, the held-out event `class_entropy`≤ 2.3934074 has probabilities 0.000 versus 1.000, risk difference +1.000 with simultaneous interval [+0.830,+1.000], giving TV at least 0.830.

Here mean color uses the numeric labels and class entropy uses natural logs. Each witness was selected only on the main bank and measured on the independent 125-run holdout. Simultaneous exact-binomial bounds over the entire 855-witness family allow choosing these examples after measurement. They illustrate different observable discrepancies; they are not universal explanatory or causal rankings of features.

E1 seed	Metric ϕ	Threshold t	P_L	P_M	TV lower
41000	$H/\log K$	0.99604342	0.0320	0.9632	0.732
41003	$\bar{c}/d$	0.49783203	0.3680	0.6304	0.063
41004	$\bar{c}/d$	0.49800781	0.3792	0.6544	0.076

Table 9: Exploratory events $\phi(X) \le t$ on the same $n = 1024, d = 50$ graph r0. Probabilities use 625 valid runs per generator; TV lower bounds have simultaneous coverage at least .95 over the separate 6,384-CDF family. H is class entropy, $K = 51$, and $\bar{c}$ is mean numeric color.

For heterogeneous prefix lists, every completed assignment obeys $U \le \min_t[t + \#\{v : d(v) \ge t\}]$. Five of the eight secondary graphs therefore force $U \le d$ under every generator (for example $U \le 44$ on the 1,024-node degree-100 graph). Agreement on that event has no discriminating content in these cells; the full test, top-color event and other profiles remain informative targets. Irregular results are not pooled with regulars.

In the separate 120-hypothesis irregular family, the V2/old-MMD rejection counts are E1 NORMALIZED: 7/40 versus 0/40; DeepSets: 26/40 versus 21/40; LocalPaletteTransformer: 37/40 versus 33/40. Figure 21 reports top-color appearance differences, which retain information when missing-color occupancy is forced by the lists. Its fixed-checkpoint mean intervals are linear images of the original simultaneous elementary CP bounds; the shared teacher enters once. One graph per irregular cell limits generalization, and maximum degree does not specify its full palette-capacity profile.

Exploratory explanations with simultaneous threshold selection. The original single-event explanation selector can overfit categorical patterns even when an independently evaluated global statistic rejects. For E1 checkpoint 41003 on the 1,024-node degree-50 graph r0, it fitted 500 distinct triples. Its event covered 250/250 teacher versus 0/250 model rows during selection, 1/250 versus 0/250 evaluation rows, and 0/125 versus 1/125 reserved rows. The honest holdout correctly refused to validate that event. We preserve this failure and all original omnibus results.

After inspecting it, we added an explicitly exploratory analysis using all 625 original attempts and only the seven scalar functions frozen before sampling. For each of 57 graphs, 16 generators and 7 functions, the DKW radius is $\epsilon_N = \sqrt{\log(2 \cdot 6384/.05)/(2N)}$, clipped at 1. A union bound covers all 6,384 CDFs and all thresholds simultaneously with probability at least .95, with the shared teacher counted once. Subtracting clipped bands allows data-dependent choice of a predefined function and threshold without a naive selected-event interval. This is a new separate confidence family, not independent confirmation or a revision of the primary rejection counts.

Positive full-law TV lower bounds in the main cohort are E1 NORMALIZED: 119/240 overall, including 109/115 global rejections; DeepSets: 167/240 overall, including 167/170 global rejections; LocalPaletteTransformer: 180/240 overall, including 180/180 global rejections. All fifteen E1 comparisons at $n = 1024, d = 50$ have positive bounds in this family, despite nearly uninformative missing-color and top-appearance events. Figure 23 and Table 9 give examples from the same graph r0. Normalized class entropy detects a strong checkpoint-specific shift, while numeric mean color also distinguishes two checkpoints for which the original categorical explanation failed. The individual CDF radius is .09980 at 625 valid runs; the report archives probability and difference bands for all seven metrics and all 855 comparisons, including zero bounds. Noninjective projections cannot establish equality or upper bounds on full-law TV.

Separate exploratory candidate intervention. A prospectively recorded extra experiment replaces only the candidate channel by exact local teacher proposals on the intervened policy's own state. Learned participation, original COMMIT, checkpoints and cutoff are unchanged; no safety mask is added. Across 60 of 60 planned cells (all checkpoints on three new priority graphs and the historical graph), the status is `complete`. The sample count of 1,000 independent pairs per cell was selected exclusively from a separate timing pilot, within the same total GPU budget. These observations do not enter the original 720 hypotheses.

Common-random-number coupling, with independent pairs, gives simultaneous upper bounds on conditional TV between the intervened policy I and Luby; paired outputs are never treated as independent two-sample observations. The bound is at most .05 in 0/60 cells; approximate restoration to the teacher law is therefore not established. Original and intervention event intervals jointly support a positive lower bound on $\mathrm{TV}(P_M, P_I)$ in 40/60 cells, with coverage at least .95. We recorded 0 unsafe COMMIT decisions and did not repair them. A large coupling upper bound does not prove residual discrepancy, since the coupling need not be optimal. This controlled computational intervention addresses the candidate channel; it does not identify complete mediation or separate degree from palette causality.

A separate supplementary addendum was recorded after original witness examples were inspected but before any intervention sample. It retains the single honestly selected original event for each of all sixty cells and uses its original independent holdout. Simultaneous CP bounds on 360 event, mismatch and success probabilities, followed by direct fixed-event comparison under the intervened policy and the triangle inequality, give positive lower bounds on $\mathrm{TV}(P_M, P_I)$ in 43/60 cells. The simultaneous coverage is at least .95 for this supplementary family; it is separate from the preceding event-effect family, and no joint .95 guarantee is claimed over their union. No new simulations or event reselection are involved.

The final ledger charged 10.185 of 12 GPU-process hours, including pilots and diagnostic trajectories. Statistical analyses use CPU. The audit checked 650,656 distinct new algorithm seeds, without historical overlap, unchanged checkpoint/source hashes, a complete teacher-bank replay, two omnibus replays and multiplicity recalculation. Confirmation statuses are [570000, 0, 0, 0] in the order proper, improper, cutoff and technical error. The protocol was committed as `5633b547682b` before confirmation.

What We Can Prove, What We Observe, and What Remains Open. We can prove ideal teacher color symmetry, initial MAX-state invariance, conditional permutation validity and stated coverage under independent runs. We observe finite-cohort effects, interactions, replications and diagnostic proposal/acceptance chains. Any candidate intervention has the separate scope stated above. We cannot order all complete-law TV distances, generalize three graphs and five trainings universally, or infer complete mediation from association. On regular graphs, degree and palette size vary together, leaving their separate causal effects unidentified. Previous small-graph equivalence statements retain their original scope; large-graph nonrejections establish no approximate equivalence.

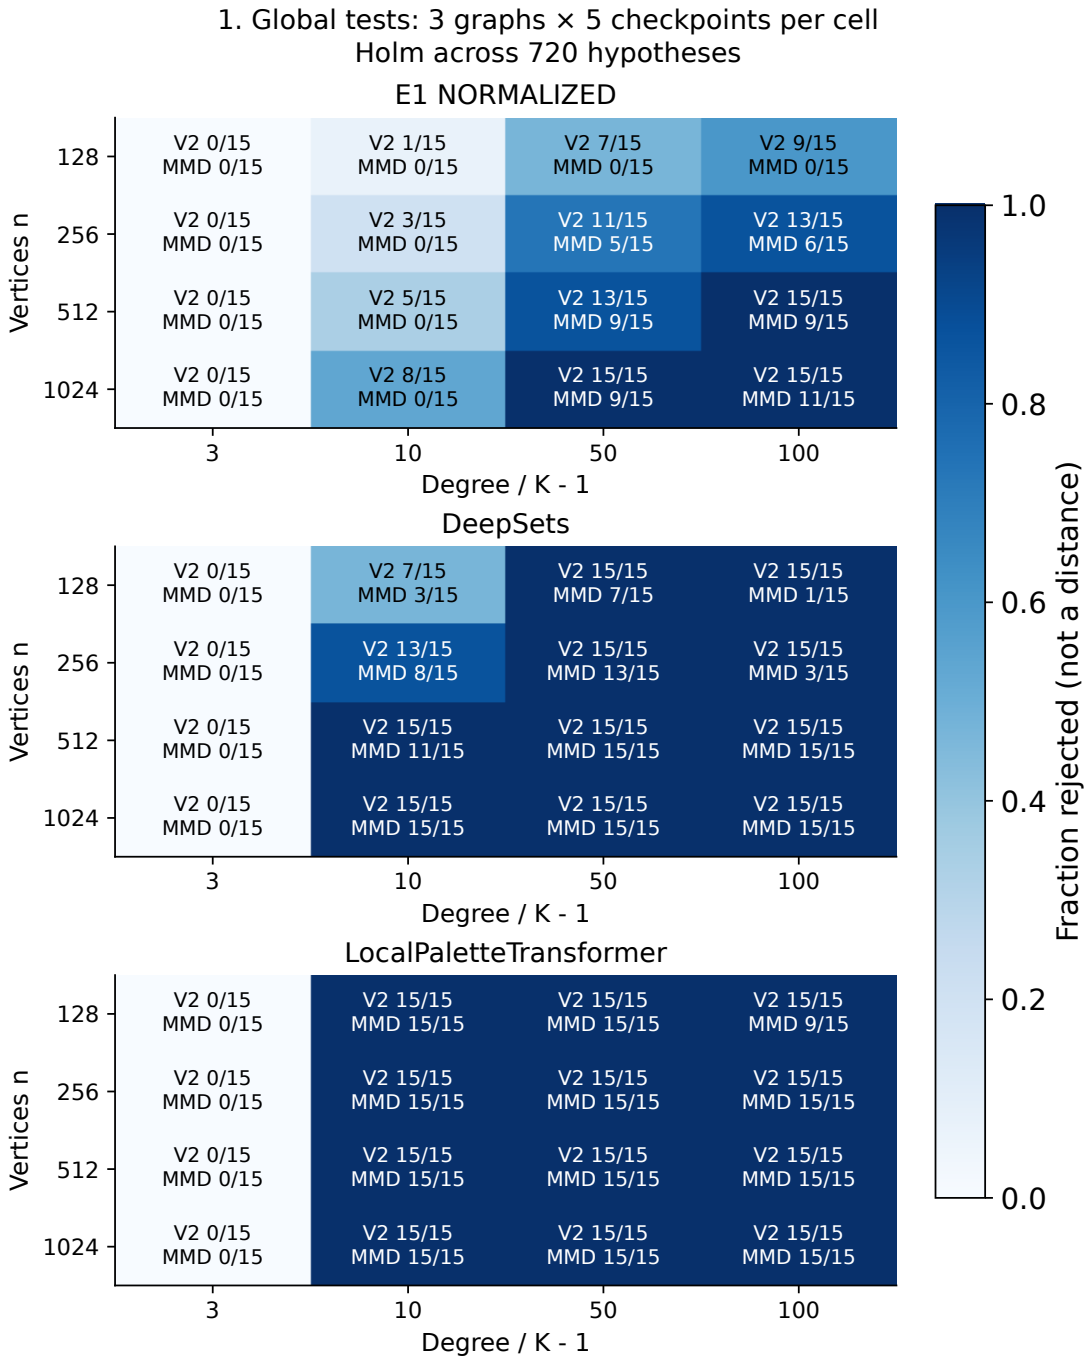


Figure 12: Global tests; each cell contains three graphs and five checkpoints. Rejection fractions are not distances.

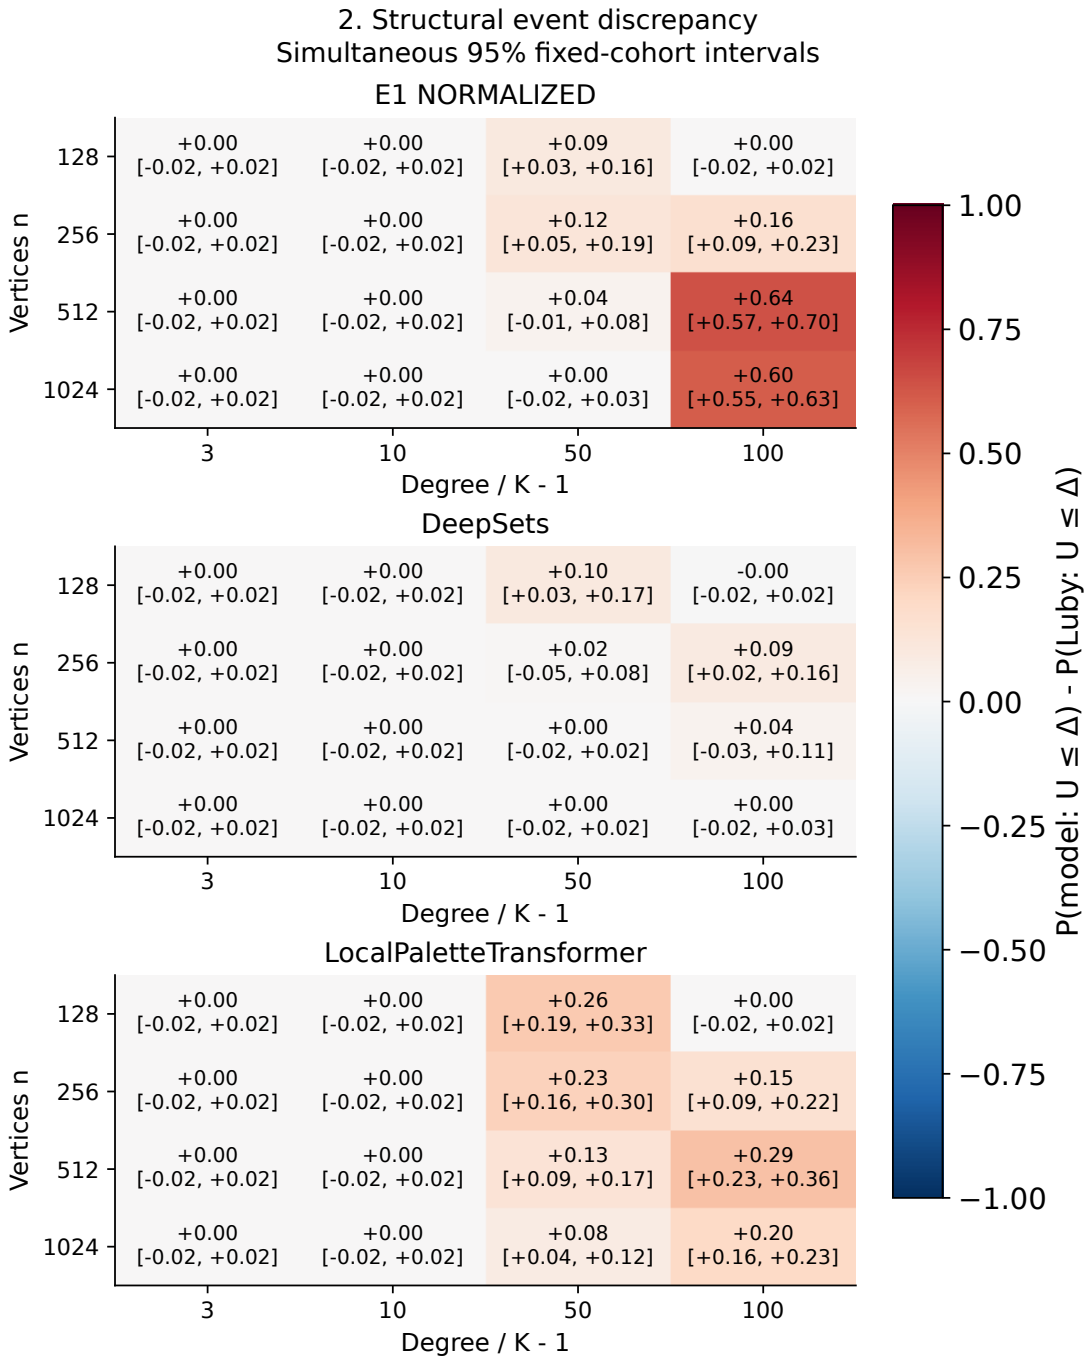


Figure 13: Differences in the probability of using at most the degree many colors, with simultaneous fixed-cohort intervals.

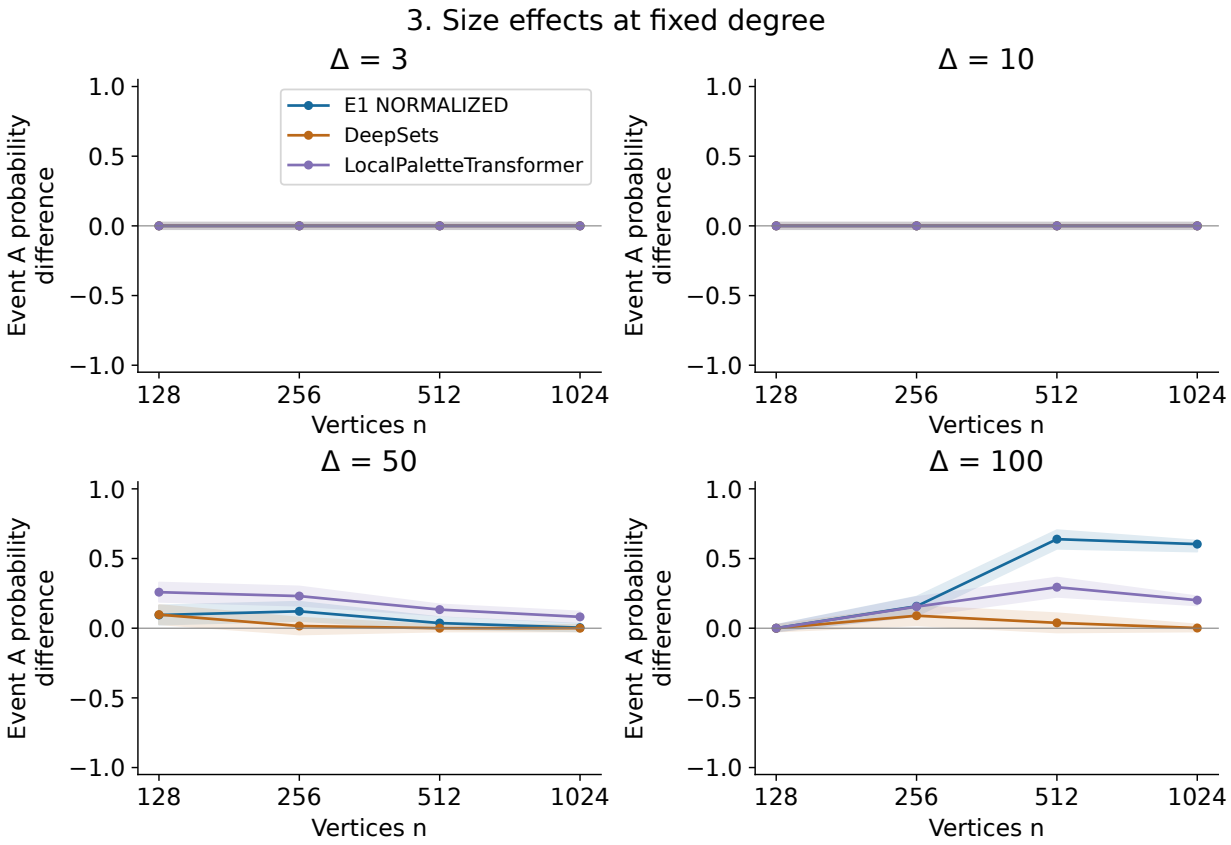


Figure 14: Size slices at fixed degree, with simultaneous fixed-cohort uncertainty.

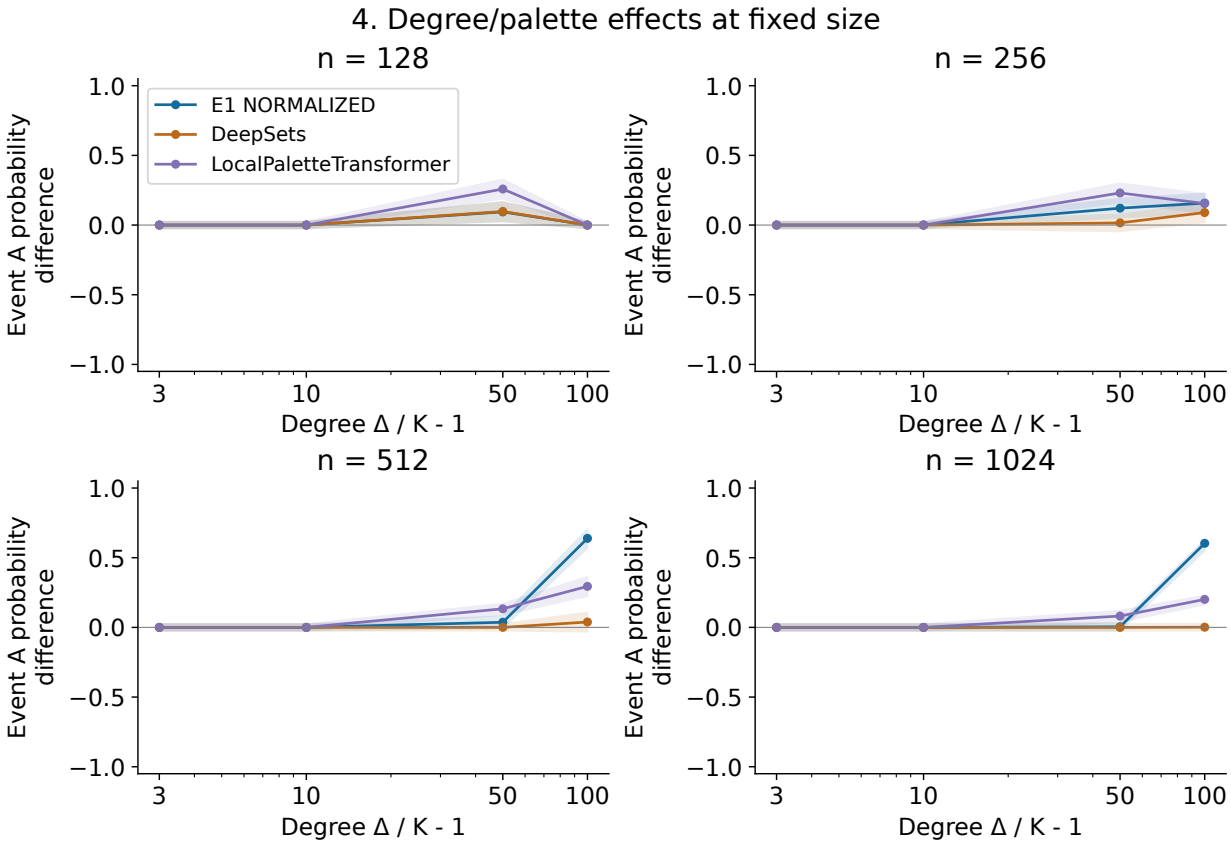


Figure 15: Degree/palette slices at fixed size, without a monotone TV assumption.

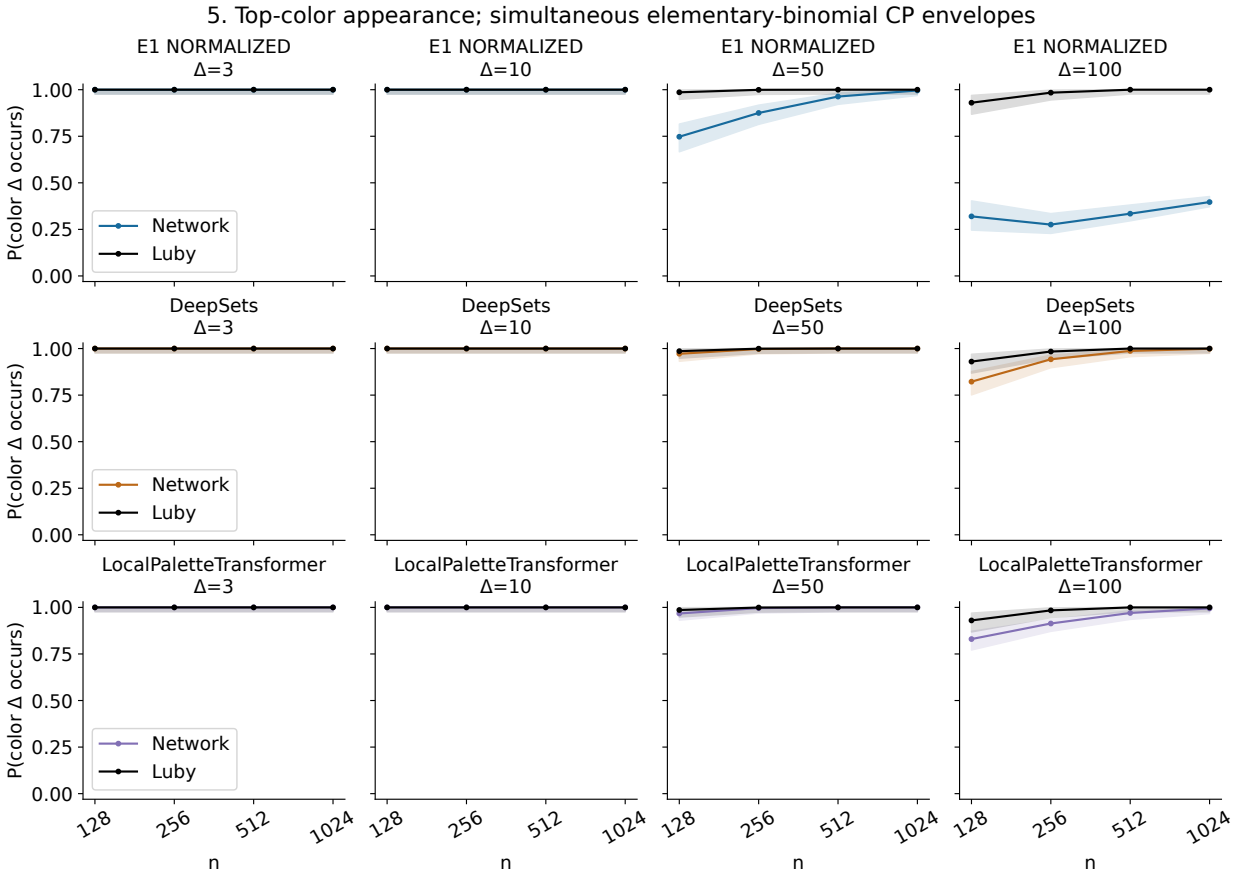


Figure 16: Top-color appearance probabilities with simultaneous elementary CP envelopes.

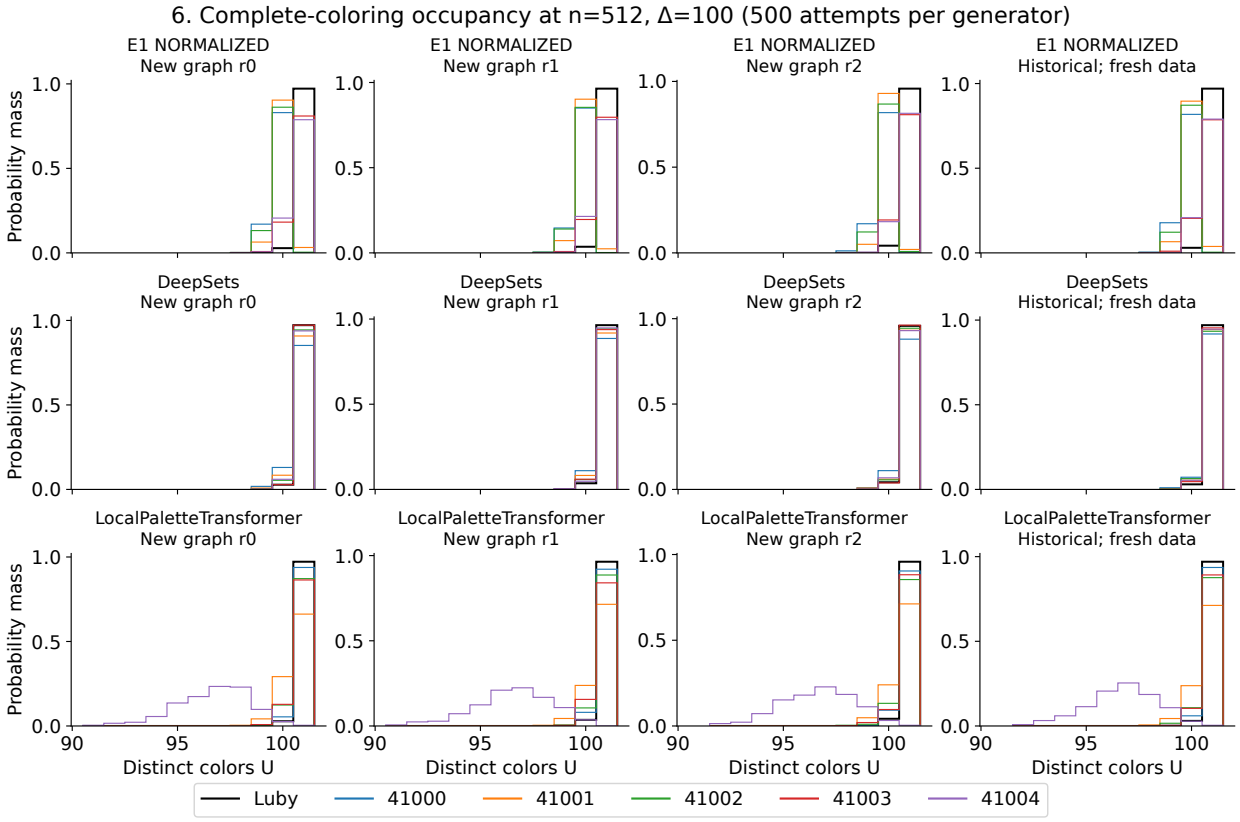


Figure 17: Occupancy distributions on three new priority graphs and the historical graph with independent fresh data.

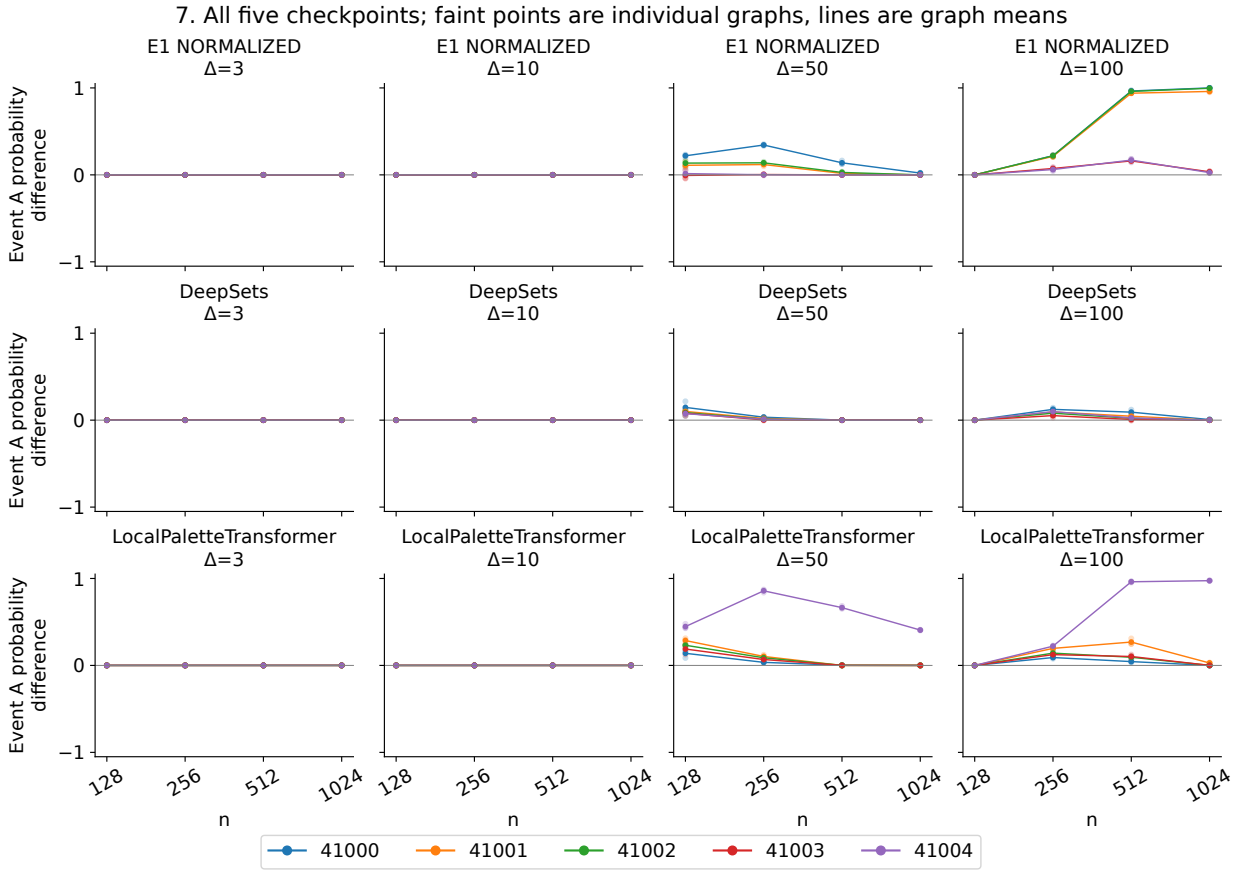


Figure 18: All five checkpoints; faint points retain individual graph variation.

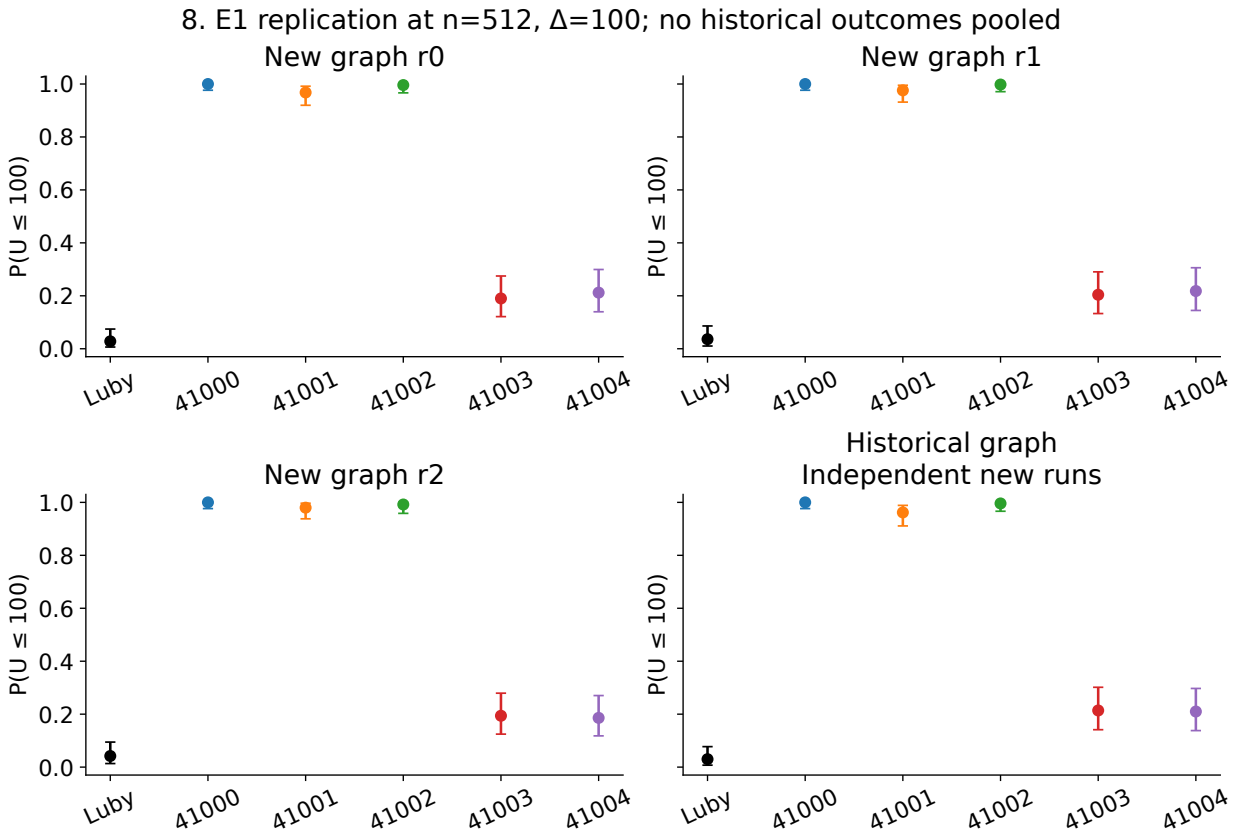


Figure 19: Independent priority-case E1 replications, without pooling historical outcomes.

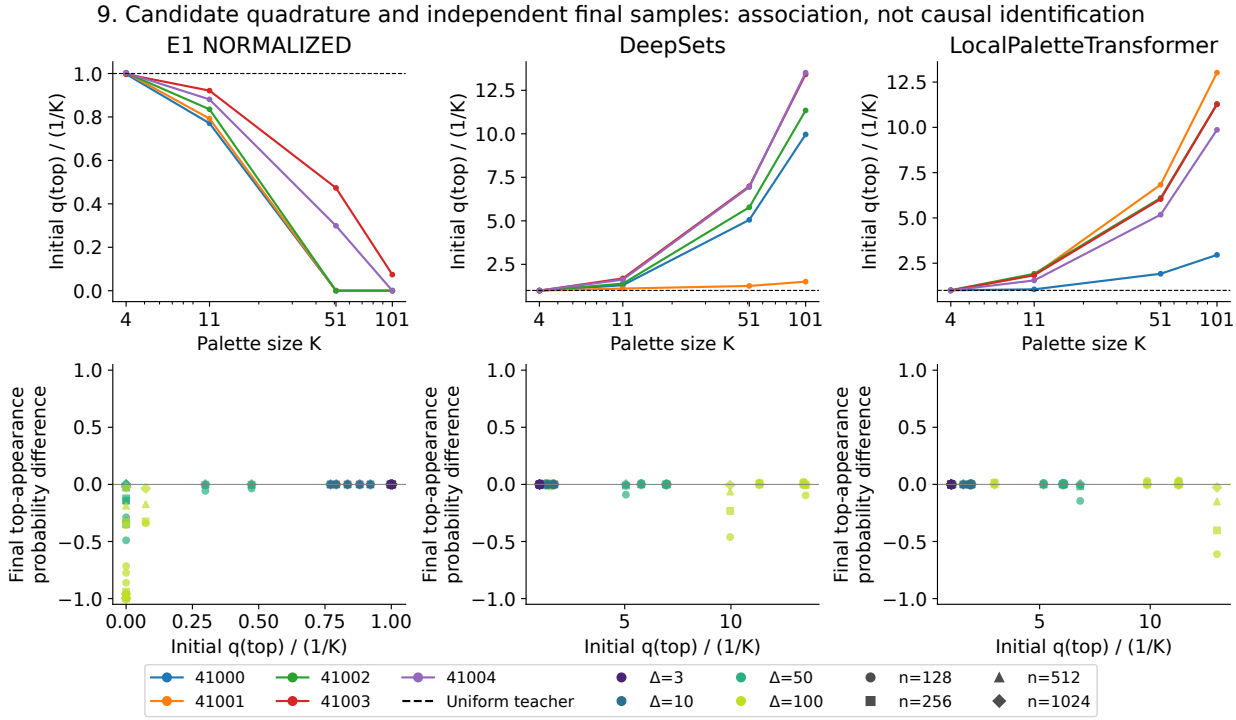


Figure 20: Same-state candidate quadrature and independent final samples: association does not identify causality.

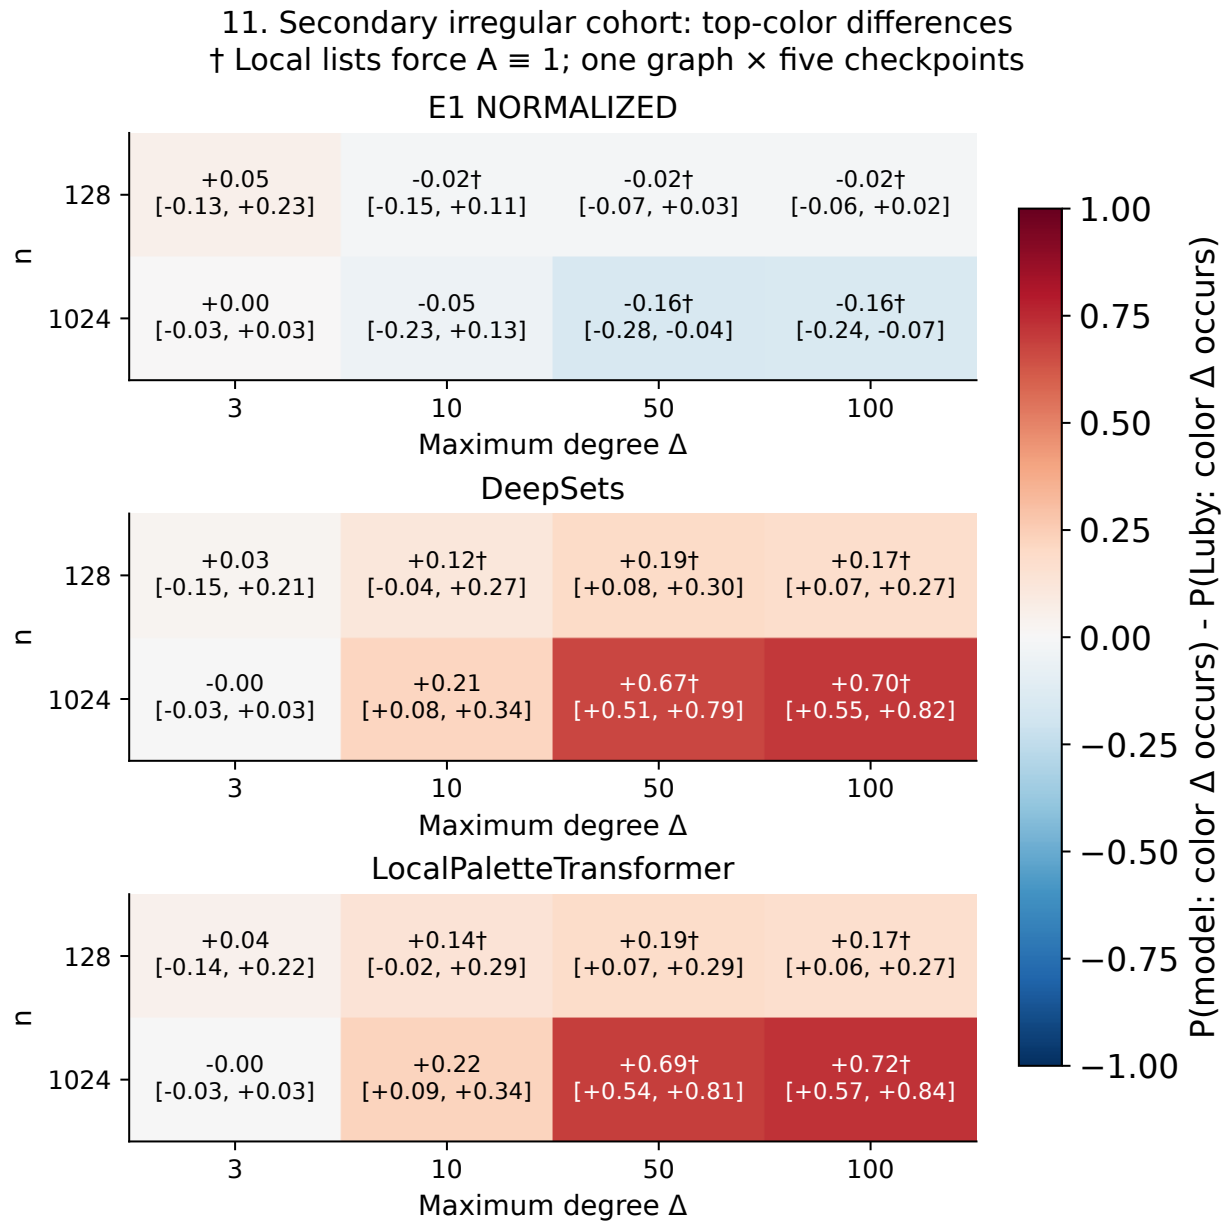


Figure 21: Separate irregular cohort: top-color appearance risk differences and simultaneous CP envelopes, averaged over the five fixed checkpoints. A dagger marks list profiles that force the missing-color event A to be true under every completed generator. All eight graphs are retained.

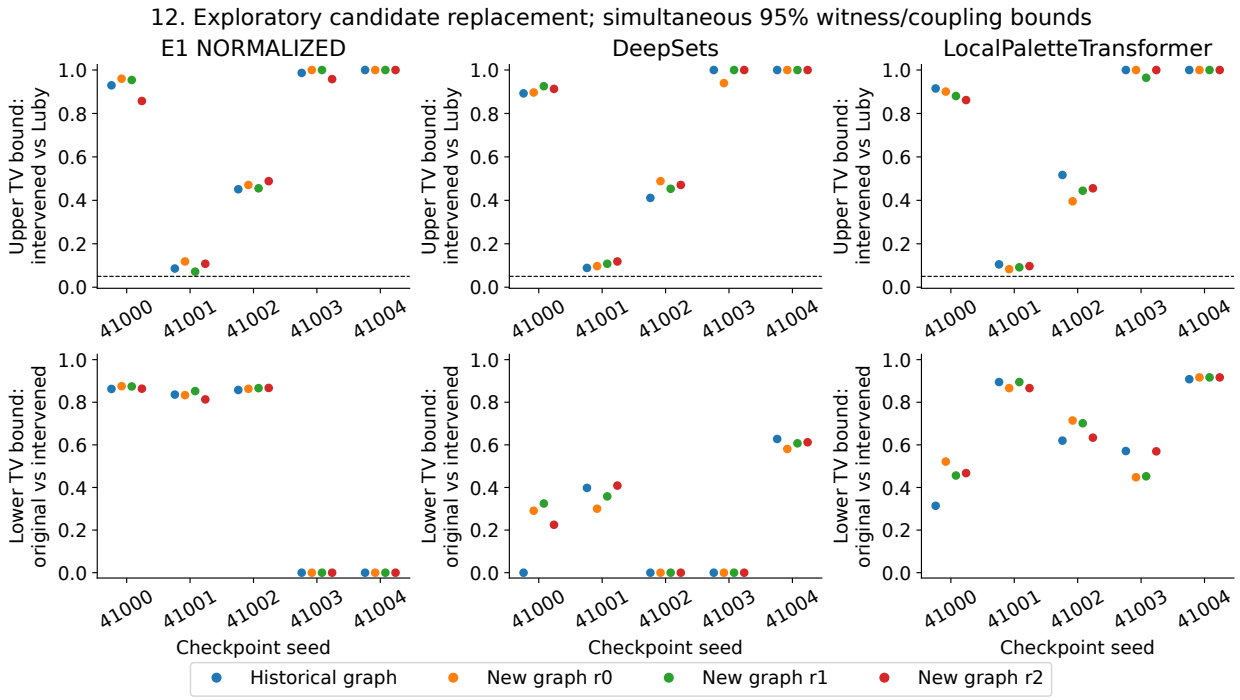


Figure 22: Separate exploratory candidate-channel intervention on four priority graphs. The supplementary witness/coupling family gives simultaneous 95 percent upper bounds for intervened versus Luby and lower effect bounds for original versus intervened. All original-policy tests remain separate.

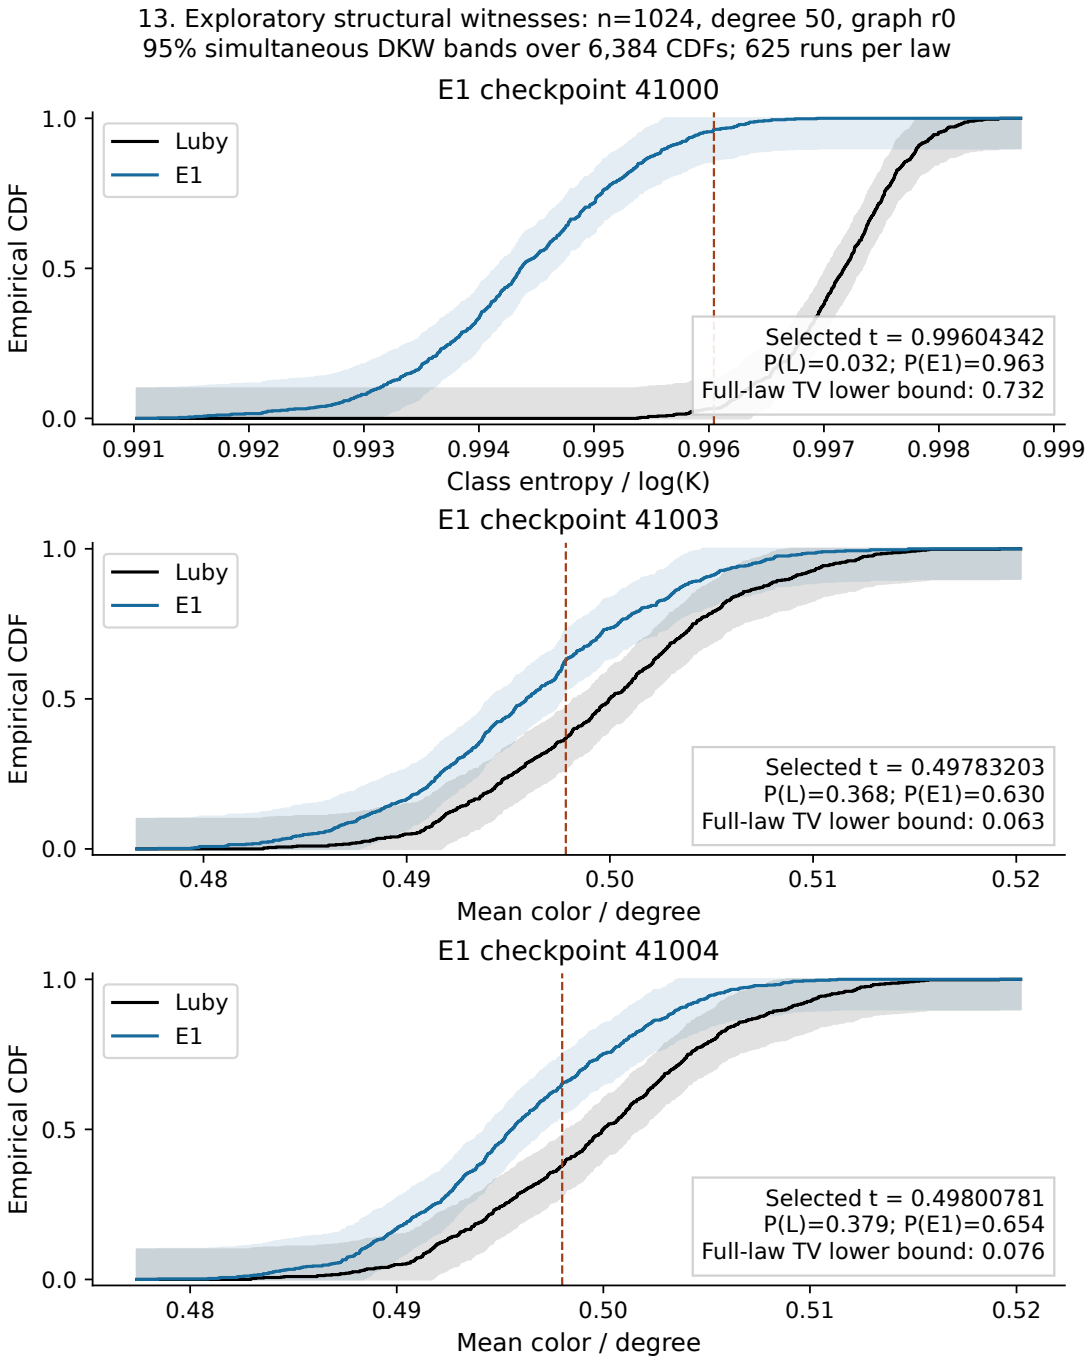


Figure 23: Exploratory structural CDF witnesses on one fixed graph, with three E1 checkpoints shown separately. Shaded DKW bands cover all thresholds and all 6,384 predefined graph/generator/function CDFs simultaneously with probability at least .95. Dashed thresholds are selected within this covered family. All 625 original runs per law are used; this is not an independent confirmatory analysis.

15 Discussion, Limitations and Future Work

Success on finite graphs is evidence about a specified distribution, rather than universal correctness. Five training networks permit only limited inference over initialization; small graph strata have wide confidence intervals. Shared graphs and repeated clique tapes must retain their dependence in analysis. The generic baselines retain UCGNN's graph-interface and safety pathway, so they do not test every possible end-to-end attention architecture. A fixed parameter count still permits costs that grow with N, $|E|$ and K.

An exploratory alternative teacher starts at $\lfloor Kr_c \rfloor$ and scans cyclically to the first available color, keeping participation and rejection unchanged. Its candidate mass at c is the cyclic gap preceding c divided by K, usually different from uniform over available colors. A fresh seed-41005 pilot reached 0.9903 local candidate validation fidelity and completed 304/304 graph evaluations without unsafe COMMIT. On its own graph trajectories, cyclic-teacher candidate fidelity declined from 0.9911 at degree 3 to 0.03975 at degree 200, while coloring remained successful. The new candidate law is thus learned in degree and transfers as a useful coloring policy, not as an exact high-degree implementation of that teacher. This single-seed study is exploratory. It uses newly generated cyclic teacher trajectories and differs in example/update counts from the main uniform-teacher comparisons. Separate CSV columns distinguish fidelity to the cyclic and uniform teachers; they must not be pooled. Teacher-free RL and supervised-to-RL fine-tuning ask separate questions; the accompanying design specifies rewards, private stochastic actions and a PPO-based comparison [13], with no large RL run here. Asynchronous execution, compressed communication, certified candidate anti-concentration and larger independent cohorts remain future work.

Our evidence refutes necessity of the original prefixes for the tested architecture family, and supports normalization and multiplicity control under one fixed degree-three training procedure. It does not establish necessity of MAX across all possible learned distributed algorithms, or that attention has equal population performance. Isolating the first and second communication reductions, studying more training procedures and certifying diffuse candidate mass are useful next experiments. Per-round records retain proposal support size, maximum mass and pair collisions; full candidate histograms are retained for controlled local grids, rather than every graph round. The code and fixed evaluation cohort remain available for replay and finer distributional diagnosis.

A Training runs

B Additional Local-Palette and Candidate-Law Diagnostics

References

[1] Felix Biggs, Antonin Schrab, and Arthur Gretton. Mmd-fuse: Learning and combining kernels for two-sample testing without data splitting. In *Advances in Neural Information Processing Systems*, volume 36, pages 75151–75188, 2023.

[2] Pim de Haan, Dinesh Jayaraman, and Sergey Levine. Causal confusion in imitation learning. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL https://proceedings.neurips.cc/paper_files/paper/2019/hash/947018640bf36a2bb609d3557a285329-Abstract.html.

[3] Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander

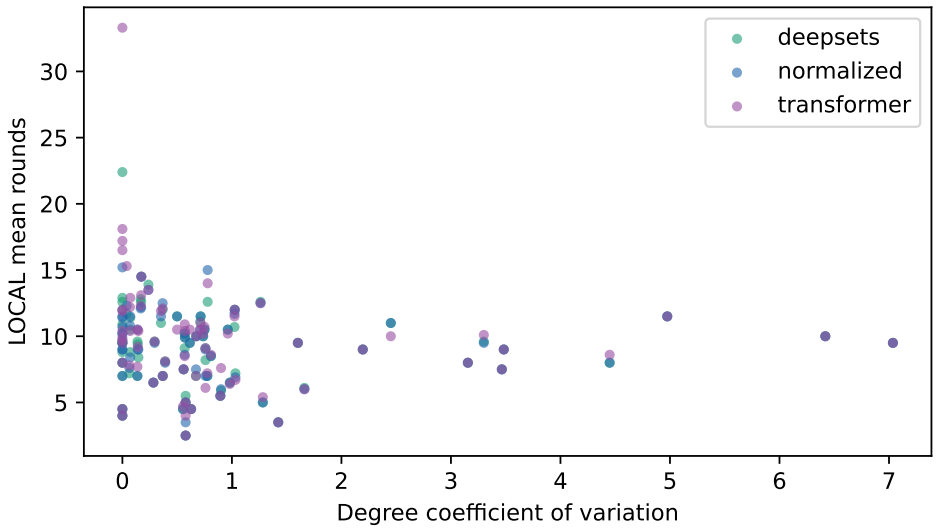


Figure 24: LOCAL mean rounds by degree heterogeneity. Points share graph identities across architectures. This association alone is not a causal effect.

Smola. A kernel two-sample test. *Journal of Machine Learning Research*, 13(25):723–773, 2012. URL https://www.jmlr.org/papers/v13/gretton12a.html.

[4] Jesse Hemerik and Jelle Goeman. Exact testing with random permutations. *TEST*, 27:811–825, 2018. doi: 10.1007/s11749-017-0571-1.

[5] Amirhossein Kazemnejad, Inkit Padhi, Karthikeyan Natesan Ramamurthy, Payel Das, and Siva Reddy. The impact of positional encoding on length generalization in transformers, 2023. URL https://arxiv.org/abs/2305.19466.

[6] Henrique Lemos, Marcelo Prates, Pedro Avelar, and Luis Lamb. Graph colouring meets deep learning: Effective graph neural network models for combinatorial problems, 2019. URL https://arxiv.org/abs/1903.04598.

[7] Andreas Loukas. What graph neural networks cannot learn: Depth vs width. In *International Conference on Learning Representations*, 2020. URL https://openreview.net/pdf?id=B1l2bp4YwS.

[8] Joël Mathys, Florian Grötschla, Kalyan Varma Nadimpalli, and Roger Wattenhofer. Flood and echo net: Algorithmically aligned GNNs that generalize, 2023. URL https://arxiv.org/abs/2310.06970.

[9] Belinda Phipson and Gordon K. Smyth. Permutation p-values should never be zero: calculating exact p-values when permutations are randomly drawn. *Statistical Applications in Genetics and Molecular Biology*, 9(1):Article 39, 2010. doi: 10.2202/1544-6115.1585.

[10] Stephane Ross, Geoffrey Gordon, and Drew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, volume 15 of *Proceedings of Machine Learning Research*, pages 627–635, 2011. URL https://proceedings.mlr.press/v15/ross11a.html.

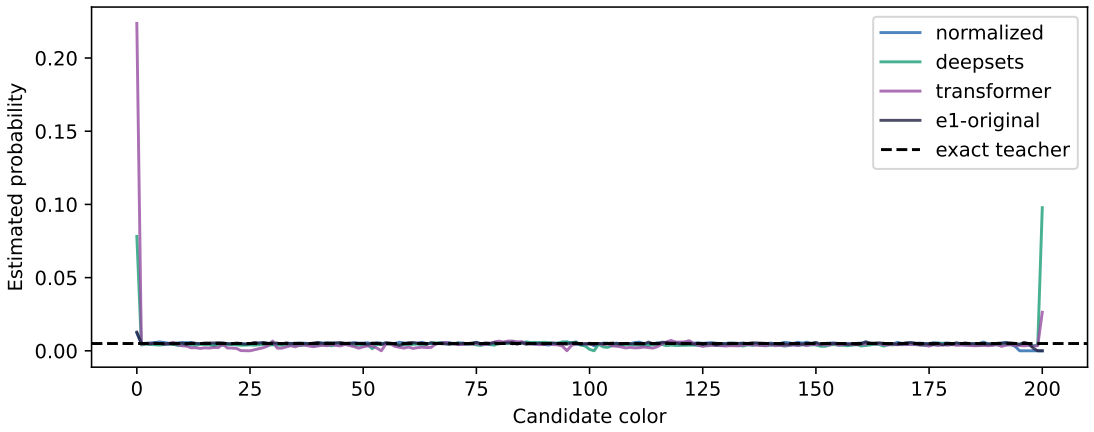


Figure 25: Estimated candidate probabilities in the same all-free $K = 201$ state, seed 41000 for each new architecture. The teacher line is analytically uniform. All five replicas and the separately labeled original E1 cohort are in CSV.

[11] Ryoma Sato, Makoto Yamada, and Hisashi Kashima. Approximation ratios of graph neural networks for combinatorial problems. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL https://arxiv.org/abs/1905.10261.

[12] Antonin Schrab, Ilmun Kim, Melisande Albert, Beatrice Laurent, Benjamin Guedj, and Arthur Gretton. Mmd aggregated two-sample test. *Journal of Machine Learning Research*, 24(194): 1–81, 2023.

[13] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms, 2017. URL https://arxiv.org/abs/1707.06347.

[14] Olga Solodova, Nick Richardson, Deniz Oktay, and Ryan P. Adams. Graph neural networks gone hogwild. In *International Conference on Learning Representations*, 2025. URL https://arxiv.org/abs/2407.00494.

[15] Jukka Suomela. Survey of local algorithms. *ACM Computing Surveys*, 45(2):24:1–24:40, 2013. doi: 10.1145/2431211.2431223. URL https://www.cs.helsinki.fi/local-survey/.

[16] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2017. URL https://arxiv.org/abs/1706.03762.

[17] Petar Veličković and Charles Blundell. Neural algorithmic reasoning, 2021. URL https://arxiv.org/abs/2105.02761.

[18] Petar Veličković, Adrià Puigdomènech Badia, David Budden, Razvan Pascanu, Andrea Banino, Misha Dashevskiy, Raia Hadsell, and Charles Blundell. The CLRS algorithmic reasoning benchmark. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 22084–22102, 2022. URL https://proceedings.mlr.press/v162/velickovic22a.html.

[19] Keyulu Xu, Mozhi Zhang, Jingling Li, Simon S. Du, Ken-ichi Kawarabayashi, and Stefanie Jegelka. How neural networks extrapolate: From feedforward to graph neural networks. In

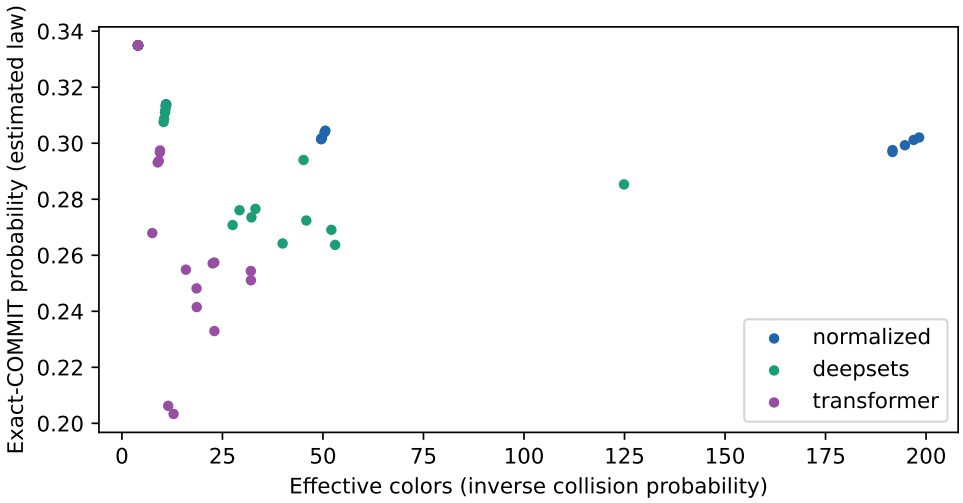


Figure 26: Candidate diversity and predicted exact-COMMIT probability on shared all-free clique states. Predictions use estimated laws and fixed participation probability 1/2, not a universal guarantee from the diversity metric.

International Conference on Learning Representations, 2021. URL https://openreview.net/forum?id=UH-cmocLJC.

[20] Manzil Zaheer, Satwik Kottur, Siamak Ravanbakhsh, Barnabas Poczos, Ruslan Salakhutdinov, and Alexander J. Smola. Deep sets. In *Advances in Neural Information Processing Systems*, volume 30, 2017. URL https://proceedings.neurips.cc/paper_files/paper/2017/hash/f22e4747da1aa27e363d86d40ff442fe-Abstract.html.

[21] Zhongyuan Zhao, Gunjan Verma, Chirag Rao, Ananthram Swami, and Santiago Segarra. Distributed scheduling using graph neural networks, 2020. URL https://arxiv.org/abs/2011.09430.

[22] Hattie Zhou, Arwen Bradley, Etai Littwin, Noam Razin, Omid Saremi, Josh Susskind, Samy Bengio, and Preetum Nakkiran. What algorithms can transformers learn? a study in length generalization, 2023. URL https://arxiv.org/abs/2310.16028.

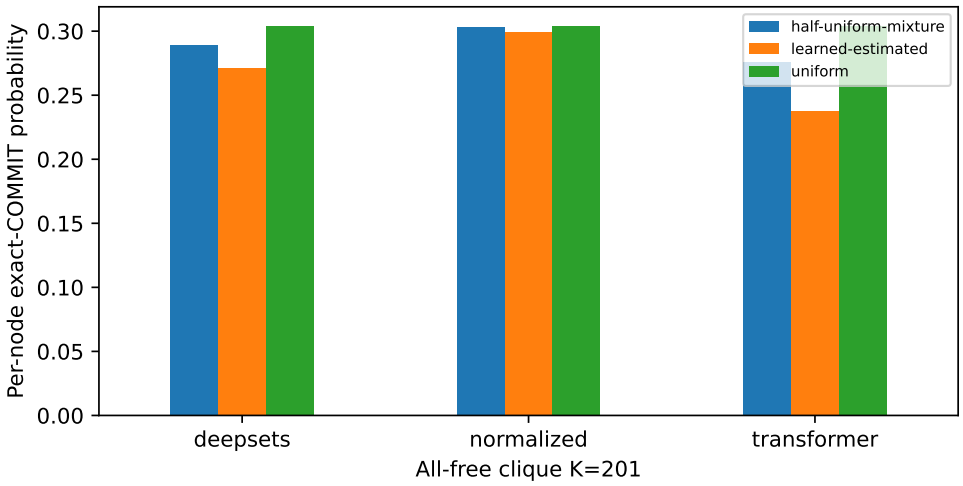


Figure 27: Controlled candidate-law substitution in the all-free $K = 201$ clique: estimated learned law, uniform law, and their 50:50 mixture. COMMIT is exact and participation is fixed at 1/2 for this intervention.

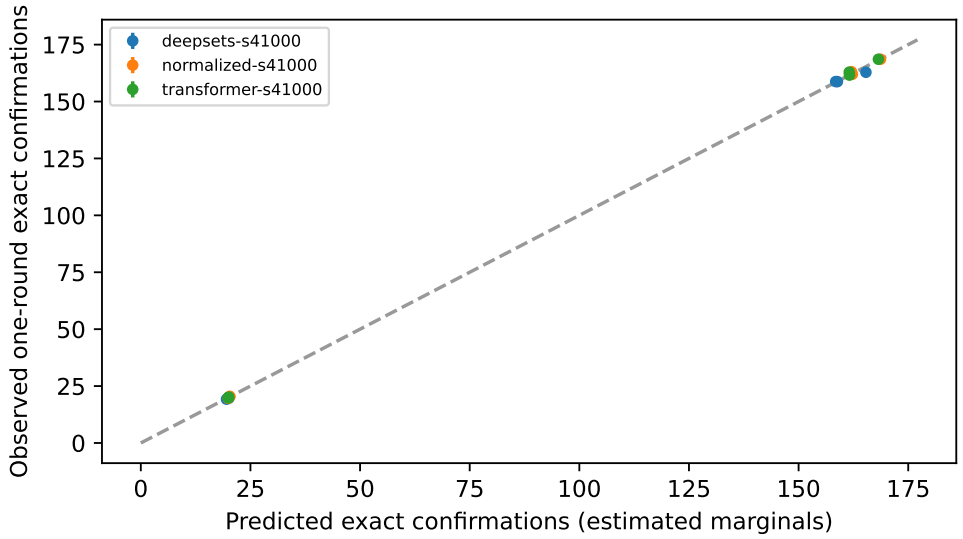


Figure 28: Six frozen heterogeneous LOCAL states, three new seed-41000 policies. Predictions from independently estimated candidate/participation marginals are compared with 256 fresh one-round exact-COMMIT observations per context. Error bars show 1.96 Monte Carlo standard errors for the observations; they do not include uncertainty in the predicted marginals.

Model	Seed	Epoch	Params	Updates	Candidate	COMMIT
cyclic_teacher	41005	120	16035	17760	0.9903	1.0000
deepsets	41000	120	17907	17880	0.9948	1.0000
deepsets	41001	120	17907	17640	0.9965	1.0000
deepsets	41002	120	17907	17760	0.9970	1.0000
deepsets	41003	120	17907	17760	0.9881	1.0000
deepsets	41004	120	17907	17760	0.9935	1.0000
mean	41000	120	16035	17880	0.9983	1.0000
mean	41001	120	16035	17640	0.9981	1.0000
mean	41002	120	16035	17760	0.9995	1.0000
mean	41003	120	16035	17760	0.9980	1.0000
mean	41004	120	16035	17760	0.9994	1.0000
normalized	41000	120	16035	17880	0.9971	1.0000
normalized	41001	120	16035	17640	0.9985	1.0000
normalized	41002	120	16035	17760	0.9986	1.0000
normalized	41003	120	16035	17760	0.9985	1.0000
normalized	41004	120	16035	17760	0.9993	1.0000
own_only	41000	120	16035	17880	0.9971	1.0000
raw_endpoints	41000	120	16035	17880	0.9850	1.0000
raw_endpoints	41001	120	16035	17640	0.9897	1.0000
raw_endpoints	41002	120	16035	17760	0.9891	1.0000
raw_endpoints	41003	120	16035	17760	0.9882	1.0000
raw_endpoints	41004	120	16035	17760	0.9886	1.0000
sum	41000	120	16035	17880	0.9983	1.0000
sum	41001	120	16035	17640	0.9980	1.0000
sum	41002	120	16035	17760	0.9991	1.0000
sum	41003	120	16035	17760	0.9982	1.0000
sum	41004	120	16035	17760	0.9993	1.0000
transformer	41000	120	16995	17880	0.9957	1.0000
transformer	41001	120	16995	17640	0.9925	1.0000
transformer	41002	120	16995	17760	0.9962	1.0000
transformer	41003	120	16995	17760	0.9932	1.0000
transformer	41004	120	16995	17760	0.9969	1.0000

Table 10: Training progress and in-degree validation, with all seeds shown. Partial epochs are explicitly listed.