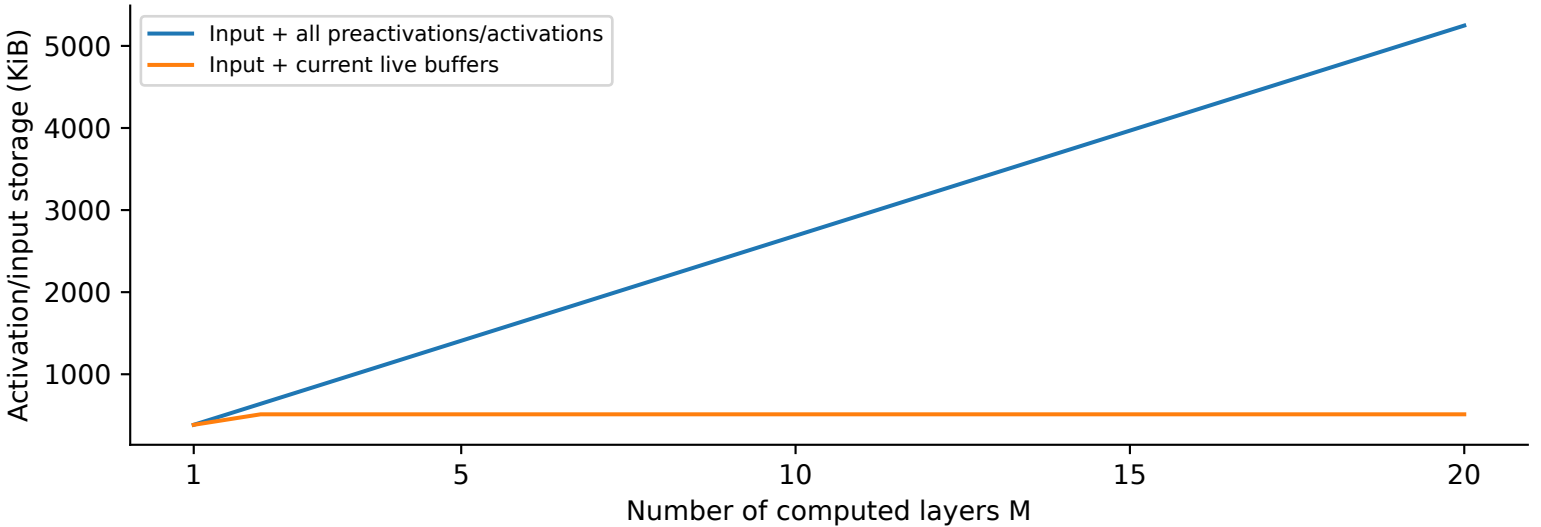
Depth accumulates cached activations; inference can reuse buffers
Input + all preactivations/activations
Input + current live buffers
Activation/input storage (KiB)
5000
4000
3000
2000
1000
1
5
10
15
20
Number of computed layers M