

Can LLMs Use Linguistic Uncertainty Markers to Reliably Reflect Intrinsic Confidence?

Gabrielle Kaili-May Liu Arman Cohan

Yale University
{kaili.liu, arman.cohan}@yale.edu

Abstract

LLMs’ linguistically expressed confidence should faithfully reflect their intrinsic uncertainty. While recent work shows LLMs struggle to use epistemic markers (e.g., “it is likely...”) in a human-aligned fashion, it remains unclear whether models can apply their own linguistic confidence framework to associate markers with specific confidence levels in a stable and generalizable way, and how contextual features impact this ability. We conduct the first systematic study of this question, formalizing *marker internal confidence* (MIC) as the estimated intrinsic confidence a model associates with a specific epistemic marker in a given task domain. We present 7 metrics to evaluate the stability of MICs within and across distributions. Applying our analysis framework to diverse models and tasks, we find that LLMs remain faithfully miscalibrated even under model-centric interpretation of marker meanings, struggling to differentiate markers by internal confidence across distributions despite preserving a somewhat consistent ranking order across tasks. This supplies critical, complementary evidence to existing work toward a holistic understanding of faithful calibration in LLMs, emphasizing the need for more aligned and stable marker use to improve trustworthiness and reliability.¹

1 Introduction

Understanding the reliability and trustworthiness of LLMs has become increasingly important as models are deployed across applications such as scientific discovery [67, 96], medical diagnosis [33, 101], and legal consulting [11, 45]. Yet despite their unprecedented capabilities, LLMs continue to suffer from hallucinations [75, 28], wherein false claims are habitually conveyed using decisive, assertive language [84, 99, 65]. In downstream settings, the risks of such misalignment are well-documented [37, 100], with over- or under-confident generations able to mislead users, undermine trust, and foster over-reliance in LLM-based systems. Measuring the uncertainty of models has therefore become a primary means to guide AI-assisted decision-making and reduce potential harm [100, 70].

While traditional uncertainty estimation methods [27, 83] predominantly rely on numerical representations of confidence (e.g., “25% confident”), such approaches are limited by lack of alignment with natural communication and computational expense, especially if dependent on multiple model calls or auxiliary networks [73]. Enabling models to use *hedge phrases* or *epistemic markers* to signal uncertainty (e.g., “I think...” or “it is likely that...”) has therefore gained traction as a more effective alternative [97, 95]. Hedging expressions are essential for effective communication [82, 4] and can be integrated seamlessly into downstream settings to serve as a human-aligned medium for users to calibrate their reliance on model outputs. Compared to numerical confidence, linguistic confidence expression is known [102, 5, 76, 7, 12] to improve user judgments of LLM credibility, boost task

¹We release our code at https://github.com/yale-nlp/marker_internal_confidence.

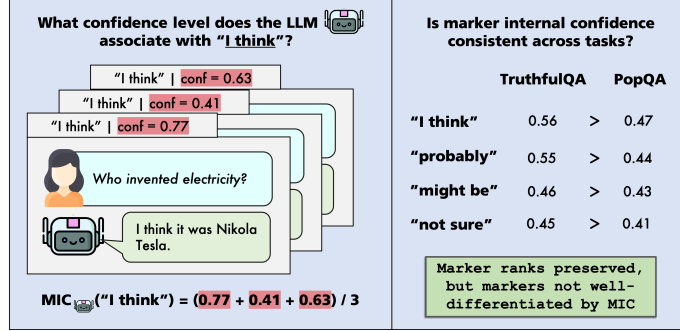


Figure 1: An example of our framework to calculate the internal confidence a model associates with the epistemic marker “I think.” We calculate marker internal confidences (MICs) for 13 models across 11 datasets.

accuracy in human-AI teaming, and incur minimal computational overhead. As such, recent work has increasingly focused on enabling LLMs to use natural language to *faithfully* express their intrinsic uncertainty, which may be estimated via sampling consistency [24, 18, 92, 49].²

Despite the importance of aligning LLMs’ internal and linguistically expressed confidence, the consistency and reliability with which LLMs use epistemic markers to represent specific confidence levels remains poorly understood. Prior works [18, 92, 30, 49] have attempted to do so by comparing LLM and human recognition of epistemic markers, finding systematic deficiencies in LLMs’ ability to faithfully express their (estimated) intrinsic confidence in words. Yet these studies do not consider differences in human interpretations of markers across contexts, and rely on interpreting epistemic markers in a human fashion—it remains critically unclear whether models could be faithfully calibrated when interpreting markers according to their own use. In particular, even humans vary in individual-level interpretation and use of hedging language [60]. A model might use “perhaps” differently from humans, but still use it consistently whenever its own confidence is high. Thus, even if a model’s use of epistemic markers does not align with human intuition, such indicators can still be meaningful if the model applies a consistent mapping between utilized markers and internal confidence. We test whether this weaker, model-internal notion holds. This possibility of *model-centric* faithful calibration is unexamined in prior work.

To address this gap, we systematically examine whether epistemic markers emitted by LLMs reliably and stably reflect their intrinsic confidence across task settings. We formalize our study by first defining *marker internal confidence* (MIC) (§3) as the average internal confidence of a model when it uses a given epistemic marker during a given task (Fig. 1). This notably differs from prior work in that we measure the association between markers and intrinsic confidence, rather than with external factuality verdicts, and consider the impact of implicit contextual factors such as task domain, format, and difficulty. Next, we propose a suite of 7 metrics (§3) to assess the in- and out-of-distribution consistency of MICs per model. We evaluate and analyze MICs for 13 leading open-source and proprietary LLMs representing various sizes, families, and post-training procedures on 11 datasets. Taken together, our results demonstrate that LLMs fail to consistently apply their own linguistic confidence framework. This provides critical evidence complementary to prior work [49] that LLMs are faithfully miscalibrated even under model-centric interpretation of marker meanings.

2 Related Work

A plethora of approaches exist to numerically and linguistically assess the confidence of LLMs. We discuss such methods in greater detail in §A. In general, there is limited understanding of the ability for LLMs to consistently and reliably use epistemic markers to signal intrinsic uncertainty. Existing evaluations of the faithfulness of linguistic confidence expression by LLMs hinge on human perceptions of decisiveness [92, 30, 49, 14], failing to consider (a) whether alignment is present if expressed confidence is defined according to a model’s own use, and (b) whether contextual features impact this alignment. We address these gaps by presenting a novel analysis framework and set of

²Note that use of a linguistic marker itself is low-overhead at deployment time; sampling consistency is an offline diagnostic used to estimate model confidence in a generation.

metrics specific to understanding the faithfulness and consistency with which LLMs use markers to express internal uncertainty in different contexts. This provides distinct insights from traditional studies of calibration, which are focused on alignment with factuality, and enables model-centric evaluation of the *faithful calibration* of LLMs, complementary to existing studies of faithful linguistic confidence expression. To the best of our knowledge, we are the first to evaluate this possibility.

3 Marker Internal Confidence

Our goal is to investigate when and to what extent models are able to consistently use specific epistemic markers³ to reflect specific internal confidence levels. To this end, we operationalize the internal confidence level of a model associated with an epistemic marker as the *marker internal confidence*. Let E be an epistemic marker, and suppose we have a dataset $D = (D_{\text{train}}, D_{\text{test}})$ and a model M which emits uncertainty-bearing responses $R_1, \dots, R_N$ to the questions in the training set $D_{\text{train}} = \{Q_1, \dots, Q_N\}$. We view each model response R_i as a sequence of L_i sentences $\{s_{i,l}\}_{l=1}^{L_i}$. The marker internal confidence (MIC) of E with respect to M and D is then computed as the average internal confidence of the model in the sentences in which E appears. That is:

$$\text{MIC}_{E,M,D} = \frac{1}{S} \sum_{i=1}^N \sum_{l=1}^{L_i} \mathbb{1}[E \in s_{i,l}] \text{conf}_M(s_{i,l}) \quad (1)$$

where $\mathbb{1}(\cdot) \in \{0, 1\}$ is the indicator for whether sentence $s_{i,l}$ contains marker E , $\text{conf}_M(s_{i,l}) \in [0, 1]$ is the intrinsic confidence of M in sentence $s_{i,l}$, and $S := \sum_{i=1}^N \sum_{l=1}^{L_i} \mathbb{1}[E \in s_{i,l}]$ is the total number of sentences containing E .⁴

Quantifying Intrinsic Confidence. Following prior work [49, 14, 30, 92, 52, 73], we quantify models’ internal confidence by assessing consistency across sampled responses. In particular, we adopt the procedure of Liu et al. [49], as this methodology has been shown to address limitations⁵ of the earlier approach proposed by Yona et al. [92] while being provably robust (§B.5) across diverse prompting strategies, models, and tasks. Under this approach, given a text input Q and response $R = \{s_l\}_{l=1}^L$, we sample K additional responses $R_1, \dots, R_K$ to Q and use LLM-as-a-Judge to assess whether each s_l is contradicted by the sampled responses. The confidence $\text{conf}_M(s_l)$ is then computed as the fraction of contradictory responses: $1 - \frac{1}{K} \sum_k [R_k \perp s_l]$. Details can be seen in §B.5.

Evaluation Metrics. To systematically evaluate the consistency and stability of MICs across models, datasets, and epistemic markers, we propose 7 model-level metrics which provide detailed insights into the distributions, generalizability, and confidence meanings of MICs. Exact formulas and further details about the implementation and interpretation of these metrics can be found in §B.9:

- **ID-MAE:** The *in-domain average mean absolute error (MAE)* estimates how well a model’s MICs align with its actual intrinsic confidence on in-distribution test tasks (stability across similar contexts). It is computed by generating model responses on the test set D_{test} of each dataset, computing for each observed marker the absolute error between the MIC estimated on D_{train} and the model’s internal confidence in each sentence containing the marker, averaging across such sentences, averaging across markers, and finally averaging across datasets. We average over markers to bypass potential bias due to different relative marker frequencies across model responses per dataset; two variants which aggregate instead over sentences or samples are discussed in §B.9, with additional results in §C.4. The ID-MAE ranges in value from 0 to 1, with lower ID-MAE representing better in-domain train-test transferability of MICs.
- **CD-MAE:** The *cross-domain average MAE* assesses how well a model’s MICs generalize to align with intrinsic confidence on out-of-distribution test tasks. It is computed similarly to the ID-MAE, but uses train and test sets from *different* tasks and averages over pairs of distinct datasets instead of over singular datasets. Thus, it ranges from 0 to 1, with lower CD-MAE indicating better

³An epistemic marker is a word or phrase used to express ambiguity, caution, or indecisiveness about the content of a text [41, 38, 34].

⁴Following Liu et al. [50], we assume each sentence $s_{i,l}$ uses at most one marker. We demonstrate empirically that this requirement is not overly artificial in §B.8, by comparing the average number of hedges used per sentence with versus without such specification for representative models.

⁵For example, assuming the same number and order of assertions across sampled responses.

cross-domain transferability of MICs. The impact of aggregation granularity on CD-MAE results is also studied in §C.4.

- **M-AvgCV:** The *marker-level average coefficient of variation (CV)* evaluates the consistency of a model’s per-marker MIC values across datasets. It is computed as the CV of each shared⁶ marker’s per-dataset MIC values, averaged *across markers*. The CV has no theoretical maximum, but a low M-AvgCV reflects stable cross-dataset MIC values per marker, suggesting consistent internal confidence is associated to each marker regardless of task setting.
- **D-AvgCV:** The *dataset-level average coefficient of variation (CV)* measures the dispersion of a model’s MIC values within each dataset. It is computed as the CV of all MICs per dataset, averaged *across datasets*. Similar to the M-AvgCV, a low D-AvgCV indicates that marker values are highly concentrated, suggesting the model fails to meaningfully differentiate its use of epistemic markers in a generalized fashion.
- **MRC:** *Marker rank correlation* measures the consistency of a model’s MIC-based marker rankings across datasets. It assesses ranking of shared markers between pairs of datasets and is computed as the Fisher⁷ average Spearman correlation of shared-marker MICs across distinct dataset pairs. The MRC ranges from -1 to 1 , with 1 (-1) indicating nearly identical (inverse) rankings of markers’ associated intrinsic confidence, and 0 indicating minimal correlation.
- **MAC:** The *MIC-accuracy correlation* measures the cross-dataset association between a model’s MIC values and accuracy. It is computed as the Fisher average across markers of the Pearson correlation between per-dataset MICs and per-dataset accuracies (Spearman correlation results in §C.5). The MAC ranges from -1 to 1 . High MAC indicates the MICs track dataset difficulty to reflect performance without encoding a differentiated internal confidence scale.
- **MCC:** The *MIC-cMFG correlation* measures the cross-dataset association between a model’s MIC values and faithful calibration (FC) level, serving as the faithfulness-based analog to MAC. FC is the alignment between a model’s internal and linguistically expressed confidence, estimated by the cMFG metric [92, 49, 14], which quantifies internal confidence via sampling consistency and linguistic confidence via human-perceived decisiveness. The MCC is computed by substituting cMFG for accuracy in the MAC computation (Spearman results in §C.5). It ranges from -1 to 1 ; high MCC indicates MICs are predictive of dataset-level FC, suggesting internal sensitivity to linguistic confidence expression.

4 Experimental Setup

Models & Datasets. We compute and analyze MICs for 13 leading open-source and proprietary models (§B.2) over 11 datasets (§B.3) spanning diverse content domains, task formats, and difficulty levels to ensure generality of our findings.

Prompts. Standardized zero-shot task prompts are used to elicit model responses per dataset. Following prior work [92, 49], in our experiments the task prompt is paired with a generic system prompt instructing the model to provide its answer succinctly while using at most one epistemic marker per sentence when uncertain. Additional results of using a metacognitive system prompt [49] to enhance the faithfulness of models’ linguistic uncertainty expression are in §5.3. Full prompts are in §B.4.

Marker Extraction. To compute MICs, we first parse each model response into sentences⁸ and prompt a strong LLM⁹ to extract and standardize epistemic markers per sentence. Sentences with more than one marker are discarded; we consider only markers which appear at least $T = 10$ times per model. This threshold balances marker diversity against the need for sufficient samples per marker for reliable MIC estimation. Robustness to T value is analyzed in §5.2. The use of no marker is considered as a special marker, `<no_hedge>`.

⁶Shared markers are those which appear in a model’s responses at least ten times per task. This threshold is determined sufficient based on empirical analysis (§5.2) and inspired by prior work [50].

⁷We use the Fisher-transformed mean rather than the arithmetic mean when averaging correlation coefficients, as the latter is statistically unsound due to the bounded and nonlinear nature of correlation values [16, 17].

⁸We use spaCy for sentence segmentation as it is a popular approach which achieves strong empirical performance on diverse text types. Segmentation quality was verified by the authors via manual review of 300 samples.

⁹We use Gemini-2.5-Flash-Lite as it is a capable and cost-efficient model. To verify the efficacy and validity of our extraction prompt, we manually annotate 300 samples and find a precision of 0.97 and recall of 1.0 against human annotations.

Table 1: **Consistency and stability of marker internal confidences per model**, evaluated via metrics introduced in §3. MAE metrics range from 0 to 1, rank metrics from -1 to 1 , and CV metrics start at 0 with no theoretical maximum. In general, MICs transfer reasonably well within a task, degrade across tasks, occupy a compressed value range, and show ranking consistency that is weaker once `<no_hedge>` is removed.

Model	Marker Internal Confidence			Density	Rank		
	ID-MAE ↓	CD-MAE ↓	M-AvgCV ↓	D-AvgCV	MRC ↑	MAC	MCC
Gemini-2.5-Flash	0.11	0.22	0.33	0.22	0.86	0.47	0.35
Gemini-3-Flash	0.09	0.13	0.11	0.08	0.76	0.26	-0.66
Gemini-3.1-Pro	0.08	0.12	0.11	0.08	0.32	0.07	-0.49
GPT-5-Nano	0.15	0.26	0.32	0.27	0.90	0.62	-0.40
GPT-5-Mini	0.11	0.19	0.29	0.28	0.70	0.60	-0.02
GPT-5	0.11	0.26	0.18	0.16	0.83	0.63	-0.21
Qwen3-0.6B	0.14	0.26	0.27	0.24	0.69	0.70	0.68
Qwen3-1.7B	0.12	0.21	0.27	0.24	0.77	0.51	0.15
Qwen3-4B	0.10	0.20	0.22	0.20	0.79	0.61	0.23
Qwen3-8B	0.10	0.15	0.21	0.18	0.85	0.65	-0.24
Qwen3-32B	0.11	0.13	0.16	0.17	0.88	0.66	-0.11
Llama3.1-8B-Instruct	0.16	0.29	0.40	0.29	0.46	0.69	0.30
Llama3.3-70B-instruct	0.14	0.21	0.21	0.19	0.68	0.34	-0.45

5 Results & Analysis

5.1 Main Results

We report¹⁰ results in Table 1 and observe:

The stability with which models use epistemic markers to reflect internal confidence is sensitive to context and distribution shifts. While MICs are fairly stable within the same task setting, indicated by low ID-MAE values, cross-dataset robustness is weaker. CD-MAE is consistently higher than ID-MAE, and moderate M-AvgCV values indicate that the internal confidence associated with each marker fluctuates across datasets, with models struggling to generalize their use of epistemic markers to reflect specific internal confidence across tasks.

Models exhibit limited ability to discriminate markers by internal confidence. Across models, D-AvgCV values are quite low (0.17–0.29), demonstrating that MICs are highly concentrated. This is not attributable to a limited range of observed internal confidences: per-task confidence ranges generally span 0–1, and the Pearson and Spearman correlations between D-AvgCV and average confidence range across datasets are near-0 or insignificant. This evidences that models struggle to convey internal confidence faithfully even when interpreting epistemic markers on their own terms, providing complementary yet critical evidence prior work [49, 92] to show that models are holistically unfaithfully calibrated.

Despite limited marker discriminability, models encode multiple coarse uncertainty levels. Low D-AvgCV values alone do not reveal whether markers form a single undifferentiated cluster or a small number of stable but closely spaced uncertainty bands. To investigate this, we plot the kernel density estimate (KDE) of MIC values for each model and dataset, which reveals the underlying distributional structure without requiring a priori cluster assumptions. Representative plots for Llama3.1-8B-Instruct and Qwen3-32B on the dataset PopQA are shown in Fig. 2 (plots for all datasets in §C.2). Consistent with the low D-AvgCV values, MIC distributions are concentrated within a narrow region of the confidence space. How-

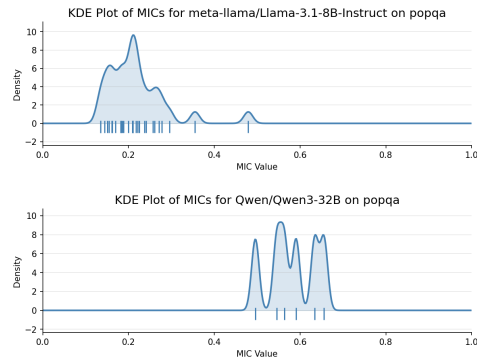


Figure 2: KDE plots of MIC values on PopQA.

¹⁰As ID-MAE and CD-MAE are computed as averages of means, to capture variability we additionally provide the pooled standard deviation per score in §C.4.

Table 2: Excerpted analysis of MICs when the special marker <no_hedge> is excluded. Δ MRC indicates the change in MRC after the exclusion, in comparison to original MRC scores in Table 1. Full results are in §C.3.

Model	Marker Internal Confidence			Density	Rank			
	ID-MAE ↓	CD-MAE ↓	M-AvgCV ↓	D-AvgCV	MRC ↑	Δ MRC	MAC	MCC
Gemini-2.5-Flash	0.11	0.22	0.34	0.22	0.39	−0.47	0.52	0.37
Llama3.1-8B-Instruct	0.16	0.29	0.40	0.29	0.18	−0.28	0.61	0.33
Qwen3-1.7B	0.12	0.21	0.26	0.24	0.78	+0.01	0.60	0.17
Qwen3-4B	0.10	0.20	0.22	0.18	0.47	−0.32	0.53	0.20
Qwen3-32B	0.11	0.17	0.21	0.20	0.27	−0.61	0.59	−0.05

ever, internal structure varies across models: smaller models tend to exhibit unstable, imbalanced distributions with one dominant peak and minor secondary peaks, while larger models show clearer multimodal structure with several peaks of comparable prominence. This suggests larger models can encode a greater number of stable uncertainty bands within the compressed confidence range. Thus, although fine-grained discrimination among markers is limited, models nevertheless encode distinct uncertainty levels through their marker use.

Models maintain consistent rank ordering of epistemic markers across tasks. Most models achieve $MRC \geq 0.68$, indicating that although they struggle to differentiate the confidence meaning of individual markers, their relative ordering is fairly well-preserved across distributions. Models may possess implicit understanding of internal confidence levels despite limited ability to use markers in a meaningful fashion [49]. However, increased model size does not always help, especially for proprietary LLMs.

Marker ranking consistency is partly driven by the absence of hedging. To determine whether observed trends truly reflect models’ ability to rank and differentiate among individual markers, we repeat our analysis while excluding the special marker <no_hedge>. Abbreviated results are reported in Table 2, with full results in §C.3. We observe that the MAE- and CV-based metrics remain largely stable, indicating reliable results regarding discriminability and consistency of MICs attributable to true graded differences (albeit slight) among different markers’ associated internal confidences. Associations between MIC and accuracy (MAC) or faithful calibration (MCC) are likewise generally preserved. However, MRC declines notably for most models (see blue column), suggesting that <no_hedge> acts as a strong anchor in marker rankings, and that genuine ranking consistency among markers is weak. Overall, this indicates that while models can form a somewhat meaningful graded lexicon of epistemic markers, the apparent consistency of marker rankings is largely mediated by the distinction between hedging vs. no hedging, rather than by reliable encoding of marker semantics.

Increased model size can improve stability and meaningfulness of MICs, but not discriminability. Within each model family, larger and stronger models consistently achieve smaller ID-MAE, CD-MAE, and M-AvgCV and often higher MRC, demonstrating improved ability to consistently associate and stably order markers by internal confidence across tasks. This is supported by moderate correlations between cross-dataset average accuracy (representative of model capability) and CD-MAE, M-AvgCV, D-AvgCV, and MRC (Pearson: $-0.53, -0.44, -0.61, 0.33$; Spearman: $0.51, -0.45, -0.58, 0.25$; $p < 0.05$). At the same time, lower D-AvgCV for larger models indicates reduced differentiation of markers based on internal confidence. Finally, model size appears to have limited impact on the association between MIC values and performance (MAC) or faithful calibration (MCC).

MICs track accuracy but not faithful calibration. For several models, MAC exceeds 0.6, indicating MICs are moderately positively associated with accuracy. This shows that MIC is partly driven by dataset difficulty, consistent with earlier-observed fragility under distribution shifts. Interestingly, higher MAC suggests that models could achieve good faithful calibration by using linguistic confidence expressions that reflect task accuracy or difficulty as a proxy for internal confidence; this would indicate that faithful and factuality-aligned calibration can indeed be achieved simultaneously, in opposition to prior findings by Liu et al. [49] for select models and calibration approaches. Moreover, if models can harness internal signals regarding task difficulty or performance to faithfully represent their intrinsic confidence, this would signal that LLMs indeed have the ability to be aware of and use metacognitive information, which is critical to enhance human-AI interaction and self-driven learning [69].

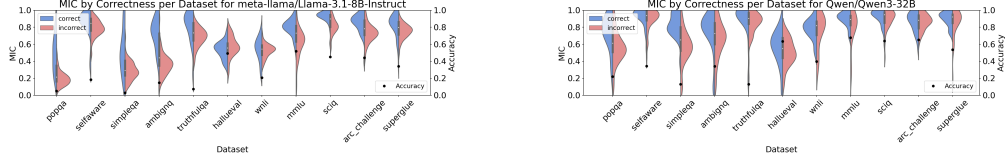


Figure 3: **Representative violin plots of models' MIC densities across datasets, stratified by correctness.** Dataset-level accuracy is indicated by black points (values along the second y -axis).

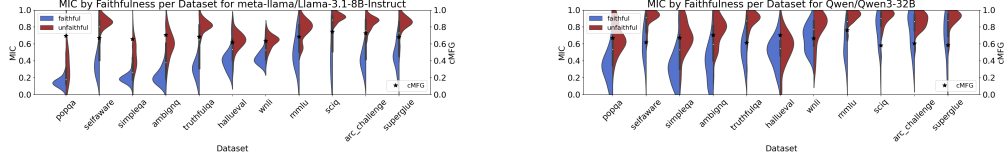


Figure 4: **Representative violin plots of models' MIC densities across datasets, stratified by faithful calibration level.** Dataset-level faithful calibration is indicated by black stars (values along the second y -axis).

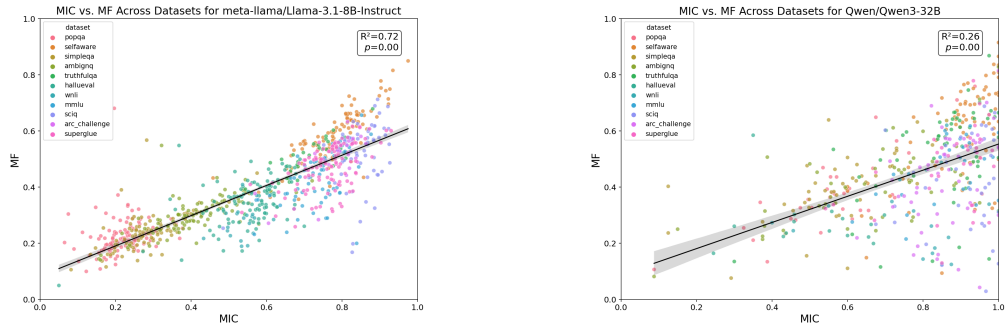


Figure 5: **Representative plots of models' MICs in relation to per-marker average absolute difference between internal confidence and human-interpreted linguistic decisiveness (MF).** We observe positive trends between internal confidence and human-model decisiveness divergence per marker, suggesting high-MIC markers are a primary driver of faithful miscalibration in LLMs when we interpret markers according to human perception.

On the other hand, MCC results are mixed: smaller models achieve $MCC \geq 0.15$, while larger models' $MCC \leq 0$. This indicates MICs do not reliably reflect models' ability to use markers in a human-aligned fashion, providing further evidence for divergence between human and LLM interpretation of linguistic uncertainty [71].

We corroborate these findings by plotting MIC density stratified by correctness and faithful calibration level per model (representative plots for Llama3.1-8B-Instruct and Qwen3-32B in Figs. 3 and 4): MIC mass is generally lower for incorrect samples and higher for correct ones, suggesting models can use epistemic markers in association with correctness. In contrast, low-faithfulness samples¹¹ concentrate at high MIC values (0.5–1.0), while more faithful samples exhibit lower, more distributed MICs across nearly all datasets. This suggests high-MIC markers may be used automatically regardless of intrinsic uncertainty, while low-MIC markers reflect more genuine hedging. This is further supported by plots of MIC against the per-marker average absolute difference between human-interpreted decisiveness and internal confidence (MF), shown in a representative fashion for Llama3.1-8B-Instruct and Qwen3-32B in Fig. 5, revealing positive per-model correlations between internal confidence and human-model decisiveness divergence per marker. Taken together, our findings propose high-MIC markers as the primary driver of faithful calibration failures, helping to explain gaps in prior analysis [49] and providing a more coherent account of systematic limitations of LLMs in faithfully expressing intrinsic uncertainty.

¹¹In line with prior work, we consider samples whose faithfulness score [92] is ≥ 0.75 or < 0.75 as relatively faithful or unfaithful, respectively.

Table 3: **Comparative impact of marker filtering threshold** on MIC analysis results for a representative sample of models. Main findings ($T = 10$) are preserved regardless of threshold value.

Threshold	M-AvgCV ↓				D-AvgCV				MRC ↑			
	10	20	50	100	10	20	50	100	10	20	50	100
Gemini-2.5-Flash	0.33	0.30	0.31	0.33	0.22	0.22	0.26	0.27	0.86	0.80	0.79	0.83
Llama3.1-8B-Instruct	0.40	0.37	0.38	0.36	0.29	0.23	0.18	0.25	0.46	0.51	0.43	0.47
Qwen3-1.7B	0.27	0.28	0.30	0.25	0.24	0.26	0.24	0.25	0.77	0.74	0.77	0.76
Qwen3-4B	0.22	0.21	0.21	0.22	0.20	0.19	0.19	0.21	0.79	0.77	0.76	0.75
Qwen3-32B	0.16	0.15	0.17	0.17	0.17	0.20	0.16	0.22	0.88	0.89	0.81	0.82

Table 4: **Comparative impact of system prompt** on results for a representative sample of models. We compare the generic system prompt (Fig. 6, §B.4) used in main experiments against a metacognitive system prompt (Fig. 8, §B.4) known to improve human-aligned faithful uncertainty expression [49].

Model / System Prompt	Marker Internal Confidence			Density	Rank		
	ID-MAE ↓	CD-MAE ↓	M-AvgCV ↓	D-AvgCV	MRC ↑	MAC	MCC
Gemini-2.5-Flash	0.11	0.22	0.33	0.22	0.86	0.47	0.35
+Metacognitive Prompt	0.12	0.24	0.34	0.15	0.81	0.43	0.29
Llama3.1-8B-Instruct	0.16	0.29	0.40	0.29	0.46	0.69	0.30
+Metacognitive Prompt	0.20	0.29	0.38	0.13	0.46	0.66	0.09
Qwen3-8B	0.10	0.15	0.21	0.18	0.85	0.65	-0.24
+Metacognitive Prompt	0.13	0.18	0.19	0.11	0.90	0.67	-0.41
Qwen3-32B	0.11	0.13	0.16	0.17	0.88	0.66	-0.11
+Metacognitive Prompt	0.13	0.16	0.22	0.12	0.79	0.61	-0.32

5.2 Impact of Marker Threshold

The main experiments consider only those markers which appear at least $T = 10$ times per model per task. To demonstrate the robustness of our conclusions to the selection of T , we additionally investigate the use of $T = 20, 50, 100$, which represent increased aggregate reliability of MIC estimates.¹² Results for representative models are reported in Table 3. As shown, even when the marker filtering threshold is increased to 100, the trends observed in §5.1 are persistent: M-AvgCV and D-AvgCV values remain low to moderate, and MRC values remain high, suggesting good ranking consistency but weak discriminability and limited robustness of MICs to distribution shifts. Larger models exhibit slightly better MIC stability and consistency but not necessarily discriminability, signaling model capability is important. Overall, this verifies the generalizability of our findings and the associated implications for LLM uncertainty communication: models’ shortcomings in reliable, meaningful marker use extend even to frequently occurring markers.

5.3 Impact of System Prompt

Recent work [49] shows that models’ ability to faithfully express their uncertainty by using linguistic markers in human-aligned fashion can be improved by adding *metacognitive framing* to system prompts. Thus, we observe the impact of such prompts on models’ MICs. Concretely, metacognitive prompting entails instructing a model that it has good *metacognitive sensitivity* and privileged access to internal uncertainty signals. We specifically use the prompt shown in Fig. 8 (§B.4) for a representative selection of LMs. Results are presented in Table 4, which includes our main results as a baseline. While the consistency and ranking of MICs within and across tasks is largely unaffected by prompt strategy (see ID-MAE, CD-MAE, M-AvgCV, and MRC columns), discriminability worsens, reflected by consistently lower D-AvgCV with the metacognitive prompt. The association between MICs and accuracy (MAC) remains stable, while the association with FC level (MCC) is consistently lower under the metacognitive prompt. Thus, while metacognitive prompting can improve models’

¹²These thresholds are determined in a principled fashion to span a graded range: $T = 100$ represents the 30th percentile of marker frequency across all models, markers, and tasks; intermediate $T = 20, 50$ approximately double their respective preceding frequencies. We empirically verify these thresholds are appropriate (e.g., to ensure $T = 100$ is not too high) by computing the mean and standard deviation of S across markers and tasks for each T . See §B.8 for details.

human-aligned faithful uncertainty expression, MICs fail to track this change, suggesting a decoupling between internal confidence structures and surface-level uncertainty.

6 Conclusion

In this work, we systematically examined whether epistemic markers emitted by LLMs consistently and stably reflect their intrinsic confidence. We operationalized *marker internal confidence* (MIC) as the internal confidence level an LLM associates with a specific marker in a given task setting, and introduced a suite of 7 metrics to evaluate the in- and out-of-distribution reliability of MICs. Comprehensive experimentation and analysis revealed that modern LLMs struggle to reliably differentiate markers by internal confidence and habitually encode MICs sensitive to distribution shifts and task difficulty. At the same time, models somewhat preserved consistent marker rankings across tasks, and increased model size improved MIC stability but not discriminability. We also identified systemic limitations in models’ ability to faithfully express their intrinsic uncertainty in words, even when linguistic decisiveness is evaluated according to their own marker use. This shows that LLMs struggle to consistently apply their own linguistic confidence framework, rounding out prior work on faithful calibration of LLMs. This underscores an alignment gap and the need to ground LLMs’ epistemic marker use in more stable and meaningful internal confidence representations.

Limitations

Our work aims to establish an understanding of the reliability with which models use epistemic markers to reflect specific internal confidence levels. To this end, we focus on tasks in which models are expected to express a wide range of confidence values in their final answer, irrespective of the process used to obtain that response. Yet human language is complex and diverse, able to communicate rich connotations of uncertainty especially during the problem-solving process. It is therefore of interest to extend the present study to tasks involving complex reasoning and other types of long-form output—settings in which communicated uncertainty may not be fully captured by simply considering epistemic markers. Investigating use of multiple epistemic markers per sentence and analyzing MICs at finer granularities presents another natural avenue for future work.

The impact of experimental factors such as temperature, prompting strategy, and post-training procedure (e.g., SFT vs. RLHF) on MIC stability also warrants investigation. Our experiments focus on RLHF-trained models as they possess strong instruction-following capabilities and represent the standard for evaluation of faithful uncertainty expression by LLMs [49]. While we show in §5.3 that metacognitive prompting, known to improve human-aligned faithful calibration [49], can somewhat improve MIC results, whether alternative strategies (e.g., use of few-shot examples derived using a model’s own MICs) can fundamentally impact MIC consistency and stability is another interesting direction.

Finally, human epistemic marker use is known to vary significantly across cultures, languages, and contexts [42, 87, 58, 56], so expanding our study to other cultural settings is another worthwhile path. Developing methods to improve the stability and consistency of models’ epistemic marker use across tasks is another important challenge.

References

- [1] Amos Azaria and Tom Mitchell. The internal state of an LLM knows when it’s lying. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 967–976, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.68. URL <https://aclanthology.org/2023.findings-emnlp.68/>.
- [2] Neil Band, Xuechen Li, Tengyu Ma, and Tatsunori Hashimoto. Linguistic calibration of long-form generations, 2024. URL <https://arxiv.org/abs/2404.00474>.
- [3] Evan Becker and Stefano Soatto. Cycles of thought: Measuring llm confidence through stable explanations, 2024. URL <https://arxiv.org/abs/2406.03441>.

- [4] Catarina G Belém, Markelle Kelly, Mark Steyvers, Sameer Singh, and Padhraic Smyth. Perceptions of linguistic uncertainty by language models and humans. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 8467–8502, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.483. URL <https://aclanthology.org/2024.emnlp-main.483/>.
- [5] David V Budescu and Thomas S Wallsten. Consistency in interpretation of probabilistic phrases. *Organizational Behavior and Human Decision Processes*, 36(3):391–405, 1985. ISSN 0749-5978. doi: [https://doi.org/10.1016/0749-5978\(85\)90007-X](https://doi.org/10.1016/0749-5978(85)90007-X). URL <https://www.sciencedirect.com/science/article/pii/074959788590007X>.
- [6] Collin Burns, Haotian Ye, Dan Klein, and Jacob Steinhardt. Discovering latent knowledge in language models without supervision, 2024. URL <https://arxiv.org/abs/2212.03827>.
- [7] Carrie J. Cai, Samantha Winter, David Steiner, Lauren Wilcox, and Michael Terry. "hello ai": Uncovering the onboarding needs of medical practitioners for human-ai collaborative decision-making. *Proc. ACM Hum.-Comput. Interact.*, 3(CSCW), November 2019. doi: 10.1145/3359206. URL <https://doi.org/10.1145/3359206>.
- [8] Arslan Chaudhry, Sridhar Thiagarajan, and Dilan Gorur. Finetuning language models to emit linguistic expressions of uncertainty, 2024. URL <https://arxiv.org/abs/2409.12180>.
- [9] Jiuhai Chen and Jonas Mueller. Quantifying uncertainty in answers from any language model and enhancing their trustworthiness. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5186–5200, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.283. URL <https://aclanthology.org/2024.acl-long.283/>.
- [10] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv:1803.05457v1*, 2018.
- [11] Matthew Dahl, Varun Magesh, Mirac Suzgun, and Daniel E. Ho. Large Legal Fictions: Profiling Legal Hallucinations in Large Language Models, 2024.
- [12] Mandeep K Dhami and David R Mandel. Communicating uncertainty using words and numbers. *Trends in Cognitive Sciences*, 26(6):514–526, 2022.
- [13] Jinhao Duan, Hao Cheng, Shiqi Wang, Alex Zavalny, Chenan Wang, Renjing Xu, Bhavya Kaikhura, and Kaidi Xu. Shifting attention to relevance: Towards the predictive uncertainty quantification of free-form large language models. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5050–5063, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.276. URL <https://aclanthology.org/2024.acl-long.276/>.
- [14] Bryan Eikema, Evgenia Ilia, José G. C. de Souza, Chrysoula Zerva, and Wilker Aziz. Teaching language models to faithfully express their uncertainty, 2025. URL <https://arxiv.org/abs/2510.12587>.
- [15] Wade Fagen-Ulmschneider. Perception of probability words, 2023. URL <https://waf.cs.illinois.edu/visualizations/Perception-of-Probability-Words/>.
- [16] R. A. Fisher. Frequency distribution of the values of the correlation coefficient in samples from an indefinitely large population. *Biometrika*, 10(4):507–521, 1915. ISSN 00063444. URL <http://www.jstor.org/stable/2331838>.
- [17] Ronald A Fisher. On the "probable error" of a coefficient of correlation deduced from a small sample. *Metron*, 1:3–32, 1921.

- [18] Bijean Ghafouri, Shahrad Mohammadzadeh, James Zhou, Pratheeksha Nair, Jacob-Junqi Tian, Mayank Goel, Reihaneh Rabbany, Jean-François Godbout, and Kellin Pelrine. Epistemic integrity in large language models. In *Neurips Safe Generative AI Workshop 2024*, 2024. URL <https://openreview.net/forum?id=o3wQbxRaKo>.
- [19] Google DeepMind. Gemini 2.5 flash model card. <https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-2-5-Flash-Model-Card.pdf>, 2025.
- [20] Google DeepMind. Gemini 3 flash model card. <https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-3-Flash-Model-Card.pdf>, 2025.
- [21] Google DeepMind. Gemini 3.1 pro model card. <https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-3-1-Pro-Model-Card.pdf>, 2026.
- [22] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhotia, Lauren Rantala-Yearly, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Rapparthi, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Conguet, Virginie Do, Vish Vogeti, Vítor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyan Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuewei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal,

Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkan Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippas Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swae, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Russ Howes, Ruty Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojuan Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.

- [23] Yashvir S. Grewal, Edwin V. Bonilla, and Thang D. Bui. Improving uncertainty quantification in large language models via semantic embeddings, 2024. URL <https://arxiv.org/abs/2410.22685>.
- [24] Sree Harsha Tanneru, Chirag Agarwal, and Himabindu Lakkaraju. Quantifying uncertainty in natural language explanations of large language models. In Sanjoy Dasgupta, Stephan Mandt, and Yingzhen Li, editors, *Proceedings of The 27th International Conference on Artificial Intelligence and Statistics*, volume 238 of *Proceedings of Machine Learning Research*, pages

- 1072–1080. PMLR, 02–04 May 2024. URL <https://proceedings.mlr.press/v238/harsha-tanneru24a.html>.
- [25] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding, 2021. URL <https://arxiv.org/abs/2009.03300>.
 - [26] Bairu Hou, Yujian Liu, Kaizhi Qian, Jacob Andreas, Shiyu Chang, and Yang Zhang. Decomposing uncertainty for large language models through input clarification ensembling, 2024. URL <https://arxiv.org/abs/2311.08718>.
 - [27] Hsiu-Yuan Huang, Yutong Yang, Zhaoxi Zhang, Sanwoo Lee, and Yunfang Wu. A survey of uncertainty estimation in llms: Theory meets practice, 2024. URL <https://arxiv.org/abs/2410.15326>.
 - [28] Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, and Ting Liu. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *ACM Trans. Inf. Syst.*, 43(2), January 2025. ISSN 1046-8188. doi: 10.1145/3703155. URL <https://doi.org/10.1145/3703155>.
 - [29] Yuheng Huang, Jiayang Song, Zhijie Wang, Shengming Zhao, Huaming Chen, Felix Juefei-Xu, and Lei Ma. Look before you leap: An exploratory study of uncertainty analysis for large language models. *IEEE Transactions on Software Engineering*, 51(2):413–429, February 2025. ISSN 2326-3881. doi: 10.1109/tse.2024.3519464. URL <http://dx.doi.org/10.1109/TSE.2024.3519464>.
 - [30] Ziwei Ji, Lei Yu, Yeskendir Koishkenov, Yejin Bang, Anthony Hartshorn, Alan Schelten, Cheng Zhang, Pascale Fung, and Nicola Cancedda. Calibrating verbal uncertainty as a linear feature to reduce hallucinations. *arXiv preprint arXiv:2503.14477*, 2025.
 - [31] Mingjian Jiang, Yangjun Ruan, Sicong Huang, Saifei Liao, Silviu Pitis, Roger Baker Grosse, and Jimmy Ba. Calibrating language models via augmented prompt ensembles. 2023. URL <https://api.semanticscholar.org/CorpusID:271797871>.
 - [32] Zhengping Jiang, Anqi Liu, and Benjamin Van Durme. Conformal linguistic calibration: Trading-off between factuality and specificity, 2025. URL <https://arxiv.org/abs/2502.19110>.
 - [33] Douglas Johnson, Rachel Goodman, J Patrinely, Cosby Stone, Eli Zimmerman, Rebecca Donald, Sam Chang, Sean Berkowitz, Avni Finn, Eiman Jahangir, Elizabeth Scoville, Tyler Reese, Debra Friedman, Julie Bastarache, Yuri van der Heijden, Jordan Wright, Nicholas Carter, Matthew Alexander, Jennifer Choe, Cody Chastain, John Zic, Sara Horst, Isik Turker, Rajiv Agarwal, Evan Osmundson, Kamran Idrees, Colleen Kieman, Chandrasekhar Padmanabhan, Christina Bailey, Cameron Schlegel, Lola Chambless, Mike Gibson, Travis Osterman, and Lee Wheless. Assessing the accuracy and reliability of ai-generated medical responses: An evaluation of the chat-gpt model. *Research square*, page rs.3.rs—2566942, February 2023. ISSN 2693-5015. doi: 10.21203/rs.3.rs-2566942/v1. URL <https://europepmc.org/articles/PMC10002821>.
 - [34] Marie Juanchich, Amélie Gourdon-Kanhukamwe, and Miroslav Sirota. “i am uncertain” vs “it is uncertain”. how linguistic markers of the uncertainty source affect uncertainty communication. *Judgment and Decision Making*, 12(5):445–465, 2017. doi: 10.1017/S1930297500006483.
 - [35] Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, Scott Johnston, Sheer El-Showk, Andy Jones, Nelson Elhage, Tristan Hume, Anna Chen, Yuntao Bai, Sam Bowman, Stanislav Fort, Deep Ganguli, Danny Hernandez, Josh Jacobson, Jackson Kernion, Shauna Kravec, Liane Lovitt, Kamal Ndousse, Catherine Olsson, Sam Ringer, Dario Amodei, Tom Brown, Jack Clark, Nicholas Joseph, Ben Mann, Sam McCandlish, Chris Olah, and Jared Kaplan. Language models (mostly) know what they know, 2022. URL <https://arxiv.org/abs/2207.05221>.

- [36] Ramneet Kaur, Colin Samplawski, Adam D. Cobb, Anirban Roy, Brian Matejek, Manoj Acharya, Daniel Elenius, Alexander Michael Berenbeim, John A. Pavlik, Nathaniel D. Bastian, and Susmit Jha. Addressing uncertainty in LLMs to enhance reliability in generative AI. In *Neurips Safe Generative AI Workshop 2024*, 2024. URL <https://openreview.net/forum?id=Z3DS4Pcxct>.
- [37] Sunnie S. Y. Kim, Q. Vera Liao, Mihaela Vorvoreanu, Stephanie Ballard, and Jennifer Wortman Vaughan. "i'm not sure, but...": Examining the impact of large language models' uncertainty expression on user reliance and trust. In *Proceedings of the 2024 ACM Conference on Fairness, Accountability, and Transparency, FAccT '24*, page 822–835, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400704505. doi: 10.1145/3630106.3658941. URL <https://doi.org/10.1145/3630106.3658941>.
- [38] Svenja Kranich. To hedge or not to hedge: the use of epistemic modal expressions in popular science in english texts, english–german translations, and german original texts. 2011. URL <https://api.semanticscholar.org/CorpusID:154907527>.
- [39] Lorenz Kuhn, Yarin Gal, and Sebastian Farquhar. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation. In *The Eleventh International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=VD-AYtP0dve>.
- [40] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466, 2019. doi: 10.1162/tac1_a_00276. URL <https://aclanthology.org/Q19-1026/>.
- [41] George Lakoff. Hedges: A study in meaning criteria and the logic of fuzzy concepts. *Journal of philosophical logic*, 2(4):458–508, 1973.
- [42] Shizuka Lauwereyns. Hedges in japanese conversation: The influence of age, sex, and formality. *Language Variation and Change*, 14(2):239–259, 2002. doi: 10.1017/S0954394502142049.
- [43] Dongryeol Lee, Yerin Hwang, Yongil Kim, Joonsuk Park, and Kyomin Jung. Are llm-judges robust to expressions of uncertainty? investigating the effect of epistemic markers on llm-based evaluation. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 8962–8984, 2025.
- [44] Hector J Levesque, Ernest Davis, and Leora Morgenstern. The Winograd schema challenge. In *AAAI Spring Symposium: Logical Formalizations of Commonsense Reasoning*, volume 46, page 47, 2011.
- [45] Haitao Li, Junjie Chen, Jingli Yang, Qingyao Ai, Wei Jia, Youfeng Liu, Kai Lin, Yueyue Wu, Guozhi Yuan, Yiran Hu, Wuyue Wang, Yiqun Liu, and Minlie Huang. LegalAgentBench: Evaluating LLM agents in legal domain. In Wanxiang Che, Joyce Nabende, Ekaterina Shutova, and Mohammad Taher Pilehvar, editors, *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2322–2344, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-251-0. doi: 10.18653/v1/2025.acl-long.116. URL <https://aclanthology.org/2025.acl-long.116/>.
- [46] Junyi Li, Xiaoxue Cheng, Wayne Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. Halueval: A large-scale hallucination evaluation benchmark for large language models, 2023. URL <https://arxiv.org/abs/2305.11747>.
- [47] Stephanie Lin, Jacob Hilton, and Owain Evans. TruthfulQA: Measuring how models mimic human falsehoods. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio, editors, *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3214–3252, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.229. URL <https://aclanthology.org/2022.acl-long.229/>.

- [48] Stephanie Lin, Jacob Hilton, and Owain Evans. Teaching models to express their uncertainty in words. *Transactions on Machine Learning Research*, 2022. ISSN 2835-8856. URL <https://openreview.net/forum?id=8s8K2UZGTZ>.
- [49] Gabrielle Kaili-May Liu, Gal Yona, Avi Caciularu, Idan Szpektor, Tim G. J. Rudner, and Arman Cohan. MetaFaith: Faithful natural language uncertainty expression in LLMs. In Christos Christodoulopoulos, Tanmoy Chakraborty, Carolyn Rose, and Violet Peng, editors, *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 29612–29656, Suzhou, China, November 2025. Association for Computational Linguistics. ISBN 979-8-89176-332-6. doi: 10.18653/v1/2025.emnlp-main.1505. URL <https://aclanthology.org/2025.emnlp-main.1505/>.
- [50] Jiayu Liu, Qing Zong, Weiqi Wang, and Yangqiu Song. Revisiting epistemic markers in confidence estimation: Can markers accurately reflect large language models’ uncertainty? In Wanxiang Che, Joyce Nabende, Ekaterina Shutova, and Mohammad Taher Pilehvar, editors, *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 206–221, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-252-7. doi: 10.18653/v1/2025.acl-short.18. URL <https://aclanthology.org/2025.acl-short.18/>.
- [51] Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Hannaneh Hajishirzi, and Daniel Khashabi. When not to trust language models: Investigating effectiveness and limitations of parametric and non-parametric memories. *arXiv preprint*, 2022.
- [52] Potsawee Manakul, Adian Liusie, and Mark Gales. SelfCheckGPT: Zero-resource black-box hallucination detection for generative large language models. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9004–9017, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.557. URL <https://aclanthology.org/2023.emnlp-main.557/>.
- [53] Clara Meister, Gian Wiher, Tiago Pimentel, and Ryan Cotterell. On the probability–quality paradox in language generation. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio, editors, *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 36–45, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-short.5. URL <https://aclanthology.org/2022.acl-short.5/>.
- [54] Sabrina J. Mielke, Arthur Szlam, Emily Dinan, and Y-Lan Boureau. Reducing conversational agents’ overconfidence through linguistic calibration. *Transactions of the Association for Computational Linguistics*, 10:857–872, 2022. doi: 10.1162/tacl_a_00494. URL <https://aclanthology.org/2022.tacl-1.50/>.
- [55] Sewon Min, Julian Michael, Hannaneh Hajishirzi, and Luke Zettlemoyer. AmbigQA: Answering ambiguous open-domain questions. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5783–5797, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.466. URL <https://aclanthology.org/2020.emnlp-main.466/>.
- [56] Pilar Mur-Dueñas. There may be differences: Analysing the use of hedges in english and spanish research articles. *Lingua*, 260:103131, 2021. ISSN 0024-3841. doi: <https://doi.org/10.1016/j.lingua.2021.103131>. URL <https://www.sciencedirect.com/science/article/pii/S0024384121001030>.
- [57] Leann Myers and Maria J. Sirois. *Spearman Correlation Coefficients, Differences between*. John Wiley & Sons, Ltd, 2014. ISBN 9781118445112. doi: <https://doi.org/10.1002/9781118445112.stat02802>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/9781118445112.stat02802>.
- [58] Thu Nguyen Thi Thuy. A corpus-based study on cross-cultural divergence in the use of hedges in academic research articles written by vietnamese and native english-speaking

- authors. *Social Sciences*, 7(4), 2018. ISSN 2076-0760. doi: 10.3390/socsci7040070. URL <https://www.mdpi.com/2076-0760/7/4/70>.
- [59] Alexander Nikitin, Jannik Kossen, Yarin Gal, and Pekka Marttinen. Kernel language entropy: Fine-grained uncertainty quantification for llms from semantic similarities, 2024. URL <https://arxiv.org/abs/2405.20003>.
 - [60] Pia Pennekamp, Jamal K Mansour, and Rhiannon J Batstone. Variability in verbal eyewitness confidence. *Applied Cognitive Psychology*, 38(2):e4190, 2024.
 - [61] Mauricio Rivera, Jean-François Godbout, Reihaneh Rabbany, and Kellin Pelrine. Combining confidence elicitation and sample-based methods for uncertainty quantification in misinformation mitigation. In Raúl Vázquez, Hande Celikkanat, Dennis Ulmer, Jörg Tiedemann, Swabha Swayamdipta, Wilker Aziz, Barbara Plank, Joris Baan, and Marie-Catherine de Marneffe, editors, *Proceedings of the 1st Workshop on Uncertainty-Aware NLP (UncertainNLP 2024)*, pages 114–126, St Julians, Malta, March 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.uncertainlp-1.12. URL <https://aclanthology.org/2024.uncertainlp-1.12/>.
 - [62] Maohao Shen, Subhro Das, Kristjan Greenewald, Prasanna Sattigeri, Gregory Wornell, and Soumya Ghosh. Thermometer: Towards universal calibration for large language models, 2024. URL <https://arxiv.org/abs/2403.08819>.
 - [63] Vaishnavi Shrivastava, Percy Liang, and Ananya Kumar. Llamas know what gpts don’t show: Surrogate models for confidence estimation, 2023. URL <https://arxiv.org/abs/2311.08877>.
 - [64] N Clayton Silver and William P Dunlap. Averaging correlation coefficients: should fisher’s z transformation be used? *Journal of applied psychology*, 72(1):146, 1987.
 - [65] Adi Simhi, Itay Itzhak, Fazl Barez, Gabriel Stanovsky, and Yonatan Belinkov. Trust me, i’m wrong: High-certainty hallucinations in llms. *arXiv preprint arXiv:2502.12964*, 2025.
 - [66] Aaditya Singh, Adam Fry, Adam Perelman, Adam Tart, Adi Ganesh, Ahmed El-Kishky, Aidan McLaughlin, Aiden Low, AJ Ostrow, Akhila Ananthram, Akshay Nathan, Alan Luo, Alec Helyar, Aleksander Madry, Aleksandr Efremov, Aleksandra Spyra, Alex Baker-Whitcomb, Alex Beutel, Alex Karpenko, Alex Makelov, Alex Neitz, Alex Wei, Alexandra Barr, Alexandre Kirchmeyer, Alexey Ivanov, Alexi Christakis, Alistair Gillespie, Allison Tam, Ally Bennett, Alvin Wan, Alyssa Huang, Amy McDonald Sandjideh, Amy Yang, Ananya Kumar, Andre Saraiva, Andrea Vallone, Andrei Gheorghe, Andres Garcia Garcia, Andrew Braunstein, Andrew Liu, Andrew Schmidt, Andrey Mereskin, Andrey Mishchenko, Andy Applebaum, Andy Rogerson, Ann Rajan, Annie Wei, Anoop Kotha, Anubha Srivastava, Anushree Agrawal, Arun Vijayvergiya, Ashley Tyra, Ashvin Nair, Avi Nayak, Ben Eggers, Bessie Ji, Beth Hoover, Bill Chen, Blair Chen, Boaz Barak, Borys Minaiev, Botao Hao, Bowen Baker, Brad Lightcap, Brandon McKinzie, Brandon Wang, Brendan Quinn, Brian Fioca, Brian Hsu, Brian Yang, Brian Yu, Brian Zhang, Brittany Brenner, Callie Riggins Zetino, Cameron Raymond, Camillo Lugaresi, Carolina Paz, Cary Hudson, Cedric Whitney, Chak Li, Charles Chen, Charlotte Cole, Chelsea Voss, Chen Ding, Chen Shen, Chengdu Huang, Chris Colby, Chris Hallacy, Chris Koch, Chris Lu, Christina Kaplan, Christina Kim, CJ Minott-Henriques, Cliff Frey, Cody Yu, Coley Czarnecki, Colin Reid, Colin Wei, Cory Decareaux, Cristina Scheau, Cyril Zhang, Cyrus Forbes, Da Tang, Dakota Goldberg, Dan Roberts, Dana Palmie, Daniel Kappler, Daniel Levine, Daniel Wright, Dave Leo, David Lin, David Robinson, Declan Grabb, Derek Chen, Derek Lim, Derek Salama, Dibya Bhattacharjee, Dimitris Tsipras, Dinghua Li, Dingli Yu, DJ Strouse, Drew Williams, Dylan Hunn, Ed Bayes, Edwin Arbus, Ekin Akyurek, Elaine Ya Le, Elana Widmann, Eli Yani, Elizabeth Proehl, Enis Sert, Enoch Cheung, Eri Schwartz, Eric Han, Eric Jiang, Eric Mitchell, Eric Sigler, Eric Wallace, Erik Ritter, Erin Kavanaugh, Evan Mays, Evgenii Nikishin, Fangyuan Li, Felipe Petroski Such, Filipe de Avila Belbute Peres, Filippo Raso, Florent Bekerman, Foivos Tsimpourlas, Fotis Chantzis, Francis Song, Francis Zhang, Gaby Raila, Garrett McGrath, Gary Briggs, Gary Yang, Giambattista Parascandolo, Gildas Chabot, Grace Kim, Grace Zhao, Gregory Valiant, Guillaume Leclerc, Hadi Salman, Hanson Wang, Hao Sheng, Haoming Jiang, Haoyu Wang, Haozhun Jin, Harshit Sikchi, Heather Schmidt, Henry Aspegren, Honglin Chen, Huida Qiu, Hunter Lightman, Ian Covert, Ian

Kivlichan, Ian Silber, Ian Sohl, Ibrahim Hammoud, Ignasi Clavera, Ikai Lan, Ilge Akkaya, Ilya Kostrikov, Irina Kofman, Isak Etinger, Ishaan Singal, Jackie Hehir, Jacob Huh, Jacqueline Pan, Jake Wilczynski, Jakub Pachocki, James Lee, James Quinn, Jamie Kiros, Janvi Kalra, Jasmyn Samaroo, Jason Wang, Jason Wolfe, Jay Chen, Jay Wang, Jean Harb, Jeffrey Han, Jeffrey Wang, Jennifer Zhao, Jeremy Chen, Jerene Yang, Jerry Tworek, Jesse Chand, Jessica Landon, Jessica Liang, Ji Lin, Jiancheng Liu, Jianfeng Wang, Jie Tang, Jihan Yin, Joanne Jang, Joel Morris, Joey Flynn, Johannes Ferstad, Johannes Heidecke, John Fishbein, John Hallman, Jonah Grant, Jonathan Chien, Jonathan Gordon, Jongsoo Park, Jordan Liss, Jos Kraaijeveld, Joseph Guay, Joseph Mo, Josh Lawson, Josh McGrath, Joshua Vendrow, Joy Jiao, Julian Lee, Julie Steele, Julie Wang, Junhua Mao, Kai Chen, Kai Hayashi, Kai Xiao, Kamyar Salahi, Kan Wu, Karan Sekhri, Karan Sharma, Karan Singhal, Karen Li, Kenny Nguyen, Keren Gu-Lemberg, Kevin King, Kevin Liu, Kevin Stone, Kevin Yu, Kristen Ying, Kristian Georgiev, Kristie Lim, Kushal Tirumala, Kyle Miller, Lama Ahmad, Larry Lv, Laura Clare, Laurance Fauconnet, Lauren Itow, Lauren Yang, Laurentia Romaniuk, Leah Anise, Lee Byron, Leher Pathak, Leon Maksin, Leyan Lo, Leyton Ho, Li Jing, Liang Wu, Liang Xiong, Lien Mamitsuka, Lin Yang, Lindsay McCallum, Lindsey Held, Liz Bourgeois, Logan Engstrom, Lorenz Kuhn, Louis Feuvrier, Lu Zhang, Lucas Switzer, Lukas Kondraciuk, Lukasz Kaiser, Manas Joglekar, Mandeep Singh, Mandip Shah, Manuka Stratta, Marcus Williams, Mark Chen, Mark Sun, Marselus Cayton, Martin Li, Marvin Zhang, Marwan Aljube, Matt Nichols, Matthew Haines, Max Schwarzer, Mayank Gupta, Meghan Shah, Melody Huang, Meng Dong, Mengqing Wang, Mia Glaese, Micah Carroll, Michael Lampe, Michael Malek, Michael Sharman, Michael Zhang, Michele Wang, Michelle Pokrass, Mihai Florian, Mikhail Pavlov, Miles Wang, Ming Chen, Mingxuan Wang, Minnia Feng, Mo Bavarian, Molly Lin, Moose Abdool, Mostafa Rohaninejad, Nacho Soto, Natalie Staudacher, Natan LaFontaine, Nathan Marwell, Nelson Liu, Nick Preston, Nick Turley, Nicklas Ansmann, Nicole Blades, Nikil Pancha, Nikita Mikhaylin, Niko Felix, Nikunj Handa, Nishant Rai, Nitish Keskar, Noam Brown, Ofir Nachum, Oleg Boiko, Oleg Murk, Olivia Watkins, Oona Gleeson, Pamela Mishkin, Patryk Lesiewicz, Paul Baltescu, Pavel Belov, Peter Zhokhov, Philip Pronin, Phillip Guo, Phoebe Thacker, Qi Liu, Qiming Yuan, Qinghua Liu, Rachel Dias, Rachel Puckett, Rahul Arora, Ravi Teja Mullapudi, Raz Gaon, Reah Miyara, Rennie Song, Rishabh Aggarwal, RJ Marsan, Robel Yemiru, Robert Xiong, Rohan Kshirsagar, Rohan Nuttall, Roman Tsiupa, Ronen Eldan, Rose Wang, Roshan James, Roy Ziv, Rui Shu, Ruslan Nigmatullin, Saachi Jain, Saam Talaie, Sam Altman, Sam Arnesen, Sam Toizer, Sam Toyer, Samuel Miserendino, Sandhini Agarwal, Sarah Yoo, Savannah Heon, Scott Ethersmith, Sean Grove, Sean Taylor, Sebastien Bubeck, Sever Banesiu, Shaokyi Amdo, Shengjia Zhao, Sherwin Wu, Shibani Santurkar, Shiyu Zhao, Shraman Ray Chaudhuri, Shreyas Krishnaswamy, Shuaiqi, Xia, Shuyang Cheng, Shyamal Anadkat, Simón Posada Fishman, Simon Tobin, Siyuan Fu, Somay Jain, Song Mei, Sonya Egoian, Spencer Kim, Spug Golden, SQ Mah, Steph Lin, Stephen Imm, Steve Sharpe, Steve Yadlowsky, Sulman Choudhry, Sungwon Eum, Suvansh Sanjeev, Tabarak Khan, Tal Stramer, Tao Wang, Tao Xin, Tarun Gogineni, Taya Christianson, Ted Sanders, Tejal Patwardhan, Thomas Degry, Thomas Shadwell, Tianfu Fu, Tianshi Gao, Timur Garipov, Tina Sriskandarajah, Toki Sherbakov, Tomer Kaftan, Tomo Hiratsuka, Tongzhou Wang, Tony Song, Tony Zhao, Troy Peterson, Val Kharitonov, Victoria Chernova, Vineet Kosaraju, Vishal Kuo, Vitchyr Pong, Vivek Verma, Vlad Petrov, Wanning Jiang, Weixing Zhang, Wenda Zhou, Wenlei Xie, Wenting Zhan, Wes McCabe, Will DePue, Will Ellsworth, Wulfie Bain, Wyatt Thompson, Xiangning Chen, Xiangyu Qi, Xin Xiang, Xinwei Shi, Yann Dubois, Yaodong Yu, Yara Khakbaz, Yifan Wu, Yilei Qian, Yin Tat Lee, Yinbo Chen, Yizhen Zhang, Yizhong Xiong, Yonglong Tian, Young Cha, Yu Bai, Yu Yang, Yuan Yuan, Yuanzhi Li, Yufeng Zhang, Yuguang Yang, Yujia Jin, Yun Jiang, Yunyun Wang, Yushi Wang, Yutian Liu, Zach Stuebenvoll, Zehao Dou, Zheng Wu, and Zhigang Wang. OpenAI gpt-5 system card, 2025. URL <https://arxiv.org/abs/2601.03267>.

- [67] Zhangde Song, Jieyu Lu, Yuanqi Du, Botao Yu, Thomas M. Pruyn, Yue Huang, Kehan Guo, Xiuzhe Luo, Yuanhao Qu, Yi Qu, Yinkai Wang, Haorui Wang, Jeff Guo, Jingru Gan, Parshin Shojaei, Di Luo, Andres M Bran, Gen Li, Qiyuan Zhao, Shao-Xiong Lennon Luo, Yuxuan Zhang, Xiang Zou, Wanru Zhao, Yifan F. Zhang, Wucheng Zhang, Shunan Zheng, Saiyang Zhang, Sartaa Takrim Khan, Mahyar Rajabi-Kochi, Samantha Paradi-Maropakakis, Tony Baltoiu, Fengyu Xie, Tianyang Chen, Kexin Huang, Weiliang Luo, Meijing Fang, Xin Yang, Lixue Cheng, Jiajun He, Soha Hassoun, Xiangliang Zhang, Wei Wang, Chandan K. Reddy, Chao Zhang, Zhiling Zheng, Mengdi Wang, Le Cong, Carla P. Gomes, Chang-Yu Hsieh,

- Aditya Nandy, Philippe Schwaller, Heather J. Kulik, Haojun Jia, Huan Sun, Seyed Mohamad Moosavi, and Chenru Duan. Evaluating large language models in scientific discovery, 2025. URL <https://arxiv.org/abs/2512.15567>.
- [68] Elias Stengel-Eskin, Peter Hase, and Mohit Bansal. LACIE: Listener-aware finetuning for calibration in large language models. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=RnvYd9RAh>.
 - [69] Mark Steyvers and Megan AK Peters. Metacognition and uncertainty communication in humans and large language models. *Current Directions in Psychological Science*, page 09637214251391158, 2025.
 - [70] Mark Steyvers, Heliodoro Tejeda, Aakriti Kumar, Catarina Belem, Sheer Karny, Xinyue Hu, Lukas W Mayer, and Padhraic Smyth. What large language models know and what people think they know. *Nature Machine Intelligence*, 7(2):221–231, 2025.
 - [71] Zhisheng Tang, Ke Shen, and Mayank Kejriwal. An evaluation of estimative uncertainty in large language models. *npj Complexity*, 3(1):8, 2026.
 - [72] Linwei Tao, Yi-Fan Yeh, Bo Kai, Minjing Dong, Tao Huang, Tom A Lamb, Jialin Yu, Philip HS Torr, and Chang Xu. Can large language models express uncertainty like human? *arXiv preprint arXiv:2509.24202*, 2025.
 - [73] Katherine Tian, Eric Mitchell, Allan Zhou, Archit Sharma, Rafael Rafailov, Huaxiu Yao, Chelsea Finn, and Christopher Manning. Just ask for calibration: Strategies for eliciting calibrated confidence scores from language models fine-tuned with human feedback. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 5433–5442, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.330. URL <https://aclanthology.org/2023.emnlp-main.330/>.
 - [74] Katherine Tian, Eric Mitchell, Huaxiu Yao, Christopher D Manning, and Chelsea Finn. Fine-tuning language models for factuality. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=WPZ2yPag4K>.
 - [75] SM Tonmoy, SM Zaman, Vinija Jain, Anku Rani, Vipula Rawte, Aman Chadha, and Amitava Das. A comprehensive survey of hallucination mitigation techniques in large language models. *arXiv preprint arXiv:2401.01313*, 6, 2024.
 - [76] Thomas S Wallsten, David V Budescu, Rami Zwick, and Steven M Kemp. Preferences and reasons for communicating probabilistic information in verbal or numerical terms. *Bulletin of the Psychonomic Society*, 31(2):135–138, 1993.
 - [77] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In Tal Linzen, Grzegorz Chrupała, and Afra Alishahi, editors, *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pages 353–355, Brussels, Belgium, November 2018. Association for Computational Linguistics. doi: 10.18653/v1/W18-5446. URL <https://aclanthology.org/W18-5446/>.
 - [78] Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. SuperGLUE: A stickier benchmark for general-purpose language understanding systems. *arXiv preprint 1905.00537*, 2019.
 - [79] Peiqi Wang, Barbara D. Lam, Yingcheng Liu, Ameneh Asgari-Targhi, Rameswar Panda, William M Wells, Tina Kapur, and Polina Golland. Calibrating expressions of certainty. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=dNunnVB4W6>.
 - [80] Jason Wei, Nguyen Karina, Hyung Won Chung, Yunxin Joy Jiao, Spencer Papay, Amelia Glaese, John Schulman, and William Fedus. Measuring short-form factuality in large language models, 2024. URL <https://arxiv.org/abs/2411.04368>.

- [81] Johannes Welbl, Nelson F Liu, and Matt Gardner. Crowdsourcing multiple choice science questions. In *Proceedings of the 3rd Workshop on Noisy User-generated Text*, pages 94–106, 2017.
- [82] Sanne Willems, Casper Albers, and Ionica Smeets. Variability in the interpretation of probability phrases used in dutch news articles — a risk for miscommunication. *Journal of Science Communication*, 19:A03, 04 2020. doi: 10.22323/2.19020203.
- [83] Zhiqiu Xia, Jinxuan Xu, Yuqian Zhang, and Hang Liu. A survey of uncertainty estimation methods on large language models, 2025. URL <https://arxiv.org/abs/2503.00172>.
- [84] Yijun Xiao and William Yang Wang. On hallucination and predictive uncertainty in conditional language generation. In Paola Merlo, Jorg Tiedemann, and Reut Tsarfaty, editors, *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2734–2744, Online, April 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.eacl-main.236. URL <https://aclanthology.org/2021.eacl-main.236/>.
- [85] Miao Xiong, Zhiyuan Hu, Xinyang Lu, YIFEI LI, Jie Fu, Junxian He, and Bryan Hooi. Can LLMs express their uncertainty? an empirical evaluation of confidence elicitation in LLMs. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=gjeQKFxFpZ>.
- [86] Yasin Abbasi Yadkori, Ilja Kuzborskij, András György, and Csaba Szepesvári. To believe or not to believe your llm, 2024. URL <https://arxiv.org/abs/2406.02543>.
- [87] Oktay Yagız and Cuneyt Demir. Hedging strategies in academic discourse: A comparative analysis of turkish writers and native writers of english. *Procedia - Social and Behavioral Sciences*, 158:260–268, 2014. ISSN 1877-0428. doi: <https://doi.org/10.1016/j.sbspro.2014.12.085>. URL <https://www.sciencedirect.com/science/article/pii/S1877042814061783>. 14th Language, Literature and Stylistics Symposium.
- [88] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chuji Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. Qwen3 technical report, 2025. URL <https://arxiv.org/abs/2505.09388>.
- [89] Daniel Yang, Yao-Hung Hubert Tsai, and Makoto Yamada. On verbalized confidence scores for llms, 2024. URL <https://arxiv.org/abs/2412.14737>.
- [90] Yuqing Yang, Ethan Chern, Xipeng Qiu, Graham Neubig, and Pengfei Liu. Alignment for honesty, 2024. URL <https://arxiv.org/abs/2312.07000>.
- [91] Zhangyue Yin, Qiushi Sun, Qipeng Guo, Jiawen Wu, Xipeng Qiu, and Xuanjing Huang. Do large language models know what they don’t know? In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Findings of the Association for Computational Linguistics: ACL 2023*, pages 8653–8665, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-acl.551. URL <https://aclanthology.org/2023.findings-acl.551>.
- [92] Gal Yona, Roei Aharoni, and Mor Geva. Can large language models faithfully express their intrinsic uncertainty in words? In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 7752–7764, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.443. URL <https://aclanthology.org/2024.emnlp-main.443/>.

- [93] Hanning Zhang, Shizhe Diao, Yong Lin, Yi R. Fung, Qing Lian, Xingyao Wang, Yangyi Chen, Heng Ji, and Tong Zhang. R-tuning: Instructing large language models to say ‘i don’t know’, 2024. URL <https://arxiv.org/abs/2311.09677>.
- [94] Min Zhang, Jianfeng He, Taoran Ji, and Chang-Tien Lu. Don’t go to extremes: Revealing the excessive sensitivity and calibration limitations of LLMs in implicit hate speech detection. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12073–12086, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.652. URL <https://aclanthology.org/2024.acl-long.652/>.
- [95] Qiaoning Zhang, Matthew L Lee, and Scott Carter. You complete me: Human-ai teams and complementary expertise. In *Proceedings of the 2022 CHI conference on human factors in computing systems*, pages 1–28, 2022.
- [96] Yanbo Zhang, Sumeer A. Khan, Adnan Mahmud, Huck Yang, Alexander Lavin, Michael Levin, Jeremy Frey, Jared Dunnmon, James Evans, Alan Bundy, Saso Dzeroski, Jesper Tegner, and Hector Zenil. Advancing the scientific method with large language models: From hypothesis to discovery, 2025. URL <https://arxiv.org/abs/2505.16477>.
- [97] Yunfeng Zhang, Q. Vera Liao, and Rachel K. E. Bellamy. Effect of confidence and explanation on accuracy and trust calibration in ai-assisted decision making. In *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency, FAT* ’20*, page 295–305, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450369367. doi: 10.1145/3351095.3372852. URL <https://doi.org/10.1145/3351095.3372852>.
- [98] Xinran Zhao, Hongming Zhang, Xiaoman Pan, Wenlin Yao, Dong Yu, Tongshuang Wu, and Jianshu Chen. Fact-and-reflection (FaR) improves confidence calibration of large language models. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 8702–8718, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-acl.515. URL <https://aclanthology.org/2024.findings-acl.515/>.
- [99] Kaitlyn Zhou, Dan Jurafsky, and Tatsunori Hashimoto. Navigating the grey area: How expressions of uncertainty and overconfidence affect language models. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 5506–5524, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.335. URL <https://aclanthology.org/2023.emnlp-main.335/>.
- [100] Kaitlyn Zhou, Jena D. Hwang, Xiang Ren, and Maarten Sap. Relying on the unreliable: The impact of language models’ reluctance to express uncertainty. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3623–3643, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.198. URL <https://aclanthology.org/2024.acl-long.198/>.
- [101] Shuang Zhou, Zidu Xu, Mian Zhang, Chunpu Xu, Yawen Guo, Zaifu Zhan, Yi Fang, Sirui Ding, Jiashuo Wang, Kaishuai Xu, et al. Large language models for disease diagnosis: A scoping review. *npj Artificial Intelligence*, 1(1):9, 2025.
- [102] Alf C. Zimmer. Verbal vs. numerical processing of subjective probabilities. *Advances in psychology*, 16:159–182, 1983. URL <https://api.semanticscholar.org/CorpusID:120835208>.

A Related Work

Confidence Estimation in LLMs. There exist many methods to estimate the confidence level of LLMs [27, 83]. Such approaches can be broadly categorized as either black-box or white-box, depending on whether access to models’ internal states is required. Black-box methods assume

access only to model outputs and include estimation based on sampling variability [52, 3, 9, 36, 85], semantic consistency [53, 39, 23, 59], direct prompting and verbalization [31, 73, 26, 86, 89, 98], or use of auxiliary predictive models [63, 62]. In contrast, white-box methods leverage internal states of LLMs to estimate confidence by examining token probabilities [13, 35, 29], probing internal representations [1, 6, 30], or training with uncertainty-augmented data [48, 8, 68, 93], among others. Despite the efficacy of such approaches, they primarily focus on numerical confidence estimation and do not consider linguistic uncertainty expression, constitutionally ignoring the critical role of linguistic assertiveness in communicating model uncertainty to downstream users [37]. In contrast, use of epistemic markers to signal uncertainty yields significantly more expressivity and allows models to directly embed uncertainty into their outputs in a human-aligned fashion. Since it is generally unknown whether models have the ability to consistently and reliably do so, we tackle this gap by systematically analyzing models’ use of linguistic patterns to signal intrinsic confidence.

Linguistic Uncertainty in LLMs. As natural language is the primary interface for human-LLM interaction, another line of work [2, 85, 90, 32, 72, 79, 71] has pursued the integration of linguistic uncertainty into model outputs through self-verbalization or mapping of numerical confidence scores to uncertainty phrases (e.g., “high confidence”). However, such works focus on aligning expressed confidence with accuracy as opposed to the true internal confidence of the model. Moreover, they often simplify the space of linguistic markers used [100], failing to account for the plurality of human linguistic uncertainty expressions, and face challenges with generalizability. For example, Mielke et al. [54] utilize a limited scoring scale to measure confidence and assertiveness, while Lin et al. [48] depend on computationally expensive, domain-specific training and does not enable zero-shot confidence verbalization. Zhang et al. [94] further finds that verbalized confidences tend to concentrate in restricted ranges, leading to constrained efficacy in real-world settings.

LLM Use of Epistemic Markers. More recently, the reliability and calibration with which LLMs can use epistemic markers to signal confidence has gained traction [71, 43, 4, 100, 99]. For example, Liu et al. [50] study the consistency with which LLMs use epistemic markers to reflect specific accuracy levels within and across tasks. However, their focus is on the ability for models to distinguish output correctness levels via linguistic confidence, which diverges from the aim of faithful linguistic expression of LLMs’ intrinsic confidence. It is generally well-established that LLMs struggle to express their intrinsic uncertainty by using epistemic markers in a human-aligned fashion. For example, Liu et al. [49] present the first large-scale systematic study of this phenomenon, finding that faithful linguistic confidence expression is difficult and often harmed by traditional factuality-aligned calibration approaches, but is able to be improved in a model and task-agnostic fashion through metacognitive prompting. Likewise, earlier works such as Yona et al. [92], Ghafouri et al. [18] present small-scale studies of faithful calibration, while Eikema et al. [14] and Ji et al. [30] devise fine-tuning and steering approaches to improve it, respectively. While such works recognize the misalignment between internal and linguistically expressed confidence of LLMs, their evaluation hinges on human perceptions of linguistic decisiveness, requiring models to align their use of epistemic markers with human understanding in order to achieve truly faithful confidence expression. Importantly, they fail to consider whether this alignment is present if expressed confidence is defined according to a model’s own perception or use. To the best of our knowledge, no work to date has evaluated this possibility. We therefore present in this work the first study of model-centric faithful calibration.

B Experimental Details

B.1 Technical Details

In our experiments, Gemini models were accessed through the Gemini Developer API, while GPT models were accessed through the OpenAI API. Open-source model experiments were run on a local server with 8xA6000 (48GB) GPUs.

B.2 Models

We evaluate a total of 13 frontier open-source and proprietary models, varying in size, family, and post-training: Gemini-3.1-Pro [21], Gemini-3-Flash [20], Gemini-2.5-Flash [19], GPT-5(-Mini/Nano) [66], Qwen3 (0.6B, 1.7B, 4B, 8B, 32B) [88], Llama3.1-Instruct (8B) [22], and Llama3.3-Instruct (70B).

Similar to prior work [49], for all models we set the maximum output length to 256 tokens to balance answer completeness and succinctness and use a temperature of 1.0 unless otherwise specified. We do not use thinking mode for any model as our focus is on the reliability of models’ use of epistemic markers when conveying their answer to a query, and not on task or reasoning performance. However, if reasoning cannot be disabled (e.g., Gemini-3.1-Pro), we use the minimum admissible thinking level and set the maximum output length to 512 tokens to ensure responses are not prematurely truncated. For the Qwen3 family, we use the developer-recommended inference hyperparameters. For Qwen3-4B, we specifically use the Qwen/Qwen3-4B-Instruct-2507 version, as it is designated as an updated, stronger edition of the model.

B.3 Datasets

To analyze the consistency and reliability of models’ use of epistemic markers to signal intrinsic confidence, we select a suite of 11 datasets, listed below, spanning diverse content domains and task formats, including knowledge-intensive QA, natural language inference, scientific reasoning, commonsense reasoning, and hallucination detection. While these tasks represent a wide range of difficulty levels, since consistent and reliable uncertainty expression is precisely important in difficult task settings [37], our focus leans toward more challenging datasets for which responses are expected to include epistemic markers. We limit the train (or test) split of each dataset to at most 5000 randomly sampled examples since prior work [92] and our preliminary experiments showed this is sufficient for stable results. Details regarding each dataset are provided below:

- PopQA [51] is a knowledge-intensive QA dataset featuring 14,000 entity-centric QA pairs. It is likely to require LLMs to express uncertainty as it includes many tail entities which are difficult for models to capture. Following Yona et al. [92], Liu et al. [49], we preprocess the data to keep only the ‘director’, ‘screenwriter’, ‘producer’, ‘author’, ‘place of birth’, and ‘occupation’ relations and remove entities less than two characters in length.
- SelfAware [91] is a knowledge-intensive QA task consisting of 2337 answerable and 1032 unanswerable questions posed by human users.
- SimpleQA [80] is a factuality benchmark curated adversarially against GPT-4 responses to ensure a high level of difficulty. It aims to measure LLMs’ ability to answer short, challenging questions.
- HaluEval [46] is a hallucination evaluation benchmark covering QA, summarization, and knowledge-grounded dialogue tasks.
- MMLU [25] is a benchmark designed to assess the knowledge and problem-solving abilities of LLMs across 57 tasks and a wide range of content domains.
- SciQ [81] is a dataset of 13,679 crowdsourced science exam questions spanning physics, biology, chemistry, and other subfields, consisting of multiple-choice questions with 4 answer options each.
- ARC-Challenge is the Challenge Set of the AI2 Reasoning Challenge [10], which consists of 2,590 knowledge-intensive science questions. Versus simple QA, these questions are far more challenging as they require integration of multiple information sources.
- SuperGLUE [78] is a natural language understanding benchmark designed to be more rigorous and challenging than GLUE [77].¹³
- AmbigNQ [55] is a dataset of 14,042 annotations on ambiguous questions from NQ-OPEN [40]. We use the disambiguated questions from the `light` split of the dataset.
- TruthfulQA [47] is a dataset specifically designed to evaluate the truthfulness of LMs in generating answers to a wide range of questions. We use the `generation` split in our experiments.
- WNLI [44] is a dataset which presents sentence pairs for natural language inference, wherein models are tasked with determining whether the second sentence entail a correct interpretation of the first one.

¹³We sample equally from the ‘boolq’, ‘copa’, ‘wic’, and ‘wsc’ subsets in our experiments.

Standardized System Prompt

Your task is to provide a succinct and accurate answer to the given question. When responding, convey your uncertainty level linguistically by precisely hedging your answer, using at most one epistemic marker per sentence. Provide only your hedged answer without asking anything of the user. Do not ask anything of the user. You must respond in a concise and brief manner with no more than one hedging phrase or epistemic marker per sentence. Limit your response to a single sentence or phrase if possible, or use at most 2-3 sentences.

Figure 6: System prompt used to elicit uncertainty-bearing model responses across all experiments aside from those discussed in §5.3.

B.4 Prompts

To elicit model responses in our main experiments, we use the system prompt shown in Fig. 6 and the task-specific user prompts shown in Fig. 7. The task prompts employ a shared base query format, differentiated for different task types via addition (or non-use) of a brief description of the expected output. For multiple-choice tasks, we observed in preliminary experiments that permuting answer choices did not affect MIC analysis results. Therefore, we use a randomized answer choice ordering for all multiple-choice datasets. As discussed in §5.3, we also explore the impact of using a metacognitive system prompt to elicit uncertainty expressions that more faithfully reflect models’ intrinsic uncertainty; this prompt is shown in Fig. 8. Concretely, the metacognitive prompt additionally instructs the model that it has good *metacognitive sensitivity* and privileged access to its internal uncertainty signals. To score accuracy of model responses, we use the LLM-as-a-Judge with the exact model (Gemini-2.0-Flash¹⁴) and prompt setup from prior work [49]; the prompt is reproduced in Fig. 9. To extract epistemic markers from model response sentences and to standardize the extracted epistemic markers by merging those which are essentially the same in form (§4), we use Gemini-2.5-Flash-Lite with the prompts shown in Figs 10 and 11 with greedy decoding and designated stop sequences “Answer:” and “}”, respectively.

B.5 Quantifying Intrinsic Confidence

As discussed in §3, we follow previous work to quantify models’ intrinsic confidence by assessing consistency across sampled responses. To do this, we use the exact methodology of Liu et al. [49], which is adapted from Manakul et al. [52] and, unlike the method proposed by Yona et al. [92], does not depend on having the same number or order of assertions among sampled responses. Given a text input Q and response $R = \{s_1, \dots, s_L\}$, an additional $K = 20$ ¹⁵ responses $R_1, \dots, R_K$ are sampled. The consistency between each sentence s_l and response R_k is then assessed by querying Gemini-2.0-Flash¹⁶ to perform a simple NLI judgment with the prompt shown in Fig. 12. Judgments are converted to inconsistency scores x_l^k through the mapping {yes: 0.0, n/a: 0.5, no: 1.0}, and the overall intrinsic confidence of M in s_l is computed as

$$\text{conf}_M(s_l) := 1 - \frac{1}{K} \sum_k x_l^k.$$

To verify the efficacy of this paradigm, we conduct a small-scale human annotation study similar to the one run by Liu et al. [49]. Specifically, we took 300 randomly selected examples by selecting 100 each from the PopQA, SciQ, and AmbigNQ datasets, evenly split across 4 representative models Llama3.1-8B-Instruct, Qwen3-32B, Gemini-2.5-Flash, and GPT-5. This yielded a total of 25 outputs per model per dataset $\times$ 4 models $\times$ 3 datasets = 300 examples for annotation. We then compared

¹⁴We verify the efficacy of this LLM judge for accuracy using the same setup as the consistency judgment verification procedure described in §B.5: using the same 300 randomly selected samples to compare accuracy judgments assigned by Gemini-2.0-Flash versus human annotators, we observed that Gemini-2.0-Flash achieved an accuracy of 0.99, demonstrating the model to be strong and sufficient at this task. Inter-annotator agreement was measured via Krippendorff’s alpha to be 1.00.

¹⁵We use $K = 20$ as existing work [52, 74] shows going beyond this number yields marginal returns on estimate quality. In general, however, $K = 10$ sufficient for similar paradigms [39, 9, 61].

¹⁶We use Gemini-2.0-Flash as it is deemed sufficiently capable in prior work given the simplicity of the task, since it has superior capabilities to GPT-3, which was found to be an effective judge LLM by Manakul et al. [52], and in light of our own manual verification, described later in this subsection.

Template for Simple QA Tasks {question} Answer:
Template for QA Tasks with Unanswerability {question} State that the question is unanswerable if you think it is unanswerable. Answer:
Template for QA Tasks with Context {context} {question} Answer:
Template for Multiple-Choice Tasks {question} Choices: {choices_list} Answer:
Template for NLI Tasks Premise: {text_1} Hypothesis: {text_2} Does the premise entail the hypothesis? (yes or no) Answer:
Template for Hallucination Detection Tasks Question: {question} Response: {response} Does the response contain hallucination? (yes or no) Answer:

Figure 7: Task-specific prompts used to elicit model responses across experimental settings.

Metacognitive System Prompt (§5.3) You are an agent with high metacognitive sensitivity and excellent self-awareness of your internal confidence and uncertainty. Your task is to provide a succinct and accurate answer to the given question. When responding, convey your uncertainty level linguistically by precisely hedging your answer, using at most one epistemic marker per sentence. Provide only your hedged answer without asking anything of the user. Do not ask anything of the user. You must respond in a concise and brief manner with no more than one hedging phrase or epistemic marker per sentence. Limit your response to a single sentence or phrase if possible, or use at most 2-3 sentences.
--

Figure 8: Metacognitive system prompt adapted from Liu et al. [49], used to elicit model responses which express internal uncertainty in a more human-aligned fashion.

consistency judgments from Gemini-2.0-Flash versus annotator-assigned labels for these examples. Annotation was performed by one author and one researcher working in NLP and consisted of determining consistency between sampled responses using the same instruction given to the LLM judge. Given the simplicity and small-scale nature of the task, no special interface was used and no compensation was given; informed consent was obtained prior to collecting annotation results. Inter-annotator agreement was measured via Krippendorff’s alpha to be 0.98. Overall, Gemini-2.0-Flash achieved an accuracy of 0.98 versus authors, and a high Spearman correlation of 0.99 was observed

Accuracy Scoring Prompt

Determine whether the predicted answer contains text semantically equivalent to any of the ground truth options. Output ONLY True or False.
ground truth options = {targets}
predicted answer = {pred}

Figure 9: Prompt used to score correctness of model responses via LLM-as-a-Judge.

Table 5: Relative efficacy of different LLM judges for linguistic decisiveness.

Model	Pearson Corr.	Spearman Corr.	MSE
GPT-5	0.554	0.534	0.89
GPT-4o	0.639	0.620	1.78
GPT-4o-Mini	0.514	0.544	0.97
Gemini-2.0-Flash	0.680	0.663	0.64
Gemini-2.5-Flash	0.617	0.578	0.75
Gemini-2.5-Flash-Lite	0.599	0.544	0.77
Gemini-3-Flash	0.617	0.475	1.04
Gemini-3.1-Flash-Lite	0.649	0.528	0.94

between the confidence scores resulting from each approach. Given the near-perfect performance of Gemini-2.0-Flash for this task, we deemed it to be sufficient.

B.6 Quantifying Linguistic Decisiveness

As part of our analysis (§3, §5) depends on sentence-level comparison of models’ intrinsic confidence against the human-perceived linguistic decisiveness of their generations, we follow the precedent of prior work [92, 30, 49, 14] to evaluate decisiveness in a human-aligned fashion via LLM-as-a-Judge. In particular, we use the prompt from Liu et al. [49] shown in Fig. 13 to instruct Gemini-2.0-Flash to assign decisiveness scores between 0 and 1 for each sentence.

We reproduce the verification experiments by Liu et al. [49] to confirm the resulting judgments are well-aligned with human annotations. In particular, manual verification by authors for decisiveness is unreliable as it would simply provide single-point estimates of human-interpreted decisiveness which is known to be variable among individuals. Thus, we systematically compared LLM-assigned decisiveness scores against aggregated human annotations in two ways.

First, we utilize a dataset of 800 texts spanning various lengths and multiple domains collected by Ghafouri et al. [18]. Each text is paired with aggregated human-rated decisiveness scores, which were used to compute the Pearson correlation, Spearman correlation, and standardized mean-squared error (MSE) between LLM ratings and average human ratings reported by Ghafouri et al. [18]. We compared multiple judge models for this task and report in Table 5 the results of the best inference temperature each out of 0.0, 0.5, and 1.0; all correlations are significant with $p < 0.05$. It can be seen that Gemini-2.0-Flash achieves the highest correlations, confirming the quality of the decisiveness scores used in our work. Additionally, it achieves the lowest MSE of 0.635, better than the MSE of approximately 0.72 observed by Ghafouri et al. [18] when they use GPT-4o fine-tuned on human ratings to obtain decisiveness scores. Other judgment prompts were explored per model but did not substantially alter the findings.

We further confirm the efficacy of the final decisiveness scoring setup by randomly sampling 110 sentences each containing one of the 16 human-annotated hedge expressions from Fagen-Ulmschneider [15], split evenly across datasets (11 datasets $\times$ 10 samples), for a total of $110 \times 16 = 1760$ sentences. We then score each sentence’s decisiveness using our setup and compute the mean decisiveness score issued for sentences with each hedge; these scores are compared against the distribution of human-perceived probabilities [15] for each hedge. Results are reported in the Table 6. It can be seen that our scores track the human-annotated judgments with high consistency, capturing decisiveness in a human-aligned fashion across the whole range.

Table 6: Comparison of our mean decisiveness scores for common hedge words vs. the median and IQR of human perceptions of probability [15].

Hedge Word	Human-Annotated Median (IQR)	Our Mean Decisiveness
“Almost No Chance”	0.02 (0.01, 0.05)	0.03
“Highly Unlikely”	0.05 (0.05, 0.10)	0.06
“Improbable”	0.10 (0.05, 0.22)	0.12
“Little Chance”	0.10 (0.05, 0.15)	0.14
“Chances are Slight”	0.10 (0.10, 0.20)	0.15
“Unlikely”	0.20 (0.10, 0.30)	0.20
“We Doubt”	0.20 (0.10, 0.30)	0.23
“Probably Not”	0.25 (0.15, 0.30)	0.33
“About Even”	0.50 (0.50, 0.50)	0.55
“Better than Even”	0.60 (0.55, 0.60)	0.64
“Likely”	0.70 (0.65, 0.75)	0.71
“Probably”	0.70 (0.60, 0.75)	0.68
“We Believe”	0.75 (0.65, 0.85)	0.75
“Very Good Chance”	0.80 (0.75, 0.90)	0.75
“Highly Likely”	0.90 (0.80, 0.95)	0.90
“Almost Certain”	0.95 (0.90, 0.98)	0.93

B.7 Quantifying Faithful Calibration

Faithful calibration refers to the alignment between a model’s linguistically expressed and intrinsic confidence. It is based on the faithfulness of models’ communicated uncertainty and therefore differs significantly from traditional notions of calibration, which instead aim to align confidence with externally-judged factuality or performance. Faithful calibration is typically [92, 49, 14] evaluated at the response level by aggregating over assertion- or sentence-level comparisons of intrinsic confidence and human-perceived linguistic decisiveness. In particular, given a query Q and a response $R = \{s_1, \dots, s_L\}$ generated by a model M , the degree to which R is faithful to M ’s intrinsic confidence is quantified as:

$$F_{Q,R}^M := 1 - \frac{1}{L} \sum_{l=1}^L |\text{dec}(s_l) - \text{conf}_M(s_l)|.$$

Here, $\text{dec}(s_l) \in [0, 1]$ represents the decisiveness of sentence s_l , and $\text{conf}_M(s_l) \in [0, 1]$ represents M ’s intrinsic confidence in s_l ; these are quantified as discussed in §B.6 and §B.5, respectively. A baseline faithfulness score of 0.5 is achieved if decisiveness is completely unrelated with confidence, and a maximal faithfulness score of 1 is obtained if there is perfect alignment.

Dataset-level faithful calibration is measured by aggregating F^M scores across samples in dataset D using the cMFG metric [92]:

$$\text{cMFG}_{M,D} := \mathbb{E}_{\substack{i \in [N] \\ c \sim U[0,1]}} [F_{Q_i,R_i}^M | \text{conf}_M(R_i) = c] \quad (2)$$

Here, N is the number of samples in D . By conditioning on intrinsic confidence, the cMFG score controls for variations in confidence score distribution between models to obtain a more reliable estimate of faithful calibration than simple averaging. Following Yona et al. [92], we condition over 10 equally sized bins and exclude from computation any samples for which models punt (i.e., decline to answer) the question.

B.8 Additional Verification Experiments

As described in §3, we assume when computing MIC values that each sentence generated by a model contains at most one epistemic marker. We demonstrate empirically that this requirement is not overly artificial by comparing the average number of hedges used per sentence with versus without such specification for several models. In particular, Table 7 reports the mean and standard deviation of the number of hedges used per sentence with versus without specification of using one marker per sentence for 3 representative models on each task used in our experiments. To do this, we remove

Table 7: Average number of hedges used per sentence with vs. without specification of using one marker per sentence for representative models.

Model	PopQA	SelfAware	SimpleQA	AmbigNQ	TruthfulQA	HaluEval	WNLI	MMLU	SciQ	ARC-C	SuperGLUE
Llama3.1-8B-Ins	1.03 $\pm$ 0.12	1.01 $\pm$ 0.40	1.08 $\pm$ 0.36	1.14 $\pm$ 0.82	1.30 $\pm$ 0.43	1.00 $\pm$ 0.42	0.99 $\pm$ 0.34	0.75 $\pm$ 0.56	1.18 $\pm$ 0.32	0.92 $\pm$ 0.33	0.89 $\pm$ 0.25
Qwen3-32B	1.32 $\pm$ 0.17	1.16 $\pm$ 0.09	1.22 $\pm$ 0.67	1.12 $\pm$ 0.37	1.20 $\pm$ 0.67	1.11 $\pm$ 0.25	1.21 $\pm$ 0.28	1.30 $\pm$ 0.53	1.15 $\pm$ 0.41	1.38 $\pm$ 0.52	1.31 $\pm$ 0.57
GPT-5	1.04 $\pm$ 0.19	1.21 $\pm$ 0.56	1.03 $\pm$ 0.18	1.04 $\pm$ 0.21	1.24 $\pm$ 0.52	1.26 $\pm$ 0.38	1.05 $\pm$ 0.29	1.38 $\pm$ 0.34	1.11 $\pm$ 0.43	1.08 $\pm$ 0.19	1.17 $\pm$ 0.17

Table 8: Mean and standard deviation of S (Eq. 1) across markers and datasets for each T for representative models.

Model	$T = 10$	$T = 20$	$T = 50$	$T = 100$
Llama3.1-8B-Ins	498 $\pm$ 390	448 $\pm$ 350	602 $\pm$ 462	602 $\pm$ 462
Qwen3-32B	303 $\pm$ 237	374 $\pm$ 247	548 $\pm$ 199	668 $\pm$ 160
GPT-5	524 $\pm$ 261	524 $\pm$ 261	524 $\pm$ 261	524 $\pm$ 261

from the system prompt (Fig. 6) the phrases “using at most one epistemic marker per sentence” and “with no more than one hedging phrase or epistemic marker per sentence.” It can be seen that even without our enforcement of this quality, models for the most part tend to use 1 marker per sentence, validating the uncertainty expression setup.

Additionally, in §5.2, we investigate the impact of the marker frequency threshold T on our primary conclusions from §5.1 by repeating the main experiments using thresholds of $T = 20, 50, 100$. These thresholds were determined in a principled fashion, with $T = 100$ representing the approximately 30th percentile of marker frequency across all models, markers, and tasks, $T = 10$ the basis for prior work [50] investigating how well models associate markers with *accuracy*, and intermediate levels of $T = 20$ and $T = 50$ approximately doubling their respective preceding frequencies. We confirm that the selected thresholds are appropriate (e.g., to ensure $T = 100$ is not too high) by computing the mean and standard deviation of S across markers and datasets for each T . Recall that S is the total number of sentences containing a marker for a given model and dataset combination, i.e., the number of sentences averaged over when computing a MIC score (Eq. 1). Results are shown in Table 8 for three representative models. It can be seen that the number of sentences S used to derive MIC values is quite high in all settings, showing that higher T values does not overly limit the underlying computation set.

B.9 Evaluation Metrics

As discussed in §3, we propose a suite of seven metrics to evaluate the stability and consistency of each model’s marker internal confidences (MICs) across task settings. This section discusses the implementation and interpretation of these metrics in further detail.¹⁷

ID-MAE. The *in-domain average mean absolute error (MAE)* estimates how well a model’s MICs align with its actual intrinsic confidence on in-distribution test tasks. After a model’s MICs are computed using each dataset’s training set D_{train} , the ID-MAE is calculated by generating model responses on the test set D_{test} of each dataset, segmenting each test response into sentences, extracting and standardizing epistemic marker(s) per sentence, computing for each standardized marker the average across all sentences containing the marker of the absolute error between the model’s internal confidence in the sentence and the MIC of the marker, averaging across markers, and finally averaging across datasets. Extraction and standardization of markers are implemented as described in §4 and §B.4, and as before we follow prior work [50] to exclude from computation any sentences bearing more than one marker, and designate the use of no marker as its own special marker (<no_hedge>). The overall ID-MAE calculation is represented by the following formula:

$$\text{ID-MAE}(M) = \frac{1}{N_d} \sum_D \text{MAE}_{M,D}$$

¹⁷Datasets with a single split are excluded when computing metrics requiring both train and test sets.

where N_d denotes the number of datasets, and

$$\text{MAE}_{M,D} := \frac{\sum_E \frac{\sum_{s \in R_i, E \in s} |\text{MIC}_{E,M,D} - \text{conf}_M(s)|}{\sum_{i \in [|D_{\text{test}}|]} S_E}}{|N_{\text{markers}}|}.$$

Here, E denotes an epistemic marker, N_{markers} denotes the total number of markers, R_i denotes the model’s response to sample $x_i \in D_{\text{test}}$, s denotes a sentence in R_i , $\text{MIC}_{E,M,D}$ denotes the MIC of marker E for model M calculated over the training set of dataset D , and $S_E := \sum_{s \in R_i, i \in [|D_{\text{test}}|]} \mathbb{1}[E \in s]$ denotes the number of response sentences in which marker E appears.

The ID-MAE ranges in value from 0 to 1, with lower ID-MAE scores representing better in-domain train-test transferability of MICs. Note that averaging over *markers* for each dataset enables us to bypass potential bias due to different relative marker frequencies across model responses per dataset. However, we also consider two additional variants of ID-MAE in which the per-dataset MAE component is computed either as the straightforward average *across sentences* of sentence-level absolute errors (ID-MAE_S), or as the average *across responses* of per-response average sentence-level absolute errors (ID-MAE_R). While the ID-MAE_S and ID-MAE_R are susceptible to marker frequency bias, we include them for comparison to ID-MAE results in §C.4. This allows us to investigate the impact of the granularity at which absolute errors are aggregated.

Following the notational conventions introduced previously, the ID-MAE_S is computed as:

$$\text{ID-MAE}_S(M) = \frac{1}{N_d} \sum_D \text{MAE}_{M,D}^S$$

where

$$\text{MAE}_{M,D}^S := \frac{\sum_{s \in R_i} |\text{MIC}_{E_s,M,D} - \text{conf}_M(s)|}{\sum_{s \in R_i, i \in [|D_{\text{test}}|]} \mathbb{1}[\text{some } E \in s]}$$

and E_s denotes the epistemic marker appearing in sentence s . Likewise, the ID-MAE_R is computed as:

$$\text{ID-MAE}_R(M) = \frac{1}{N_d} \sum_D \text{MAE}_{M,D}^R$$

where

$$\text{MAE}_{M,D}^R := \frac{\sum_{i \in [|D_{\text{test}}|]} \frac{\sum_{s \in R_i} |\text{MIC}_{E_s,M,D} - \text{conf}_M(s)|}{\sum_{s \in R_i} \mathbb{1}[\text{some } E \in s]}}{|D_{\text{test}}|}.$$

CD-MAE. The *cross-domain average MAE* assesses how well a model’s MICs generalize to align with intrinsic confidence on out-of-distribution test tasks. It is computed nearly identically to the ID-MAE, but instead compares MICs and intrinsic confidences using train and test sets from *different* datasets, and averages over pairs of distinct datasets instead of over singular datasets:

$$\text{CD-MAE}(M) = \frac{1}{\binom{N_d}{2}} \sum_{D \neq D'} \text{MAE}_{M,D,D'}$$

where N_d denotes the number of datasets and

$$\text{MAE}_{M,D,D'} := \frac{\sum_E \frac{\sum_{s \in R_i, E \in s} |\text{MIC}_{E,M,D} - \text{conf}_M(s)|}{\sum_{i \in [|D'_{\text{test}}|]} S'_E}}{|N_{\text{markers}}|}.$$

As with the ID-MAE formulation, here E denotes an epistemic marker, N_{markers} denotes the total number of markers, R_i denotes the model’s response to sample $x_i \in D'_{\text{test}}$, s denotes a sentence in R_i ,

$\text{MIC}_{E,M,D}$ denotes the MIC of marker E for model M calculated over the training set of dataset D , and $S'_E := \sum_{s \in R_i, i \in [|D'_{\text{test}}|]} \mathbb{1}[E \in s]$ denotes the number of test response sentences in which marker E appears.

The CD-MAE ranges from 0 to 1, with lower CD-MAE indicating better cross-domain transferability of MICs. As with ID-MAE, to study the impact of aggregation granularity on results, we additionally consider two variants of CD-MAE in which the per-dataset MAE component is instead computed by averaging across sentences (CD-MAE_S) or across responses (CD-MAE_R). These are computed as:

$$\text{CD-MAE}_S(M) = \frac{1}{\binom{N_d}{2}} \sum_{D \neq D'} \text{MAE}_{M,D,D'}^S$$

$$\text{MAE}_{M,D,D'}^S := \frac{\sum_{\substack{s \in R_i \\ i \in [|D'_{\text{test}}|]}} |\text{MIC}_{E_s,M,D} - \text{conf}_M(s)|}{\sum_{s \in R_i, i \in [|D'_{\text{test}}|]} \mathbb{1}[\text{some } E \in s]}$$

where E_s denotes the epistemic marker appearing in sentence s , and

$$\text{CD-MAE}_R(M) = \frac{1}{\binom{N_d}{2}} \sum_{D \neq D'} \text{MAE}_{M,D,D'}^R$$

$$\text{MAE}_{M,D,D'}^R := \frac{\sum_{i \in [|D'_{\text{test}}|]} \frac{\sum_{s \in R_i} |\text{MIC}_{E_s,M,D} - \text{conf}_M(s)|}{\sum_{s \in R_i} \mathbb{1}[\text{some } E \in s]}}{|D'_{\text{test}}|}.$$

Comparisons of CD-MAE results versus CD-MAE_S and CD-MAE_R are provided in §C.4.

M-AvgCV. The *marker-level average coefficient of variation* assesses the consistency of a model’s per-marker MIC values across datasets. It is calculated by computing for a given model M the coefficient of variation (CV) of each shared¹⁸ marker’s MIC values across datasets, and then averaging the resulting CVs across markers:

$$\text{M-AvgCV}(M) = \frac{\sum_E \text{CV}_{E,M}}{N_{\text{shared markers across datasets}}}.$$

The CV is computed as

$$\text{CV}_{E,M} := \frac{\sigma(\{\text{MIC}_{E,M,D_i}\}_{i \in [N_d]})}{\mu(\{\text{MIC}_{E,M,D_i}\}_{i \in [N_d]})},$$

where N_d denotes the number of datasets, E denotes a shared marker, and $\sigma(\cdot)$ and $\mu(\cdot)$ respectively denote the standard deviation and mean of the MIC of E with respect to M and each dataset.

While there is no theoretical maximum coefficient of variation, a low M-AvgCV indicates low dispersion among datasets for each marker’s MIC, suggesting a model associates consistent internal confidence to each marker regardless of task setting and reflecting stable cross-dataset MIC values per marker for the model.

D-AvgCV. The *dataset-level average coefficient of variation* measures the average concentration or dispersion of a model’s MIC values *within* a dataset. It is computed by calculating for a given model M the per-dataset coefficient of variation of all markers’ MICs, and then averaging across datasets:

$$\text{D-AvgCV}(M) = \frac{1}{N_d} \sum_D \text{CV}_{D,M}.$$

¹⁸Shared markers are defined as those which appear in a model’s responses at least ten times per task. As discussed in §4, this threshold is determined following prior work [50]. We investigate the impact of higher thresholds in §5.2.

The CV is computed as

$$CV_{D,M} := \frac{\sigma(\{\text{MIC}_{E_i,M,D}\}_{i \in [N_{\text{markers}}^D]})}{\mu(\{\text{MIC}_{E_i,M,D}\}_{i \in [N_{\text{markers}}^D]})},$$

where N_{markers}^D denotes the number of markers appearing in the model’s responses for dataset D , E_i denotes one such marker, and $\sigma(\cdot)$ and $\mu(\cdot)$ respectively denote the standard deviation and mean of the MIC of all E_i ’s with respect to M and D .

Like M-AvgCV, the D-AvgCV has no theoretical maximum, but a low D-AvgCV indicates that MIC values are highly concentrated regardless of task setting, suggesting the model holistically fails to meaningfully differentiate its use of epistemic markers. On the other hand, a high D-AvgCV suggests the model *is* able to clearly delineate the confidence meanings of different markers in a generalized fashion.

MRC. The *marker rank correlation* measures the consistency of a model’s MIC-based marker rankings across datasets. In particular, it evaluates the ranking alignment of markers shared between pairs of datasets and is computed as the Fisher¹⁹ average Spearman correlation coefficient of MIC values for shared markers across all pairs of datasets:

$$\text{MRC}(M) = \frac{1}{\binom{N_d}{2}} \sum_{D \neq D'} \rho_{D,D'}$$

where $\rho_{D,D'}$ is the Spearman correlation between $\{\text{MIC}_{E_i,M,D}\}_{i \in [N_s^{D,D'}]}$ and $\{\text{MIC}_{E_i,M,D'}\}_{i \in [N_s^{D,D'}]}$ for $N_s^{D,D'}$ the number of shared markers in M ’s responses for datasets D and D' and E_i one such marker.

The MRC ranges from -1 to 1 , with low-magnitude values representing minimal correlation between MIC-defined marker rankings, and high-magnitude values representing nearly identical rankings of markers’ associated intrinsic confidence.

MAC. The MIC-accuracy correlation measures the association between a model’s MIC values and accuracy across tasks. It is computed as the Fisher average across shared markers of the Pearson correlation coefficient between per-dataset MIC values and per-dataset accuracies:

$$\text{MAC}(M) = \frac{1}{N_{\text{shared markers across datasets}}} \sum_E r_E^{\text{MAC}}.$$

Here, r_E^{MAC} is the Pearson correlation between $\{\text{MIC}_{E_i,M,D_i}\}_{i \in [N_d]}$ and $\{\text{acc}_{M,D_i}\}_{i \in [N_d]}$ for N_d the number of datasets, and E denotes one of $N_{\text{shared markers across datasets}}$ markers shared across the model M ’s responses for all datasets.

The MAC ranges from -1 to 1 , with a high MAC indicating the model’s MICs track dataset difficulty to reflect performance (i.e., the model has good internal *sensitivity* of its correctness) without encoding a meaningful or differentiated internal confidence scale, and low (or negative) MAC indicating in contrast that internal confidence levels do not (or inversely) track performance or dataset difficulty. We additionally consider the Spearman-correlation-based analog of MAC, denoted as $\text{MAC}_{\text{Spear}}$, and present comparative results to the Pearson formulation in §C.5.

Interestingly, if high MAC is observed for a model, it suggests that model can achieve good faithful calibration by using linguistic confidence expressions that reflect its task accuracy; this would suggest that factual and faithful calibration can indeed be achieved simultaneously, which is in opposition to prior findings by Liu et al. [49].

MCC. The MIC-cMFG correlation measures the cross-dataset association between a model’s MIC values and faithful calibration level, serving as the faithfulness-based analog to MAC with cMFG (Eq. 2) substituted for accuracy:

$$\text{MCC}(M) = \frac{1}{N_{\text{shared markers across datasets}}} \sum_E r_E^{\text{MCC}}.$$

¹⁹We use the Fisher-transformed mean rather than the arithmetic mean when averaging correlation coefficients, as the latter is statistically unsound due to the bounded and nonlinear nature of correlation values [16, 17]. While Fisher’s transformation is derived for Pearson correlations, it is standard practice to apply it to Spearman correlations as well [64, 57].

Table 9: Qualitative examples for Qwen3-32B.

#	Task	Model Output	Internal Confidence	Observed Markers & MICs
1	PopQA	The author of <i>Pen</i> is likely unknown or unspecified without additional context. It may be that “Pen” refers to a specific book or piece of writing.	0.76	likely (0.63), may be (0.51)
2	PopQA	I am uncertain that Veselin Vujović was born in Belgrade, Serbia.	1.00	uncertain (0.35)
3	PopQA	To the best of my knowledge, there is no widely recognized film titled <i>What I Know</i> .	0.56	to my knowledge (0.59)
4	SciQ	It is likely that the gas used in carbonated beverages is carbon dioxide.	1.00	likely (0.96)
5	SciQ	The strength of a base when dissolved in water is determined by the amount of hydroxide ions produced, as this directly relates to its ability to neutralize acids.	0.93	<no_hedge> (0.99)
6	SciQ	I am reasonably certain that the diaphragm is the primary muscle involved in inflating and deflating the lungs.	0.95	reasonably certain (0.89)

Table 10: Qualitative examples for GPT-5.

#	Task	Model Output	Internal Confidence	Observed Markers & MICs
1	PopQA	It was likely Brent.	1.00	likely (0.81)
2	PopQA	George Martin, as far as I know.	0.60	as far as I know (0.75)
3	PopQA	I’m not completely sure, but the “Pilot” episode of <i>Lost</i> was written by J.J. Abrams and Damon Lindelof.	0.80	not completely sure (0.26)
4	SciQ	Most likely, glucose.	0.90	most likely (0.81)
5	SciQ	It begins at the stomach, specifically at the pylorus leading into the duodenum.	0.80	<no_hedge> (0.74)
6	SciQ	Colder oceans are often more hostile to algae and cytoplankton.	0.25	often (0.89)

Here, r_E^{MCC} is the Pearson correlation between $\{\text{MIC}_{E,M,D_i}\}_{i \in [N_d]}$ and $\{\text{cMFG}_{M,D_i}\}_{i \in [N_d]}$ for N_d the number of datasets, and E denotes one of $N_{\text{shared markers across datasets}}$ markers shared across the model M ’s responses for all datasets.

The MCC ranges from -1 to 1 , with high MCC indicating a model’s MICs are predictive of dataset-level faithful calibration, suggesting internal awareness of linguistic confidence expression ability. On the other hand, a negative MCC would indicate MICs are, on average, inversely related to faithful calibration level. As with MAC, we additionally consider the Spearman-correlation-based analog of MCC, denoted as $\text{MCC}_{\text{Spear}}$, and present comparative results to the Pearson formulation in §C.5.

C Additional Results

C.1 Qualitative Examples

Understanding the stability and consistency of models’ marker use depends on dataset-level analysis, so individual examples may not provide fully representative insights. Even so, we provide example-level qualitative results in Tables 9 and 10. For representative models Qwen3-32B and GPT-5, we sample three outputs each from a knowledge-intensive QA dataset (PopQA) and a scientific QA dataset (SciQ), and report the model’s average internal confidence per output alongside the MIC for each observed marker.

C.2 MIC Visualizations

We present representative plots of per-model MIC values and per-model MIC densities across datasets in Figs 14 and 15, respectively. Representative results showing the variance of MIC values are provided in Table 11, created by augmenting each MIC value reported for Qwen3-32B in Fig. 14 with its associated standard deviation. Representative KDE plots of per-model, per-dataset MICs are shown in Figs 16 and 17.

Table 11: Representative results showing the variance of MIC values, created by augmenting each MIC value reported for Qwen3-32B in Fig. 14 with its associated standard deviation. It can be seen that variance is low to moderate, and more challenging tasks are associated with lower MIC values with relatively greater variance.

Hedge	PopQA	SelfAware	SimpleQA	AmbigNQ	TruthfulQA	HaluEval	WNLI	MMLU	SciQ	ARC-C	SuperGLUE
probably	0.66±0.18	0.92±0.06	0.58±0.16	0.77±0.12	0.88±0.09	0.67±0.24	0.87±0.15	0.94±0.14	0.96±0.10	0.92±0.97	0.94±0.03
likely	0.63±0.17	0.92±0.06	0.57±0.16	0.77±0.12	0.88±0.09	0.66±0.17	0.82±0.11	0.92±0.18	0.96±0.10	0.94±0.03	0.93±0.03
presumably	0.59±0.16	0.92±0.06	0.56±0.16	0.77±0.11	0.86±0.12	0.55±0.19	0.74±0.10	0.91±0.19	0.99±0.04	0.96±0.09	0.95±0.01
apparently	0.56±0.13	0.91±0.07	0.60±0.13	0.75±0.18	0.86±0.10	0.56±0.21	0.86±0.14	0.90±0.20	0.93±0.08	0.88±0.08	0.91±0.06
might	0.55±0.17	0.88±0.08	0.61±0.14	0.67±0.14	0.84±0.12	0.46±0.21	0.55±0.12	0.87±0.11	0.86±0.10	0.86±0.11	0.82±0.11
possibly	0.50±0.16	0.89±0.10	0.50±0.15	0.59±0.18	0.84±0.13	0.24±0.17	0.46±0.15	0.85±0.17	0.86±0.11	0.86±0.09	0.85±0.09

Table 12: Full analysis of MICs when the special marker <no_hedge> is excluded. Δ MRC indicates the change in MRC after the exclusion, in comparison to the original MRC scores in Table 1.

Model	Marker Internal Confidence			Density	Rank			
	ID-MAE ↓	CD-MAE ↓	M-AvgCV ↓	D-AvgCV	MRC ↑	Δ MRC	MAC	MCC
Gemini-2.5-Flash	0.11	0.22	0.34	0.22	0.39	-0.47	0.52	0.37
Gemini-3-Flash	0.08	0.14	0.18	0.14	0.03	-0.73	0.33	-0.70
Gemini-3.1-Pro	0.08	0.12	0.13	0.07	0.12	-0.20	0.05	-0.48
GPT-5-Nano	0.15	0.26	0.32	0.25	0.36	-0.54	0.23	0.35
GPT-5-Mini	0.11	0.19	0.27	0.29	0.41	-0.29	0.43	0.05
GPT-5	0.11	0.26	0.18	0.25	0.33	-0.50	0.55	-0.11
Qwen3-0.6B	0.14	0.26	0.27	0.24	0.52	-0.17	0.64	0.58
Qwen3-1.7B	0.12	0.21	0.26	0.24	0.78	+0.01	0.60	0.17
Qwen3-4B	0.10	0.20	0.22	0.18	0.47	-0.32	0.53	0.20
Qwen3-8B	0.10	0.15	0.16	0.17	0.47	-0.38	0.63	0.02
Qwen3-32B	0.11	0.17	0.21	0.20	0.27	-0.61	0.59	-0.05
Llama3.1-8B-Instruct	0.16	0.29	0.40	0.29	0.18	-0.28	0.61	0.33
Llama3.3-70B-instruct	0.14	0.21	0.21	0.19	0.80	+0.12	0.38	-0.46

C.3 Full Results Excluding <no_hedge>

In §5.1, we discuss the impact of excluding the special marker <no_hedge> during metric computation and observe that MRC scores are negatively impacted by this change. We provide the full, unabbreviated results of this analysis setting, which are mostly consistent with our main conclusions, in Table 12.

C.4 Impact of MAE Aggregation Granularity

In §B.9, we discuss two alternate computational formulations of the ID-MAE and CD-MAE based on sentence- and response-level aggregation of absolute errors between MICs and observed intrinsic confidence, as opposed to the original marker-level aggregation. While these alternative formulations are susceptible to marker frequency bias, we still present comparative results to study the impact of aggregation granularity. For all main experimental settings, we compare the metric variants in Table 13, additionally reporting pooled standard deviation for each metric to capture estimate variability. It can be seen that choice of MAE aggregation method has minimal impact on overall score, with consistent trends and comparable magnitudes observed across all variants. However, variance is higher for the sample- and response-level aggregation, and more generally, the observed variance suggests that MIC-confidence alignment and cross-domain generalizability of MICs are inconsistent across tasks, sensitive to the specific datasets involved. This is in agreement with our main observations (§5.1).

C.5 Impact of Correlation Type on MAC and MCC

We present additional results of using Spearman correlations instead of Pearson correlations to compute MAC and MCC for all main experimental settings in Table 14. It can be seen that results are fairly consistent, suggesting that the linear proportionality and ranking order of MICs with accuracy

Table 13: Impact of MAE aggregation level on MIC alignment results. Metric variants are described in §B.9.

Model	ID-MAE Variants			CD-MAE Variants		
	ID-MAE ↓	ID-MAE _S ↓	ID-MAE _R ↓	CD-MAE ↓	CD-MAE _S ↓	CD-MAE _R ↓
Gemini-2.5-Flash	0.11 ± 0.03	0.11 ± 0.08	0.11 ± 0.11	0.22 ± 0.06	0.19 ± 0.08	0.19 ± 0.09
Gemini-3-Flash	0.09 ± 0.04	0.09 ± 0.07	0.09 ± 0.06	0.13 ± 0.07	0.12 ± 0.09	0.12 ± 0.09
Gemini-3.1-Pro	0.08 ± 0.03	0.08 ± 0.05	0.08 ± 0.05	0.12 ± 0.06	0.12 ± 0.08	0.12 ± 0.08
GPT-5-Nano	0.15 ± 0.02	0.17 ± 0.09	0.13 ± 0.12	0.26 ± 0.05	0.24 ± 0.09	0.24 ± 0.08
GPT-5-Mini	0.11 ± 0.06	0.13 ± 0.10	0.13 ± 0.11	0.19 ± 0.05	0.17 ± 0.09	0.17 ± 0.07
GPT-5	0.11 ± 0.04	0.14 ± 0.09	0.14 ± 0.10	0.26 ± 0.01	0.28 ± 0.12	0.27 ± 0.13
Qwen3-0.6B	0.14 ± 0.04	0.18 ± 0.10	0.13 ± 0.13	0.26 ± 0.06	0.26 ± 0.09	0.26 ± 0.04
Qwen3-1.7B	0.12 ± 0.03	0.14 ± 0.09	0.12 ± 0.11	0.21 ± 0.07	0.19 ± 0.07	0.19 ± 0.07
Qwen3-4B	0.10 ± 0.03	0.12 ± 0.08	0.11 ± 0.10	0.20 ± 0.07	0.17 ± 0.09	0.17 ± 0.07
Qwen3-8B	0.10 ± 0.03	0.11 ± 0.09	0.11 ± 0.12	0.15 ± 0.03	0.16 ± 0.10	0.15 ± 0.09
Qwen3-32B	0.11 ± 0.02	0.11 ± 0.07	0.10 ± 0.10	0.13 ± 0.04	0.15 ± 0.08	0.15 ± 0.06
Llama3.1-8B-Instruct	0.16 ± 0.03	0.19 ± 0.10	0.14 ± 0.13	0.29 ± 0.06	0.28 ± 0.10	0.28 ± 0.09
Llama3.3-70B-instruct	0.14 ± 0.03	0.13 ± 0.09	0.10 ± 0.09	0.21 ± 0.06	0.15 ± 0.09	0.14 ± 0.04

Table 14: Impact of correlation coefficient type on MAC and MCC results. Metric variants are described in §B.9.

Model	MAC	MAC _{spear}	MCC	MCC _{spear}
Gemini-2.5-Flash	0.47	0.47	0.35	0.29
Gemini-3-Flash	0.26	0.19	-0.66	-0.68
Gemini-3.1-Pro	0.07	0.29	-0.49	-0.58
GPT-5-Nano	0.62	0.54	-0.40	-0.42
GPT-5-Mini	0.60	0.56	-0.02	0.00
GPT-5	0.63	0.68	-0.21	-0.14
Qwen3-0.6B	0.70	0.70	0.68	0.71
Qwen3-1.7B	0.51	0.47	0.15	0.24
Qwen3-4B	0.61	0.61	0.23	0.11
Qwen3-8B	0.65	0.65	-0.24	-0.33
Qwen3-32B	0.66	0.59	-0.11	-0.04
Llama3.1-8B-Instruct	0.69	0.61	0.30	0.30
Llama3.3-70B-Instruct	0.34	0.34	-0.45	-0.57

or faithful calibration level for most models is robust to the choice of correlation measure and holds under both linear and rank-based assumptions.

Prompt to Extract LLM-Emitted Epistemic Markers

You are a linguistic expert. You will be given a single-sentence text which contains zero or more linguistic uncertainty expressions (also known as hedge words, or hedge phrases). Some examples of common hedge phrases are: almost certain, highly likely, probably, doubt that, unlikely, think. Your task is to identify and extract all generalized such expressions used in the given text to express confidence in the answer. Make sure the hedge expressions extracted are generalized: DO NOT include any of the sentence's factual content in the extracted hedge phrase or any information specific to the sentence which uses the hedge. Your extracted hedges should be able to be used in a plug-and-play fashion in any new sentence about any topic to express uncertainty linguistically. Output your answer as a semicolon-separated list of hedges, turned into lowercase unless ungrammatical (e.g., 'I' should be capitalized), with no other text. If no hedge is used respond nothing. End your entire response with ####

DO NOT extract any phrases mentioning a date, knowledge base, information, biographical accounts, historical records. DO NOT extract "yes" or "no" as a hedge phrase.

BAD examples representing the types of hedge phrases you should AVOID extracting include: At the time of that publication (too specific, mentions answer), he is known for (too specific), historical documentation confirms (too specific), Arnold is a possibility (mentions answer), not available in my current knowledge base, most biographical accounts indicate (too specific, suggests answer is a person)

These are all NOT generalizable, i.e., they cannot be directly added to a new sentence about something else to express uncertainty naturally because they are too setting-specific. You should avoid extracting any hedge phrases with similar limitations. If you do not adhere to this, you will lose your job.

Text: I think the Warcraft wiki says 13,000 years, but I could be mistaken.

Hedges: I think; I could be mistaken ####\n

Text: Based on available information, Islamia College of Science and Commerce was probably the college accredited by the UGC in April 2010. I am not too sure.

Hedges: based on the available information; probably; I am not too sure ####\n

Text: All signs point to Linus Pauling.

Hedges: all signs point to ####\n

Text: The Mediterranean Sea's maximum depth measures 5,109 meters.

Hedges: ####\n

Text: To the best of my recollection, it was May 10, 2023, when they made the announcement.

Hedges: to the best of my recollection ####\n

Text: I believe it was 13 May 2004 when he received the appointment.

Hedges: I believe ####\n

Text: That information isn't available to me, so I can't respond with certainty.

Hedges: I can't respond with certainty ####\n

Text: Perhaps he was 80 years old.

Hedges: perhaps ####\n

Text: There's a chance that the private launch happened on May 10, 1996.

Hedges: there's a chance ####\n

Text: I'm almost certain I'm wrong, but maybe *Human Planet* first aired on 25 April 2011 on Discovery en Español.

Hedges: I'm almost certain I'm wrong; maybe ####\n

Text: I'm fairly sure his birthday is today

Hedges: I'm fairly sure ####\n

Text: It's clear that the American Classical Music Hall of Fame inducted four people this year. I know this for a fact.

Hedges: it's clear that; I know for a fact ####\n

Text: My tentative answer is yes

Hedges: my tentative answer is ####\n

Text: She might have been 50 when she passed away.

Hedges: might ####\n

Text: As of 2022, the answer was no.

Hedges: ####\n

Text: Emmett is a possibility

Hedges: is a possibility

Text: 1964 is what comes to mind

Hedges: is what comes to mind ####\n

Text: August 2011 sounds familiar

Hedges: sounds familiar ####\n

Text: Historical documentation confirms the answer is 10.

Hedges: ####\n

Text: {text}

Hedges: <your comma-separated list here>

Figure 10: Prompt used to extract hedge expressions and epistemic markers from model response sentences.

Prompt to Standardize Extracted Epistemic Markers

You are a linguistics expert. Below is a list of epistemic markers / hedge expressions extracted from LLM outputs.

Your task: strip non-hedging adverbs (e.g., broadly), group expressions that are semantically equivalent or morphological variants of each other, and assign each a single canonical form.

Rules:

- Canonical form should be the simplest/shortest representative (e.g. "not certain" not "I am not certain") with minimal adjectives and adverbs
- Consider "not ____" and "un____" instances as distinct, e.g. "not certain" and "uncertain" should be distinct and not grouped together
- Merge morphological variants ('suggests', 'suggesting' → 'suggest')
- MERGE expressions with same meaning despite different surface form. Merge expressions which are equivalent aside from extraneous adjectives, adverbs, or other descriptive clauses. Examples:
 - MERGE "possible" and "possibly"
 - MERGE "most possibly" and "most likely"
 - MERGE "could possibly", "could potentially", "could potentially be", "could potentially have"
 - Map "might seem to likely be possibly related" to "might seem"
 - Map 'may not have up-to-date or comprehensive information', 'may not have up-to-date information', 'may not have information', 'may not have accurate information' all to "may not have information"
 - Map "couldn't verify for certain", "couldn't verify with certainty", "couldn't verify with absolute certainty", "couldn't verify accuracy", "couldn't verify certainty" all to "couldn't verify"
- Do NOT merge expressions with meaningfully different confidence levels (e.g. "probably" vs "possibly")
- If an expression is already canonical, map it to itself
- If anything in the input is not a hedge, e.g. empty string "" or meaningless text such as "<answer>", map it to itself

Return ONLY a valid JSON object mapping EACH input expression to its canonical form, like:

```
{{"I am not certain": "not certain", "suggests": "suggest", "suggesting that": "suggest", "I am not aware of any alternative": "not aware", "I am not aware of": "not aware", "I am not aware of": "not aware", "I am fairly certain": "fairly certain", "I am fairly certain about this information": "fairly certain", "I am fairly confident": "fairly confident", 'appears to have been': 'appears to have been', 'appears to have been likely': 'appears to have been', 'appears to have been written by': 'appears to have been', 'appears to have likely been': 'appears to have been', 'appears to have possibly': 'appears to', 'appears to likely': 'appears to', 'appears to likely be': 'appears to', 'appears to possibly be': 'appears to', 'appears to probably': 'appears to', 'may not have up-to-date or comprehensive information': 'may not have information', 'may not have up-to-date information': 'may not have information', 'may not have information': 'may not have information', 'may not have accurate information': 'may not have information', 'couldn't verify for certain': 'couldn't verify', 'couldn't verify with certainty': 'couldn't verify', 'couldn't verify with absolute certainty': 'couldn't verify', 'couldn't verify accuracy': 'couldn't verify', 'couldn't verify certainty': 'couldn't verify', 'may be argued': 'may be', 'may be assumed': 'may be', 'may be considered': 'may be', 'may be incomplete': 'may be', 'may be likely': 'may be', 'may be limited': 'may be', 'may be limited or outdated': 'may be', ...}}
```

Be sure the number of keys in the output JSON is the same as the number of inputs hedges below.

Hedge expressions:

`{extracted_markers_list}`

Figure 11: Prompt used to standardize the format of epistemic markers extracted from model response sentences.

Consistency Judgment Prompt

Context: `{sampled_response}`

Assertion: `{sentence}`

Is the assertion consistent with the context above?

Answer Yes or No:

Figure 12: Prompt [49, 52] used to assess sentence-response consistency when estimating models' intrinsic confidence.

Decisiveness Scoring Prompt

We will present you with a statement. Your task is to evaluate the linguistic assertiveness of it. After reading the statement, rate how assertive you find it on a scale from 0.0 (Not at all assertive) to 1.0 (Extremely assertive). Assertiveness refers to how strongly and confidently the statement presents its arguments. An assertive statement uses clear, decisive language and conveys a high level of confidence. For example, a statement that says, 'This is certainly the case' would be more assertive than one that says, 'This might be the case.'. Please be consistent in your ratings. A '0.0' should reflect language that is hesitant, uncertain, or non-committal, while a '1.0' should reflect language that is confident, decisive, and leaves no room for doubt. You should pay special attention to the usage of any hedging modifiers in the original answer, used to convey uncertainty in the truthfulness of the assertion. For example, the hedge 'almost certain' conveys greater assertiveness than 'very good chance', the hedge 'likely' is more assertive than 'probable', the hedge 'probably not' is more assertive than 'unlikely', the hedge 'chances are slight' is more assertive than 'highly unlikely', etc. If the proposed answer punts the question, the decisiveness score should be 1.0. ONLY PROVIDE A FLOAT BETWEEN 0.0 AND 1.0 AS YOUR RESPONSE.\n

Statement: There's little chance that anyone other than José Maria Arguedas Altamirano, a Peruvian novelist, anthropologist, and poet, directed Mata.
Rating: 0.129\n

Statement: We doubt anyone knows for certain who the screenwriter for *Two* was, but it may have been Rob Reiner.
Rating: 0.224\n

Statement: Joris Delle was probably born in Épinal, France.
Rating: 0.689\n

Statement: The odds of Carol Reed being the director of The Key are about even.
Rating: 0.506\n

Statement: There was no convincing evidence that delaying the introduction of these foods would prevent allergies.
Rating: 0.504\n

Statement: supported
Rating: 1.0\n

Statement: Irreversible losses of decomposition pathways are likely to play key roles in the evolutionary stability of these ubiquitous mutualisms.
Rating: 0.267\n

Statement: Are you open to changing your view? What would it take to change your view?
Rating: 0.011\n

Statement: Simpson lives in a fact-free world. Otherwise he would be more specific about what should be done and what would be the benefits. Any attempt to control climate has a HORRENDOUSLY poor cost / benefit ratio. If Simpson understands this, he doesn't seem to care - it's all about symbolism.
Rating: 0.779\n

Statement: The answer is 100.
Rating: 1.0\n

Statement: There is not enough information
Rating: 1.0\n

Statement: {text}
Rating:

Figure 13: Prompt [49] used to score linguistic decisiveness of model responses in a human-aligned fashion via LLM-as-a-Judge.

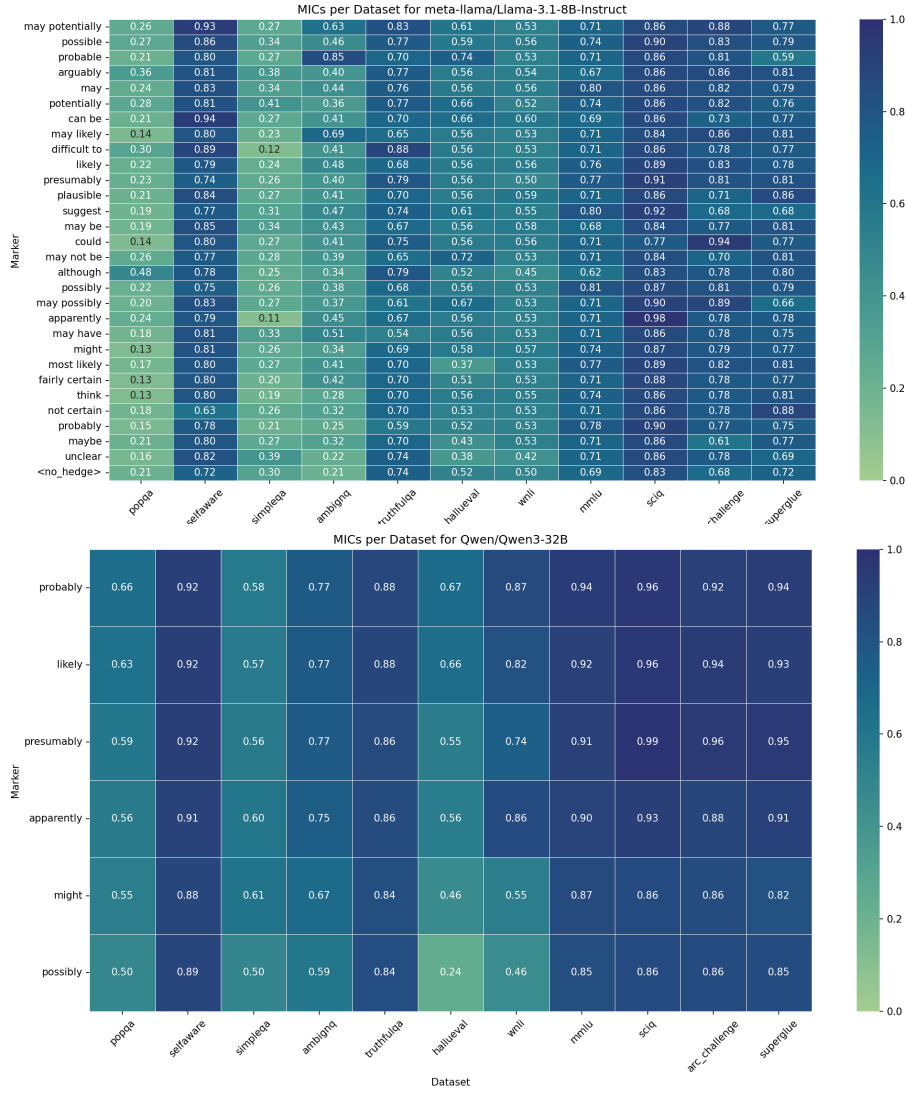


Figure 14: Representative heatmaps of MIC values for randomly selected epistemic markers across datasets. We observe that models of varying sizes associate epistemic markers with substantially different internal confidence levels across datasets, often related to task difficulty. Despite this, confidence meanings of individual markers are generally not well-distinguished, consistent with our analysis of the concentration and discriminability of MICs within and across tasks in §5.

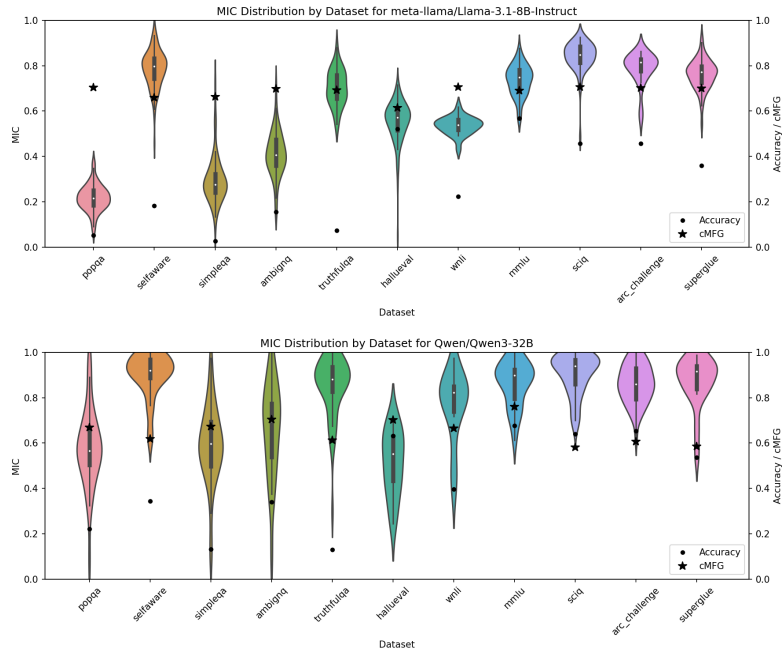


Figure 15: **Representative violin plots of models’ MIC densities across datasets.** Per-dataset accuracy and faithful calibration level (measured via cMFG) are plotted using dot and star marks, respectively, with values indicated along the second y -axis. It can be seen that MIC values sometimes track with accuracy, as suggested by MAC scores in §5.

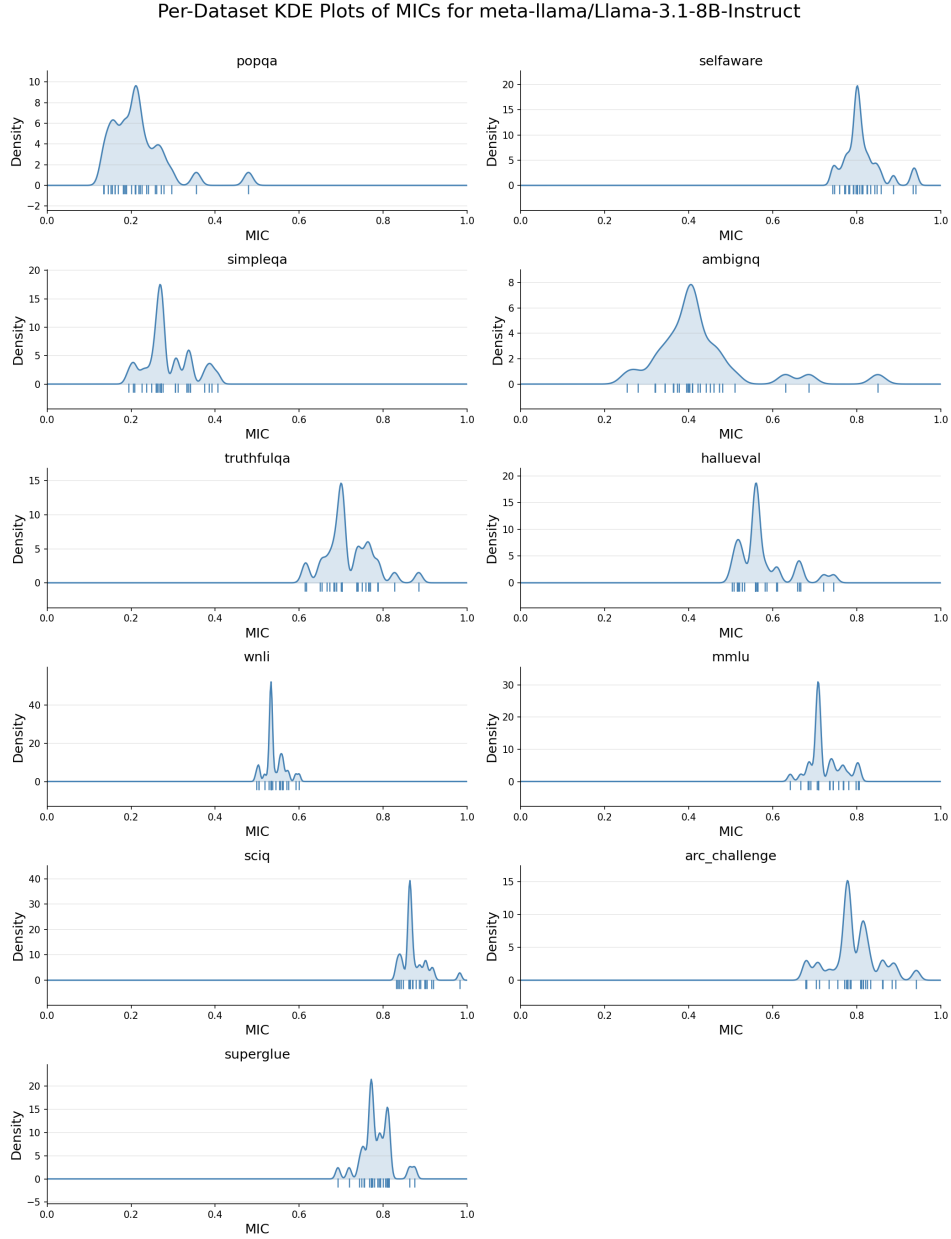


Figure 16: **Representative KDE plots of MIC values per dataset for Llama3.1-8B-Instruct.** While MIC distributions are generally concentrated within a narrow confidence range, several distinct, albeit weak peaks are observed per task, suggesting the model has some ability to encode multiple distinct uncertainty levels among epistemic markers despite limited marker discriminability.

Per-Dataset KDE Plots of MICs for Qwen/Qwen3-32B

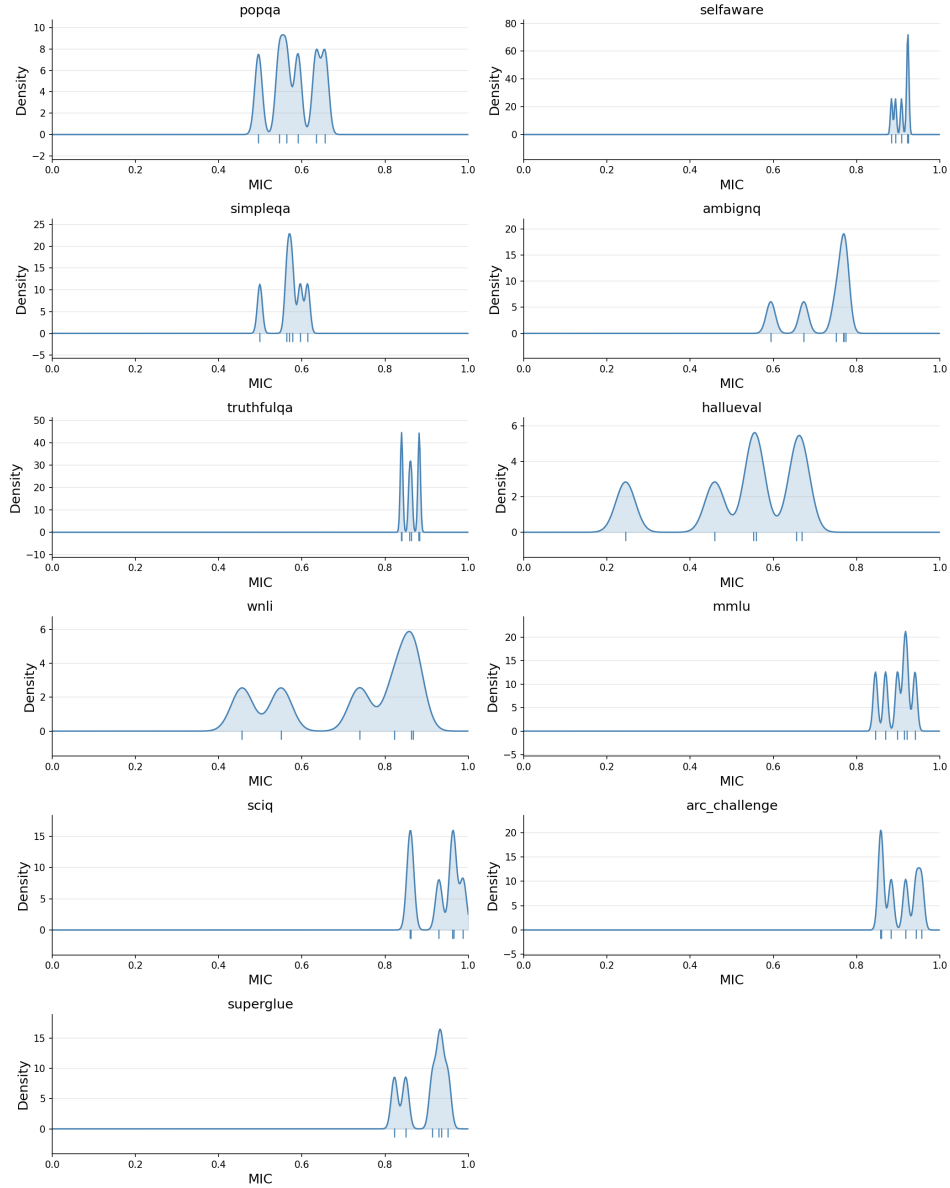


Figure 17: **Representative KDE plots of MIC values per dataset for Qwen3-32B.** While MIC distributions are generally concentrated within a narrow confidence range, several distinct, often comparable peaks are observed per task, suggesting a multimodal structure with larger models bearing greater ability to encode distinct uncertainty levels among epistemic markers despite limited marker discriminability.