
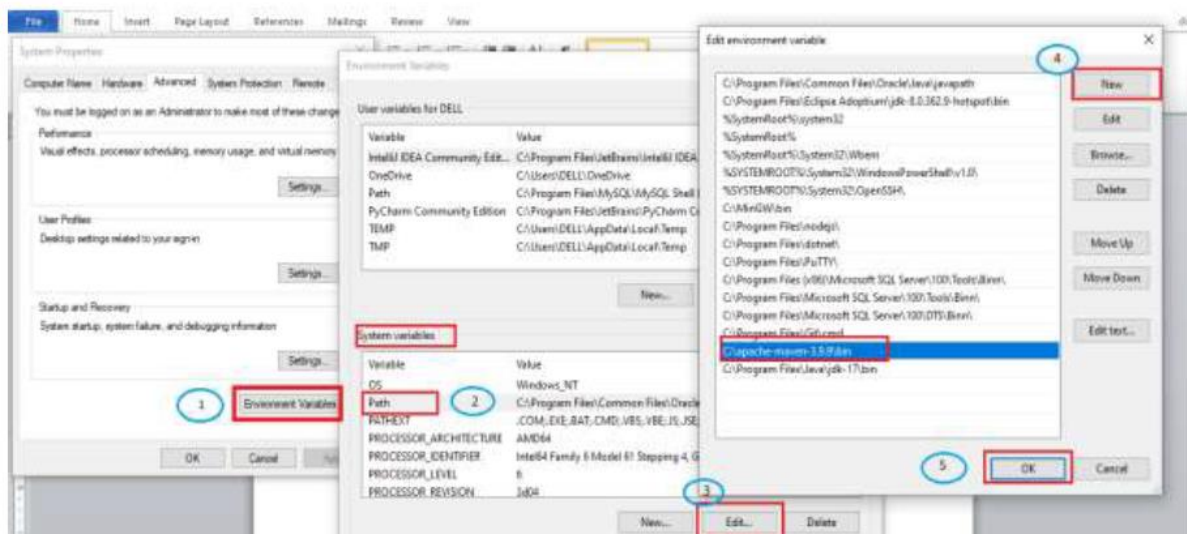


01. Command Prompt

```
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

C:\Users\DELL> java -version
```


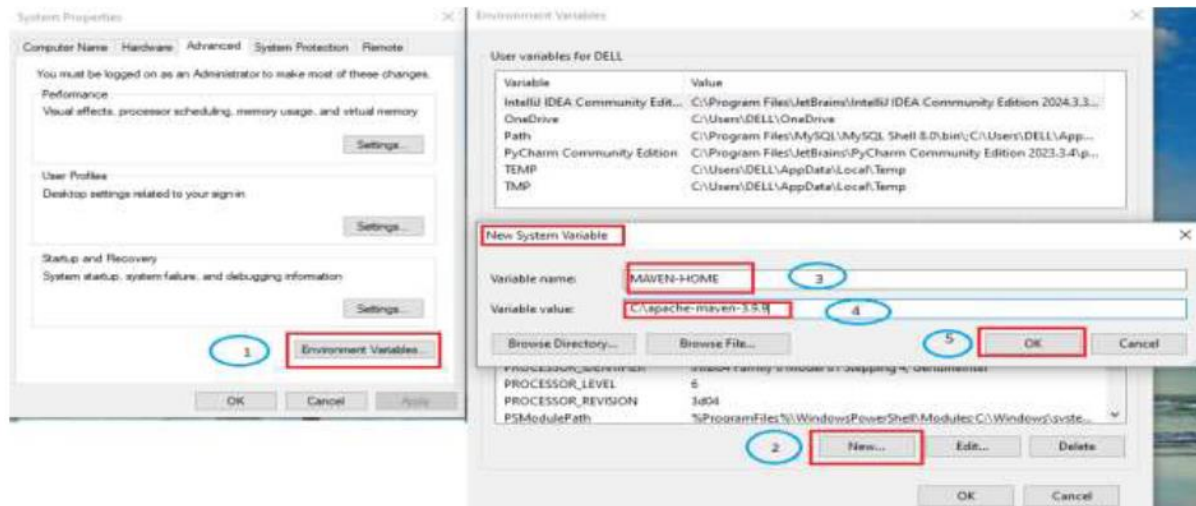



02. Command Prompt

```
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

C:\Users\DELL> mvn -version
Apache Maven 3.9.9 (8e8579a9e76f7d015ee5ec7bfcddc97d260186937)
Maven home: C:\apache-maven-3.9.9
Java version: 17.0.12, vendor: Oracle Corporation, runtime: C:\Program Files\Java\jdk-17
Default locale: en_US, platform encoding: Cp1252
OS name: "windows 10", version: "10.0", arch: "amd64", family: "windows"

C:\Users\DELL>
```

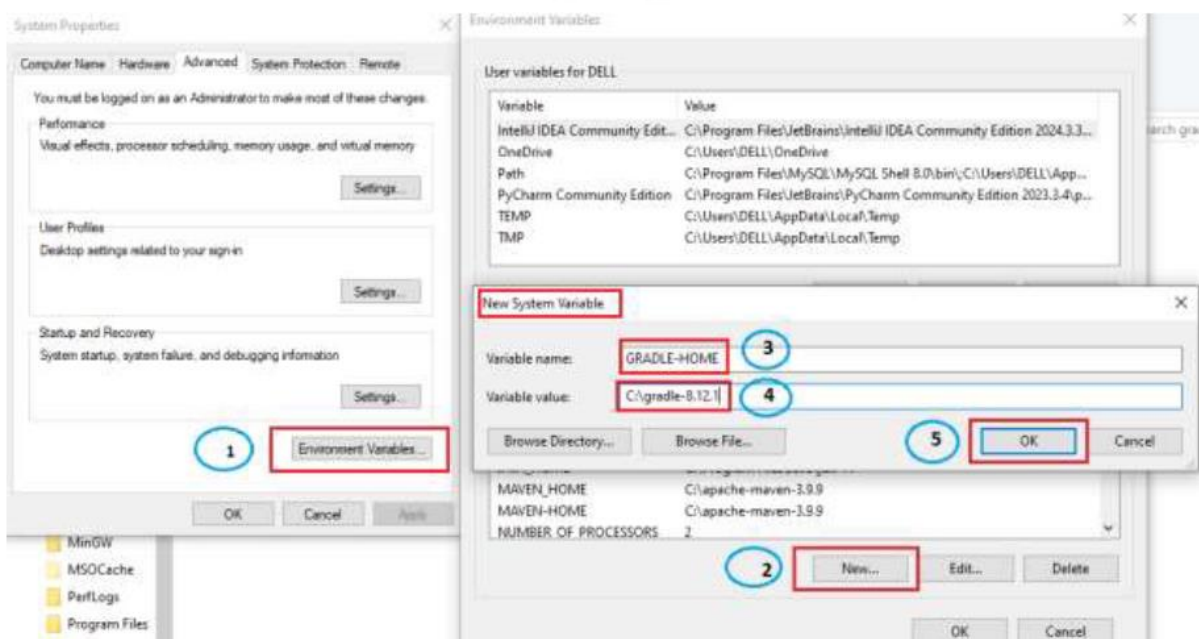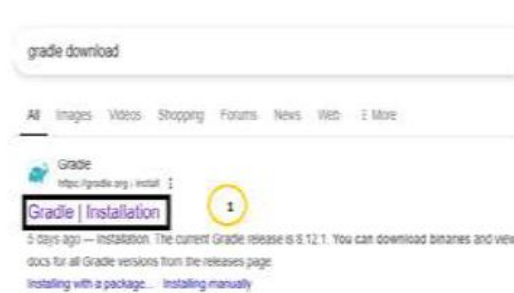

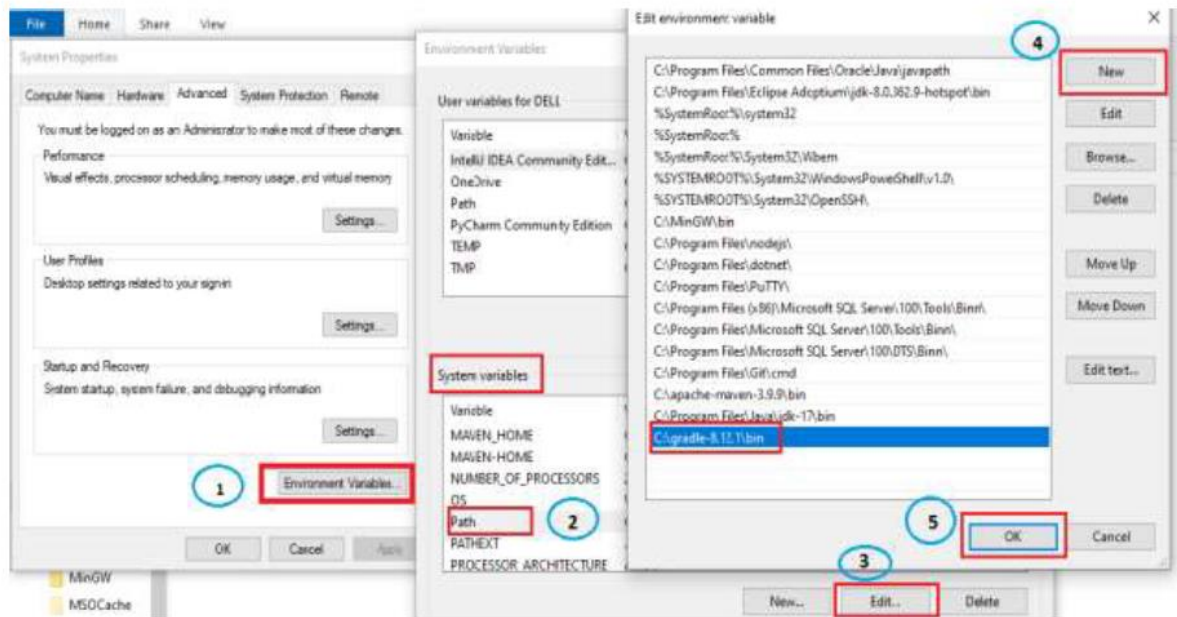

Command Prompt

```
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

C:\Users\DELL>gradle -version

Welcome to Gradle 8.12.1!

Here are the highlights of this release:
- Enhanced error and warning reporting with the Problems API
- File-system watching support on Alpine Linux
- Build and test Swift 6 libraries and apps

For more details see https://docs.gradle.org/8.12.1/release-notes.html

-----
Gradle 8.12.1
-----
Build time: 2025-01-24 12:55:12 UTC
Revision: 0b1ee1ff81d1f4a26574ff4a362ac9180852b140

Kotlin: 2.0.21
Groovy: 3.0.22
Ant: Apache Ant(TM) version 1.10.15 compiled on August 25 2024
Launcher JVM: 17.0.12 (Oracle Corporation 17.0.12+8-LTS-286)
Daemon JVM: C:\Program Files\Java\jdk-17 (no JDK specified, using current Java home)
OS: Windows 10 10.0 amd64

C:\Users\DELL>

E:\Maven-project1>mvn archetype:generate -DgroupId=com.mvit -DartifactId=flipkart-app -DarchetypeArtifactId=maven-archetype-quickstart -DarchetypeVersion=1.4 -DinteractiveMode=false
```

```
<dependencies>
  <dependency>
    <groupId>junit</groupId>
    <artifactId>junit</artifactId>
    <version>3.8.1</version>
    <scope>test</scope>
  </dependency>
</dependencies>
```

```
<build>
  <pluginManagement>
    <plugins>
      <plugin>
        <artifactId>maven-clean-plugin</artifactId>
        <version>3.1.0</version>
      </plugin>
      <plugin>
        <artifactId>maven-compiler-plugin</artifactId>
        <version>3.8.0</version>
      </plugin>
      <plugin>
        <artifactId>maven-surefire-plugin</artifactId>
        <version>2.22.1</version>
      </plugin>
    </plugins>
  </pluginManagement>
</build>
```

```

C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

E:\Maven-project>mvn archetype:generate -DgroupId=com.mvit -DartifactId=flipkart-app -DarchetypeArtifactId=maven-archetype-quickstart -DarchetypeVersion=3.3.1 -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO] -----< org.apache.maven:standalone-pom >-----
[INFO] Building Maven Stub Project (No POM) 1
[INFO] -----[ pom ]-----
[INFO] >>> archetype:3.3.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO] <<< archetype:3.3.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO] --- archetype:3.3.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] Using following parameters for creating project from Archetype: maven-archetype-quickstart:1.4
[INFO] -----
[INFO] Parameter: groupId, Value: com.mvit
[INFO] Parameter: artifactId, Value: flipkart-app
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] Parameter: package, Value: com.mvit
[INFO] Parameter: packageInPathFormat, Value: com/mvit
[INFO] Parameter: package, Value: com.mvit
[INFO] Parameter: groupId, Value: com.mvit
[INFO] Parameter: artifactId, Value: flipkart-app
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] Project created from Archetype in dir: E:\Maven-project\flipkart-app
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 4.929 s
[INFO] Finished at: 2025-03-05T20:59:58+05:30
[INFO] -----
E:\Maven-project>

```

```

File Edit Selection View Go ... ← → Search
App.java X
E:\Maven-project\flipkart-app>src>main>java>com>mvit> App.java
1 package com.mvit;
2
3 /**
4  * Hello world!
5  *
6  */
7 public class App
8 {
9     public static void main( String[] args )
10    {
11        int num1=20 ;
12        int num2=30;
13        int sum=num1+num2;
14        System.out.println("20+30 = " + sum);
15
16        System.out.println("Application executed sucessfully!");
17    }
18 }
19

```


C:\Windows\System32\cmd.exe

```
E:\Maven-project1>cd flipkart-app
```

```
E:\Maven-project1\flipkart-app> mvn compile
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1>cd flipkart-app
```

```
E:\Maven-project1\flipkart-app>mvn compile
```

```
[INFO] Scanning for projects...
```

```
[INFO]
```

```
[INFO] -----< com.mvit:flipkart-app >-----
```

```
[INFO] Building flipkart-app 1.0-SNAPSHOT
```

```
[INFO]   from pom.xml
```

```
[INFO] -----[ jar ]-----
```

```
[INFO]
```

```
[INFO] --- resources:3.0.2:resources (default-resources) @ flipkart-app ---
```

```
[INFO] Using 'UTF-8' encoding to copy filtered resources.
```

```
[INFO] skip non existing resourceDirectory E:\Maven-project1\flipkart-app\src\main\resources
```

```
[INFO]
```

```
[INFO] --- compiler:3.8.0:compile (default-compile) @ flipkart-app ---
```

```
[INFO] Changes detected - recompiling the module!
```

```
[INFO] Compiling 1 source file to E:\Maven-project1\flipkart-app\target\classes
```

```
[INFO]
```

```
[INFO] BUILD SUCCESS
```

```
[INFO]
```

```
[INFO] Total time: 4.752 s
```

```
[INFO] Finished at: 2025-03-05T22:17:41+05:30
```

```
[INFO]
```

```
[INFO]
```

```
E:\Maven-project1\flipkart-app>
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app> mvn test
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app> mvn test
[INFO] Scanning for projects...
[INFO] -----< com.wvit:flipkart-app >-----
[INFO] Building flipkart-app 1.0-SNAPSHOT
[INFO] from pom.xml
[INFO] -----[ jar ]-----
[INFO] --- resources:3.0.2:resources (default-resources) @ flipkart-app ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] skip non existing resourceDirectory E:\Maven-project1\flipkart-app\src\main\resources
[INFO] --- compiler:3.8.0:compile (default-compile) @ flipkart-app ---
[INFO] Nothing to compile - all classes are up to date
[INFO] --- resources:3.0.2:testResources (default-testResources) @ flipkart-app ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] skip non existing resourceDirectory E:\Maven-project1\flipkart-app\src\test\resources
[INFO] --- compiler:3.8.0:testCompile (default-testCompile) @ flipkart-app ---
[INFO] Changes detected - recompiling the module!
[INFO] Compiling 1 source file to E:\Maven-project1\flipkart-app\target\test-classes
[INFO] --- surefire:2.22.1:test (default-test) @ flipkart-app ---
[INFO] -----
[INFO] T E S T S
[INFO] -----
[INFO] Running com.wvit.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.169 s - in com.wvit.AppTest
[INFO] Results:
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 10.522 s
[INFO] Finished at: 2025-03-05T22:29:36+05:30
[INFO] -----
E:\Maven-project1\flipkart-app>
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app> mvn package
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app>mvn package
[INFO] Scanning for projects...
[INFO]
[INFO] -----< com.mvit:flipkart-app >-----
[INFO] Building flipkart-app 1.0-SNAPSHOT
[INFO] from pom.xml
[INFO] -----[ jar ]-----
[INFO]
[INFO] --- resources:3.0.2:resources (default-resources) @ flipkart-app ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] skip non existing resourceDirectory E:\Maven-project1\flipkart-app\src\main\resources
[INFO]
[INFO] --- compiler:3.8.0:compile (default-compile) @ flipkart-app ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- resources:3.0.2:testResources (default-testResources) @ flipkart-app ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] skip non existing resourceDirectory E:\Maven-project1\flipkart-app\src\test\resources
[INFO]
[INFO] --- compiler:3.8.0:testCompile (default-testCompile) @ flipkart-app ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- surefire:2.22.1:test (default-test) @ flipkart-app ---
[INFO]
[INFO] -----
[INFO] T E S T S
[INFO] -----
[INFO] Running com.mvit.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.352 s - in com.mvit.AppTest
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO] --- jar:3.0.2:jar (default-jar) @ flipkart-app ---
[INFO] Building jar: E:\Maven-project1\flipkart-app\target\flipkart-app-1.0-SNAPSHOT.jar
[INFO]
[INFO] BUILD SUCCESS
[INFO]
[INFO] -----
[INFO] Total time:  8.391 s
[INFO] Finished at: 2025-03-05T22:39:37+05:30
[INFO]
[INFO] -----
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app> java -cp target/flipkart-app-1.0-SNAPSHOT.jar com.mvit.App
```

C:\Windows\System32\cmd.exe

```
E:\Maven-project1\flipkart-app> java -cp target/flipkart-app-1.0-SNAPSHOT.jar com.mvit.App
20+30 = 50
Application executed successfully!

E:\Maven-project1\flipkart-app> _
```


This will create a basic web application

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

E:\maven-webapp>mvn archetype:generate -DgroupId=com.mvit.iot -DartifactId=StudentRegistrationApp -DarchetypeArtifactId=maven-archetype-webapp -DinteractiveMode=false
[INFO] Scanning for projects...
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-metadata.xml
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/mojo/maven-metadata.xml
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-metadata.xml (14 kB at 5.6 kB/s)
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/mojo/maven-metadata.xml (21 kB at 8.1 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-archetype-plugin/maven-metadata.xml
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-archetype-plugin/maven-metadata.xml (1.0 kB at 11 kB/s)
[INFO]
[INFO] -----< org.apache.maven:standalone-pom >-----
[INFO] Building Maven Stub Project (No POM) 1
[INFO] -----[ pom ]-----
[INFO]
[INFO] >>> archetype:3.3.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO] <<< archetype:3.3.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO] --- archetype:3.3.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
Downloading from central: https://repo.maven.apache.org/maven2/archetype-catalog.xml
Downloaded from central: https://repo.maven.apache.org/maven2/archetype-catalog.xml (19 kB at 2.2 MB/s)
[INFO]
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-webapp:1.0
[INFO]
[INFO] Parameter: basedir, Value: E:\maven-webapp
[INFO] Parameter: package, Value: com.mvit.iot
[INFO] Parameter: groupId, Value: com.mvit.iot
[INFO] Parameter: artifactId, Value: StudentRegistrationApp
[INFO] Parameter: packaging, Value: com.mvit.iot
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: E:\maven-webapp\StudentRegistrationApp
[INFO]
[INFO] BUILD SUCCESS
[INFO]
[INFO] -----
[INFO] Total time: 28.538 s
[INFO] Finished at: 2025-03-07T09:39:16+05:30
[INFO]
E:\maven-webapp>
```

```
File Edit Selection View Go ... Search
index.jsp X
E:\maven-webapp>StudentRegistrationApp>src>main>webapp>index.jsp>...
1 <html>
2 <head>
3   <title>Student Registration</title>
4 </head>
5 <body>
6   <h2>Student Registration Form</h2>
7   <form action="register" method="post">
8     Name: <input type="text" name="name" required><br><br>
9     Email: <input type="email" name="email" required><br><br>
10    Course: <input type="text" name="course" required><br><br>
11    Age: <input type="number" name="age" required><br><br>
12    <input type="submit" value="Register">
13  </form>
14 </body>
15 </html>
```

C:\Windows\System32\cmd.exe

Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

E:\maven-webapp\StudentRegistrationApp> mvn compile
[INFO] Scanning for projects...

C:\Windows\System32\cmd.exe

Microsoft Windows [Version 10.0.19045.5011]

(c) Microsoft Corporation. All rights reserved.

E:\maven-webapp\StudentRegistrationApp> mvn compile

[INFO] Scanning for projects...

[INFO]

[INFO] -----< com.mvit.iot:StudentRegistrationApp >-----

[INFO] Building StudentRegistrationApp Maven Webapp 1.0-SNAPSHOT

[INFO] from pom.xml

[INFO] -----[war]-----

[INFO]

[INFO] --- resources:3.3.1:resources (default-resources) @ StudentRegistrationApp ---

[WARNING] Using platform encoding (Cp1252 actually) to copy filtered resources, i.e. build is platform dependent!

[INFO] Copying 0 resource from src/main/resources to target/classes

[INFO]

[INFO] --- compiler:3.13.0:compile (default-compile) @ StudentRegistrationApp ---

[INFO] No sources to compile

[INFO]

[INFO] -----

[INFO] BUILD SUCCESS

[INFO] -----

[INFO] Total time: 5.400 s

[INFO] Finished at: 2025-03-09T11:52:35+05:30

[INFO] -----

E:\maven-webapp\StudentRegistrationApp>

E:\maven-webapp\StudentRegistrationApp> mvn package

```

C:\Windows\System32\cmd.exe
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-compress/1.23.0/commons-compress-1.23.0.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-compress/1.23.0/commons-compress-1.23.0.pom (22 kB at 69 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-parent/56/commons-parent-56.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-parent/56/commons-parent-56.pom (82 kB at 208 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/junit/junit-bom/5.9.1/junit-bom-5.9.1.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/junit/junit-bom/5.9.1/junit-bom-5.9.1.pom (5.6 kB at 131 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/com/github/luben/zstd-jni/1.5.5-2/zstd-jni-1.5.5-2.pom
Downloaded from central: https://repo.maven.apache.org/maven2/com/github/luben/zstd-jni/1.5.5-2/zstd-jni-1.5.5-2.pom (1.8 kB at 38 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-component-annotations/1.5.4/plexus-component-annotations-1.5.4.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-component-annotations/1.5.4/plexus-component-annotations-1.5.4.pom (835 B at 3.4 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-containers/1.5.4/plexus-containers-1.5.4.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-containers/1.5.4/plexus-containers-1.5.4.pom (4.2 kB at 77 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus/2.0.5/plexus-2.0.5.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus/2.0.5/plexus-2.0.5.pom (17 kB at 114 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/maven-archiver/3.6.0/maven-archiver-3.6.0.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/maven-archiver/3.6.0/maven-archiver-3.6.0.jar (20 kB at 202 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-io/3.4.0/plexus-io-3.4.0.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-io/3.4.0/plexus-io-3.4.0.jar (221 kB at 96 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-io/2.13.0/commons-io-2.13.0.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-io/2.13.0/commons-io-2.13.0.jar (241 kB at 118 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-archiver/4.7.1/plexus-archiver-4.7.1.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-archiver/4.7.1/plexus-archiver-4.7.1.jar (221 kB at 96 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-compress/1.23.0/commons-compress-1.23.0.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/commons/commons-compress/1.23.0/commons-compress-1.23.0.jar (1.1 MB at 208 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/com/github/luben/zstd-jni/1.5.5-2/zstd-jni-1.5.5-2.jar
Downloaded from central: https://repo.maven.apache.org/maven2/com/github/luben/zstd-jni/1.5.5-2/zstd-jni-1.5.5-2.jar (5.9 MB at 158 kB/s)
[INFO] Packaging webapp
[INFO] Assembling webapp [StudentRegistrationApp] in [E:\maven-webapp\StudentRegistrationApp\target\StudentRegistrationApp]
[INFO] Processing war project
[INFO] Copying webapp resources [E:\maven-webapp\StudentRegistrationApp\src\main\webapp]
[INFO] Building war: E:\maven-webapp\StudentRegistrationApp\target\StudentRegistrationApp.war
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 41.869 s
[INFO] Finished at: 2025-03-09T11:57:31+05:30
[INFO] -----
E:\maven-webapp\StudentRegistrationApp>

```

E:\maven-webapp\StudentRegistrationApp> mvn tomcat7:run

```

C:\Windows\System32\cmd.exe - mvn tomcat7:run
E:\maven-webapp\StudentRegistrationApp> mvn tomcat7:run
[INFO] Scanning for projects...
[INFO]
-----< com.mvrit.let:StudentRegistrationApp >-----
[INFO] Building StudentRegistrationApp Maven Webapp 1.0-SNAPSHOT
[INFO] from pom.xml
[INFO] -----[ war ]-----
[INFO]
[INFO] >>> tomcat7:2.2:run (default-cli) > process-classes @ StudentRegistrationApp >>>
[INFO]
[INFO] <<< resources:3.3.1:resources (default-resources) @ StudentRegistrationApp <<<
[WARNING] Using platform encoding (Cp1252 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] Copying 0 resource from src\main\resources to target\classes
[INFO]
[INFO] <<< compiler:3.13.0:compile (default-compile) @ StudentRegistrationApp <<<
[INFO] No sources to compile
[INFO]
[INFO] <<< tomcat7:2.2:run (default-cli) < process-classes @ StudentRegistrationApp <<<
[INFO]
[INFO] <<< tomcat7:2.2:run (default-cli) @ StudentRegistrationApp <<<
[INFO] Running war on http://localhost:8080/
[INFO] Using existing Tomcat server configuration at E:\maven-webapp\StudentRegistrationApp\target\tomcat
[INFO] create webapp with contextPath:
Mar 09, 2025 12:20:28 PM org.apache.coyote.AbstractProtocol init
INFO: Initializing ProtocolHandler ["http-bio-8080"]
Mar 09, 2025 12:20:28 PM org.apache.catalina.core.StandardService startInternal
INFO: Starting service Tomcat
Mar 09, 2025 12:20:28 PM org.apache.catalina.core.StandardEngine startInternal
INFO: Starting Servlet Engine: Apache Tomcat/7.0.47
Mar 09, 2025 12:20:33 PM org.apache.catalina.util.SessionIdGenerator createSecureRandom
INFO: Creation of SecureRandom instance for session ID generation using [SHA1PRNG] took [162] milliseconds.
Mar 09, 2025 12:20:33 PM org.apache.coyote.AbstractProtocol start
INFO: Starting ProtocolHandler ["http-bio-8080"]

```

Student Registration

localhost:8080/index.jsp

Student Registration Form

Name:

Email:

Course:

Age:

```
E:\Gradle-project1> gradle init
```

```
plugins {  
    id 'java'  
}  
  
repositories {  
    mavenCentral()  
}  
  
dependencies {  
    implementation 'org.springframework.boot:spring-boot-starter-web:2.5.4'  
}
```

```
plugins {  
    id java  
}  
  
repositories {  
    mavenCentral()  
}  
  
dependencies {  
    implementation ("org.springframework.boot:spring-boot-starter-web:2.5.4")  
}
```

```
> gradle build
```

- **Example Groovy DSL:**

```
task printMessage {  
    doLast {  
        println 'This is a custom task automation'  
    }  
}
```

- **Example Kotlin DSL:**

```
tasks.register("printMessage") {  
    doLast {  
        println("This is a custom task automation")  
    }  
}
```

```
E:\Gradle-project1> gradle init
```



```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

E:\Gradle-project1> gradle init

Select type of build to generate:
 1: Application
 2: Library
 3: Gradle plugin
 4: Basic (build structure only)
Enter selection (default: Application) [1..4] 1

Select implementation language:
 1: Java
 2: Kotlin
 3: Groovy
 4: Scala
 5: C++
 6: Swift
Enter selection (default: Java) [1..6] 1

Enter target Java version (min: 7, default: 21): 17

Project name (default: Gradle-project1): Groovy1

Select application structure:
 1: Single application project
 2: Application and library project
Enter selection (default: Single application project) [1..2] 1

Select build script DSL:
 1: Kotlin
 2: Groovy
Enter selection (default: Kotlin) [1..2] 2


Select test framework:
 1: JUnit 4
 2: TestNG
 3: Spock
 4: JUnit Jupiter
Enter selection (default: JUnit Jupiter) [1..4] 1

Generate build using new APIs and behavior (some features may change in the next minor release)? (default: no) [yes, no] no

> Task :init
Learn more about Gradle by exploring our Samples at https://docs.gradle.org/8.12.1/samples/sample\_building\_java\_applications.html

BUILD SUCCESSFUL in 2h 3m 7s
1 actionable task: 1 executed
E:\Gradle-project1>
```

Step 2: build.gradle (Groovy DSL)

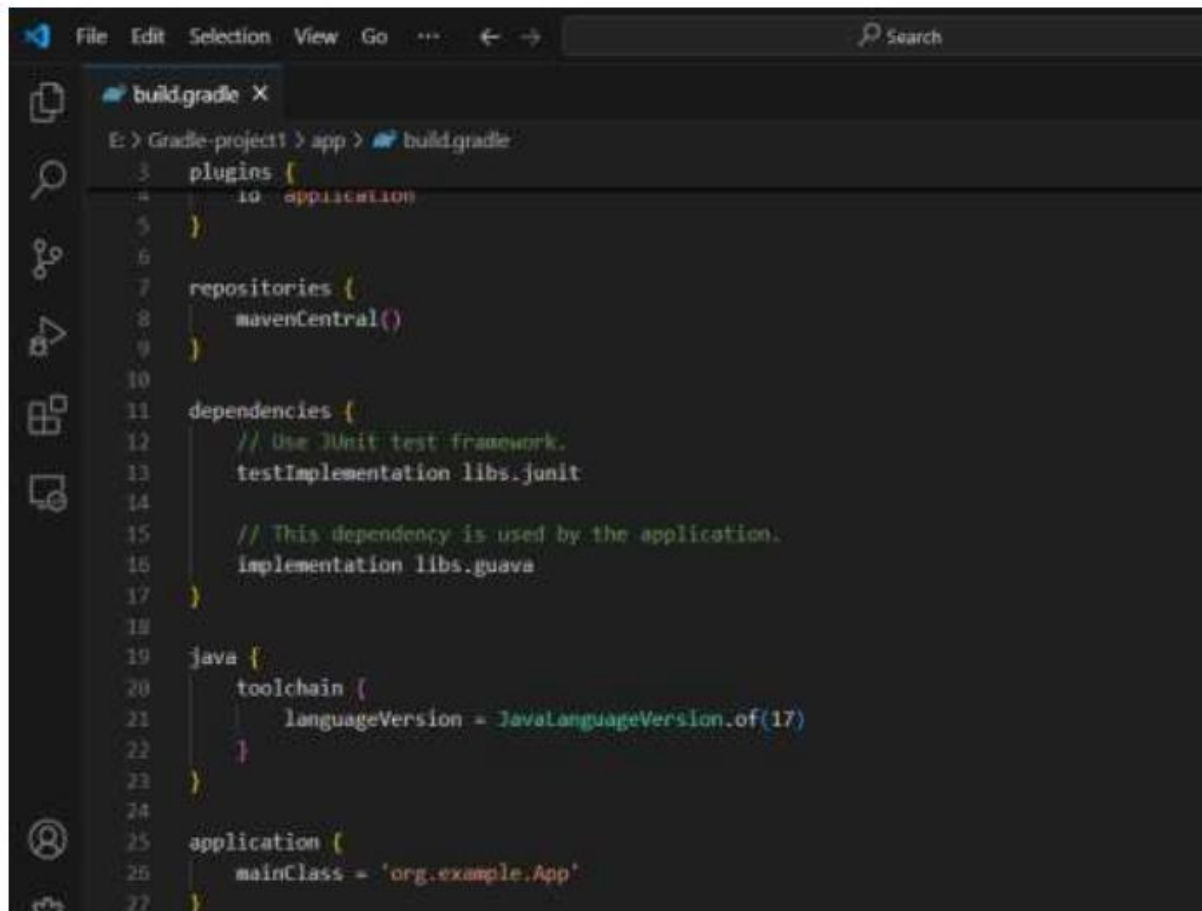


The screenshot shows an IDE window titled 'build.gradle' with the following Groovy DSL code:

```
3  plugins {
4      id 'application'
5  }
6
7  repositories {
8      mavenCentral()
9  }
10
11 dependencies {
12     // Use JUnit test framework.
13     testImplementation libs.junit
14
15     // This dependency is used by the application.
16     implementation libs.guava
17 }
18
19 java {
20     toolchain {
21         languageVersion = JavaLanguageVersion.of(17)
22     }
23 }
24
25 application {
26     mainClass = 'org.example.App'
27 }
```

Step 3: Manually navigate the folder path like `src/main/java/org/example/`


Write a simple program

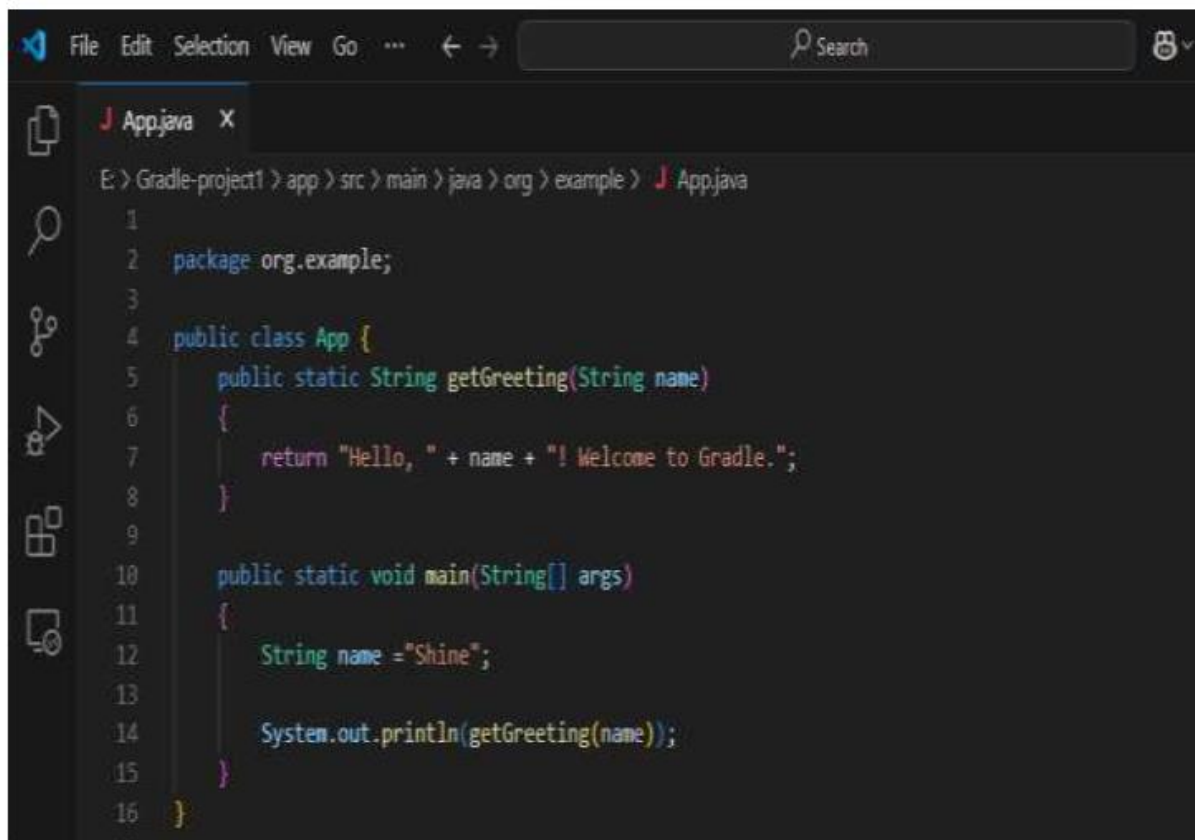A screenshot of an IDE window showing a Java file named App.java. The file path is E:\Gradle-project1\app\src\main\java\org\example\App.java. The code defines a package org.example, a public class App with a static method getGreeting that returns a formatted string, and a static main method that calls getGreeting with the name "Shine".

```
1 package org.example;
2
3
4 public class App {
5     public static String getGreeting(String name)
6     {
7         return "Hello, " + name + "! Welcome to Gradle.";
8     }
9
10    public static void main(String[] args)
11    {
12        String name = "Shine";
13
14        System.out.println(getGreeting(name));
15    }
16 }
```

Step 4: AppTest.java (JUnitTest) (update the below code)

- Manually navigate the folder path like `src/test/java/org/example/`
- After then open that file and copy the below code and paste it, save it.

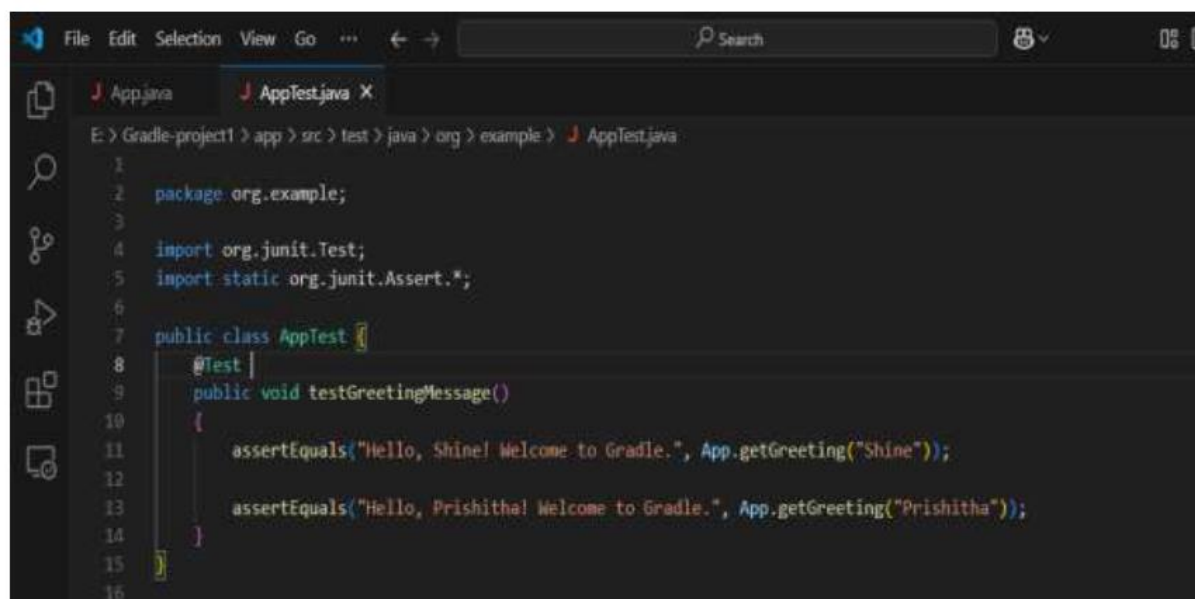A screenshot of an IDE window showing a Java file named AppTest.java. The file path is E:\Gradle-project1\app\src\test\java\org\example\AppTest.java. The code imports org.junit.Test and org.junit.Assert.*, defines a public class AppTest, and contains a @Test annotated method testGreetingMessage that uses assertEquals to verify the output of the getGreeting method for "Shine" and "Prishitha".

```
1 package org.example;
2
3
4 import org.junit.Test;
5 import static org.junit.Assert.*;
6
7 public class AppTest {
8     @Test
9     public void testGreetingMessage()
10    {
11        assertEquals("Hello, Shine! Welcome to Gradle.", App.getGreeting("Shine"));
12
13        assertEquals("Hello, Prishitha! Welcome to Gradle.", App.getGreeting("Prishitha"));
14    }
15 }
16 }
```

Step 5 : Run Gradle Commands

- To **build** the project:

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1>gradle build
```

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1>gradle build
Reusing configuration cache.

BUILD SUCCESSFUL in 16s
7 actionable tasks: 7 executed
Configuration cache entry reused.
E:\Gradle-project1>
```

- To run the project:

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1> gradle run
```

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1> gradle run
Reusing configuration cache.
```

```
> Task :app:run
Hello, Shine! Welcome to Gradle.
```

```
BUILD SUCCESSFUL in 6s
2 actionable tasks: 2 executed
Configuration cache entry reused.
E:\Gradle-project1>
```

- To test the project

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1> gradle test
```

C:\Windows\System32\cmd.exe

```
E:\Gradle-project1> gradle test
Calculating task graph as no cached configuration is available for tasks: test

BUILD SUCCESSFUL in 13s
3 actionable tasks: 2 executed, 1 up-to-date
Configuration cache entry stored.
E:\Gradle-project1> █
```

```
E:\Maven to Gradle>mvn archetype:generate -DgroupId=com.example -DartifactId=maven-project -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false
```



```

pom - Notepad
File Edit Format View Help
<?xml version="1.0" encoding="UTF-8" ?>
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>com.example</groupId>
  <artifactId>maven-project</artifactId>
  <packaging>jar</packaging>
  <version>1.0-SNAPSHOT</version>
  <name>maven-project</name>
  <url>http://maven.apache.org</url>
  <dependencies>
    <dependency>
      <groupId>junit</groupId>
      <artifactId>junit</artifactId>
      <version>3.8.1</version>
      <scope>test</scope>
    </dependency>
  </dependencies>

  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <version>3.8.1</version>
        <configuration>
          <source>1.8</source>
          <target>1.8</target>
        </configuration>
      </plugin>
    </plugins>
  </build>
</project>

```

Step 3: Open Java Code (App.java) File

- Open a file **App.java** inside the **src/main/java/com/example/** directory.
- After opening the **App.java** write a simple program

```

File Edit Selection View Go ... Search
J App.java x
E:\Maven to Gradle>maven-project>src>main>java>com>example> J App.java
1 package com.example;
2 public class App
3 {
4     public static void main( String[] args )
5     {
6         System.out.println( "Hello Maven!" );
7         System.out.println("This is the simple example");
8     }
9 }
10

```

mvn compile

```

C:\Windows\System32\cmd.exe
E:\Maven to Gradle> cd maven-project
E:\Maven to Gradle\maven-project> mvn compile
[INFO] Scanning for projects...
[INFO]
[INFO] -----< com.example:maven-project >-----
[INFO] Building maven-project 1.0-SNAPSHOT
[INFO] from pom.xml
[INFO]
[INFO] -----[ jar ]-----
[INFO]
[INFO] Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.8.1/maven-compiler-plugin-3.8.1.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.8.1/maven-compiler-plugin-3.8.1.pom (12 kB at 1.2 kB/s)
[INFO] Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.8.1/maven-compiler-plugin-3.8.1.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.8.1/maven-compiler-plugin-3.8.1.jar (62 kB at 441 kB/s)
[INFO]
[INFO] --- resources:3.3.1:resources (default-resources) @ maven-project ---
[WARNING] Using platform encoding (Cp1252 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory E:\Maven to Gradle\maven-project\src\main\resources
[INFO]
[INFO] --- compiler:3.8.1:compile (default-compile) @ maven-project ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding Cp1252, i.e. build is platform dependent!
[INFO] Compiling 1 source file to E:\Maven to Gradle\maven-project\target\classes
[INFO]
[INFO] BUILD SUCCESS
[INFO]
[INFO] Total time: 26.862 s
[INFO] Finished at: 2025-03-09T18:51:09+05:30
[INFO]
E:\Maven to Gradle\maven-project>

```

- package the project

```

C:\Windows\System32\cmd.exe
[INFO]
[INFO] Total time: 26.862 s
[INFO] Finished at: 2025-03-09T18:51:09+05:30
[INFO]
E:\Maven to Gradle\maven-project> mvn package
[INFO] Scanning for projects...
[INFO]
[INFO] -----< com.example:maven-project >-----
[INFO] Building maven-project 1.0-SNAPSHOT
[INFO] from pom.xml
[INFO]
[INFO] -----[ jar ]-----
[INFO]
[INFO] --- resources:3.3.1:resources (default-resources) @ maven-project ---
[WARNING] Using platform encoding (Cp1252 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory E:\Maven to Gradle\maven-project\src\main\resources
[INFO]
[INFO] --- compiler:3.8.1:compile (default-compile) @ maven-project ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- resources:3.3.1:testResources (default-testResources) @ maven-project ---
[WARNING] Using platform encoding (Cp1252 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory E:\Maven to Gradle\maven-project\src\test\resources
[INFO]
[INFO] --- compiler:3.8.1:testCompile (default-testCompile) @ maven-project ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding Cp1252, i.e. build is platform dependent!
[INFO] Compiling 1 source file to E:\Maven to Gradle\maven-project\target\test-classes
[INFO]
[INFO] --- surefire:3.2.5:test (default-test) @ maven-project ---
[INFO] Using auto detected provider org.apache.maven.surefire.junit.JUnit3Provider
[INFO]
[INFO] T E S T S
[INFO]
[INFO] Running com.example.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.120 s -- in com.example.AppTest
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0

```

- Run the program with below command:

```
C:\Windows\System32\cmd.exe
[INFO]
[INFO] --- surefire:3.2.5:test (default-test) @ maven-project ---
[INFO] Using auto detected provider org.apache.maven.surefire.junit3.JUnit3Provider
[INFO]
[INFO] -----
[INFO] T E S T S
[INFO] -----
[INFO] Running com.example.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.120 s -- in com.example.AppTest
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO] --- jar:3.4.1:jar (default-jar) @ maven-project ---
[INFO] Building jar: E:\Maven to Gradle\maven-project\target\maven-project-1.0-SNAPSHOT.jar
[INFO]
[INFO] -----
[INFO] BUILD SUCCESS
[INFO]
[INFO] -----
[INFO] Total time: 18.302 s
[INFO] Finished at: 2025-03-09T19:02:13+05:30
[INFO] -----
E:\Maven to Gradle\maven-project> java -cp target/maven-project-1.0-SNAPSHOT.jar com.example.App
Hello Maven!
This is the simple example
E:\Maven to Gradle\maven-project> .
```

Step 5: Migrate the Maven Project to Gradle

1. Initialize Gradle

```
E:\Maven to Gradle\maven-project> gradle init
```

C:\Windows\System32\cmd.exe

```
E:\Maven to Gradle\maven-project> gradle init

Found a Maven build. Generate a Gradle build from this? (default: yes) [yes, no]    yes


Select build script DSL:
  1: Kotlin
  2: Groovy
Enter selection (default: Kotlin) [1..2] 2

Generate build using new APIs and behavior (some features may change in the next minor r

> Task :init
Maven to Gradle conversion is an incubating feature.
For more information, please refer to https://docs.gradle.org/8.12.1/userguide/migrating

BUILD SUCCESSFUL in 4m 55s
1 actionable task: 1 executed
E:\Maven to Gradle\maven-project>
```

2. Navigate the project folder and open `build.gradle` file then the do the necessary changes and save it.

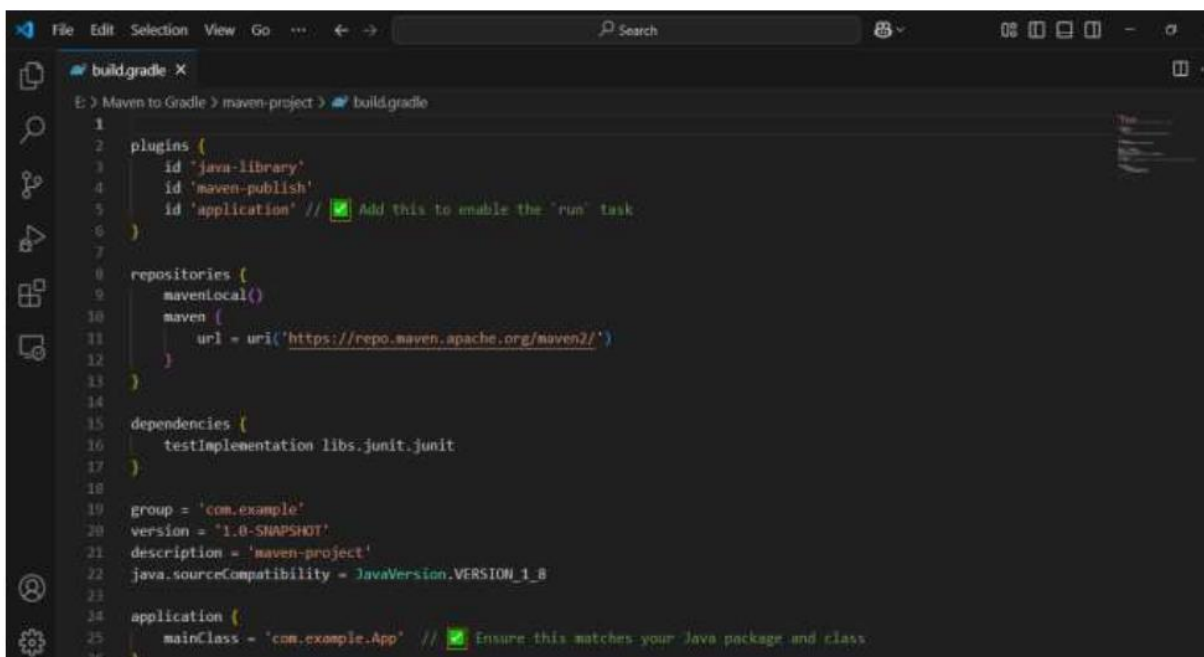

```
>gradle build
```

C:\Windows\System32\cmd.exe

```
E:\Maven to Gradle\maven-project>gradle build
Calculating task graph as configuration cache cannot be reused because file 'build.gradle'

BUILD SUCCESSFUL in 19s
7 actionable tasks: 3 executed, 4 up-to-date
Configuration cache entry stored.
E:\Maven to Gradle\maven-project>
```

C:\Windows\System32\cmd.exe

```
E:\Maven to Gradle\maven-project> gradle run
Calculating task graph as configuration cache cannot be reused because file 'build.gradle'
> Task :run
Hello Maven!
This is the simple example

BUILD SUCCESSFUL in 5s
2 actionable tasks: 1 executed, 1 up-to-date
Configuration cache entry stored.
E:\Maven to Gradle\maven-project>
```

- **Maven Output:**

```
E:\Maven to Gradle\maven-project> java -cp target/maven-project-1.0-SNAPSHOT.jar com.examp
Hello Maven!
This is the simple example

E:\Maven to Gradle\maven-project>
```

- **Gradle Output:**

C:\Windows\System32\cmd.exe

```
E:\Maven to Gradle\maven-project> gradle run
Calculating task graph as configuration cache cannot be reused because file 'build.gradle' has changed.
> Task :run
Hello Maven!
This is the simple example

BUILD SUCCESSFUL in 5s
2 actionable tasks: 1 executed, 1 up-to-date
Configuration cache entry stored.
E:\Maven to Gradle\maven-project>
```


Getting Started

Unlock Jenkins


To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

```
C:\ProgramData\Jenkins\.jenkins\secrets\initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

Continue

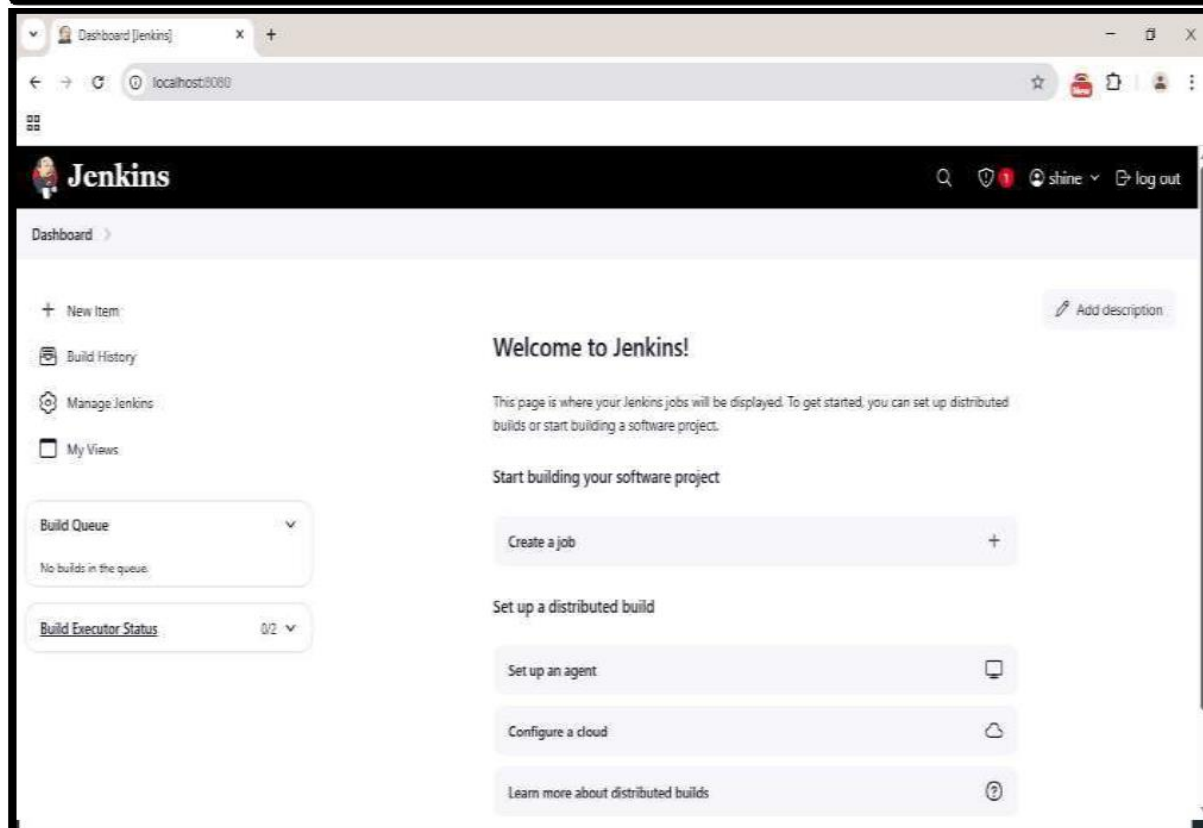

The screenshot shows the Jenkins Dashboard in a web browser. The browser's address bar displays 'localhost:8080'. The Jenkins logo is in the top left, and the top right shows a search icon, a shield with a red exclamation mark, a user profile 'shine', and a 'log out' link. The main content area is titled 'Welcome to Jenkins!' and includes a description: 'This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.' Below this, there are two main sections: 'Start building your software project' with a 'Create a job' button, and 'Set up a distributed build' with buttons for 'Set up an agent', 'Configure a cloud', and 'Learn more about distributed builds'. On the left sidebar, there are links for 'New Item', 'Build History', 'Manage Jenkins', and 'My Views'. At the bottom of the sidebar, there are two status boxes: 'Build Queue' (showing 'No builds in the queue') and 'Build Executor Status' (showing '0/2').

Dashboard [Jenkins] x +

localhost:8080

Jenkins

Dashboard >

+ New Item

Build History

Manage Jenkins

My Views

Build Queue

No builds in the queue.

Build Executor Status 0/2

Welcome to Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job +

Set up a distributed build

Set up an agent

Configure a cloud

Learn more about distributed builds

Add description

MINGW64: /e:/maven-lab1/amazon-app

```
D:\E:\e:/maven-lab1/amazon-app
$ git init
Initialized empty Git repository in E:/maven-lab1/amazon-app/.git/

D:\E:\e:/maven-lab1/amazon-app (master)
$ git add .
warning: in the working copy of 'target/maven-status/maven-compiler-plugin/compile/default-compile/createdFiles.lst', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'target/maven-status/maven-compiler-plugin/compile/default-compile/inputFiles.lst', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/createdFiles.lst', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/inputFiles.lst', LF will be replaced by CRLF the next time Git touches it

D:\E:\e:/maven-lab1/amazon-app (master)
$ git commit -m "first commit"
[master (root-commit) 16c0569] first commit
13 files changed, 191 insertions(+)
create mode 100644 pom.xml
create mode 100644 src/main/java/com/mvit/App.java
create mode 100644 src/test/java/com/mvit/AppTest.java
create mode 100644 target/amazon-app-1.0-SNAPSHOT.jar
create mode 100644 target/classes/com/mvit/App.class
create mode 100644 target/maven-archiver/pom.properties
create mode 100644 target/maven-status/maven-compiler-plugin/compile/default-compile/createdFiles.lst
create mode 100644 target/maven-status/maven-compiler-plugin/compile/default-compile/inputFiles.lst
create mode 100644 target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/createdFiles.lst
create mode 100644 target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/inputFiles.lst
create mode 100644 target/surefire-reports/TEST-com.mvit.AppTest.xml
create mode 100644 target/surefire-reports/com.mvit.AppTest.txt
create mode 100644 target/test-classes/com/mvit/AppTest.class

D:\E:\e:/maven-lab1/amazon-app (master)
$ git branch -M main

D:\E:\e:/maven-lab1/amazon-app (main)
$ git remote add origin https://github.com/gayithrishn/Mavenproject-Jenkins-CI-Pipeline.git

D:\E:\e:/maven-lab1/amazon-app (main)
$ git push -u origin main
Enumerating objects: 39, done.
```

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Mavenproject-Jenkins-CI-Pipeline Public



Unwatch 1

main

1 Branch 0 Tags

Go to file

t

Add file

<> Code

gayithrishn first commit

16c0569 · 3 minutes ago 1 Commit

src	first commit	3 minutes ago
target	first commit	3 minutes ago
pom.xml	first commit	3 minutes ago

```
[INFO] Building jar: C:\ProgramData\Jenkins\.jenkins\workspace\CI-Pipeline -Maven-lab1\target\amazon-app-1.0-SNAPSHOT.jar
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 34.007 s
[INFO] Finished at: 2025-05-11T14:01:50+05:30
[INFO] -----
[CI-Pipeline -Maven-lab1] $ cmd /c call C:\Windows\TEMP\jenkins16150511932822624243.bat
```

```
C:\ProgramData\Jenkins\.jenkins\workspace\CI-Pipeline -Maven-lab1>java -cp target\amazon-app-1.0-SNAPSHOT.jar com.mvit.App
Hello welcome to Devops lab
program executed successfully

C:\ProgramData\Jenkins\.jenkins\workspace\CI-Pipeline -Maven-lab1>exit 0
Finished: SUCCESS
```

Ansible Inventory File with Localhost Entry

```
prishitha@DELL-PC:~/devops-lab$ vi inventory.ini
[local]
localhost ansible_connection=local
```

Ansible Connectivity Check Using Ping Module

```
prishitha@DELL-PC:~/devops-lab$ vi inventory.ini
prishitha@DELL-PC:~/devops-lab$ ansible all -i inventory.ini -m ping
localhost | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": false,
  "ping": "pong"
}
prishitha@DELL-PC:~/devops-lab$
```

Playbook File Created to Install htop (install_htop.yml)

```
prishitha@DELL-PC:~/devops-lab$ vi install_htop.yml
```

```
---
- name: Install htop system monitor tool
  hosts: local
  become: true
  tasks:
    - name: install htop package
      ansible.builtin.package:
        name: htop
        state: present
```

Playbook Execution Output for Installing htop

```
prishitha@DELL-PC:~/devops-lab$ vi install_htop.yml
prishitha@DELL-PC:~/devops-lab$ ansible-playbook -i inventory.ini install_htop.yml

PLAY [Install htop system monitor tool] *****

TASK [Gathering Facts] *****
ok: [localhost]

TASK [install htop package] *****
ok: [localhost]

PLAY RECAP *****
localhost : ok=2  changed=0  unreachable=0  failed=0  skipped=0
```

 Mavenproject-Jenkins-CI-Pipeline Public

 Pin  Unwatch 1

 main  1 Branch  0 Tags

 Go to file

 t

Add file

 Code

 gayithrishn first commit

15c0569 · 3 minutes ago  1 Commit

 src	first commit	3 minutes ago
 target	first commit	3 minutes ago
 pom.xml	first commit	3 minutes ago

Ansible Playbook creation and Execution

```
prishitha@DELL-PC:~/Ansible-lab$ vi deploy.yml
```

```
- name: deploy JAR from jenkins
  hosts: local
  become: true

tasks:
  - name: copy .jar from jenkins workspace
    copy:
      src: /mnt/c/ProgramData/Jenkins/.jenkins/workspace/CI-Pipeline -Maven-lab1/target/amazon-app-1.0-SNAPSHOT.jar
      dest: /home/prishitha/Ansible-lab/amazon-app-1.0-SNAPSHOT.jar
      mode: 0755

  - name: Run the Application
    shell: nohup java -jar /home/prishitha/Ansible-lab/amazon-app-1.0-SNAPSHOT.jar > app.log 2>&1 &
```

```
prishitha@DELL-PC: ~/Ansible-lab
prishitha@DELL-PC:~/Ansible-lab$ vi deploy.yml
prishitha@DELL-PC:~/Ansible-lab$ ansible-playbook -i inventory.ini deploy.yml

PLAY [deploy JAR from jenkins] *****

TASK [Gathering Facts] *****
ok: [localhost]

TASK [copy .jar from jenkins workspace] *****
changed: [localhost]

TASK [Run the Application] *****
changed: [localhost]

PLAY RECAP *****
localhost                : ok=3  changed=2  unreachable=0  failed=0  skipped=0  rescued=0  ignored=0

prishitha@DELL-PC:~/Ansible-lab$
```


Application Running Confirmation (Log Output)

```
prishitha@DELL-PC:~/Ansible-lab$ cat app.log
Hello welcome to Devops lab
program executed successfully
prishitha@DELL-PC:~/Ansible-lab$
```

Manifest Attribute Error During JAR Execution

```
prishitha@DELL-PC:~/Ansible-lab$ cat app.log
no main manifest attribute, in /home/prishitha/Ansible-lab/amazon-app-1.0-SNAPSHOT.jar
prishitha@DELL-PC:~/Ansible-lab$
```

The screenshot shows the Azure DevOps web interface for a project named 'Devops-lab'. The left sidebar contains navigation links: Overview, Summary, Dashboards, Wiki, Boards, Repos, Pipelines, and Test Plans. The main content area is titled 'About this project' and includes a placeholder for a project description with a '+ Add Project Description' button. To the right, there is a 'Project stats' section showing 'Pipelines' with a 0% completion rate and 'Builds succeeded'. Below this, a 'Members' section shows 1 member. The top of the interface includes the Azure DevOps logo, the project name, a search bar, and buttons for 'Private' and 'Invite'.

Azure DevOps devops-lab-project / Devops-lab / Overview / Summary

Search

Devops-lab

Private Invite

About this project

Help others to get on board!

Describe your project and make it easier for other people to understand it.

+ Add Project Description



Project stats

Period: Last 7 day

Pipelines

0%

Builds succeeded

Members

1

Azure DevOps DEVOPS-LAB-NEW-1 / LAB-1 / Pipelines / gaythirah/maven-jenkins-pipeline / 20250514.1

Search

LAB-1

Jobs in run #20250514.1

gaythirah/maven-jenkins-pipeline

Jobs		
Job		1m 2s
Initialize job	10s	
Checkout gaythirah/...	34s	
Run a one-line script	11s	
Run a multi-line script	4s	
Post-job: Checkout gayl...	1s	
Finalize Job	<1s	

Job

Pool: LocalPool
Queued: Just now [maven_parallel_jobs]
Agent: azure-agent1
Started: Just now
Duration: 1m 2s

The agent request is already running or has already completed.

Job preparation parameters

Job live console data:

```
Starting: Job
43 Async Command Start: WindowsPreInstalledGitTelemetry
44 Async Command End: WindowsPreInstalledGitTelemetry
45 Async Command Start: WindowsPreInstalledGitTelemetry
46 Async Command End: WindowsPreInstalledGitTelemetry
47 Async Command Start: WindowsPreInstalledGitTelemetry
48 Async Command End: WindowsPreInstalledGitTelemetry
49 Async Command Start: WindowsPreInstalledGitTelemetry
50 Async Command End: WindowsPreInstalledGitTelemetry
51 Async Command Start: WindowsPreInstalledGitTelemetry
52 Async Command End: WindowsPreInstalledGitTelemetry
53 Finishing: Job
```

Azure DevOps

vtu-devops-lab / devops-lab10 / Pipelines / gayithrshn.PIPELINE--AZUR... / 20250513.7

Q Search

devops-lab10

+

Overview

Boards

Repos

Pipelines

Pipelines

Environments

Library

Test Plans

Artifacts

#20250513.7 • Update azure-pipelines.yml for Azure Pipelines

gayithrshn.PIPELINE--AZURE-DEVOPS

Run new

This run is being retained as one of 3 recent runs by pipeline.

View retention leases

Summary Tests Code Coverage

Summary

1 Run(s) Completed (1 Passed, 0 Failed)

1

Total tests

1 Passed

0 Failed

0 Others

100%

Pass percentage

384ms

Run duration

59ms

0

Tests not reported

Bug

Link

Test run

Column Options