

OPEN API MERCHANT DOCUMENT

v1.9



CREATED BY
Milan Gadoya

CREATED DATE
17th Oct 2025

TABLE OF CONTENTS

Integration Guidelines	4
1. Generate API and Secret Key Specification	4
2. Signature Generation	5
Step 1: Sort All Request Body Parameters Alphabetically by Parameter Name	5
Step 2: Join the Parameter-Value Pairs into a String	6
Step 3: Generate Base64-encoded HMAC Token	7
3. Payload Encryption Token Generation	7
Steps for Encryption and Decryption:	7
1. Convert the request body to a JSON string.	7
Example JSON String:	7
2. Authentication API	9
1. Request	9
2. Request Parameter	9
1. Success Response	9
2. Failed Response(Credential Mismatch)	10
3. Initiate Payment API	11
1. Request	11
2. Request Parameter	12
1. Success Response	12
4. Redirect URL API	14
1. Usage	14
2. Request	14
3. Query Parameter	14
5. Redirect URL API Guidelines	16
6. Transaction Check Status	17
1. Request	17
2. Request Parameter	18
1. Success Response	18
7. Generate Dynamic QR	19
1. Request	19
2. Request Parameter	20
2. Success Response	20
8. Generate Dynamic Payment Link	21
1. Request	21
2. Request Parameter	22
3. Success Response	22
9. Payment Methods	23
10. Transaction status values	23

Version Management

S.No.	Version	Date	Author	Reviewed By	Notes
1	1.0	28-NOV-2023	Milan Gadoya	Nikunj Gundaniya	Initial draft
2	1.1	29-DEC-2023	Milan Gadoya	Nikunj Gundaniya	API Changes
3	1.2	01-JAN-2024	Milan Gadoya	Nikunj Gundaniya	API Response Change
4	1.3	14-JUN-2024	Milan Gadoya	Nikunj Gundaniya	API Response Change
5	1.4	20-JUN-2024	Milan Gadoya	Nikunj Gundaniya	API Response Change
6	1.5	14-NOV-2024	Milan Gadoya	Nikunj Gundaniya	API Changes
7	1.6	07-DEC-2024	Milan Gadoya	Nikunj Gundaniya	Check status API response changes
8	1.7	16-SEP-2025	Milan Gadoya	Nikunj Gundaniya	Added metadata in callback and check status API response
9	1.8	17-OCT-2025	Milan Gadoya	Nikunj Gundaniya	Added API Generate Dynamic Qr and Generate Dynamic Payment Link
10	1.9	2-JUNE-2026	Milan Gadoya	Nikunj Gundaniya	Added fields in metadata


Integration Guidelines

1. Generate API and Secret Key Specification

To obtain the Secret Key and API Key, follow these steps:

1. **Log in** to the merchant panel with your credentials.
2. Navigate to the **developer options**.
3. **Copy** the Secret Key and API Key.
4. If the keys are not present, **click the generate button** and then copy the keys.
5. Check the base URL from the image below and utilize it accordingly.

Refer to the image below for the merchant developer options:

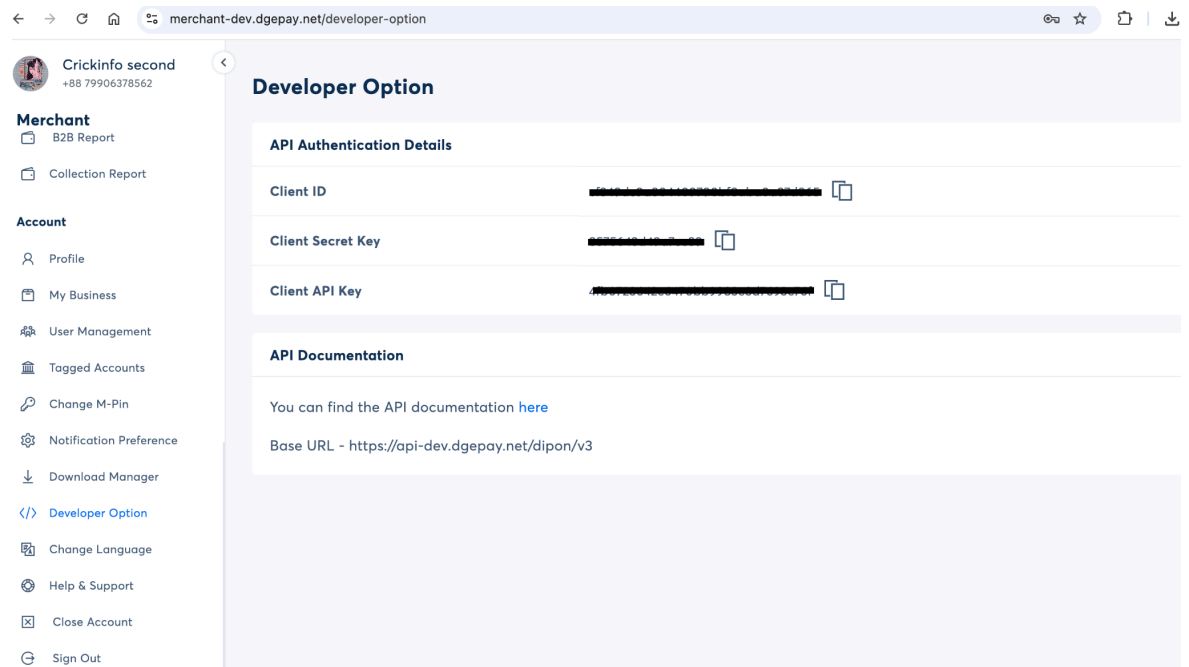

2. Signature Generation

The signature is a string constructed using the following steps:

Step 1: Sort All Request Body Parameters Alphabetically by Parameter Name

Request Body Before Sorting:

```
{
  "customer_token": null,
  "note": "Testing open api",
  "amount": 15,
  "payment_method": null,
  "unique_txn_id": "5419465db471443081017c3f07c1ddb",
  "payee_information": {
    "dial_code": "+88",
    "phone_number": "45124565633"
  },
  "redirect_url": "https://www.facebook.com/"
}
```

Example Code (Java) for Sorting:

```
ObjectMapper mapper = new ObjectMapper();
Map params = mapper.convertValue(RequestedBodyClass, Map.class);
String body = mapper.writeValueAsString(new TreeMap<>(params));
```

Request Body After Sorting:

```
{
  "amount": 15,
  "customer_token": null,
  "note": "Testing open api",
```

```

    "payee_information": {
        "dial_code": "+88",
        "phone_number": "45124565633"
    },
    "payment_method": null,
    "redirect_url": "https://www.facebook.com/",
    "unique_txn_id": "5419465db471443081017c3f07c1ddbe"
}

```

Step 2: Join the Parameter-Value Pairs into a String

- Extract each key-value pair from the sorted JSON object.
- For nested objects, extract key-value pairs recursively and format them as nested keys.
- Concatenate parameters and values into a single string without spaces or delimiters.

Example of Extraction and Concatenation:

- Parameters and values:
 - amount: 15
 - customer_token: null
 - note: Testing open api
 - payee_information.dial_code: +88
 - payee_information.phone_number: 45124565633
 - payment_method: null
 - redirect_url: <https://www.facebook.com/>
 - unique_txn_id: 5419465db471443081017c3f07c1ddbe

Formatted JSON String:

```

"amount15.0customer_tokennullnoteTestingopenapipayee_inform
ationdial_code+88phone_number45124565633payment_methodnul
lredirect_urlhttps://www.facebook.com/unique_txn_id5419465db47144
3081017c3f07c1ddbe"

```

Note: The final string should not contain {, }, ", :, spaces, or , .

Example Code (Java) for Formatting:

```

body = StringUtils.replaceEach(body, new String[] { "{", "}", "\"", ":", " ", " ", " " },
new String[] { "", "", "", "", "", "" });

```

Step 3: Generate Base64-encoded HMAC Token

Generate a Base64-encoded RFC 2104-compliant HMAC token using the API key.

Reference Algorithm: [HMAC SHA256 in Java](#)

Sample Keys for Reference:

```
String secretKey = "96f1f52c12c7tce4";
```

```
String apiKey = "dce9ac492a3f480bbc525522ba72d422";
```

Java Code for Signature Generation:

```
Mac sha256_HMAC = Mac.getInstance("HmacSHA256");

SecretKeySpec secretKeySpec = new
SecretKeySpec(apiKey.getBytes(), "HmacSHA256");

sha256_HMAC.init(secretKeySpec);

String hash =
Base64.getEncoder().encodeToString(sha256_HMAC.doFinal(body.ge
tBytes()));
```

Generated Signature:

```
"qDbOW1qTkGBsFrNnsppLzn93Lf8Y3eAvPViWld2ITik="
```

Use this signature in the initiate payment API header.

3. Payload Encryption Token Generation

Steps for Encryption and Decryption:

1. Convert the request body to a JSON string.

Example JSON String:

```
{"amount":15.0,"customer_token":null,"note":"Testing open
api","payee_information":{"dial_code":"+88","phone_number":"4512456
5633"},"payment_method":null,"redirect_url":"https://www.facebook.co
m/","unique_txn_id":"5419465db471443081017c3f07c1ddb"}"
```

2. Pass the JSON string into the encryptData method.

Java Code for Encryption:

```

private static final String ALGORITHM = "AES";

public static String encryptData(String data) throws Exception {
    byte[] key = Arrays.copyOf(secretKey.getBytes("UTF-8"), 16); //
    Ensure the key is 16 bytes

    SecretKeySpec secretKeySpec = new SecretKeySpec(key,
    ALGORITHM);

    Cipher cipher = Cipher.getInstance(ALGORITHM);

    cipher.init(Cipher.ENCRYPT_MODE, secretKeySpec);

    byte[] encryptedBytes = cipher.doFinal(data.getBytes("UTF-8"));

    return Base64.getEncoder().encodeToString(encryptedBytes);
}

```

Sample Encrypted Output:

```

2JsVGxvi4Lyw8MD/v9aXDeuij6gi3L7gooUXINEnFRQamtU6eiiMb41HNug
jZ14cejGbAOmG0vjXcd1gsAJkVwmHunLO9jAcHT4SmoNkWm1Y2xjVHB
7w5Zgh49GJSMDYtB6bCgSG+8q6CTzmH3NITA+AuZYTzS7S/7WwagNd
XagY6i5ZALiPHzGFfh498BOIZDEU11JeMiWEIREFk3/OmgkTwmruH179fr
CL6B6j0wbCRRb4cHyiF1Ubsrjv92oEFNbYHU39O38IIogORSv+C3grCzS
90j6sqjKYOCaNSd2yL9fEw1n167pcv2NidaLLKBvdMIGKxDOCD3prtE2D
cQ==

```

Java Code for Decryption:

```

public static String decryptToken(String encryptedToken) throws Exception {
    byte[] key = Arrays.copyOf(secretKey.getBytes("UTF-8"), 16);
    SecretKeySpec secretKeySpec = new SecretKeySpec(key, ALGORITHM);
    Cipher cipher = Cipher.getInstance(ALGORITHM);
    cipher.init(Cipher.DECRYPT_MODE, secretKeySpec);
    byte[] decryptedBytes =
    cipher.doFinal(Base64.getDecoder().decode(encryptedToken));
    return new String(decryptedBytes, "UTF-8");
}

```

2. Authentication API

The Authentication API is used to generate an authentication token for merchants. This token is required to access various services provided by the payment gateway.

This API authenticates merchants by validating their credentials and generates an access token, which is used for subsequent API calls

Below are the details for using this API.

1. Request

Method	POST
URL	{{baseurl}}/payment_gateway/authenticate
BODY	{ "client_id": "46abe0124e0de528987820898bd35c0fc112b439f", "client_secret": "e0efba2486e73dfb488294ea928f69f0a2a86833e" }
Authorization	Basic Auth (Basic QW5kcmV3QGdtYWIsLmNvbTowMDAw)
TYPE	application/json
Description	This API is used to authenticate merchants.

2. Request Parameter

Parameter Name	Value	Mandatory(Y/N)
client_id	String	Y
client_secret	String	Y

1. Success Response

Status	Response
--------	----------

200	<pre>{ "success": 1, "error": [], "data": { "access_token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWIiOiIxOTc4NzIxY2NIMjE0M2E0OWQ0MDg5ZjlkZTA0ZGQ0ZSIsInJvbmVzIjpbIJPTEVfTUVSQ0hBTlQiXSwiZXhwIjoxNzMxNjY3MjgzfQ.urC3WzOyre4t0ErozD3rXJDqY8bd sPktffytW0qShx8", "expiry_time": "2024-11-15 10:41:23" } }</pre>
-----	--

2. Failed Response(Credential Mismatch)

Status	Response
422	<pre>{ "data": { }, "success": "0", "error": ["Credentials are not valid"] }</pre>

3. Initiate Payment API

The Initiate Payment API is used to generate a payment link for customers. This API requires an authentication token obtained from the Authenticate API. The payment link directs customers to a secure payment page where they can complete their transactions.

This API initiates a payment by generating a unique payment link. The link is sent to the customer, who can use it to access the payment page and complete the transaction.

1. Request

Method	POST
URL	{{base url}}/payment_gateway/initiate_payment
Body	<pre>{ "amount": 15, "customer_token": null, "note": "Testing open api", "payee_information": { "dial_code": "+88", "phone_number": "45124565633" }, "payment_method": null, "redirect_url": "https://www.facebook.com/", "unique_txn_id": "5419465db471443081017c3f07c1ddbe", "meta_data": { "custom_field_1": "8807282737473", "custom_field_2": "John Doe", "custom_field_3": "CUST_001", "customer_phone": "6353", "customer_full_name": "priyanka Dalwadi", "customer_email": "priyanka.d@digipay.guru", "center_name": "IVAC", "center_address": "Dhaka, Bangladesh avenue gulsan", "center_email": "support@ivac.net", "center_phone": "09606501240", "vat": 10.0, "sd": 0.0, "service_charge": 0.0, "total": 10.0, "sub_total": 10.0, "paid_amount": 10.0 }, "product_list": [{ product_name: "Product 1", price: 100, discount: 10, sub_total: 90 }, { product_name: "Product 2",</pre>

	<pre> price: 200, discount: 10, sub_total: 90 },], } } </pre>
Encrypted Body	<pre> eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWUiOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIiJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWUiOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIiJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWUiOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIiJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWUiOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIiJPTEVfQ1VTVE9NRVliX </pre>
Header	Signature
Authorization	<pre> Bearer eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWUiOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIiJPTEVfQ1VTVE9NRVliX </pre>
TYPE	application/json
Description	This API is used to generate webview urls and proceed for payment.

2. Request Parameter

Parameter Name	Value	Mandatory(Y/N)
amount	String	Y
note	String	N
payee_information	JSON	N
unique_txn_id	String	Y
redirect_url	String	Y
customer_token	String	N
payment_method	String	N
meta_data	JSON	N

customer_token - If the customer completes the payment, a token will be sent to your site upon redirection. This token represents the customer and can be used for future transactions. When the same customer initiates a new transaction, you should pass this token in the customer_token field so the customer does not need to log in again.

payment_method - This parameter specifies the payment method code, such as a bank code or other identifier, representing the chosen payment method for the transaction.

meta_data - This parameter allows merchants to pass custom fields in payment requests. These fields will be saved in the transaction and can be viewed in the merchant portal. Please use the same keys provided in the request. For example:

```
"meta_data": {  
  "custom_field_1": "8807282737473",  
  "custom_field_2": "John Doe",  
  "custom_field_3": "CUST_001"  
}
```

Note for Request Parameters

For the request parameters listed above, fields that are marked as not mandatory (N) should still be included in the request. If you are not providing a value for these non-mandatory fields, you must pass them as **null** in the request body.

1. Success Response

Status	Response
200	<pre>{ "success": 1, "error": [], "data": { "webview_url": "http://checkout-dev.dgepay.net/login?data=ePivv5oMA91QPSR+BQFeC6 AT4NDZgYTjadjaraaMb4ntgld15J2Y/li0zXIANwoeS2D2Pkm6dhHdArFyuQ CMHrQVpUqaso9V2KoxsLS4bEvpGeb+CP5dPVPNAUnHHS+POsInIoHy8 /t/nGIIINT0aMsW5kA5Qfg518HeBfNIN/YVXecRoIKdWWZTyALS7pUWOG z448Qx8d9TbJKqqhzh5X7INnVOqzv+DSkK+BVrirNoKFIQmGQZRW3jXgS 2PTocjXR5f4ncPEtZUMGC2VxYLRkuSYVFxZjQOjGx8NljWIM=", "unique_txn_id": "5419465db471443081017c3f07c1ddbe" } }</pre>

4. Redirect URL API

The Redirect URL API is used to handle the redirection of customers back to the merchant's site after they complete their payment on the payment gateway. The redirection includes essential information about the transaction, such as its status and a unique transaction identifier.

When a customer completes their payment, they are redirected to the merchant's specified return URL. The payment gateway appends several query parameters to this URL, providing the merchant with details about the transaction.

1. Usage

Merchants should implement handling for the redirect URL in their system to process the incoming query parameters. This allows them to update the transaction status in their records, inform the customer of the payment outcome, and take any necessary actions based on the transaction status.

2. Request

Method	GET
URL	https://www.openmerchantapi.com?data?=value
Encrypted URL	https://www.openmerchantapi.com?data=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJkNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliXeyJ0e
Parameter	"status":1, "unique_txn_id": "41d1f61c324145c3a10e2d2419a6d06e", "customer_token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJkNT"
Description	The merchant sends the transaction information after user payment at their side. User will redirect as a GET request to the redirect URL provided by the previous API in the flow after payment operation is completed.

3. Query Parameter

Parameter Name	Value	Mandatory(Y/N)
status	Integer	Y
customer_token	String	N
unique_txn_id	String	Y

payment_method	String	Y
txn_number	String	Y
third_party_txn_number	String	N
message	String	Y
txn_id	String	N
amount	Integer	N
created_date	Integer	N
metadata	Json	N

5. Redirect URL API Guidelines

When a merchant redirects to the redirect public URL, all information is passed in an encrypted format using a secret key spec. Upon receiving the data, the merchant will decrypt the data using the secret key spec and verify it

6. Transaction Check Status

The Transaction Check Status API is used to verify the status of a specific transaction. This API requires the unique transaction ID and returns the details of the transaction, including its status, amount, and creation date.

This API checks the status of a transaction using the `unique_txn_id`. The request body should be encrypted, and the response includes detailed information about the transaction.

1. Request

Method	POST
URL	{{base_url}}/payment_gateway/check_transaction_status
BODY	{ "unique_txn_id": "41d1f61c324145c3a10e2d2419a6d06e ", }
Encrypted Body	eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliXeyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliX
Header	Signature
Authorization	Bearer eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiI0ZDJKNTA2ZWY3NjY0OGYzOTZhM2UyNmY3NDJjNDYyOSIsInJvbGVzIjpbIJPTEVfQ1VTVE9NRVliX
TYPE	application/json
Description	This API is used to check the status of transaction for payment

2. Request Parameter

Parameter Name	Value	Mandatory(Y/N)
unique_txn_id	String	Y

1. Success Response

Status	Response
200	<pre>{ "status_code": 200, "data": { "message": "TRANSACTION SUCCESS", "txn_id": "d59b0a6fcdef41e3ae7518de1bd65cae", "status_code": "3", "amount": 18.23, "created_date": 1758030303, "txn_number": "30303174", "payment_method": "Master Card (EBL)", "unique_txn_id": "Ekt-1758030255819xohqbmsl6", "third_party_txn_number": "EBL030318059467", "metadata": { "custom_field_1": "8807282737473", "custom_field_2": "John Doe", "custom_field_3": "CUST_001" }, "customer_phone": "6353", "customer_full_name": "priyanka Dalwadi", "customer_email": "priyanka.d@digipay.guru", "center_name": "IVAC", "center_address": "Dhaka, Bangladesh avenue gulsan", "center_email": "support@ivac.net", "center_phone": "09606501240", "vat": 10.0, "sd": 0.0, "service_charge": 0.0, "total": 10.0, "sub_total": 10.0, "paid_amount": 10.0 }, "product_list": [{ "product_name": "Product 1", "price": 100, "discount": 10, "sub_total": 90 }, { "product name": "Product 2",</pre>

	<pre> price: 200, discount: 10, sub_total: 90 },], } } </pre>

7. Generate Dynamic QR

The Generate Dynamic QR API is used to create a unique and scannable payment QR for each transaction. This API takes the transaction amount and other required details, applies a small fractional adjustment to ensure uniqueness, and generates an EMV-compliant QR string. The final QR is converted into an image and returned as a URL for easy scanning. The request must be encrypted, and the response includes the generated QR link along with essential transaction information.

1. Request

Method	POST
URL	{{base_url}}/payment_gateway/generate_dynamic_qr
BODY	<pre> { "amount": 27.00, "callback_url": "https://merchant.example.com/payment/callback", "unique_txn_id": "TXN20251113124516" } </pre>

Encrypted Body	eftg2WR/JjiHj3pTaxMhx/DRK73Sy53iERwLzrn2HDNJ3X0XgJo8VI4ACTyTutss3yoG5f8Uvytbwjp1csrNOAaeZlyUe4wg5M/D3+QDsYlvHVFCFDnbMagdvRBb2YrkyF4Oduo+xl71EkVHo1+5RKDZFueXmMkCHRYQe7p3XCliSS38orTERorm2TKr4LH1
Header	Signature
Authorization	Bearer eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWIiOiI2NDg1NGRhNDc0YzQ5ODc4MjJiNTJhMDY2MTdjODUzliwicm9sZXMiOiUk9MRV9NRVJDSEFOVCJdLCJleHAiOiE3NjM3MjgyMzF9.bhc51Cr835vQxNOtCg9BFf9xGhEFGD0jqUhle3IJRM
TYPE	application/json
Description	This API is used to Generate Dynamic QR .

2. Request Parameter

Parameter Name	Value	Mandatory(Y/N)
amount	Double	Y
callback_url	String	N
unique_txn_id	String	Y

2. Success Response

Status	Response
200	{ "status_code": 200, "data": { "message": "QR Generated Successfully", "qr_image": "https://media.dgipay.net/dipon-bucket/20251117_113419-1763379259728" } }

8. Generate Dynamic Payment Link

The Generate Dynamic Payment Link API is used to create a unique, secure payment link for a specific transaction. This API takes details such as the amount, transaction ID, and callback Redirect URL, and generates a dynamic link that it can use to complete the payment. The request must be encrypted, and the response returns the generated payment link .This ensures easy payment initiation, tracking, and seamless redirection after the transaction is completed.

1. Request

Method	POST
URL	{{base_url}}/payment_gateway/generate_dynamic_payment_link
BODY	{ "amount": 27.00, "callback_redirect_url": "https://merchant.example.com/payment/callback_redirect", "unique_txn_id": "TXN20251113124516" }

Encrypted Body	R5RSKH3njFICvvP8lml8WKRHa3MUvTMFfhztd74zXzaTFtqS2DMEzyy2 nonfAvJKL5btETzLcKjWafsMWMkY+rQrF9lJwVoADbWFGNwBIGlnAXm AYgsS56bxcX2T90ZGg0ndXcHOIXzWQUsbFikL9nDPv9TNqXVA3eXbC hxvP/6t7wAulbysV/djk3pU+D8ylkkt/KK0xEaK5tkyq+Cx9Q==
Header	Signature
Authorization	Bearer eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWIiOiI2NDg1NGRhNDc0 YzQ5ODc4MjJiNTljMDY2MTdjODUzliwicm9sZXMiOiUk9MRV9NRVJD SEFOVCJdLCJleHAiOiE3NjM3MjgyMzF9.bhc51Cr835vQxNOtCg9BFf9xG hEFBGD0jqUhle3IJRM
TYPE	application/json
Description	This API is used to Generate Dynamic Payment Link .

2. Request Parameter

Parameter Name	Value	Mandatory(Y/N)
amount	Double	Y
callback_url	String	N
unique_txn_id	String	Y

3. Success Response

Status	Response
200	{ "status_code": 200, "data": { "message": "Payment Link Generated Successfully", "payment_link": "https://media.dgepay.net/dipon-bucket/20251117_113419-17633792597 29" } }

9. Payment Methods

code	value
2002	bKash
2013	nagad
2005	Upay
0175	Pubali bank
6002	DBBI Nexus
6004	DBBI Master card
2001	DBBI Rocket
6005	DBBI Visa card
6001	Ucb card payment
6006	Cellfin
6007	Meghna pay

6008	City bank
------	-----------

10. Transaction status values

code	value
1	Pending
2	Approved
3	Success
4	Failed
5	Rejected
6	Refunded