


Govern every agent.

Keep every worker lightweight.

A single authority plane for agent identity, MCP access, managed credentials, deterministic evidence and reusable artifacts.

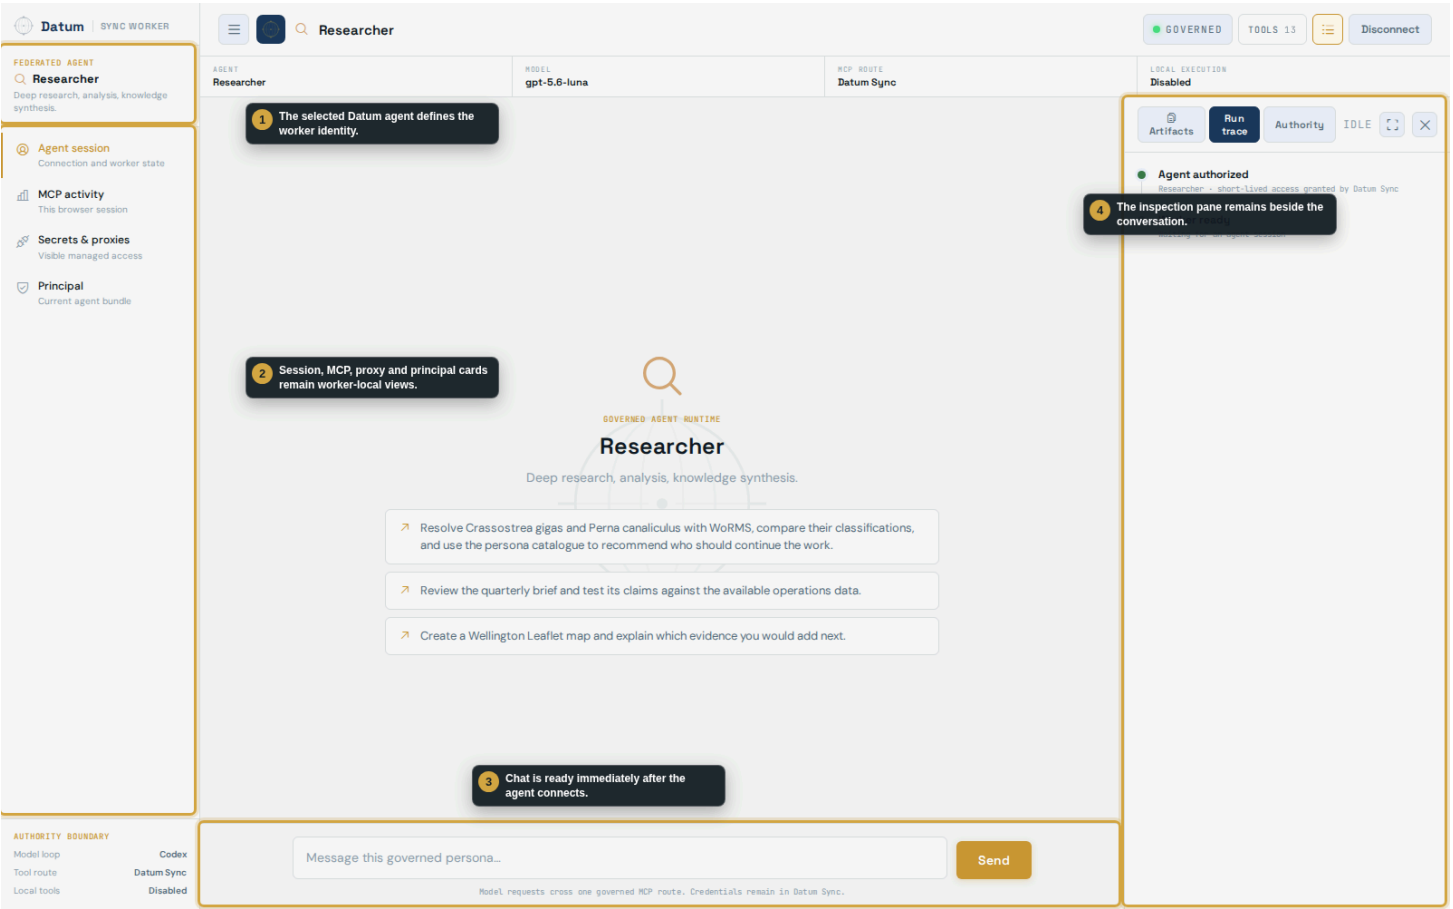

AGENTS Permission-bound personas	MCP One governed route	SECRETS Never exposed to workers	ARTIFACTS Durable and shareable
-------------------------------------	---------------------------	-------------------------------------	------------------------------------

01 • AGENT FLEET

An agent is a governed bundle

Users connect to a ready persona. Datum Sync supplies the identity, prompt, tools, credentials and limits behind it.

DATUM

0 sessions · 0 awaiting approval

Refresh

?

0

Dashboard

AUTHENTICATION

Principals

Approvals

Access lab

Resources

Secrets & Proxies

MCP Activity

Credentials

Activity

Workspace settings

Datum-Sync

Auth portal · Local prototype

Principals

People and agents, each with their own identity and explicit permissions.

1 Each persona is a registered principal with an independent bundle.

2 Search and filter the single-user agent fleet.

Search principals...

All states

Workspace principals

PRINCIPAL	KIND	STATE	MCP SERVERS	LIVE SESSIONS	ACTIONS
Data Engineer Data pipelines, spatial ETL, schema mapping and governed delivery.	AGENT	ACTIVE	4	0	MCP access Issue token Restrict Disable Edit grant
Developer Code, architecture, debugging, deployment.	AGENT	ACTIVE	3	0	MCP access Issue token Restrict Disable Edit grant
Security Threat modelling, auditing, hardening.	AGENT	ACTIVE	3	0	MCP access Issue token Restrict Disable Edit grant
GIS Analyst Geospatial data, mapping, spatial analysis.	AGENT	ACTIVE	3	0	MCP access Issue token Restrict Disable Edit grant
Designer UI/UX, visual design, brand systems.	AGENT	ACTIVE	2	0	MCP access Issue token Restrict Disable Edit grant
Manager					MCP access Issue token Restrict Disable

CONNECT Choose an approved persona in the worker	AUTHORIZE Issue a short-lived principal session	EVALUATE Recheck tool and credential policy on every call	OPERATE Review, restrict or revoke from one portal call
---	--	--	--

Seven demo personas prove the single-user fleet model today; the existing parent-owner boundary provides the path to separate user fleets.

02 • GOVERNED ACCESS

One route for MCP and credentials

OfficeCLI, PostgreSQL and Datum Harness capabilities are registered once, then exposed per agent through the Datum Sync gateway.

Dashboard

Authentication

Principals

Approvals

Access lab

Resources

Secrets & Proxies

MCP Activity

Credentials

Activity

Workspace settings

0 sessions

0 awaiting approval

Refresh

?

0

Secrets & Proxies

Register MCP servers, govern their tools and service identities, and see exactly which agents retain effective.

1 MCP servers, tool states and managed upstream identities.

2 Register another governed MCP endpoint here.

+ Add MCP server

SERVER	PROVIDER	STATE	HEALTH	MINIMUM	TOOLS
Datum Harness tools harness-tools	datum-harness	ACTIVE	OK	Tier 2	3 Refresh Disable server
Legacy Datum service legacy-local	datum-legacy	ACTIVE	OK	Tier 2	9 Refresh Disable server
OfficeCLI document demo officecli-demo	officecli-demo	ACTIVE	OK	Tier 2	1 Refresh Disable server
PostgreSQL analytics demo postgres-demo	postgres-demo	ACTIVE	OK	Tier 2	5 Refresh Disable server

Tool catalogue

GATEWAY TOOL	SERVER	MINIMUM	STATE
harness__list_personas List the agent personas defined by the Datum Harness source configuration.	harness-tools	Tier 1	ACTIVE Disable tool
harness__render__leaflet_map Render bounded Leaflet HTML from a centre point and optional markers. No files are written.	harness-tools	Tier 1	ACTIVE Disable tool
harness__names_lookup Resolve up to 20 scientific names through the public World Register of Marine Species API.	harness-tools	Tier 1	ACTIVE Disable tool

Dashboard

Authentication

Principals

Approvals

Access lab

Resources

Secrets & Proxies

MCP Activity

Credentials

Activity

Workspace settings

0 sessions

0 awaiting approval

Refresh

?

0

MCP Activity

Deterministic request traces from receipt through authentication, session checks, tool dispatch and completion.

1 Every endpoint flow receives a deterministic trace.

2 Expand a flow to inspect authentication, authorization and dispatch.

Recent MCP flows

STARTED	PRINCIPAL / CLIENT	METHOD / TOOL	PROVIDER	OUTCOME	DURATION
Sep 14, 05:26 PM ad9f19bc7	researcher datum-federated-worker	tools/List —	local gateway	OK	16 ms Timeline
Sep 14, 05:26 PM 33dbda47	researcher datum-federated-worker	notifications/initialized —	local gateway	OK	12 ms Timeline
Sep 14, 05:26 PM bd9f6b03d	researcher datum-federated-worker	initialize —	local gateway	OK	29 ms Timeline
Sep 14, 05:25 PM 389c6ffa	researcher datum-federated-worker	tools/List —	local gateway	OK	22 ms Timeline
Sep 14, 05:25 PM 2cf827d	researcher datum-federated-worker	notifications/initialized —	local gateway	OK	12 ms Timeline
Sep 14, 05:25 PM 5e0e8972	researcher datum-federated-worker	initialize —	local gateway	OK	120 ms Timeline
Sep 14, 05:24 PM 1497af89	researcher datum-federated-worker	tools/List —	local gateway	OK	22 ms Timeline
Sep 14, 05:24 PM 09ecc2a5	researcher datum-federated-worker	notifications/initialized —	local gateway	OK	30 ms Timeline
Sep 14, 05:24 PM —	researcher —	initialize —	—	OK	38 ms Timeline

REGISTER
Add endpoints and discover tools

GRANT
Bind selected tools and service identities to an agent

TRACE
Record the endpoint flow without prompts, arguments or results

REVOKE
Disable a tool, server or grant before the next call

OPERATOR VISIBILITY
Server and tool state · auth type · credential fingerprint and version · effective agents · decision timing

PROTECTED BY DESIGN
No secret values · no prompts · no tool arguments · no database rows · no returned document text

Operators see labels, fingerprints, versions, effective agents and use state. Upstream credential values never enter the browser, model context or worker process.

A worker can place generated output in a pane, save it through Datum Sync and share it with another named agent without copying files through chat.


1 · CREATE Private to the producing agent	2 · INSPECT Preview in split or focused pane	3 · SHARE Named, time-bounded read access	4 · REVOKE Effective on the next list or read
DURABLE BY DESIGN Immutable versions retain ownership, logical path, content hash, MIME type, source trace and expiry.		SAFE BY DEFAULT Resources start private. Named shares are read-only and HTML previews run inside a restricted sandbox.	

Datum Sync product overview · Page 4

04 · DEMONSTRATION

Show the complete control loop in ten minutes

Move between the operator portal and federated worker to make each policy decision visible and immediate.

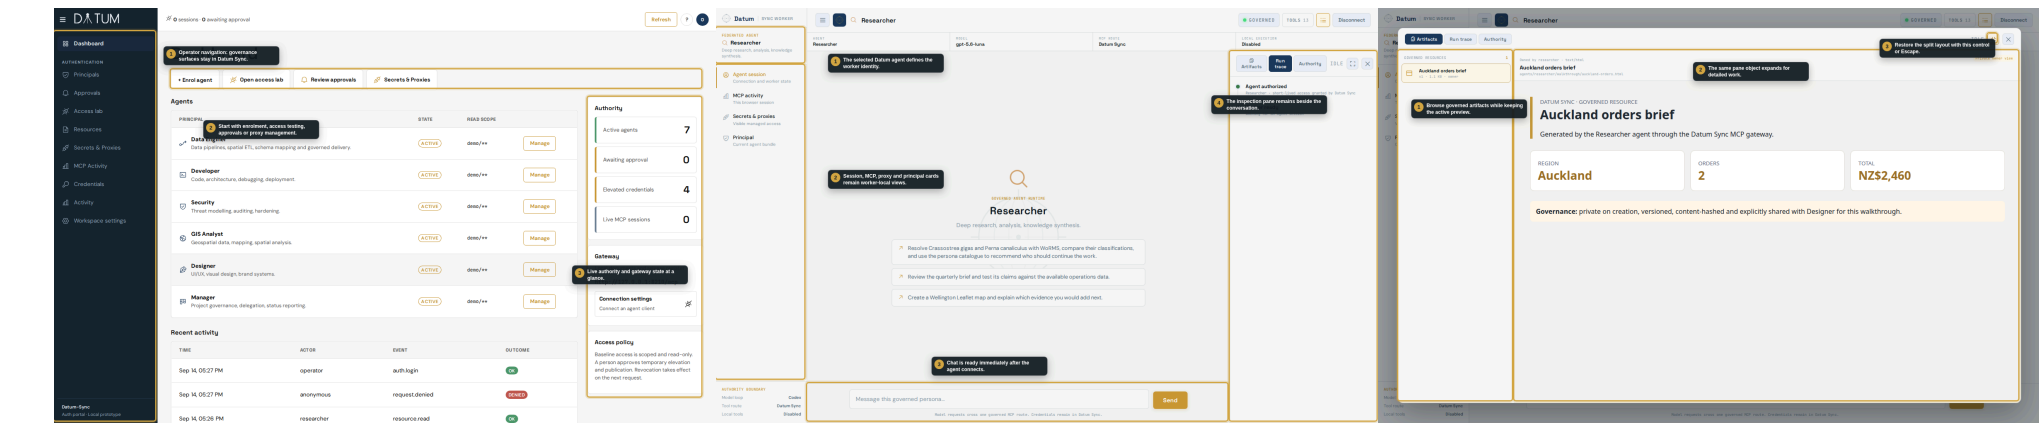

01	Connect Researcher	Choose a 15-minute demo or 2, 4, or 8-hour session; the composer is ready immediately.
02	Call a real MCP tool	Ask for an Auckland PostgreSQL summary or an OfficeCLI document listing.
03	Inspect the evidence	Open MCP Activity and follow authentication, policy, dispatch and completion.
04	Prove control	Disable a tool or revoke a credential grant, repeat the request, then restore it.
05	Create and share	Save an HTML artifact, focus its pane, share it with Designer, then revoke access.
START · <code>cd /home/spatial-partners/Desktop/Datum-sync · .venv/bin/python local/manage.py start</code> · Portal 127.0.0.1:8210 · Worker 127.0.0.1:8220		
DATUM SYNC		Connect to a useful agent while identity, MCP access, credentials, evidence and artifacts remain governed in one place.