

@NGUYỄN Thị Thu Trang, trangntt@soict.hust.edu.vn

OBJECT-ORIENTED PROGRAMMING

5. MEMORY MANAGEMENT AND CLASS ORGANIZATION

Nguyen Thi Thu Trang
trangntt@soict.hust.edu.vn

1

2

Content

1. Memory management in Java
2. Class organization
3. Utility classes in Java

2

3

1. Memory management in Java

- Java does not use pointer, hence memory addresses can not be overwritten accidentally or intentionally.
- The allocation or re-allocation of memory, management of memory that is controlled by JVM, are completely transparent with developers.
- Developers do not need to care about the allocated memory in heap in order to free it later.

3

4

C/C++ pointer

```
byte i = 4;
byte* p = &i;
printf("%d", *p);
i = 8; printf("%d", *p);
*(p+2) = 6;
```

4

5

1.1. Heap memory

```
String s = new String("hello");
```

- Heap memory is used to write information created by **new** operator.

The diagram shows a stack frame labeled 'S' with several slots. The top slot contains a pointer (indicated by a green arrow) that points to a 'java.lang.String' object in the 'Heap Memory'. This object contains the string 'hello'.

5

6

1.1. Heap memory (2)

```
String s = new String("hello");
String t = s;
```

- Heap memory is used to write information created by **new** operator.

The diagram shows a stack frame labeled 'S' with two slots, 's' and 't'. Both 's' and 't' contain pointers (indicated by blue arrows) that point to the same 'java.lang.String' object in the 'Heap Memory'. This object contains the string 'hello'.

6

7

1.2. Stack memory

```
String s = new String("hello");
String t = s;
int i = 201;
int j = i;
```

- Local value in Stack memory is used as a reference pointer to Heap
- Value of primitive data is written directly in Stack

The diagram shows a stack frame with variables 's', 't', 'i', and 'j'. 's' and 't' contain pointers (indicated by blue arrows) that point to a 'java.lang.String' object in the 'Heap memory'. This object contains the string 'hello'. 'i' and 'j' contain the value '201'.

7

8

1.3. Garbage collector (gc)

- The garbage collector sweeps through the JVM's list of objects periodically and reclaims the resources held by unreferenced objects
- All objects that have no object references are eligible for garbage collection
 - References out of scope, objects to which you have assigned null, and so forth
- The JVM decides when the gc is run
 - Typically, the gc is run when memory is low
 - May not be run at all
 - Unpredictable timing

8

9

Working with the garbage collector

- You cannot prevent the garbage collector from running, but you can request it to run soon
 - `System.gc()` ;
 - This is only a request, not a guarantee
- The `finalize()` method of an object will be run immediately before garbage collection occurs
 - This method should only be used for special cases (e.g. cleaning up memory allocation from native calls) because of the unpredictability of the garbage collector
 - Things like open sockets, files, and so forth should be cleaned up during normal program flow before the object is dereferenced

103600

9

10

Java destructors?

- Java does not have the concept of a destructor for objects that are no longer in use
- Deallocation of memory is done automatically by the JVM through the `finalize()` method
 - A background process called the garbage collector reclaims the memory of unreferenced objects
 - The association between an object and an object reference is severed by assigning another value to the object reference, for example:
 - `objectReference = null;`
 - An object with no references is a candidate for deallocation during garbage collection


103600

10

11

`finalize()` method

- Any class has method `finalize()` – that is executed right after the garbage collection process takes place (considered as destructor in Java despite not)
- Override this method in some special cases in order to “self-clean” used resources when objects are freed by gc
 - E.g. pack socket, file,... that should be handled in the main thread before the objects are disconnected from reference.

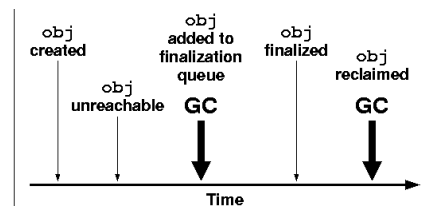


103600


11

12


```
String s = new String("hello");
String t = s;
int i = 201;
int j = i;
```

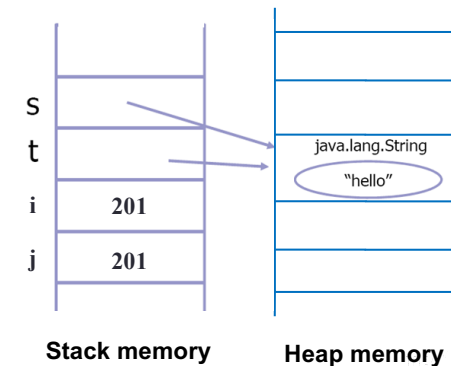

12

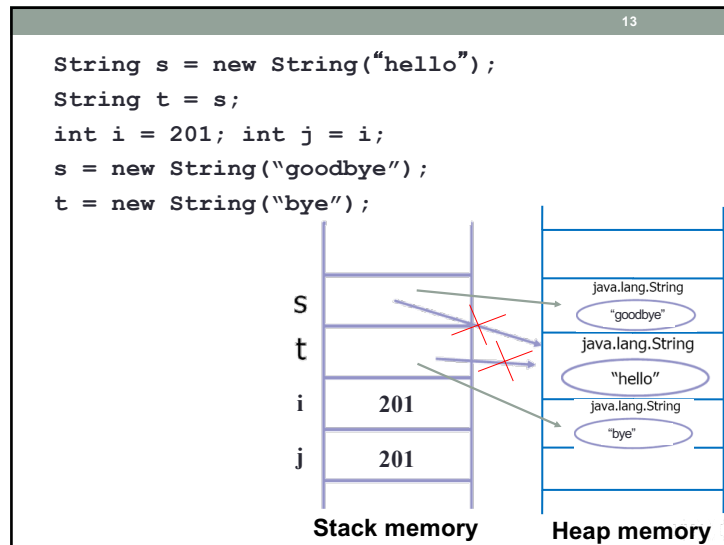

13

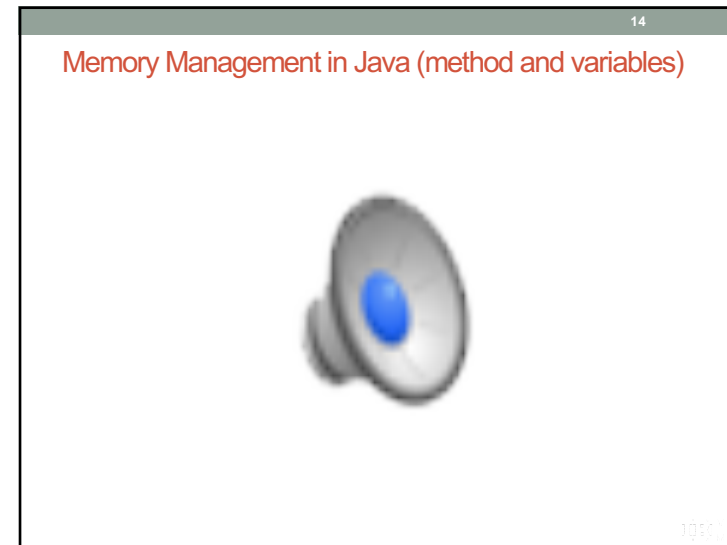

14

15

1.4. Object comparison

- **Primitive data types:** == checks whether their values are the equal


```
int a = 1;
int b = 1;
if (a==b)... // true
```
- **Objects:** == checks whether two objects are unique ~ whether they **refer to the same object**

```
Employee a = new Employee(1);
Employee b = a;
if (a==b)... // true
```

```
Employee a = new Employee(1);
Employee b = new Employee(1);
if (a==b)... // false
```

1056 1056 1056 1056

15

16

equals() method

- For primitive data types → does not exist
- For objects: every object has this method
 - Compares values of objects

```
public class Equivalence {
    public static void main(String[] args) {
        Integer n1 = new Integer(47);
        Integer n2 = new Integer(47);
        System.out.println(n1 == n2);
        System.out.println(n1.equals(n2));
    }
}
```

1056 1056 1056 1056

16


17

equals() method of your class

```

class Value {
    int i;
    public Value(int i) { this.i = i;}
}
public class EqualsMethod2 {
    public static void main(String[] args) {
        Value v1 = new Value(10);
        Value v2 = new Value(10);
        System.out.println(v1.equals(v2));
    }
}

```

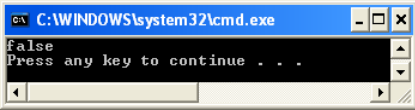

17

18

Content


1. Memory management in Java
- ➔ 2. Class organization
3. Utility classes in Java

18

@NGUYỄN Thị Thu Trang, trangntt@soict.hust.edu.vn 19

Package in UML

- A general purpose mechanism for organizing elements into groups
- A model element that can contain other model elements
- A package can be used:
 - To organize the model under development
 - As a unit of configuration management



19

20

Package in OOP and Java


- Composed of a set of classes that have common logical relations
- Considered as a directory, a place to organize classes in order to locate them easily
- A package can also contain another package
 - com.google: "com" package contains "google" package
- Example in Java:
 - Some packages already available in Java: `java.lang`, `javax.swing`, `java.io`...
 - Packages can be manually defined by users
 - Separated by ".", convention for naming package: lowercase
 - Example: `package oolt.hedspi;`

20

21

Why Package?

- Organize and locate easily the classes and use classes in an appropriate manner
- Avoid conflict in naming classes
 - Different packages can contains classes with same name
- Protect classes, data and methods in a larger area compared to relation between classes




21

@NGUYEN Thi Thu Trang, trangntt@soict.hust.edu.vn 22

A Package Can Contain Classes

- The package, University Artifacts, contains one package and five classes.

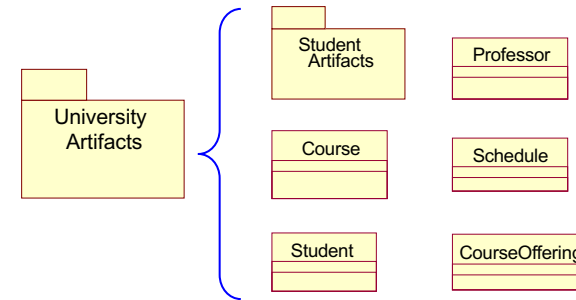

22

23

Package declaration

- Declaration syntax:

```
package package.name;
access_modifier class ClassName{
    // Class body
}
```

- **access_modifier:**

- **public:** Class can be accessed from anywhere, including outside its package.
- **private:** Class can only be accessed from inside the class
- **None (default):** Class can be access from inside its package

23

24

Member declaration of class

- Class members have access definition similarly to the class


	public	None	private
Same class			
Same package			
Different package			

24

25

Fully qualified class name

- A fullname of a class includes package name and class name:

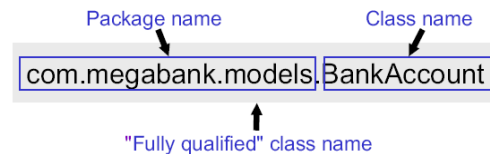

1056 6

25

26

2.1. References between classes

- In the same package: use class name
- In different packages: must provide the full-name of class defined in other packages.
- Example:

```
package oolt.hedspi;
public class HelloNameDialog{
    public static void main(String[] args){
        String result;
        result = javax.swing.JOptionPane.
            showInputDialog("Please enter your name:");
        javax.swing.JOptionPane.
            showMessageDialog(null, "Hi " + result + "!");
    }
}
```


1056 6

26

27

Using import command

To import packages or classes to make other classes directly visible to your class

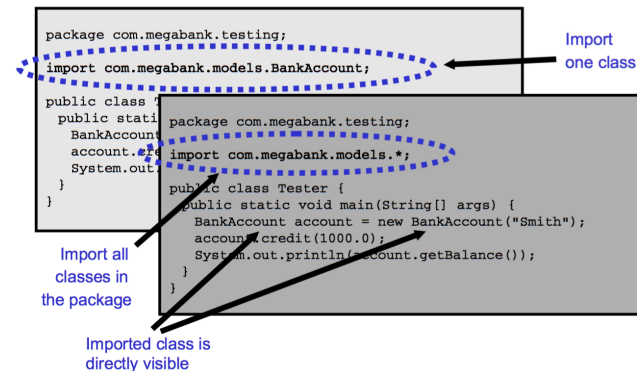

1056 6

27

28

2.2. Packages in Java

•java.applet	•javax.rmi
•java.awt	•javax.security
•java.beans	•javax.sound
•java.io	•javax.sql
•java.lang	•javax.swing
•java.math	•javax.transaction
•java.net	•javax.xml
•java.nio	•org.apache.commons
•java.rmi	•org.ietf.jgss
•java.security	•org.omg.CORBA
•java.sql	•org.omg.IOP
•java.text	•org.omg.Messaging
•java.util	•org.omg.PortableInterceptor
•javax.accessibility	•org.omg.PortableServer
•javax.crypto	•org.omg.SendingContext
•javax.imageio	•org.omg.stub.java.rmi
•javax.naming	•org.w3c.dom
•javax.net	•org.xml
•javax.print	

1056 6

28

29

Basic packages in Java

- **java.lang**
 - Provides classes that are fundamental to the design of the Java programming language
 - Includes wrapper classes, String and StringBuffer, Object, and so on
 - Imported implicitly into all classes
- **java.util**
 - Contains the collections framework, event model, date and time facilities, internationalization, and miscellaneous utility classes
- **java.io**
 - Provides for system input and output through data streams, serialization and the file system

29

30

Basic packages in Java

- **java.math**
 - Provides classes for performing arbitrary-precision integer arithmetic and arbitrary-precision decimal arithmetic
- **java.sql**
 - Provides the API for accessing and processing data stored in a data source (usually a relational database)
- **java.text**
 - Provides classes and interfaces for handling text, dates, numbers, and messages in a manner independent of natural languages
- **javax.swing**
 - Provides classes and interfaces to create graphics

30

31

Sample package: java.lang

- **Basic Entities**
 - Class, Object, Package, System
- **Wrappers**
 - Number, Boolean, Byte, Character, Double, Float, Integer, Long, Short, Void
- **Character and String Manipulation**
 - Character.Subset, String, StringBuffer, Character.UnicodeBlock
- **Math Functions**
 - Math, StrictMath
- **Runtime Model**
 - Process, Runtime, Thread, ThreadGroup, ThreadLocal, InheritableThreadLocal, RuntimePermission
- **JVM**
 - ClassLoader, Compiler, SecurityManager
- **Exception Handling**
 - StackTraceElement, Throwable
- Also contains Interfaces, Exceptions and Errors

31

32

Content

1. Memory management in Java
2. Class organization
- ➔ 3. Utility classes in Java

32

33

3.1. Wrapper class

- Primitives have no associated methods; there is no behavior associated with primitive data types
- Each primitive data type has a corresponding class, called a wrapper
 - Each wrapper object simply stores a single primitive variable and offers methods with which to process it
 - Wrapper classes are included as part of the base Java API

1056/6

33

34

Wrapper classes

Primitive Type	Wrapper Class
boolean	Boolean
byte	Byte
char	Character
double	Double
float	Float
int	Integer
long	Long
short	Short

1056/6

34

35

Converting data type

- Use `toString()` to convert number values to string
- Use `<type>Value()` to convert an object of a wrapper class to the corresponding primitive value

```
Float objF = new Float("4.67");
float f = objF.floatValue(); // f=4.67F
int i = objF.intValue(); // i=4
```

- Use `parse<type>()` and `valueOf()` to convert string to number values.


```
int i = Integer.parseInt("123"); // i=123
double d = Double.parseDouble("1.5"); // d=1.5
Double objF2 = Double.valueOf("-36.12");
long l = objF2.longValue(); // l=-36L
```

1056/6

35

36

Converting data type (2)

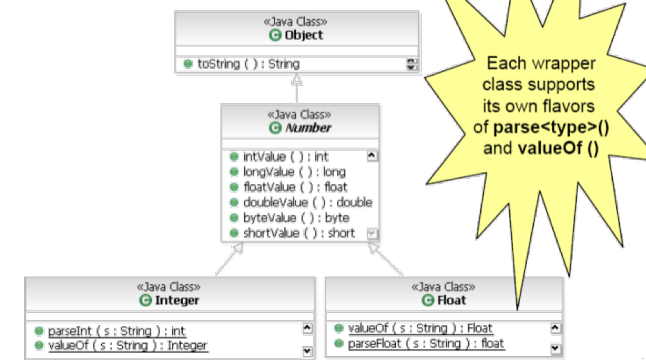

1056/6

36

37

Constants

- **Boolean**
 - Boolean FALSE
 - Boolean TRUE
- **Byte**
 - byte MIN_VALUE
 - byte MAX_VALUE
- **Character**
 - int MAX_RADIX
 - char MAX_VALUE
 - int MIN_RADIX
 - char MIN_VALUE
 - Unicode classification constants
- **Double**
 - double MAX_VALUE
 - double MIN_VALUE
 - double NaN
 - double NEGATIVE_INFINITY
 - double POSITIVE_INFINITY
- **Float**
 - float MAX_VALUE
 - float MIN_VALUE
 - float NaN
 - float NEGATIVE_INFINITY
 - float POSITIVE_INFINITY
- **Integer**
 - int MIN_VALUE
 - int MAX_VALUE
- **Long**
 - long MIN_VALUE
 - long MAX_VALUE
- **Short**
 - short MIN_VALUE
 - short MAX_VALUE

1056.0

37

38

Example

```
double d = (new Integer(Integer.MAX_VALUE)).
           doubleValue();
System.out.println(d); // 2.147483647E9

String input = "test 1-2-3";
int output = 0;
for (int index = 0; index < input.length(); index++)
{
    char c = input.charAt(index);
    if (Character.isDigit(c))
        output = output * 10 + Character.digit(c, 10);
}
System.out.println(output);
```

1056.0

38

39

3.2. String

- The String type is a class, not a primitive data type
- A String literal is made up of any number of characters between double quotes:

```
String a = "A String";
```

```
String b = "";
```

- A String object can be initialized in other ways:

```
String c = new String();
```

```
String d = new String("Another String");
```

```
String e = String.valueOf(1.23); // "1.23"
```


```
String f = null;
```

1056.0

39

String Literal vs. String Object

```
String s1 = "Hello";           // String literal
String s2 = "Hello";           // String literal
String s3 = s1; // same reference
String s4 = new String("Hello"); // String object
String s5 = new String("Hello"); // String object
String s6 = s5;
s5 = new String("Goodbye");
s1 = "Goodbye";
```

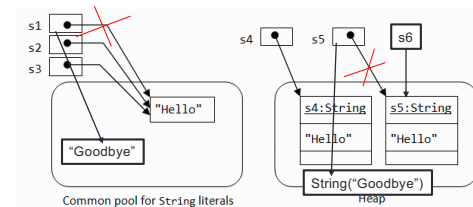

40

41

a. String concatenation

- The + operator concatenates Strings:

```
String a = "This" + " is a " + "String";
//a = "This is a String"
```

*There are more efficient ways to concatenate Strings
(this will be discussed later)*

- Primitive data types used in a call to println() are automatically converted to String

```
System.out.println("answer = " + 1 + 2 + 3);
System.out.println("answer = " + (1+2+3));
```

→ Do two above commands print out the same output?

1056.0

41

42

b. Methods of String

Strings are objects; objects respond to messages

- ✓ Use the dot (.) operator to send a message
- ✓ String is a class, with methods

```
String name = "Joe Smith";
name.toLowerCase(); // "joe smith"
name.toUpperCase(); // "JOE SMITH"
"Joe Smith ".trim(); // "Joe Smith"
"Joe Smith".indexOf('e'); // 2
"Joe Smith".length(); // 9
"Joe Smith".charAt(5); // 'm'
"Joe Smith".substring(5); // "mith"
"Joe Smith".substring(2,5); // "e S"
```

1056.0

42

43

c. String comparison

- `oneString.equals(anotherString)`

- Tests for equivalence
- Return true or false

```
String name = "Joe";
if ("Joe".equals(name))
    name += " Smith";
```

- `oneString.equalsIgnoreCase(anotherString)`

- Case insensitive test for equivalence

```
boolean same = "Joe".equalsIgnoreCase("joe");
```

- `oneString == anotherString` is problematic
 - Compare two objects


1056.0

43

44

c. Comparing two Strings (2)

```
String s1 = new String("Hello");
String s2 = s1;
(s1==s2) returns true
```



```
String s1 = new String("Hello");
String s2 = new String("Hello");
(s1==s2) returns false
s1.equals(s2) return true
```



1056.0

44

45

3.3. StringBuffer/StringBuilder

- String is an immutable type:
 - Object does not change the value after being created
→ Strings are designed for not changing their values
 - Concatenating strings will create a new object to store the result
→ String concatenation is memory consuming
- StringBuffer/StringBuilder is a mutable type:
 - Object can change the value after being created


=> String concatenation can get very expensive,
only use in building a simple String

105600

45

46

3.3. StringBuffer (2)

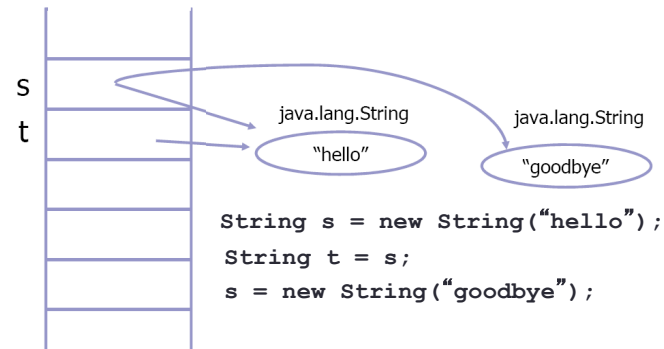

105600

46

47

3.3. StringBuffer (3)

- **StringBuffer:**
 - Provides String object that can change the value → Use **StringBuffer** when:
 - Predict that characters in the String can be changed
 - When processing a string, e.g. reading text data from a text file or building a String through a loop
 - Provides a more efficient mechanism for building and concatenating strings:
 - String concatenation is often done by compiler in class **StringBuffer**


105600

47

48

3.3. StringBuffer (4)

- Changing attribute: If an object is changed, all the references to the object will be affected with the new value

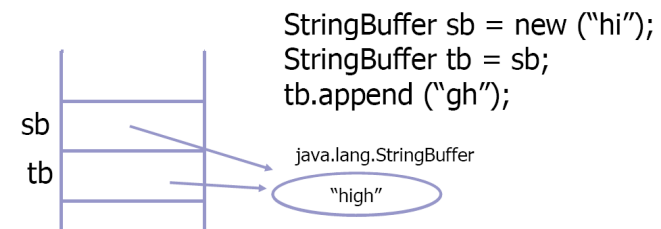

105600

48

49

3.3. StringBuffer (5)

- If we create a String by a loop, we should use **StringBuffer**

```
StringBuffer buffer = new StringBuffer(15);
buffer.append("This is ") ;
buffer.append("String") ;
buffer.insert(7," a") ;
buffer.append('.');
System.out.println(buffer.length()); // 17
System.out.println(buffer.capacity()); // 32
String output = buffer.toString() ;
System.out.println(output); // "This is a String."
```

1056 / 0

49

50

Example of reading from a file

```
String str = "";
for (int i=0; i<1.000.000; i++){
    //read a line from a file
    str += line;
}

StringBuffer str = new StringBuffer("");
for (int i=0; i<1.000.000; i++){
    //read a line from a file
    str.append(line);
}
```

1056 / 0

50

51

3.4. Math class

- java.lang.Math provides static properties:

- Constants:

- Math.E
- Math.PI

- Methods:

- max, min...
- abs, floor, ceil...
- sqrt, pow, log, exp...
- cos, sin, tan, acos, asin, atan...
- random

«Java Class» Math
Math ()
sin ()
cos ()
tan ()
asin ()
acos ()
atan ()
toRadians ()
toDegrees ()
exp ()
log ()
sqrt ()
IEEEremainder ()
ceil ()
floor ()
rint ()
atan2 ()
pow ()
round ()
round ()
initRNG ()
random ()
abs ()
abs ()
abs ()
abs ()
max ()
max ()
max ()
min ()
min ()
min ()
min ()
<clinit> ()

51

3.4. Math class (2)

- Most of methods receive **double** arguments and return **double**

- Example:

$$e^{\sqrt{2\pi}}$$

```
Math.pow(Math.E,
         Math.sqrt(2.0*Math.PI))
```

Or:

```
Math.exp(Math.sqrt(2.0*Math.PI))
```

«Java Class» Math
Math ()
sin ()
cos ()
tan ()
asin ()
acos ()
atan ()
toRadians ()
toDegrees ()
exp ()
log ()
sqrt ()
IEEEremainder ()
ceil ()
floor ()
rint ()
atan2 ()
pow ()
round ()
round ()
initRNG ()
random ()
abs ()
abs ()
abs ()
abs ()
max ()
max ()
max ()
min ()
min ()
min ()
min ()
<clinit> ()

52