

API testing

1.

Post :

<https://restful-booker.herokuapp.com/auth>

[Example 1:](#)

1. curl -X POST \
2. <https://restful-booker.herokuapp.com/auth> \
3. -H 'Content-Type: application/json' \
4. -d '{
5. "username" : "admin",
6. "password" : "password123"

}

Header

Field	Type	Description
Content-Type	string	Sets the format of payload you are sending Default value: application/json

Request body

Field	Type	Description
username	String	Username for authentication Default value: admin
password	String	Password for authentication Default value: password123

Success 200



Field	Type	Description
token	String	Token to use in future requests

[Response:](#)

7. HTTP/1.1 200 OK
- 8.
9. {
10. "token": "abc123"

}

Apply on postman ::

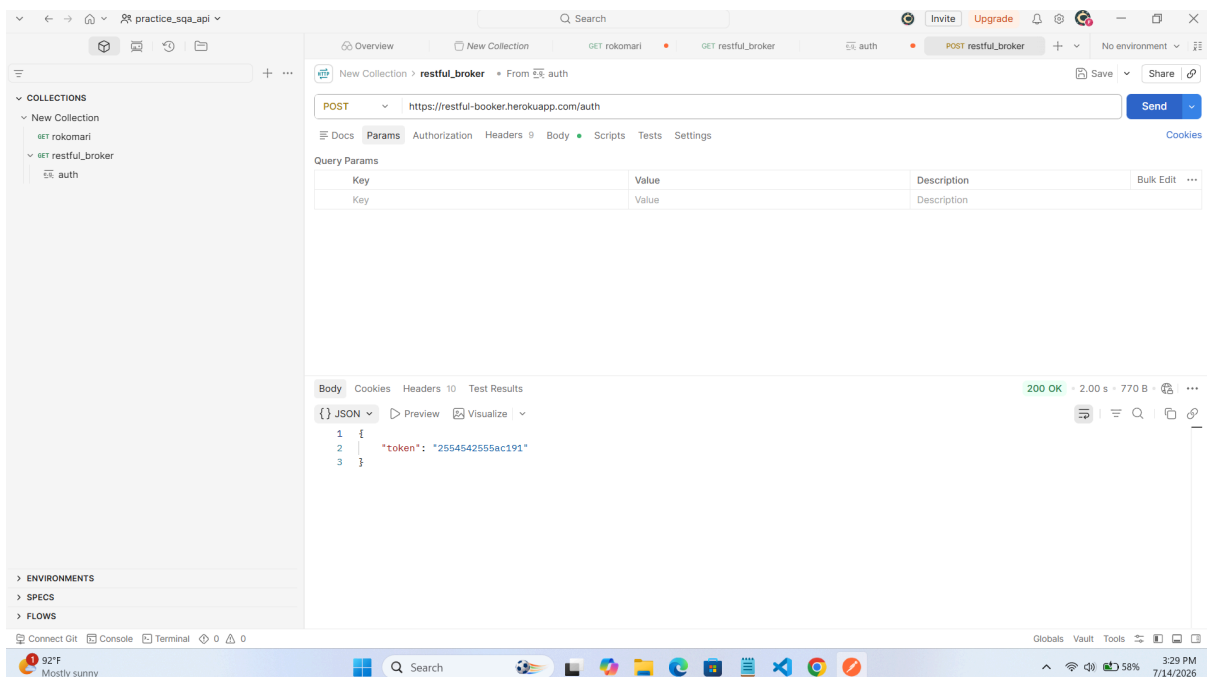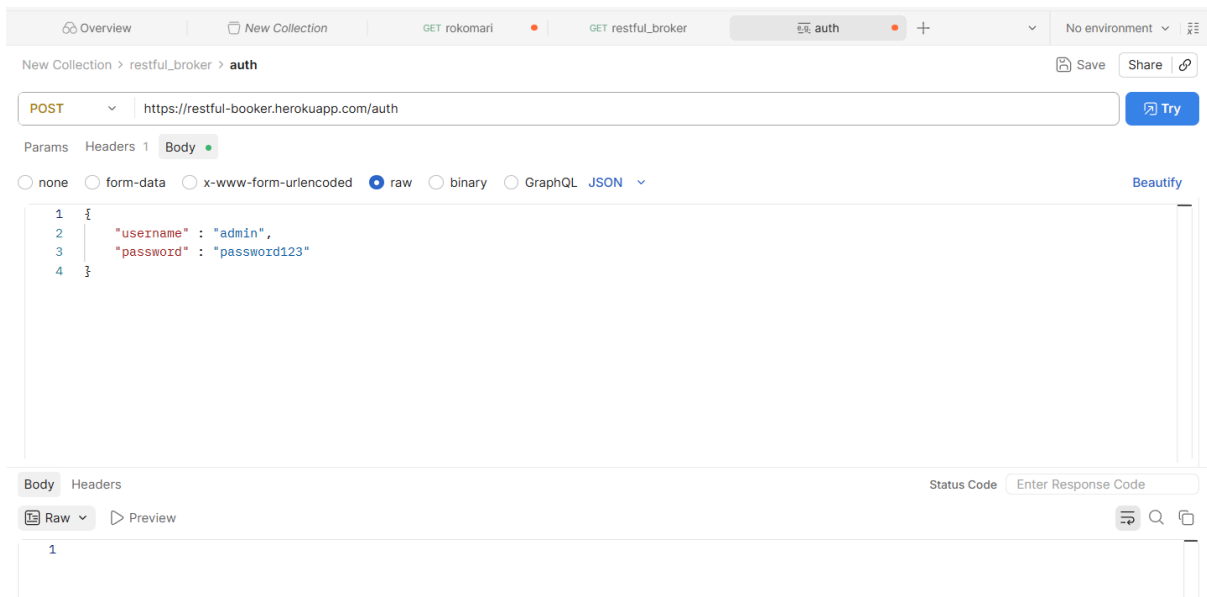

Example 2 :: Booking

Booking - GetBookingIds

Returns the ids of all the bookings that exist within the API. Can take optional query strings to search and return a subset of booking ids.

get

<https://restful-booker.herokuapp.com/booking>

Example 1 (All IDs):

Example 2 (Filter by name):

Example 3 (Filter by checkin/checkout date):

```
curl -i https://restful-booker.herokuapp.com/booking
```

Parameter

Field	Type	Description
firstname optional	String	Return bookings with a specific firstname
lastname optional	String	Return bookings with a specific lastname
checkin optional	date	Return bookings that have a checkin date greater than or equal to the set checkin date. Format must be CCYY-MM-DD
checkout optional	date	Return bookings that have a checkout date greater than or equal to the set checkout date. Format must be CCYY-MM-DD

Success 200

Field	Type	Description
object	object []	Array of objects that contain unique booking IDs
bookingid	number	ID of a specific booking that matches search criteria

Response:

```
HTTP/1.1 200 OK
```

```
[
```

```
{
```

```

    "bookingid": 1
  },
  {
    "bookingid": 2
  },
  {
    "bookingid": 3
  },
  {
    "bookingid": 4
  }
]

```

Ans ::

The screenshot shows the REST Client interface. The URL bar displays the endpoint: `https://restful-booker.herokuapp.com/booking?checkin=2026-05-20`. The request method is GET. The response status is 200 OK. The response body is a JSON array of booking objects. The first object has a `bookingid` of 59, and the last object has a `bookingid` of 95.

```


1  [
2    {
3      "bookingid": 59
4    },
5    {
6      "bookingid": 69
7    },
8    {
9      "bookingid": 81
10   },
11   {
12     "bookingid": 95
13   },
14   {

```

[parameter was optional so i just type in for check in & then test it]


Example :: 3

Get booking __ segment

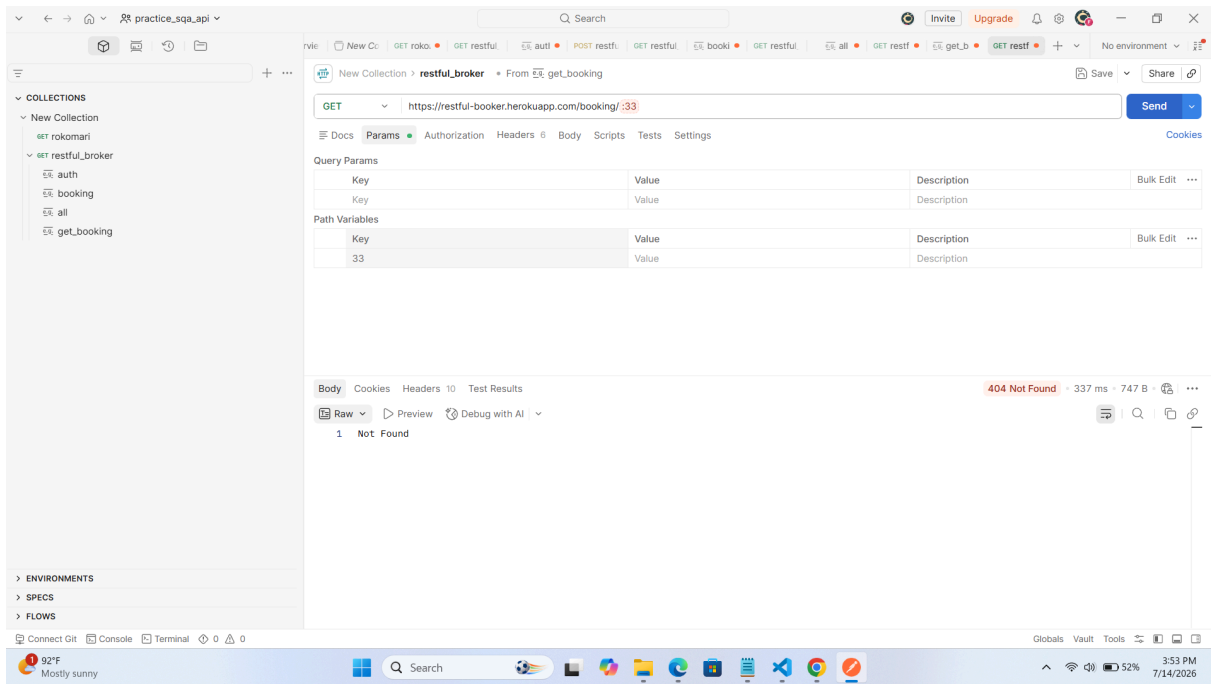


(here , when i add api that time i have to select id and i do that)

Example 4 :: get booking 1

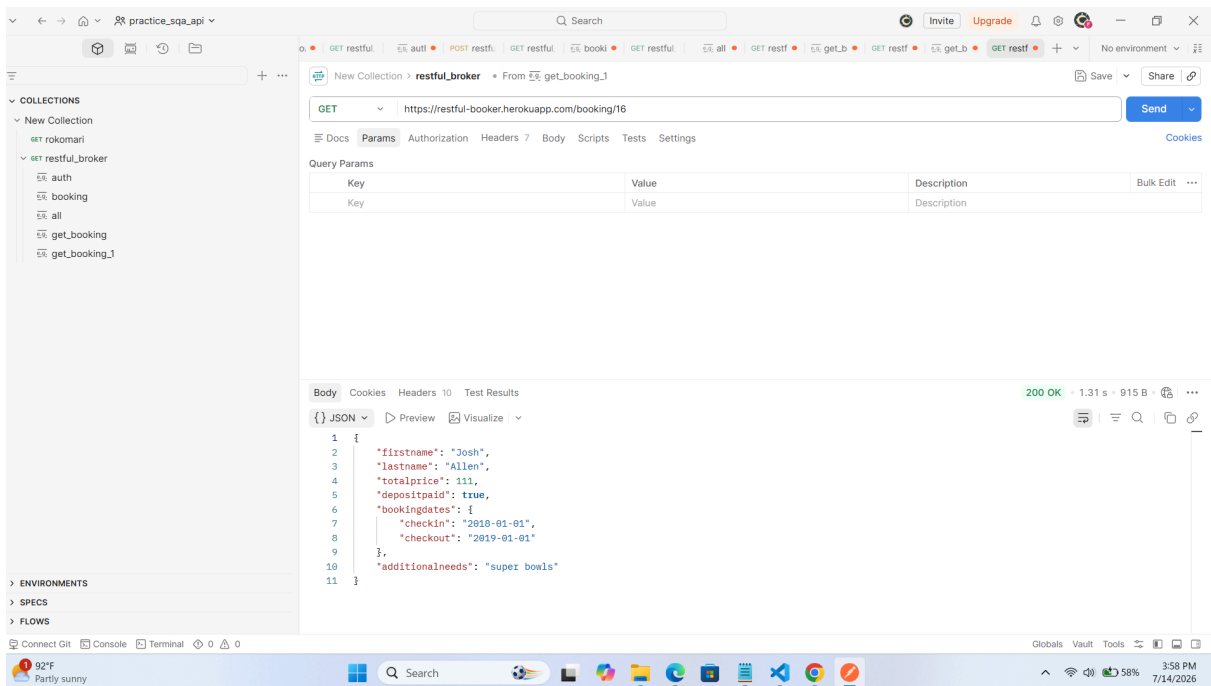

Here i kept id 16 and got result because that is exist

Example :: 5 create booking

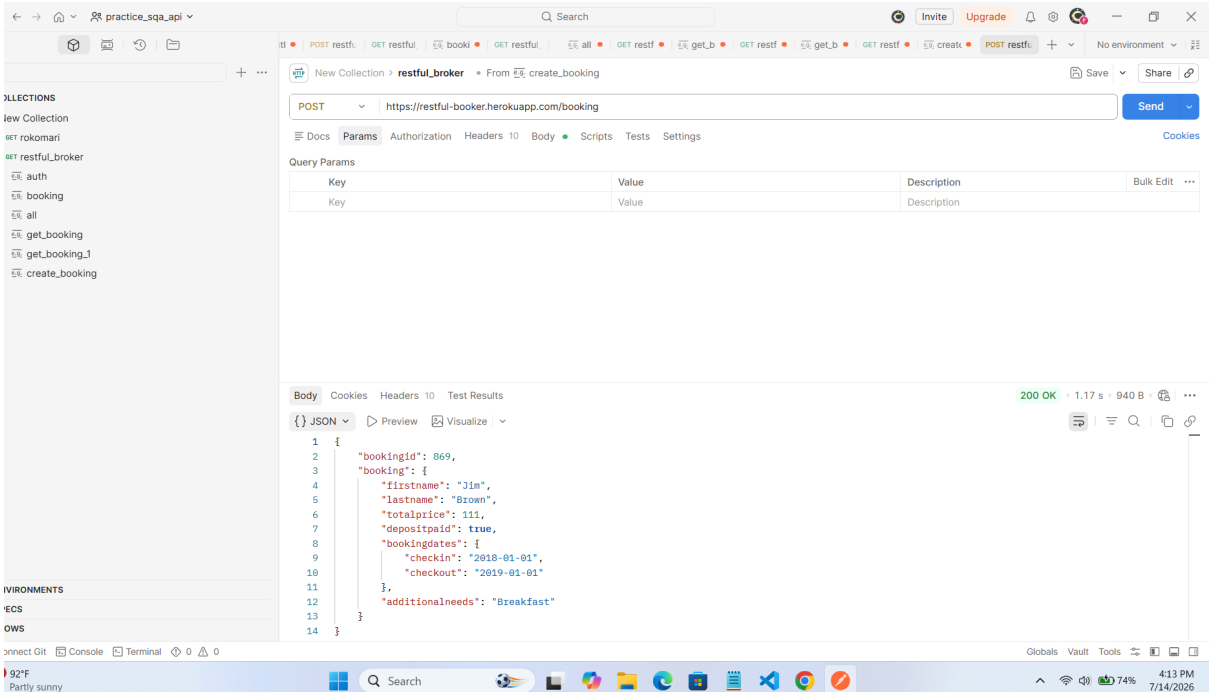

Example 6 :: update booking

