


01 The split, and why it is a split

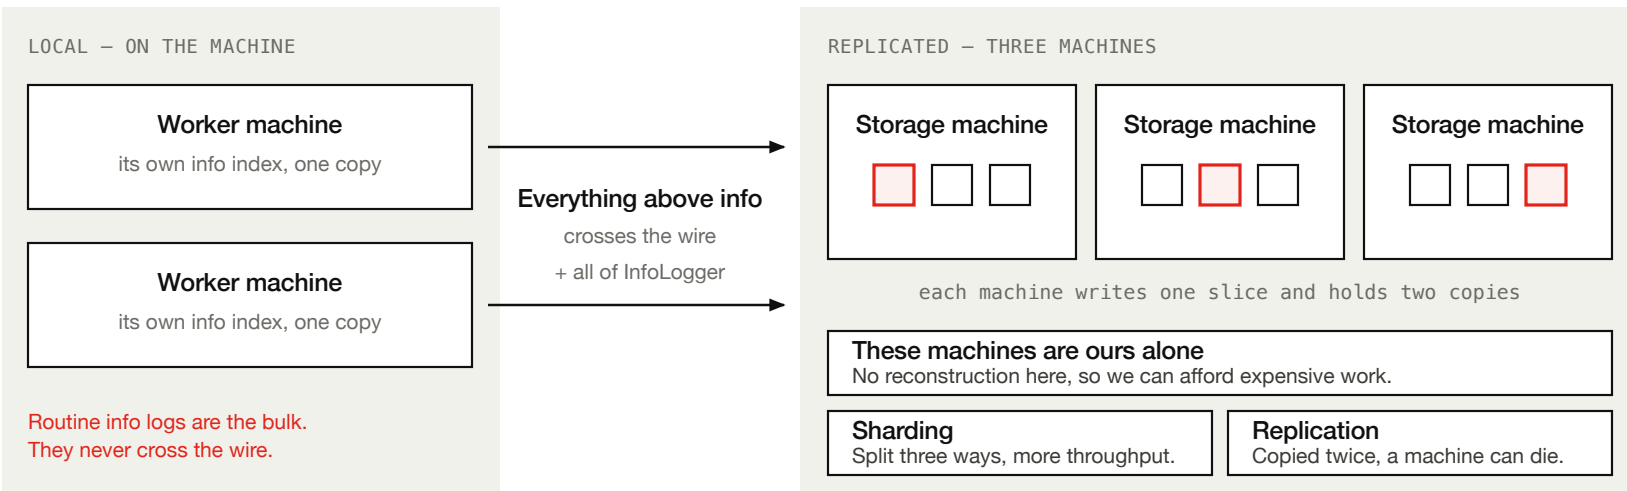

One storage machine may die and we lose nothing.

Every record is on all three. The cluster needs two of the three to agree, so it keeps running.

The local half is one copy on purpose. If a worker dies you lose that machine's routine logs, which is the cheap half.

02 Three things to watch

**JVM heap**

The memory the Java process may hold. Every index costs heap, so we cap how many exist.

**Memory outside the heap**

The search index and the file cache use it. We lock the memory down, so a node can never swap.

**ISM – Index State Management**

Indices roll on a clock, old ones are deleted. Routine logs 8 days, others 35, InfoLogger 56.