





Agent/Client
Protocol



The editor for what's next

Zed is a next-generation code editor designed for high-performance collaboration with humans and AI.

Download now D

Clone source C

Available for macOS, Linux, and Windows

Fast


Written from scratch in Rust to efficiently leverage multiple CPU cores and your GPU.

Intelligent

Integrate upcoming LLMs into your workflow to generate, transform, and analyze code.

Collaborative

Chat with teammates, write notes together, and share your screen and project. All included.

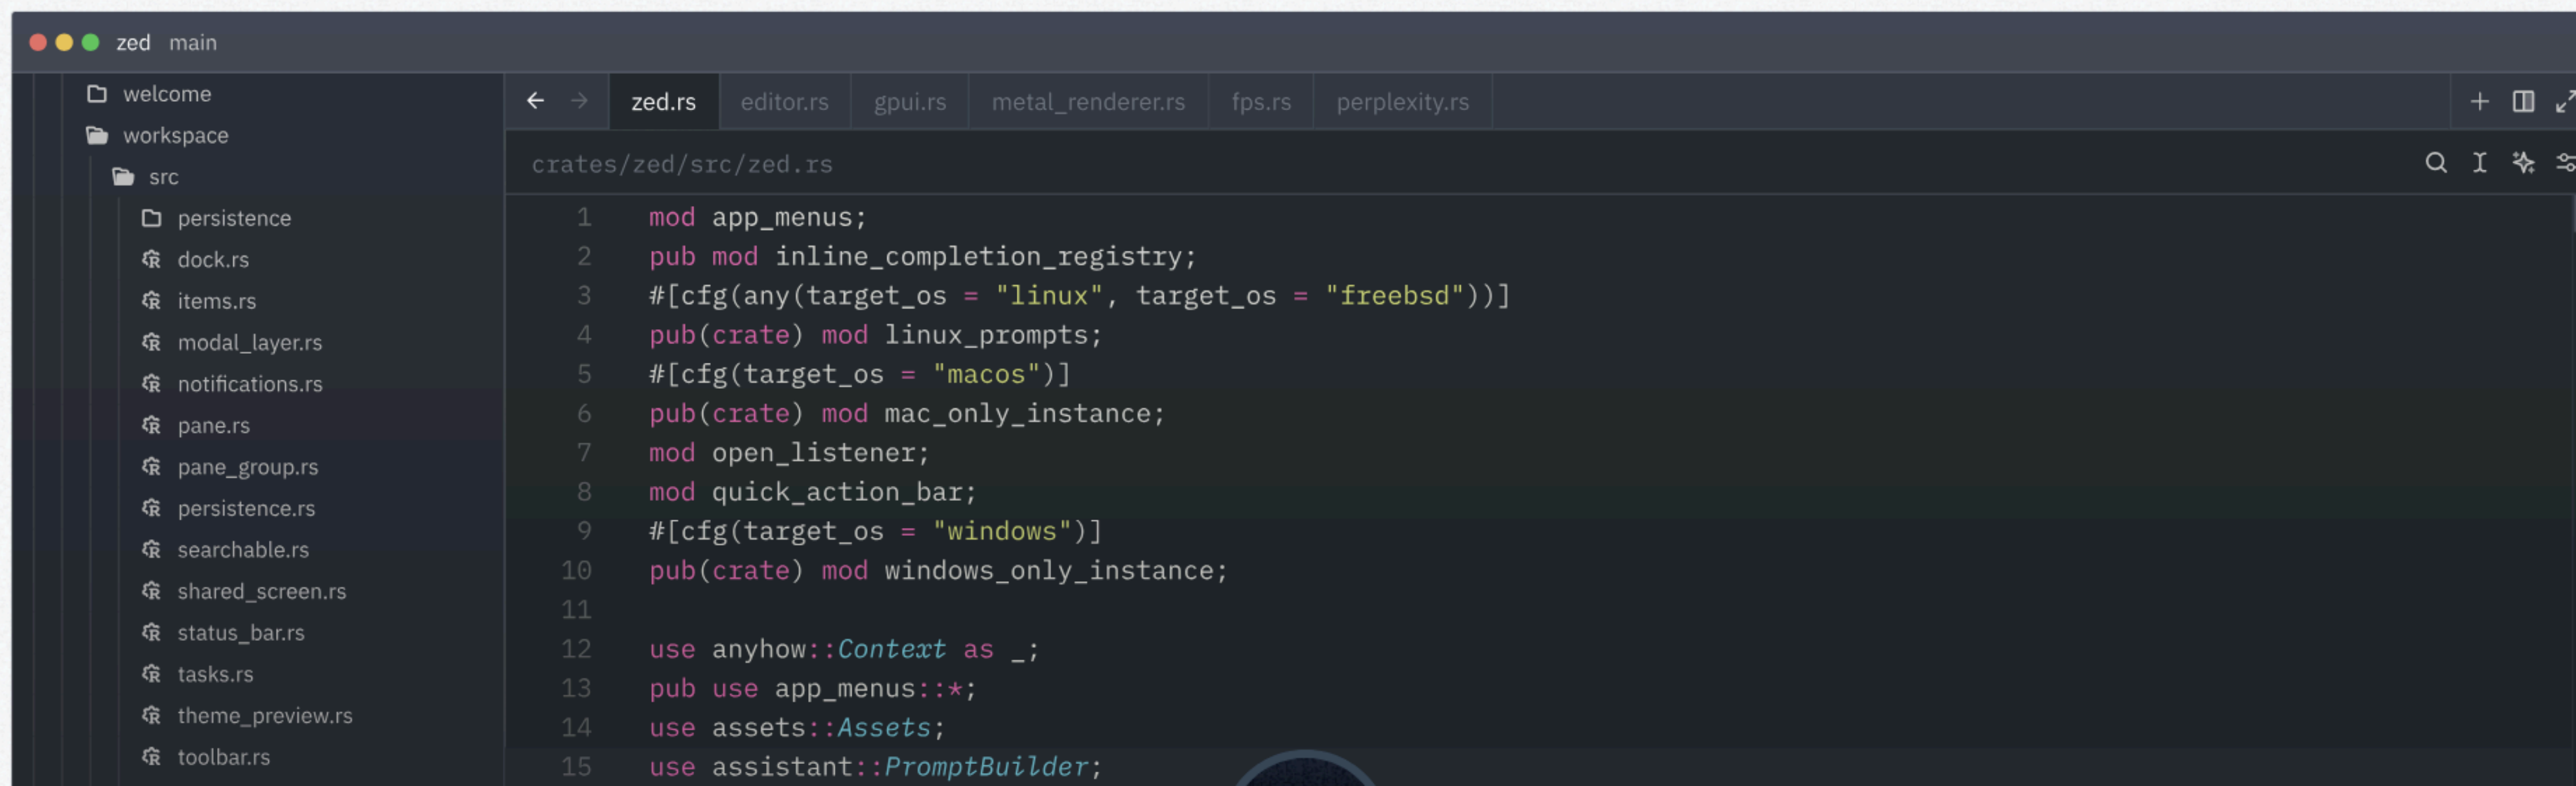

agent-client-protocolmain

1 ChangeStage All

Tracked

README.md

agent.rsReview: Capabilities for Agent Client ProtocolUncommitted Changes

README.md > aStageUnstageStage AllCommit

Jump To Fileg space

1StageRestore

2

3

4

5# Agent Client Protocol

6

7The Agent Client Protocol (ACP) standardizes communication between _code editors_ (interactive programs for viewing and editing source code) and _coding agents_ (programs that use generative AI to autonomously modify code).StageRestore

8

9Learn more at agentclientprotocol.com.

10

11## Integrations

12

13- [Schema](./schema/schema.json)

14### Official Libraries

15- **Kotlin**: [`acp-kotlin`](https://github.com

Capabilities for Agent Client Protocol+ = ...

Protocol Suggestions: If you'd like to propose additions or

License

License

By contributing, you agree that your contributions will be license

This project is licensed under the Apache 2.0 License. By contribu

I've cleaned up the README with the following improvements:

Changes made:

1. Fixed spacing in the HTML anchor tag

2. Changed italics to bold for key terms (code editors, coding agents) for better emphasis

3. Reorganized the Integrations section with clearer subsections:

- “Official Libraries” prominently listed first
- “Community Resources” for schema, agents, clients, and community libraries

4. Standardized punctuation – used en-dashes (–) consistently and changed “See” to lowercase “see” for consistency

5. Moved “Schema” to “Protocol Schema” for clarity and moved it under Community Resources

6. Improved wording – changed “we follow” semicolon to period for better readability

7. Made “License” a top-level section (## instead of ###) since it's not really part of Contributing

8. Enhanced the license text to make it clearer that the project itself is licensed under Apache 2.0

> Edits • 1 file

Reject Allcmd-shift-nKeep Allcmd-shift-y

Message the Zed Agent – @ to include context

11k / 200kWriteClaude Sonnet 4.5

docs: Move brand assets to the r...

Commit Tracked

1:1 -- NORMAL --

+ Add Server



- 

+ Add Provider



Manage Subscription

 Start New Thread

 Amazon Bedrock

A Anthropic ✓

GitHub Copilot Chat ✓




G Google AI ✓

 LM Studio Mistral Ollama ✓ OpenAI ✓

OpenRouter



zed on ↗ main [\$] via 🐙 orystack via 🦀 v1.90.0
> claude



Claude Code

v2.0.27

Sonnet 4.5 · API Usage Billing
 /Users/benbrandt/github/zed

> /status

└─ Status dialog dismissed

> /help

Claude Code

v2.0.27

general

comman custom-com (tab to ds mands cycle)

Claude understands your codebase, makes edits with your permission, and executes commands – right from your terminal.

Shortcuts

! for	double tap esc to	ctrl + _ to
bash mode	clear input	undo
/ for	shift + tab to	ctrl + z to
commands	ctrl + o for dits	suspend
@ for	verbose output	ctrl + v to
file	ctrl + t to show	paste images
paths	tab to toggle	
# to	thinking	
memorize	shift + ↵ for	
	newline	

For more help: <https://docs.claude.com/en/docs/claude-code/overview>
Esc to exit

>_ OpenAI Codex (v0.46.0)


model: gpt-5-codex /model to change
directory: ~/github/zed

To get started, describe a task or try one of these commands:

- /init - create an AGENTS.md file with instructions for Codex
- /status - show current session configuration
- /approvals - choose what Codex can do without approval
- /model - choose what model and reasoning effort to use
- /review - review any changes and find issues

> Summarize recent commits

100% context left · ? for shortcuts

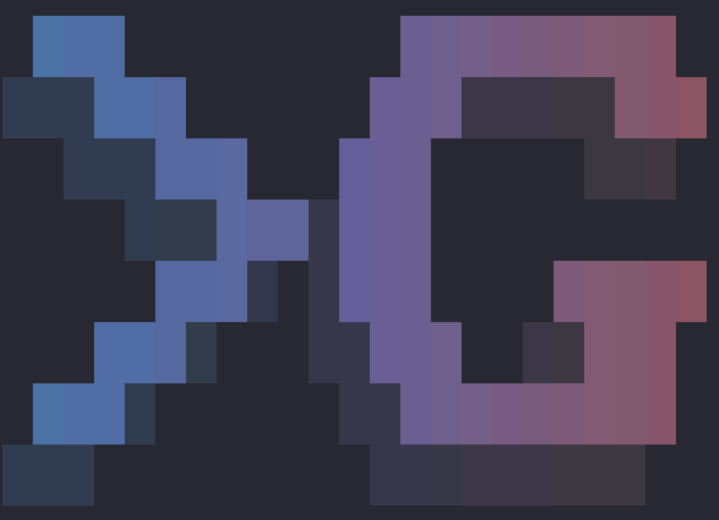

v0.8.0-nightly.20250925
.b1da8c21

Tips for getting started:

1. Ask questions, edit files, or run commands.
2. Be specific for the best results.
3. **/help** for more information.

> /help

Basics:

Add context: Use @ to specify files for context (e.g., @src/myFile.ts) to target specific files or folders.
Shell mode: Execute shell commands via ! (e.g., !npm run start) or use natural language (e.g. start server).

Commands:

- /about** - show version info
- /auth** - change the auth method
- /bug** - submit a bug report
- /chat** - Manage conversation history.
 - list** - List saved conversation checkpoints
 - save** - Save the current conversation as a checkpoint. Usage: /chat save <tag>
 - resume** - Resume a conversation from a checkpoint. Usage: /chat resume <tag>
 - delete** - Delete a conversation checkpoint. Usage: /chat delete <tag>
 - share** - Share the current conversation to a markdown or json file. Usage: /chat share <file>
- /clear** - clear the screen and conversation history

Use the tools you love

in your favorite editor.

Use the agent you love

in your favorite editor.



Agent/Client
Protocol

JSON-RPC Spec

Bidirectional communication via methods and notifications

```
↑ initialize
  { "protocolVersion": 1, "clientCapabilities": { "fs": { "readTextFile": true, "writeTextFile": true }, "terminal": true, "_meta": { "terminal_output": true } }, "clientInfo": { "name": "zed", "title": "Zed" } }

↓ initialize
  { "protocolVersion": 1, "authMethods": [{ "id": "oauth-personal", "name": "Log in with Google", "description": null }, { "id": "gemini-api-key", "name": "Use Gemini API key", "description": "Requires setting up a Gemini API key" } ] }

↑ session/new
  { "cwd": "/Users/benbrandt/github/agent-client-protocol", "mcpServers": [] }

↓ session/new
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3" }

↑ session/prompt
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "prompt": [{ "type": "text", "text": "Hi can you make a plan to update this repo?" }] }

↓ session/update
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "update": { "sessionUpdate": "agent_thought_chunk", "content": { "type": "text", "text": "**Beginning repository update planning**\n\nI'm developing a plan to update the repository by exploring the details and then formulating a strategy." } } }

↓ session/update
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "update": { "sessionUpdate": "agent_thought_chunk", "content": { "type": "text", "text": "**Exploring project details further**\n\nI'm now diving deeper into the repository to understand the current state and identify areas for improvement." } } }



↓ session/update
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "update": { "sessionUpdate": "agent_message_chunk", "content": { "type": "text", "text": "Of course. I will start by exploring the repository to understand the current state and identify areas for improvement." } } }


↓ session/update
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "update": { "sessionUpdate": "agent_message_chunk", "content": { "type": "text", "text": "I will then use the information gathered to formulate a plan for the update. Finally, I will present the plan to you for approval." } } }

↓ session/update
  { "sessionId": "3017576b-e1a4-4448-a1e4-7cf604b3a4a3", "update": { "sessionUpdate": "tool_call_update", "toolCallId": "run_shell_command-1762289373790", "status": "failed", "content": [{ "type": "content", "text": "Error running shell command: run_shell_command-1762289373790 failed with error: Command 'git checkout -b update' failed with exit code 1." } ] } }
```

UX-first

Ensure flexibility to clearly render the agent's intent, without being overly abstract.

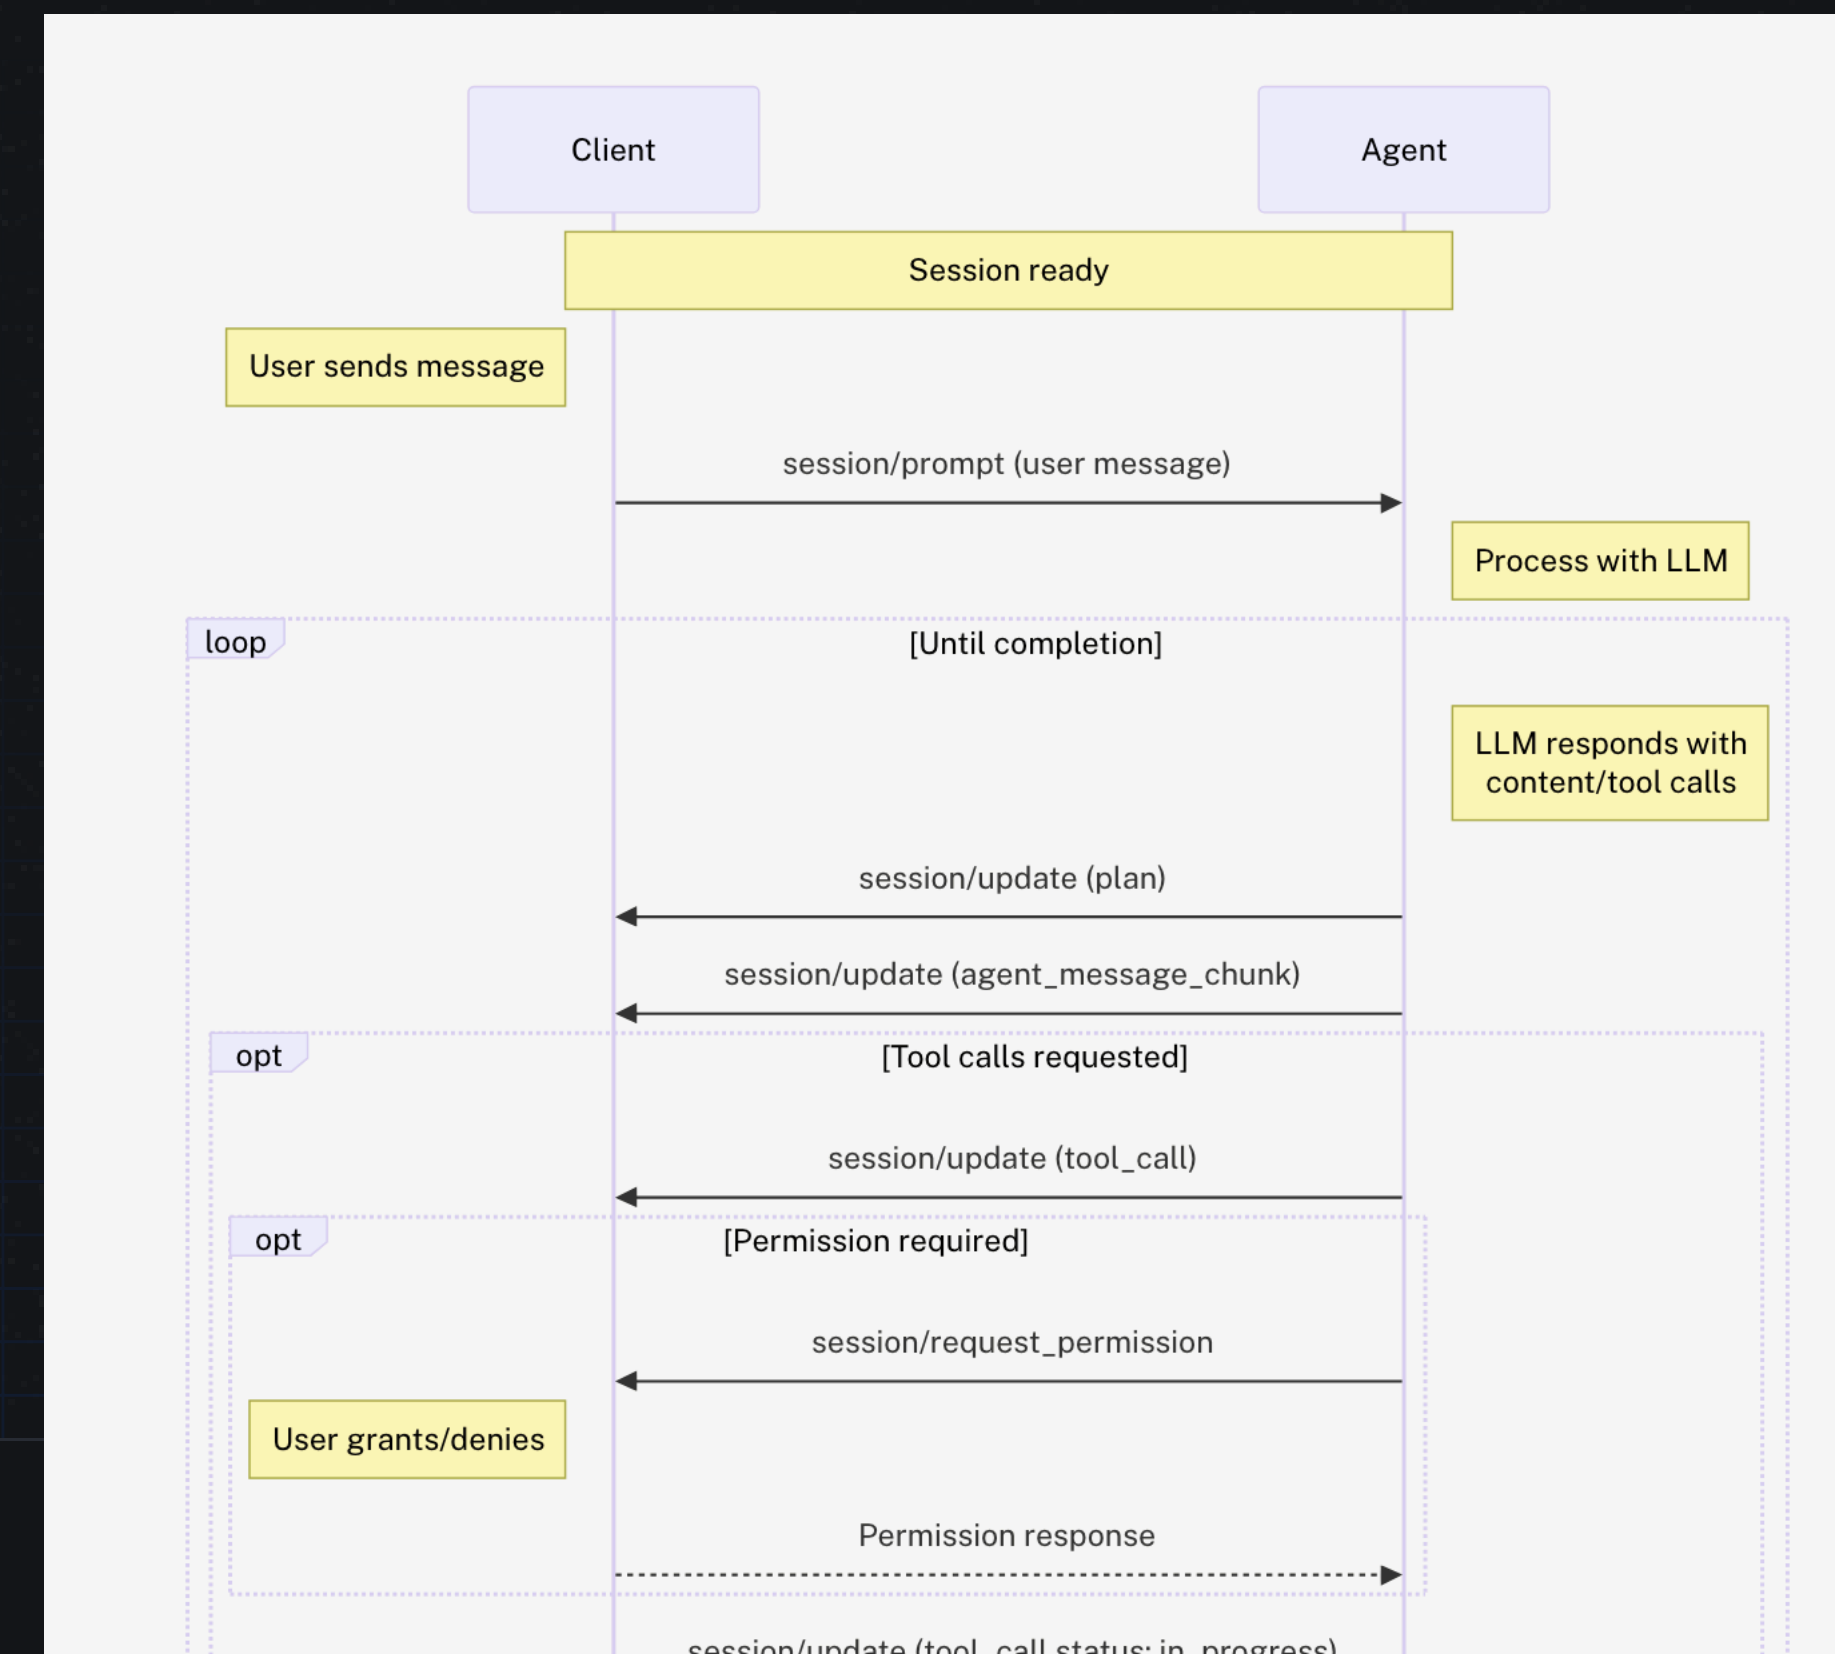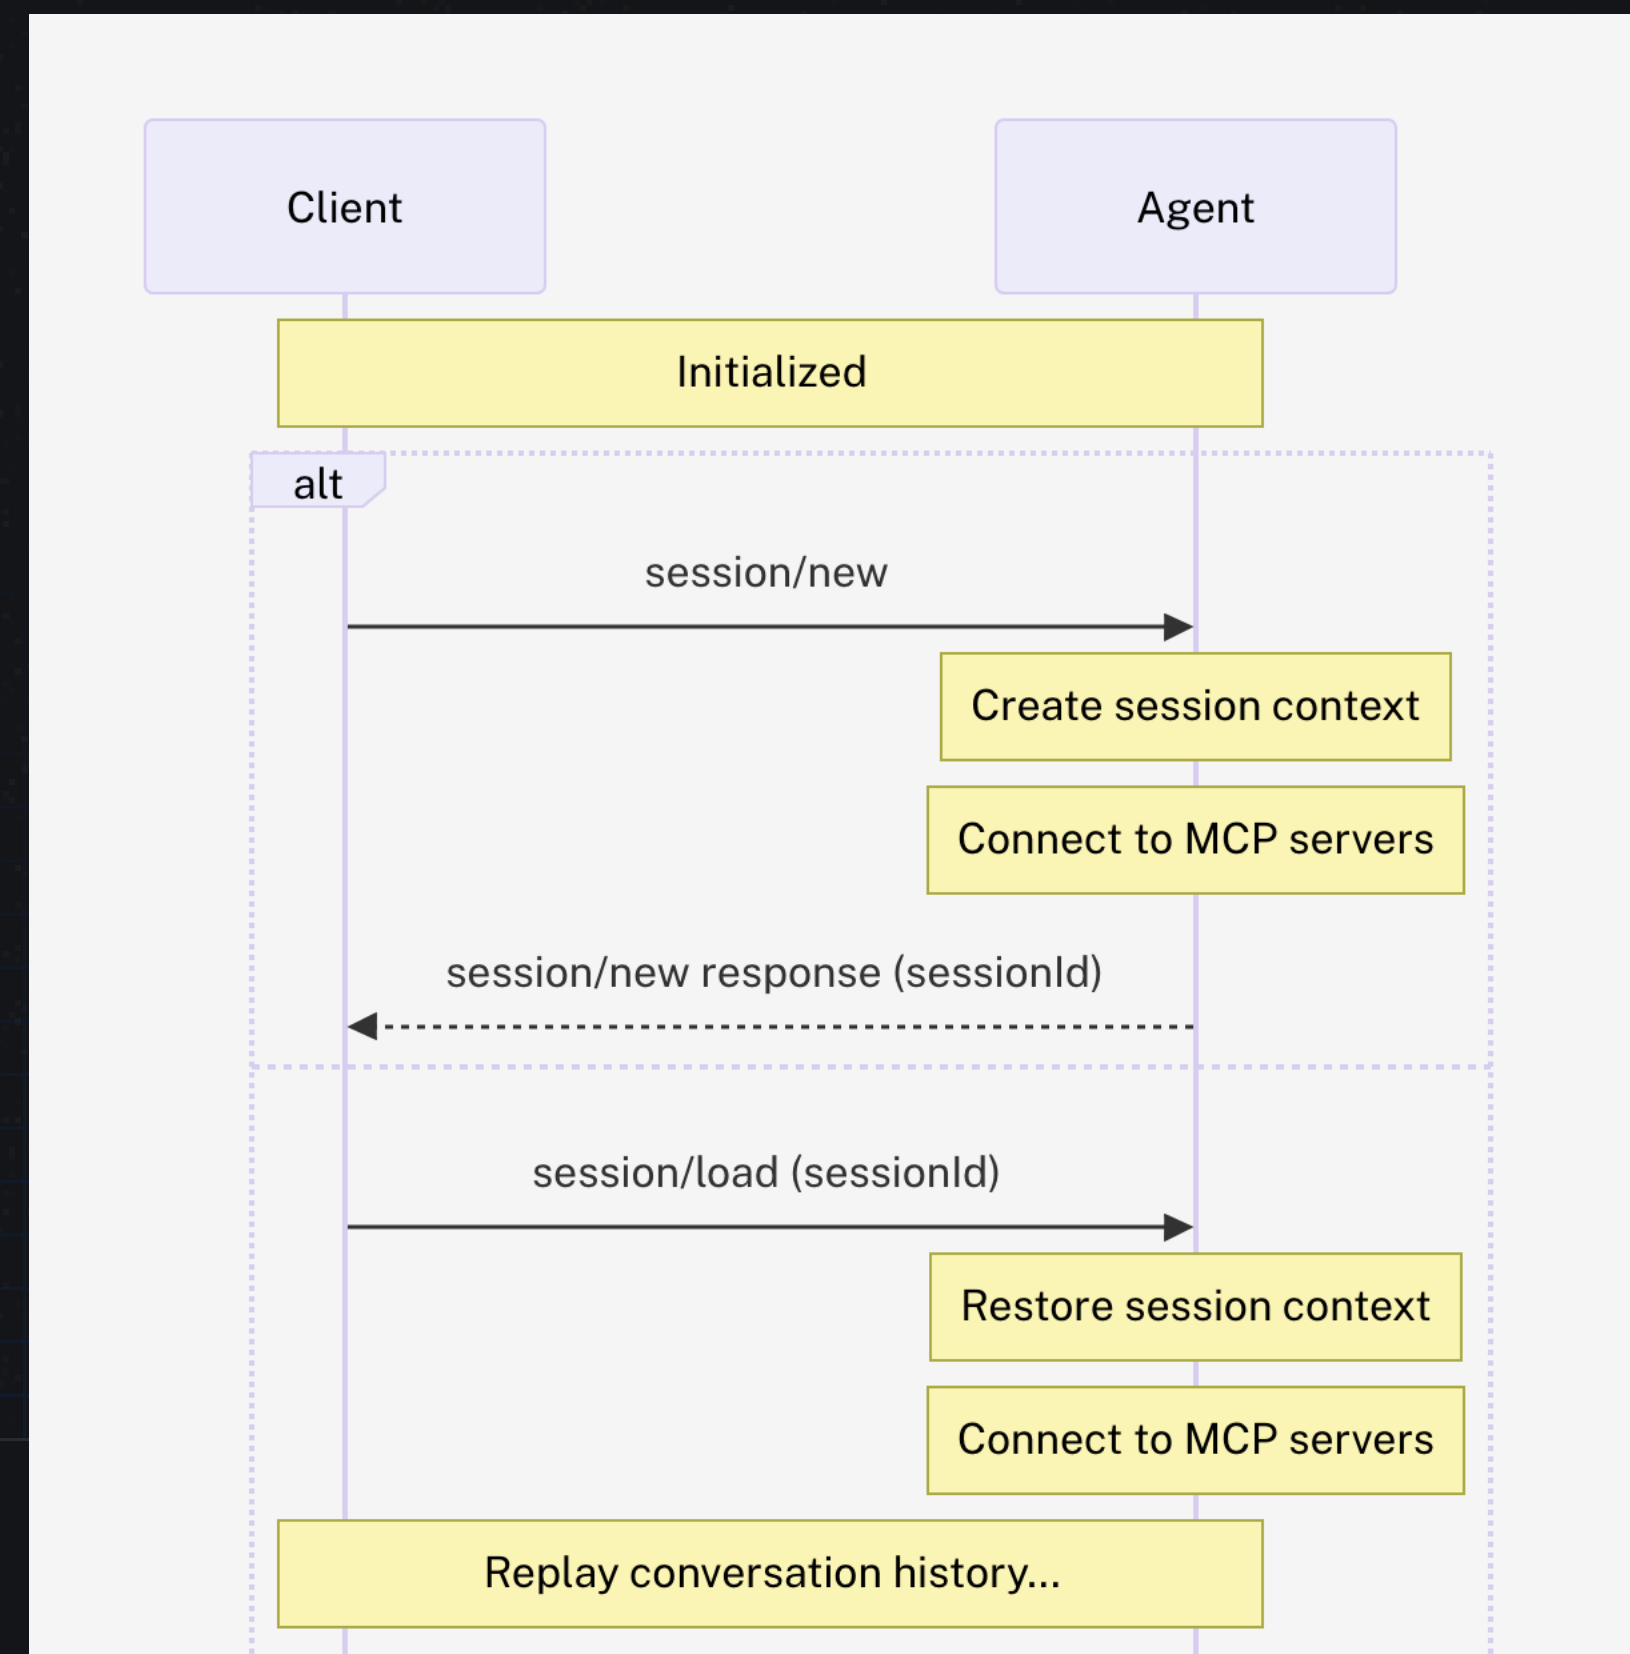



Plan to Update ACP Repository

```
test rpc::tests::id_display ... ok
test version::tests::test_deserialize_string ... ok
test rpc::tests::id_serialization ... ok
test version::tests::test_deserialize_max_u16 ... ok
test version::tests::test_deserialize_u64 ... ok
test version::tests::test_deserialize_zero ... ok
test version::tests::test_deserialize_large_number ... ok
test rpc::tests::id_serialization ... ok
test agent::test_serialization::test_mcp_server_http_serialization ... ok
test rpc::test_notification_wire_format ... ok
test agent::test_serialization::test_mcp_server_stdio_serialization ... ok
test agent::test_serialization::test_mcp_server_sse_serialization ... ok

test result: ok. 12 passed; 0 failed; 0 ignored; 0 measured; 0 filtered out; finished in 0.00s

Running unittests rust/bin/generate.rs (target/debug/deps/generate-07dd36468992b7e9)

running 0 tests

test result: ok. 0 passed; 0 failed; 0 ignored; 0 measured; 0 filtered out; finished in 0.00s
```

Now let me check what dependencies might need updating and understand the complete project structure better:

Run Command

cargo outdated 2>&1 || echo "cargo-outdated not installed"

Always Allow

Allow

Deny

Read file .github/workflows

..

Message the Zed Agent – @ to include context

22k / 200k Write Claude Sonnet 4.5

New Thread

```
current directory
cd /Users/benbrandt/github/agent-client-protocol && cat rust-toolchain.toml

[toolchain]
channel = "1.89"
profile = "minimal"
components = ["rustfmt", "clippy"]
```

current directory

cd /Users/benbrandt/github/agent-client-protocol && npm outdated

Package	Current	Wanted	Latest	Location	Depended by
tsx	4.20.5	4.20.6	4.20.6	node_modules/tsx	agent-client-protocol

current directory

cd /Users/benbrandt/github/agent-client-protocol && cargo

Plan

8 Tasks

Update Rust toolchain from 1.89 to 1.91 (latest stable)

Update Rust dependencies (schemars, serde, derive_more)

Update npm dependencies (tsx from 4.20.5 to 4.20.6, prettier)

Update GitHub Actions workflow dependencies

Run formatting checks and fix any issues

Run cargo clippy and fix any new lints

Run tests to ensure everything still works

Update CHANGELOG.md with version bump and changes

Message Claude Code – @ to include context, / for commands

Always Ask Default (recommended)

New Thread

Thinking

Read extend-diff-type.mdx

Thinking

Read CHANGELOG.md

Thinking

List /Users/benbrandt/github/agent-client-protocol/.docs

Thinking

Search TODO

Thinking

/Users/benbrandt/github/agent-client-protocol/. Run git log -5 --oneline

7eca160 Update cagent link

2f40371 RFD Draft: Session Config Options (#210)

ecea849 Add contributing docs (#222)

c64e1a9 docs: Add Obsidian client via the Agent Client plugin (#220)

3fbeb44 docs: Move brand assets to the repo (#219)

Thinking

Search extend diff

Thinking

Message Codex – @ to include context, / for commands

Auto gpt-5-codex (medium)

New Thread

Thinking

npm install is blocked. I'll analyze package.json and package-lock.json to assess dependencies, starting with reading the lock file to determine installed versions and then manually checking for updates.

package-lock.json

Thinking

Okay, package.json and package-lock.json show prettier at ^3.3.3 (locked to 3.6.2) and tsx at ^4.20.5. I'll use web_fetch to check npmjs.com for the latest versions of both.

Searching the web for: "prettier npm, tsx npm"

Thinking

Web search was unhelpful. I'll revise my query to find the latest version of prettier and tsx on npmjs.com.

Searching the web for: "prettier npm version, tsx npm version"

Thinking

Okay, prettier is current at 3.6.2. tsx is outdated at 4.20.5, with 4.20.6 available. Now to check Rust dependencies. Since I can't use cargo outdated, I'll find an alternative method.

Searching the web for: "check for outdated cargo dependencies without comm"

Thinking

Okay, checking for outdated cargo dependencies. I'll try cargo outdated first. If that fails, I'll manually check crates.io. Running cargo outdated now.

Message Gemini CLI – @ to include context

Clients



Zed


Agents



Gemini CLI



Codex
(via adapter)



Claude Code
(via adapter)

Clients



Zed



All IDEs
(coming soon)



Neovim
Plugins



Emacs
Plugins



marimo

Python Notebooks



SQL Notebooks
(coming soon)



Obsidian
Plugins

more coming soon!


Agents



Gemini CLI



Codex
(via adapter)



Claude Code
(via adapter)



Junie
(coming soon)



goose



Kimi CLI



OpenCode



cagent



Stakpak

more coming soon!

Bring the best agents everywhere.



Agent Client Protocol (ACP)

A protocol for connecting any editor to any agent

Verified

70 followers <https://agentclientprotocol.com/>

Unfollow

README.md



Agent/Client Protocol

Agent Client Protocol

The Agent Client Protocol (ACP) standardizes communication between *code editors* (interactive programs for viewing and editing source code) and *coding agents* (programs that use generative AI to autonomously modify code).

Learn more at agentclientprotocol.com.

Integrations

- [Schema](#)
- [Agents](#)
- [Clients](#)
- [Official Libraries](#)

View as: Public

You are viewing the README and pinned repositories as a public user.

[Get started with tasks](#) that most successful organizations complete.

Top discussions this past month

Session info - tokens used and cost

3 2

How is a client supposed to resume an existing session with the agent?


2 9


v0.5.0

2 0

[View all discussions](#)

People

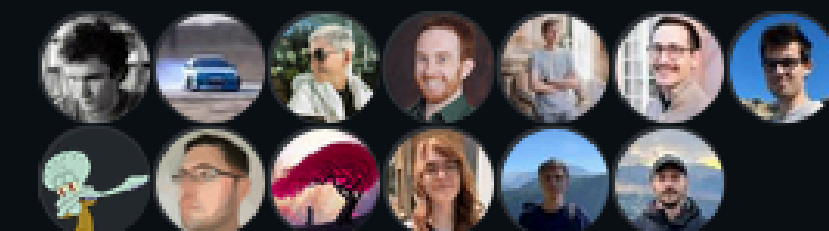



Draft

- Session List
- Session Config Options

Accepted

- Introduce RFD Process

Requests for Dialog (RFDs)

Copy page

Our process for introducing changes to the protocol

A “Request for Dialog” (RFD) is ACP’s version of the RFC process. RFDs are the primary mechanism for proposing new features, collecting community input on an issue, and documenting design decisions.

When to write an RFD

You should consider writing an RFD if you intend to make a “substantial” change to ACP or its documentation. What constitutes a “substantial” change is evolving based on community norms and varies depending on what part of the ecosystem you are proposing to change.

Some changes do not require an RFD:

- Rephrasing, reorganizing or refactoring
- Addition or removal of warnings
- Additions that strictly improve objective, numerical quality criteria (speedup, better browser support)
- Fixing objectively incorrect behavior

The RFD Process

On this page

When to write an RFD

The RFD Process

1. Propose by opening a PR
2. Merge to “Draft” when championed
- 2b. Move to “To be removed”
3. Move to “Preview” when fully implemented
4. Completed
5. Implementation and completion

RFD Lifecycle

Governance

Discussion and Moderation

Licensing



Agent/Client
Protocol

agentclientprotocol.com



We're Hiring!