RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
> library(ggplot2)
warning message:
package 'ggplot2' was built under R version 4.4.2
> View(mpg)
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_point()
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_point()
```

Environment | History | Connections | Tutorial


Import Dataset | 196 MiB | List

R | Global Environment

Environment is empty

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

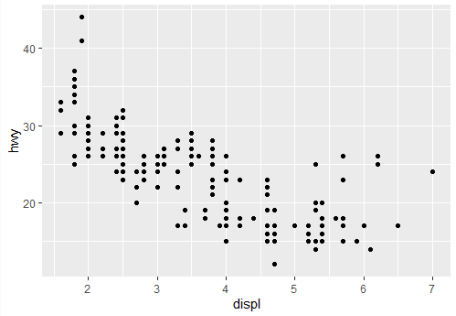

66°F Sunny | Search | 8:55 PM 12/6/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
> library(ggplot2)
warning message:
package 'ggplot2' was built under R version 4.4.2
> View(mpg)
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_point()
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_bar()
Error in `geom_bar()`:
! Problem while computing stat.
i Error occurred in the 1st layer.
Caused by error in `setup_params()`:
! `stat_count()` must only have an x or y aesthetic.
Run `rlang::last_trace()` to see where the error occurred.
> ggplot(mpg, aes(x=displ)) + geom_bar()
>
```

Environment | History | Connections | Tutorial


Import Dataset | 187 MiB | List

R | Global Environment

Environment is empty

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

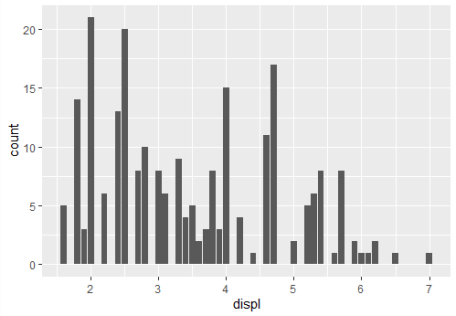

66°F Sunny | Search | 8:56 PM 12/6/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
package 'ggplot2' was built under R version 4.4.2
> View(mpg)
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_point()
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_bar()
Error in `geom_bar()`:
! Problem while computing stat.
i Error occurred in the 1st layer.
Caused by error in `setup_params()`:
! `stat_count()` must only have an x or y aesthetic.
Run `rlang::last_trace()` to see where the error occurred.
> ggplot(mpg, aes(x=displ)) + geom_bar()
> ggplot(mpg, aes(x=displ, color = 'pink'')) + geom_bar()
+ ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
Error: unexpected string constant in:
"ggplot(mpg, aes(x=displ, color = 'pink'')) + geom_bar()
ggplot(mpg, aes(x=displ, color = '"
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
>
```

Environment | History | Connections | Tutorial


Import Dataset | 149 MiB | List

R | Global Environment

Environment is empty

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

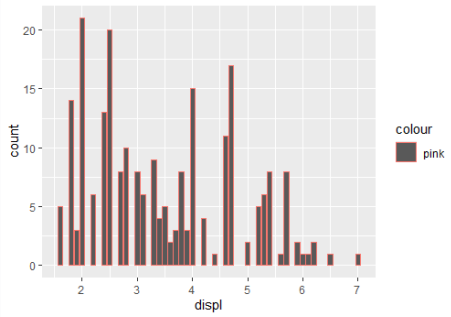

66°F Sunny | Search | 9:21 PM 12/6/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_bar()
Error in `geom_bar()`:
! Problem while computing stat.
i Error occurred in the 1st layer.
Caused by error in `setup_params()`:
! `stat_count()` must only have an x or y aesthetic.
Run `rlang::last_trace()` to see where the error occurred.
> ggplot(mpg, aes(x=displ)) + geom_bar()
> ggplot(mpg, aes(x=displ, color = 'pink'')) + geom_bar()
+ ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
Error: unexpected string constant in:
"ggplot(mpg, aes(x=displ, color = 'pink'')) + geom_bar()
ggplot(mpg, aes(x=displ, color = '"
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
> p <- ggplot(mpg, aes(x=cyl))
> p <- ggplot(mpg, aes(x=cyl, fill = drv))
> p + geom_bar()
>
```

Environment | History | Connections | Tutorial

Import Dataset | 152 MiB | List


R | Global Environment

Data

p	List of 11

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

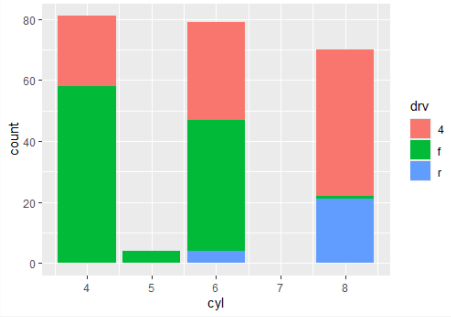

66°F Sunny | Search | 9:25 PM 12/6/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
Error in `geom_bar()`:
! Problem while computing stat.
i Error occurred in the 1st layer.
Caused by error in `setup_params()`:
! `stat_count()` must only have an x or y aesthetic.
Run `rlang::last_trace()` to see where the error occurred.
> ggplot(mpg, aes(x=displ)) + geom_bar()
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
+ ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
Error: unexpected string constant in:
"ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
ggplot(mpg, aes(x=displ, color = '"
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
> p <- ggplot(mpg, aes(x=cyl))
> p <- ggplot(mpg, aes(x=cyl, fill = drv))
> p + geom_bar()
> p + geom_bar(position = 'dodge')
>
```

Environment | History | Connections | Tutorial

Import Dataset | 154 MiB | List


R | Global Environment

Data

p | List of 11

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

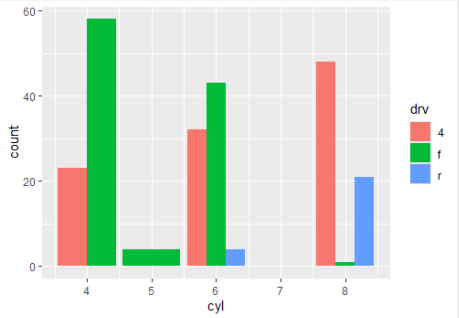

66°F Sunny | Search | 9:26 PM 12/6/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

mpg

Filter

	manufacturer	model	displ	year	cyl	trans	drv	cty	hwy	fl	class
1	audi	a4	1.8	1999	4	auto(l5)	f	18	29	p	compact
2	audi	a4	1.8	1999	4	manual(m5)	f	21	29	p	compact
3	audi	a4	2.0	2008	4	manual(m6)	f	20	31	p	compact
4	audi	a4	2.0	2008	4	auto(av)	f	21	30	p	compact
5	audi	a4	2.8	1999	6	auto(l5)	f	16	26	p	compact
6	audi	a4	2.8	1999	6	manual(m5)	f	18	26	p	compact
7	audi	a4	3.1	2008	6	auto(av)	f	18	27	p	compact
8	audi	a4 quattro	1.8	1999	4	manual(m5)	4	18	26	p	compact

Showing 1 to 8 of 234 entries, 11 total columns

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
! Problem while computing stat.
i Error occurred in the 1st layer.
Caused by error in `setup_params()`:
! `stat_count()` must only have an x or y aesthetic.
Run `rlang::last_trace()` to see where the error occurred.
> ggplot(mpg, aes(x=displ)) + geom_bar()
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
+ ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
Error: unexpected string constant in:
"ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
ggplot(mpg, aes(x=displ, color = '"
> ggplot(mpg, aes(x=displ, color = 'pink')) + geom_bar()
> p <- ggplot(mpg, aes(x=cyl))
> p <- ggplot(mpg, aes(x=cyl, fill = drv))
> p + geom_bar()
> p + geom_bar(position = 'dodge')
> ggplot(mpg, aes(x=displ, y=hwy)) + geom_point(colour='plum')
>
```

Environment | History | Connections | Tutorial

Import Dataset | 212 MiB | List


R | Global Environment

Data


p | List of 11

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

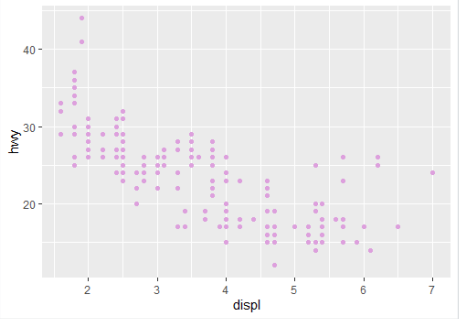

66°F Sunny | Search | 9:28 PM 12/6/2024

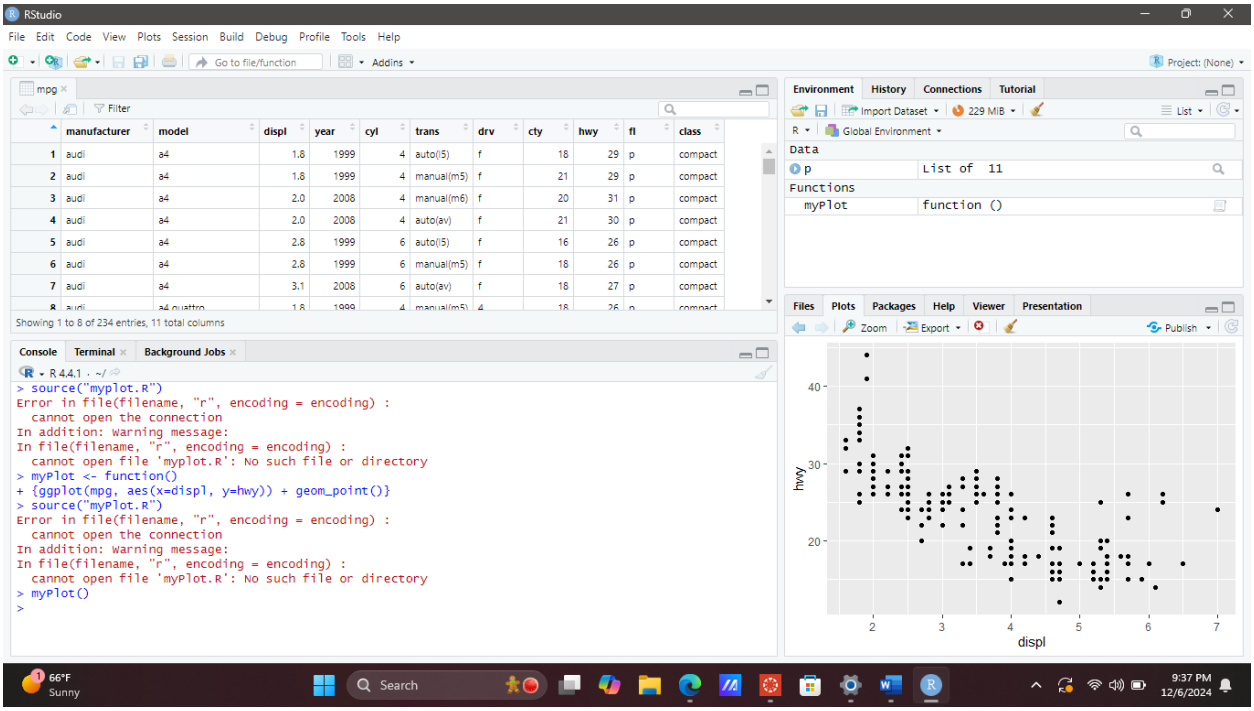
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
Project: (None)
mpg
Filter
manufacturer model displ year cyl trans drv cty hwy fl class
1 audi a4 1.8 1999 4 auto(l5) f 18 29 p compact
2 audi a4 1.8 1999 4 manual(m5) f 21 29 p compact
3 audi a4 2.0 2008 4 manual(m6) f 20 31 p compact
4 audi a4 2.0 2008 4 auto(av) f 21 30 p compact
5 audi a4 2.8 1999 6 auto(l5) f 16 26 p compact
6 audi a4 2.8 1999 6 manual(m5) f 18 26 p compact
7 audi a4 3.1 2008 6 auto(av) f 18 27 p compact
Showing 1 to 8 of 234 entries, 11 total columns
Console Terminal Background Jobs
R 4.4.1 · ~/
> source("myplot.R")
Error in file(filename, "r", encoding = encoding) :
cannot open the connection
In addition: Warning message:
In file(filename, "r", encoding = encoding) :
cannot open file 'myplot.R': No such file or directory
> myPlot <- function()
+ {ggplot(mpg, aes(x=displ, y=hwy)) + geom_point()}
> source("myPlot.R")
Error in file(filename, "r", encoding = encoding) :
cannot open the connection
In addition: Warning message:
In file(filename, "r", encoding = encoding) :
cannot open file 'myPlot.R': No such file or directory
> myPlot()
>
Environment History Connections Tutorial
Import Dataset
229 MiB
List
R
Global Environment
Data
p List of 11
Functions
myPlot function ()
Files Plots Packages Help Viewer Presentation
Zoom
Export
Publish
hwy
displ
40
30
20
2
3
4
5
6
7
66°F
Sunny
Search
9:37 PM
12/6/2024