RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
> holiday_type<-c('General Holiday','Bonus Holiday','Sick Leave','Casual Leave','Paid Lea
ve')
> holiday_count<-c(9,22,11,3,15)
> performance_rating<-c(3,4,5,4,5)
> holiday_data<-data.frame(holiday_type,holiday_count,performance_rating)
> holiday_data
     holiday_type holiday_count performance_rating
1 General Holiday             9                 3
2   Bonus Holiday            22                 4
3      Sick Leave            11                 5
4    Casual Leave             3                 4
5      Paid Leave            15                 5
>
```

Environment | History | Connections | Tutorial

Import Dataset | 144 MiB | List

R | Global Environment

holiday_data — 5 obs. of 3 variables

values

cyl	num [1:4] 5 7 3 4
holiday_count	num [1:5] 9 22 11 3 15
holiday_type	chr [1:5] "General Holiday" "Bonus Holiday" "Sick …
hp	num [1:4] 150 140 101 100
mpg	num [1:4] 23 25 21 5
order_position	int [1:4] 1 2 3 4

Files | Plots | Packages | Help | Viewer | Presentation

subset

R: Subsetting Vectors, Matrices and Data Frames | Find in Topic

This is a generic function, with methods supplied for matrices, data frames and vectors (including lists). Packages and users can add further methods.

For ordinary vectors, the result is simply `x[subset & !is.na(subset)]`.

For data frames, the `subset` argument works on the rows. Note that `subset` will be evaluated in the data frame, so columns can be referred to (by name) as variables in the expression (see the examples).

The `select` argument exists only for the methods for data frames and matrices. It works by first replacing column names in the selection expression with the corresponding column numbers in the data frame and then using the resulting integer vector to index the columns. This allows the use of the standard indexing conventions so that for example ranges of columns can be specified easily, or single columns can be dropped (see the examples).

The `drop` argument is passed on to the indexing method for matrices and data frames: note that the default for matrices is different from that for indexing.

Factors may have empty levels after subsetting; unused levels are not automatically removed. See `droplevels` for a way to drop all unused levels from a data frame.

62°F Clear | Search | 6:45 PM 10/30/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Project: (None)

Console | Terminal | Background Jobs

R 4.4.1 · ~/

```
> holiday_type<-c('General Holiday','Bonus Holiday','Sick Leave','Casual Leave','Paid Lea
ve')
> holiday_count<-c(9,22,11,3,15)
> performance_rating<-c(3,4,5,4,5)
> holiday_data<-data.frame(holiday_type,holiday_count,performance_rating)
> holiday_data
     holiday_type holiday_count performance_rating
1 General Holiday             9                 3
2   Bonus Holiday            22                 4
3      Sick Leave            11                 5
4    Casual Leave             3                 4
5      Paid Leave            15                 5
> boxplot(holiday_data$performance_rating)
>
```

Environment | History | Connections | Tutorial

Import Dataset | 155 MiB | List

R | Global Environment


holiday_data — 5 obs. of 3 variables

values

cyl	num [1:4] 5 7 3 4
holiday_count	num [1:5] 9 22 11 3 15
holiday_type	chr [1:5] "General Holiday" "Bonus Holiday" "Sick …
hp	num [1:4] 150 140 101 100
mpg	num [1:4] 23 25 21 5
order_position	int [1:4] 1 2 3 4

Files | Plots | Packages | Help | Viewer | Presentation

Zoom | Export | Publish

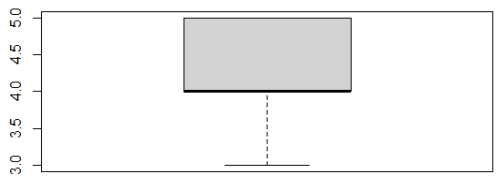

Finance headline United States re... | Search | 6:49 PM 10/30/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Console Terminal Background Jobs

R 4.4.1 · ~/

```
> holiday_type<-c('General Holiday','Bonus Holiday','Sick Leave','Casual Leave','Paid Leave')
> holiday_count<-c(9,22,11,3,15)
> performance_rating<-c(3,4,5,4,5)
> holiday_data<-data.frame(holiday_type,holiday_count,performance_rating)
> holiday_data
     holiday_type holiday_count performance_rating
1 General Holiday             9                 3
2   Bonus Holiday            22                 4
3      Sick Leave            11                 5
4    Casual Leave             3                 4
5      Paid Leave            15                 5
> boxplot(holiday_data$performance_rating)
> title(xlab='Holiday',ylab='Performance Rating')
> boxplot(holiday_data$performance_rating,xlab='Holiday',ylab='Performance Rating',col="cyan")
>
```

Environment History Connections Tutorial


Import Dataset 131 MiB List

R Global Environment

holiday_data	5 obs. of 3 variables
values	
cyl	num [1:4] 5 7 3 4
holiday_count	num [1:5] 9 22 11 3 15
holiday_type	chr [1:5] "General Holiday" "Bonus Holiday" "Sick …
hp	num [1:4] 150 140 101 100
mpg	num [1:4] 23 25 21 5
order_position	int [1:4] 1 2 3 4

Files Plots Packages Help Viewer Presentation

Zoom Export Publish

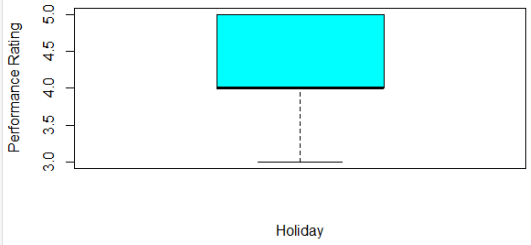

62°F Clear | Search | 6:54 PM 10/30/2024

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Console Terminal Background Jobs

R 4.4.1 · ~/

```
> holiday_type<-c('General Holiday','Bonus Holiday','Sick Leave','Casual Leave','Paid Leave')
> holiday_count<-c(9,22,11,3,15)
> performance_rating<-c(3,4,5,4,5)
> holiday_data<-data.frame(holiday_type,holiday_count,performance_rating)
> holiday_data
     holiday_type holiday_count performance_rating
1 General Holiday             9                 3
2   Bonus Holiday            22                 4
3      Sick Leave            11                 5
4    Casual Leave             3                 4
5      Paid Leave            15                 5
> boxplot(holiday_data$performance_rating)
> title(xlab='Holiday',ylab='Performance Rating')
> boxplot(holiday_data$performance_rating,xlab='Holiday',ylab='Performance Rating',col="cyan")
> plot(holiday_data$holiday_count,holiday_data$performance_rating,xlab='Holiday Count',ylab='Performance Rating',col="green")
>
```

Environment History Connections Tutorial


Import Dataset 185 MiB List

R Global Environment

Data	
cars	4 obs. of 3 variables
holiday_data	5 obs. of 3 variables
values	
cyl	num [1:4] 5 7 3 4
holiday_count	num [1:5] 9 22 11 3 15
holiday_type	chr [1:5] "General Holiday" "Bonus Holiday" "Sick …
hp	num [1:4] 150 140 101 100

Files Plots Packages Help Viewer Presentation

Zoom Export Publish

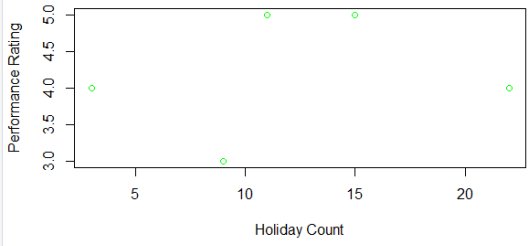

62°F Clear | Search | 7:02 PM 10/30/2024