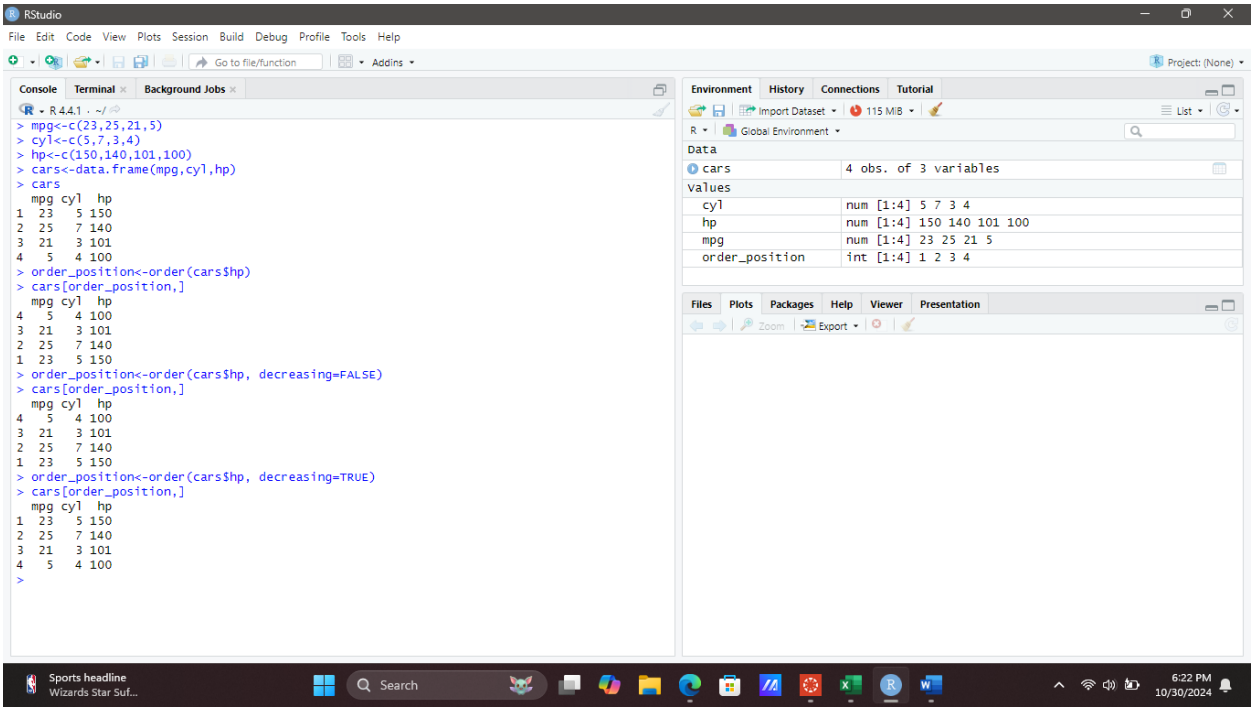
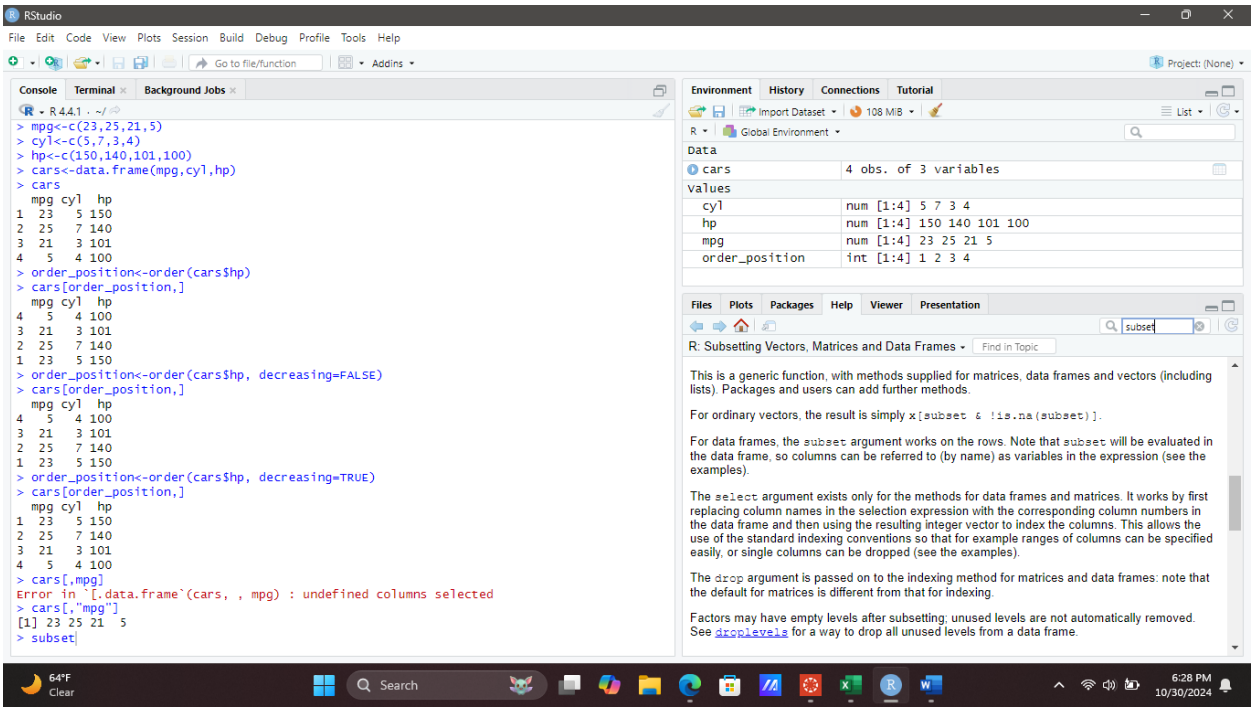
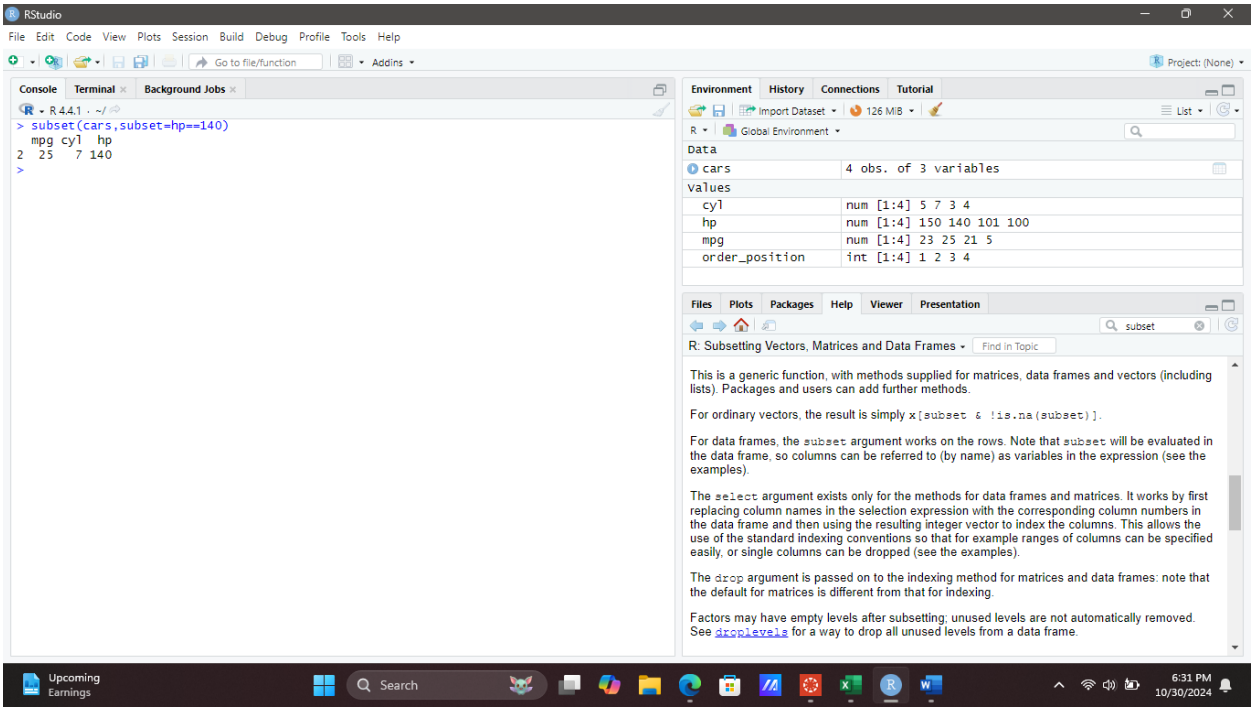

RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Console Terminal Background Jobs
R 4.4.1 · ~/
> mpg<-c(23,25,21,5)
> cyl<-c(5,7,3,4)
> hp<-c(150,140,101,100)
> cars<-data.frame(mpg,cyl,hp)
> cars
mpg cyl hp
1 23 5 150
2 25 7 140
3 21 3 101
4 5 4 100
> order_position<-order(cars$hp)
> cars[order_position,]
mpg cyl hp
4 5 4 100
3 21 3 101
2 25 7 140
1 23 5 150
> order_position<-order(cars$hp, decreasing=FALSE)
> cars[order_position,]
mpg cyl hp
4 5 4 100
3 21 3 101
2 25 7 140
1 23 5 150
> order_position<-order(cars$hp, decreasing=TRUE)
> cars[order_position,]
mpg cyl hp
1 23 5 150
2 25 7 140
3 21 3 101
4 5 4 100
>
Environment History Connections Tutorial
Import Dataset 115 MiB
Global Environment
Data
cars 4 obs. of 3 variables
values
cyl num [1:4] 5 7 3 4
hp num [1:4] 150 140 101 100
mpg num [1:4] 23 25 21 5
order_position int [1:4] 1 2 3 4
Files Plots Packages Help Viewer Presentation
Export
Sports headline
Wizards Star Suf...
Search
6:22 PM
10/30/2024


RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Console Terminal Background Jobs
R 4.4.1 · ~/
> mpg<-c(23,25,21,5)
> cyl<-c(5,7,3,4)
> hp<-c(150,140,101,100)
> cars<-data.frame(mpg,cyl,hp)
> cars
mpg cyl hp
1 23 5 150
2 25 7 140
3 21 3 101
4 5 4 100
> order_position<-order(cars$hp)
> cars[order_position,]
mpg cyl hp
4 5 4 100
3 21 3 101
2 25 7 140
1 23 5 150
> order_position<-order(cars$hp, decreasing=FALSE)
> cars[order_position,]
mpg cyl hp
4 5 4 100
3 21 3 101
2 25 7 140
1 23 5 150
> order_position<-order(cars$hp, decreasing=TRUE)
> cars[order_position,]
mpg cyl hp
1 23 5 150
2 25 7 140
3 21 3 101
4 5 4 100
> cars[,mpg]
Error in `[.data.frame`(cars, , mpg) : undefined columns selected
> cars[,"mpg"]
[1] 23 25 21 5
> subset
Environment History Connections Tutorial
Import Dataset 108 MiB
Global Environment
Data
cars 4 obs. of 3 variables
values
cyl num [1:4] 5 7 3 4
hp num [1:4] 150 140 101 100
mpg num [1:4] 23 25 21 5
order_position int [1:4] 1 2 3 4
Files Plots Packages Help Viewer Presentation
subset
R: Subsetting Vectors, Matrices and Data Frames
Find in Topic
This is a generic function, with methods supplied for matrices, data frames and vectors (including lists). Packages and users can add further methods.
For ordinary vectors, the result is simply x[subset & !is.na(subset)].
For data frames, the subset argument works on the rows. Note that subset will be evaluated in the data frame, so columns can be referred to (by name) as variables in the expression (see the examples).
The select argument exists only for the methods for data frames and matrices. It works by first replacing column names in the selection expression with the corresponding column numbers in the data frame and then using the resulting integer vector to index the columns. This allows the use of the standard indexing conventions so that for example ranges of columns can be specified easily, or single columns can be dropped (see the examples).
The drop argument is passed on to the indexing method for matrices and data frames: note that the default for matrices is different from that for indexing.
Factors may have empty levels after subsetting; unused levels are not automatically removed. See droplevels for a way to drop all unused levels from a data frame.
64°F
Clear
Search
6:28 PM
10/30/2024


RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
Project: (None)
Console
Terminal
Background Jobs
R 4.4.1 · ~/
> subset(cars,subset=hp==140)
mpg cyl hp
2 25 7 140
>
Environment
History
Connections
Tutorial
Import Dataset
126 MiB
List
R
Global Environment
Data
cars
4 obs. of 3 variables
values
cyl
num [1:4] 5 7 3 4
hp
num [1:4] 150 140 101 100
mpg
num [1:4] 23 25 21 5
order_position
int [1:4] 1 2 3 4
Files
Plots
Packages
Help
Viewer
Presentation
subset
R: Subsetting Vectors, Matrices and Data Frames
Find in Topic
This is a generic function, with methods supplied for matrices, data frames and vectors (including lists). Packages and users can add further methods.
For ordinary vectors, the result is simply x[subset & !is.na(subset)].
For data frames, the subset argument works on the rows. Note that subset will be evaluated in the data frame, so columns can be referred to (by name) as variables in the expression (see the examples).
The select argument exists only for the methods for data frames and matrices. It works by first replacing column names in the selection expression with the corresponding column numbers in the data frame and then using the resulting integer vector to index the columns. This allows the use of the standard indexing conventions so that for example ranges of columns can be specified easily, or single columns can be dropped (see the examples).
The drop argument is passed on to the indexing method for matrices and data frames: note that the default for matrices is different from that for indexing.
Factors may have empty levels after subsetting; unused levels are not automatically removed. See droplevels for a way to drop all unused levels from a data frame.
Upcoming
Earnings
Search
6:31 PM
10/30/2024