Execution of commands on Windows Command Prompt

Open Command Prompt

- Press ***Windows*** + ***R***
- Type: cmd and Press ***Enter***

You get to see the prompt similar to:

```
C:\Users\Dell>
```

1. Create Directory (mkdir)

Syntax


mkdir <directory_name>

Example

mkdir Work

Description

Creates a new folder.



2. Change Directory (cd)

Syntax

cd <directory_name>

Example

cd Work

Description

Moves into a folder.




3. Current Directory (cd)

Syntax

cd

Example
cd

Description
Shows current directory.

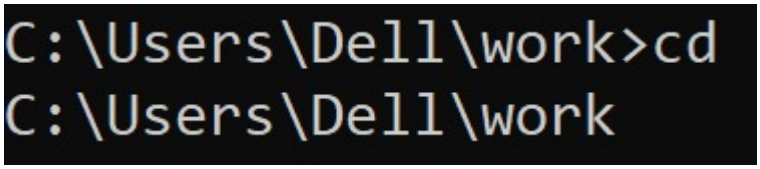


4.Go Back(cd ..)

Syntax
cd ..

Example
cd ..

Description
Moves to parent folder.

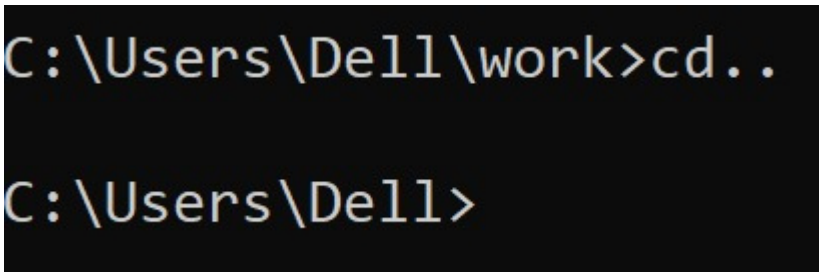


5.ListFiles (dir)

Syntax
dir

Example
dir

Description
Displays files and folders.

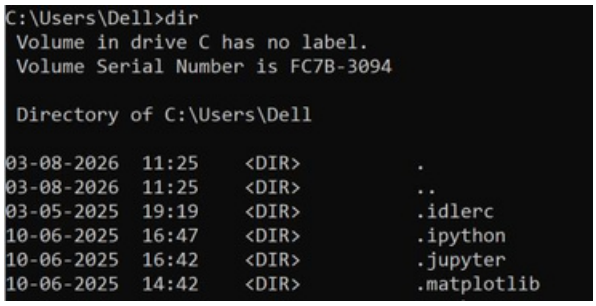

6.CreateFile(type nul >)

Syntax
type nul > <file>

Example
type nul > new.py

Description
Creates an empty file.
Details:

`type` → Windows command
`nul` → A special Windows device that contains no data
`>` → Redirects output to a file
`new.py` → The file to create

```
C:\Users\Dell\work>type nul > new.py

C:\Users\Dell\work>dir
 Volume in drive C has no label.
 Volume Serial Number is FC7B-3094

 Directory of C:\Users\Dell\work

03-08-2026  12:04    <DIR>          .
03-08-2026  12:04    <DIR>          ..
03-08-2026  12:01                 0 hello.py
03-08-2026  12:04                 0 new.py
03-08-2026  11:55                 0 test.txt
               3 File(s)              0 bytes
               2 Dir(s)   4,285,128,704 bytes free
```

7.Edit using Notepad:

Command :
notepad new1.py


- If the file exists, it opens in Notepad.
- If it doesn't exist, Notepad asks:

```
Do you want to create a new file?
```

Click ***Yes***.

- Type your Python code:

```
print("Hello, World!") and save
```

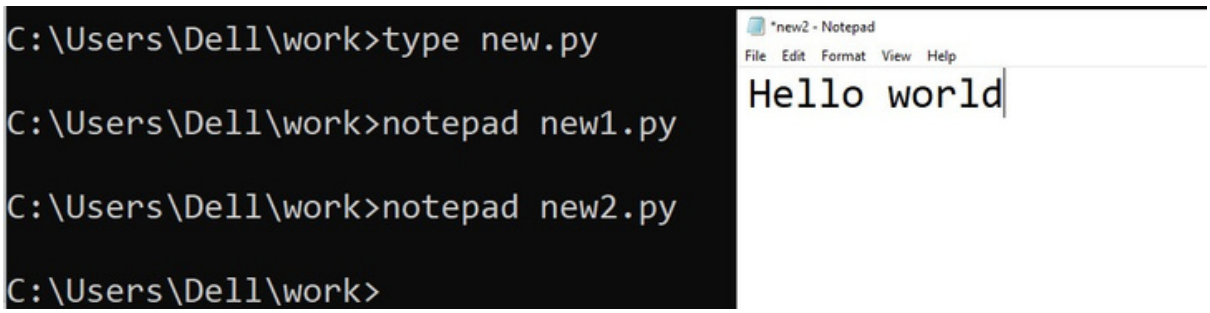

8.View the file

```
C:\Users\Dell\work>type new1.py
hello
C:\Users\Dell\work>
```

9. Copy File (copy)

Syntax

copy <source> <destination>

Example

copy new1.py new2.py

Description

Copies files.

```
C:\Users\Dell\work>copy new1.py new2.py
Overwrite new2.py? (Yes/No/All): y
        1 file(s) copied.
```

10. Move File (move)

Syntax

move <source> <destination>

Example

move new1.py hello.py

Description

Moves files.

```
C:\Users\Dell\work>move new1.py hello.py
Overwrite C:\Users\Dell\work\hello.py? (Yes/No/All): y
        1 file(s) moved.
```

11. Rename (ren)

Syntax


ren <old> <new>

Example

ren hello.py new3.py

Description

Renames file.

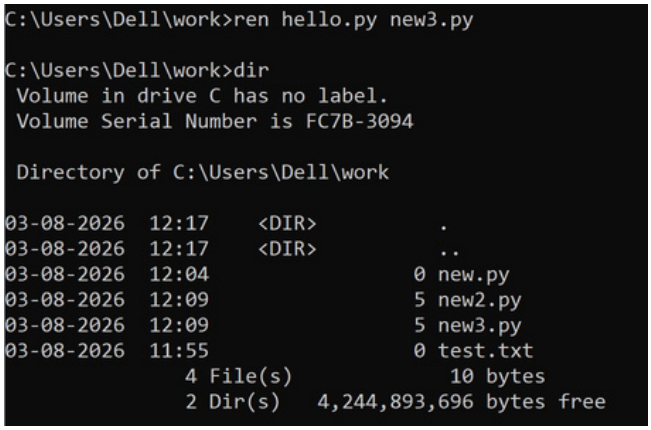

12. Delete File (del)

Syntax

del <file>

Example

del new3.py

Description

Deletes file.

13. Delete Folder (rmdir)

Syntax

rmdir <folder>

Example

rmdir work

Description

Deletes empty folder.

14. Delete Folder Recursively (rmdir /s)

Syntax

rmdir /s Project

Example

rmdir /s Project

Description

Deletes folder and contents.

15. Clear Screen (cls)

Syntax

cls

Example

cls


Description
Clears terminal.

16.DisplayText (echo)

Syntax
echo <text>

Example
echo Hello

Description
Prints text.

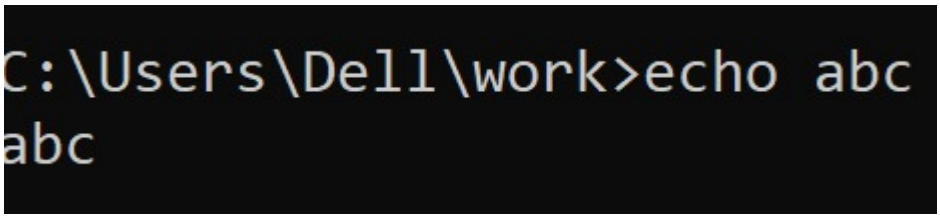


17.Help(help)

Syntax
help

Example
help

Description
Lists commands.

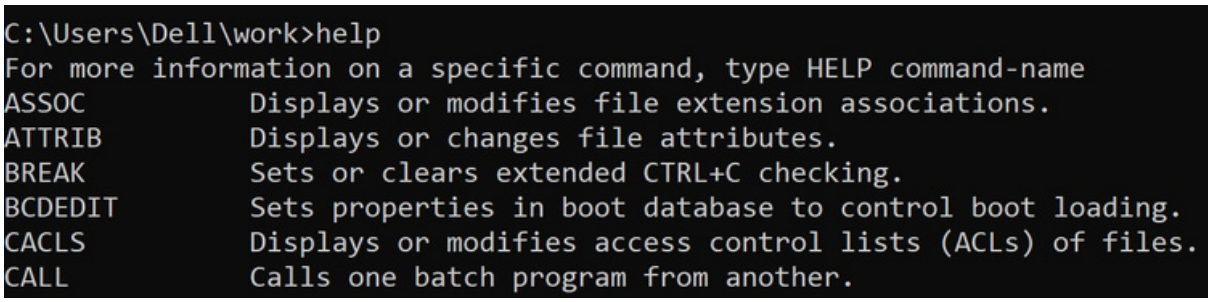

18.CommandHelp(help mkdir)

Syntax
help mkdir

Example
help mkdir

Description
Shows help for mkdir.

19. System Info (systeminfo)

Syntax
systeminfo

Example
systeminfo

Description
Displays Windows info.

```
C:\Users\Dell\work>systeminfo

Host Name:                 DESKTOP-P64SBF0
OS Name:                   Microsoft Windows 10 Home Single Language
OS Version:                10.0.19045 N/A Build 19045
OS Manufacturer:           Microsoft Corporation
OS Configuration:          Standalone Workstation
OS Build Type:             Multiprocessor Free
Registered Owner:          Dell
Registered Organization:
```

20. Attribute

Syntax
attrib

Description
Display File Attributes
Thefilehasthe***Archive (A)*** attribute in below pic.

```
C:\Users\Dell\work>attrib
A                   C:\Users\Dell\work\new.py
A                   C:\Users\Dell\work\new2.py
A                   C:\Users\Dell\work\test.txt
```

Make file Read only

```
C:\Users\Dell\work>attrib +R new.py

C:\Users\Dell\work>attrib
A    R              C:\Users\Dell\work\new.py
A                   C:\Users\Dell\work\new2.py
A                   C:\Users\Dell\work\test.txt
```

Basic Windows Process Commands

1. Display Running Processes (`tasklist`)

Syntax
```
tasklist
```

Example
```
C:\Users\Dell>tasklist
```
Description
Displaysallcurrently running processes along with their Process ID (PID) and memory usage.

```
C:\Users\Dell\work>tasklist

Image Name                     PID Session Name        Session#    Mem Usage
========================= ======== ================ =========== ============
System Idle Process              0 Services                   0          8 K
System                           4 Services                   0        664 K
Secure System                   56 Services                   0     15,268 K
Registry                       108 Services                   0     36,348 K
smss.exe                       404 Services                   0        156 K
```

2. Display Detailed Process Information (`tasklist /v`)

Syntax
```
tasklist /v
```
Example
```
C:\Users\Dell>tasklist /v
```
Description
Displaysdetailed information about each running process, including its status, username, CPU time, and window title.

3. Display Running Services (`tasklist /svc`)

Syntax
```
tasklist /svc
```
Example
```
C:\Users\Dell>tasklist /svc
```

Description
Displaysallrunning processes along with the Windows services associated with them.

4. Filter a Process (`tasklist /FI`)

Syntax
```
tasklist /FI "IMAGENAME eq <process_name>"
```
Example
```
C:\Users\Dell>tasklist /FI "IMAGENAME eq notepad.exe"
```

Description
Displaysinformation only for the specified process

5. Start a Process (`start`)

Syntax
```
start <application_name>
```

Example

```
C:\Users\Dell>start notepad
```

Description

Startsanewapplication or process.

6. Stop a Process by Name (`taskkill /IM`)

Syntax

```
taskkill /IM <process_name> /F
```

Example

```
C:\Users\Dell>taskkill /IM notepad.exe /F
```

Description

Terminatesaprocess using its executable name.

7. Stop a Process by Process ID (`taskkill /PID`)

Syntax

```
taskkill /PID <PID> /F
```

Example

```
C:\Users\Dell>taskkill /PID 4568 /F
```

Description

Terminatesaprocess using its Process ID (PID).

8. Display System Information (`systeminfo`)

Syntax

Example

```
C:\Users\Dell>systeminfo
```

Description


Displays detailed information about the operating system, processor, RAM, BIOS, and installed updates.

9. Display Computer Name (`hostname`)

Syntax

Example

```
C:\Users\Dell>hostname
```

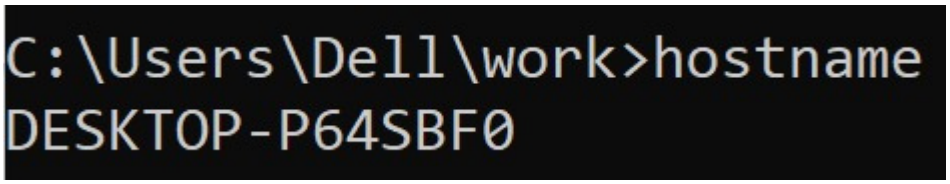

Description

Displaysthename of the current computer.

10. Display Current User (`whoami`)

Syntax

Example

```
C:\Users\Dell>whoami
```

Description

Displaysthename of the currently logged-in user.

```
C:\Users\Dell\work>whoami
desktop-p64sbf0\dell
```

Prepared by,
Prof. Mamatha L
CSE(AIML)