

## Challenge-9

Marzuki Nooranas

2023-10-16

### Code Along - 9

#### Slide 8:

```
library(tidyverse)
```

```
## — Attaching core tidyverse packages — tidyverse 2.0.0 —
## ✓ dplyr      1.1.2      ✓ readr      2.1.4
## ✓ forcats    1.0.0      ✓ stringr    1.5.0
## ✓ ggplot2    3.4.3      ✓ tibble     3.2.1
## ✓ lubridate  1.9.2      ✓ tidyr      1.3.0
## ✓ purrr      1.0.2
## — Conflicts — tidyverse_conflicts() —
## ✗ dplyr::filter() masks stats::filter()
## ✗ dplyr::lag()     masks stats::lag()
## ⓘ Use the conflicted package (<http://conflicted.r-lib.org/>) to force all
conflicts to become errors
```

```
tidydata <- tribble(
  ~country, ~year, ~cases, ~population,
  "Afghanistan", 1999, 745, 19987071,
  "Afghanistan", 2000, 2666, 20595360,
  "Brazil", 1999, 37737, 172006362,
  "Brazil", 2000, 80488, 174504898,
  "China", 1999, 212258, 1272915272,
  "China", 2000, 213766, 1280428583)
```

```
tidydata
```

```
## # A tibble: 6 × 4
##   country      year  cases population
##   <chr>      <dbl> <dbl>      <dbl>
## 1 Afghanistan 1999     745   19987071
## 2 Afghanistan 2000    2666   20595360
## 3 Brazil      1999   37737  172006362
## 4 Brazil      2000   80488  174504898
## 5 China       1999  212258 1272915272
## 6 China       2000  213766 1280428583
```

```
nontidydata <- tribble(
```

```
  ~country, ~year, ~rate,
  "Afghanistan", 1999, "745/19987071",
  "Afghanistan", 2000, "2666/20595360",
  "Brazil", 1999, "37737/172006362",
  "Brazil", 2000, "80488/174504898",
  "China", 1999, "212258/1272915272",
```

```
"China", 2000, "213766/1280428583")
```

```
nontidydata
```

```
## # A tibble: 6 × 3
##   country      year rate
##   <chr>      <dbl> <chr>
## 1 Afghanistan 1999 745/19987071
## 2 Afghanistan 2000 2666/20595360
## 3 Brazil      1999 37737/172006362
## 4 Brazil      2000 80488/174504898
## 5 China       1999 212258/1272915272
## 6 China       2000 213766/1280428583
```

#### Slide 11:

```
nontidydata
```

```
## # A tibble: 6 × 3
##   country      year rate
##   <chr>      <dbl> <chr>
## 1 Afghanistan 1999 745/19987071
## 2 Afghanistan 2000 2666/20595360
## 3 Brazil      1999 37737/172006362
## 4 Brazil      2000 80488/174504898
## 5 China       1999 212258/1272915272
## 6 China       2000 213766/1280428583
```

```
tidieddata <- nontidydata %>%
  separate(rate, into = c("cases",
                          "population"),
            sep = "/")
```

```
tidieddata
```

```
## # A tibble: 6 × 4
##   country      year cases population
##   <chr>      <dbl> <chr>   <chr>
## 1 Afghanistan 1999 745     19987071
## 2 Afghanistan 2000 2666    20595360
## 3 Brazil      1999 37737   172006362
## 4 Brazil      2000 80488   174504898
## 5 China       1999 212258  1272915272
## 6 China       2000 213766  1280428583
```

#### #Slide 12:

```
newtidieddata <- tidieddata %>%
  pivot_longer(
    cols = cases:population,
    names_to = "measurement",
    values_to = "value"
  )
```


```
newtidieddata
```

```
## # A tibble: 12 × 4
##   country      year measurement value
##   <chr>      <dbl> <chr>      <chr>
## 1 Afghanistan 1999 cases      745
## 2 Afghanistan 1999 population 19987071
## 3 Afghanistan 2000 cases      2666
## 4 Afghanistan 2000 population 20595360
## 5 Brazil      1999 cases      37737
## 6 Brazil      1999 population 172006362
## 7 Brazil      2000 cases      80488
## 8 Brazil      2000 population 174504898
## 9 China       1999 cases      212258
## 10 China       1999 population 1272915272
## 11 China       2000 cases      213766
## 12 China       2000 population 1280428583
```

```
## 1 Afghanistan 1999 cases 745
## 2 Afghanistan 1999 population 19987071
## 3 Afghanistan 2000 cases 2666
## 4 Afghanistan 2000 population 20595360
## 5 Brazil 1999 cases 37737
## 6 Brazil 1999 population 172006362
## 7 Brazil 2000 cases 80488
## 8 Brazil 2000 population 174504898
## 9 China 1999 cases 212258
## 10 China 1999 population 1272915272
## 11 China 2000 cases 213766
## 12 China 2000 population 1280428583
```

#Slide 13:

```
ggplot(newtidieddata) +
  aes(x=year,y=value, colour=country) +
  geom_point() +
  geom_line(aes(group = country))+
  facet_wrap(~measurement) +
  theme_bw()
```

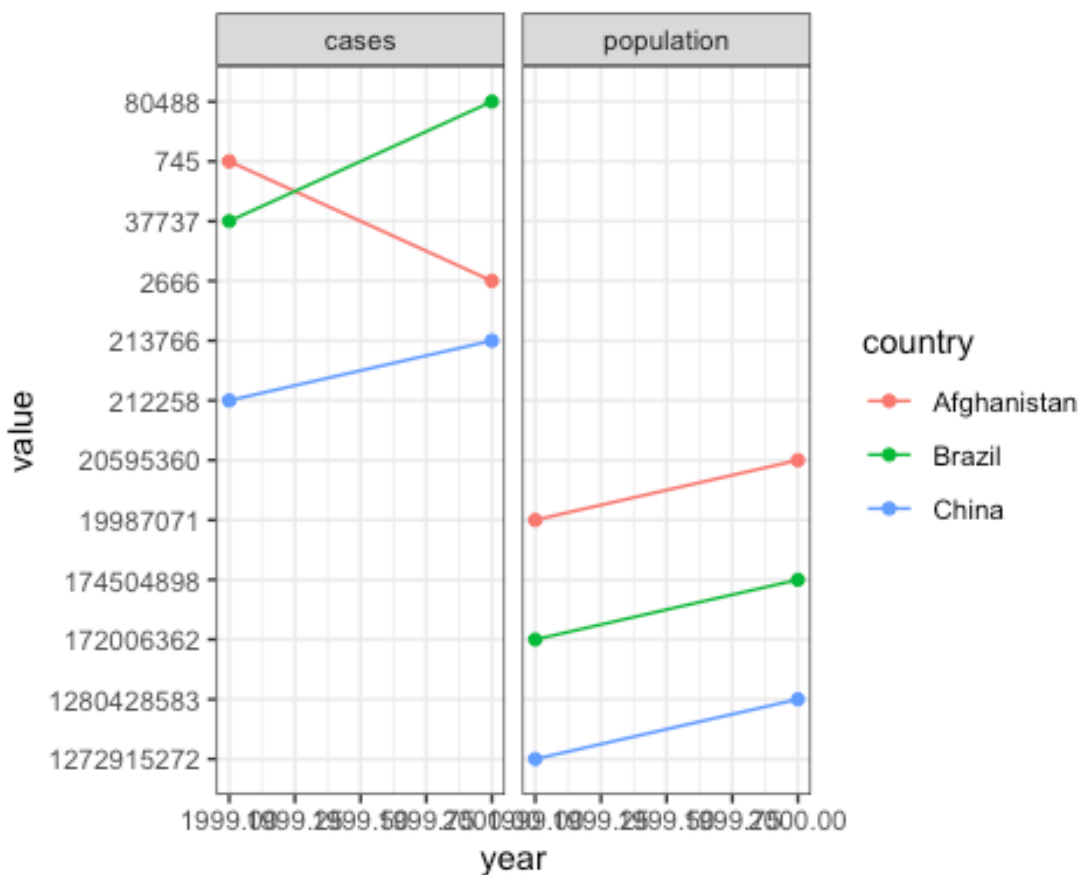

#Slide 14:

```
df <- tribble(
  ~id, ~bp1, ~bp2,
```

```

"A", 100, 120,
"B", 140, 115,
"C", 120, 125
)
df

## # A tibble: 3 × 3
##   id      bp1    bp2
##   <chr> <dbl> <dbl>
## 1 A      100    120
## 2 B      140    115
## 3 C      120    125

df %>%
  pivot_longer(
    cols = bp1:bp2,
    names_to = "measurement",
    values_to = "value"
  )

## # A tibble: 6 × 3
##   id      measurement value
##   <chr> <chr>         <dbl>
## 1 A      bp1           100
## 2 A      bp2           120
## 3 B      bp1           140
## 4 B      bp2           115
## 5 C      bp1           120
## 6 C      bp2           125

```

### Slide 18:

```

newtidieddata

## # A tibble: 12 × 4
##   country      year measurement value
##   <chr>      <dbl> <chr>      <chr>
## 1 Afghanistan 1999 cases      745
## 2 Afghanistan 1999 population 19987071
## 3 Afghanistan 2000 cases      2666
## 4 Afghanistan 2000 population 20595360
## 5 Brazil      1999 cases      37737
## 6 Brazil      1999 population 172006362
## 7 Brazil      2000 cases      80488
## 8 Brazil      2000 population 174504898
## 9 China       1999 cases      212258
## 10 China      1999 population 1272915272
## 11 China      2000 cases      213766
## 12 China      2000 population 1280428583

newtidieddata %>%
  pivot_wider(names_from="measurement",
    values_from="value")

```

```
## # A tibble: 6 × 4
##   country      year cases  population
##   <chr>      <dbl> <chr>   <chr>
## 1 Afghanistan 1999  745   19987071
## 2 Afghanistan 2000 2666   20595360
## 3 Brazil       1999 37737  172006362
## 4 Brazil       2000 80488  174504898
## 5 China        1999 212258 1272915272
## 6 China        2000 213766 1280428583
```

#Slide 19:

```
df <- tribble(
  ~id, ~measurement, ~value,
  "A", "bp1", 100,
  "B", "bp1", 140,
  "B", "bp2", 115,
  "A", "bp2", 120,
  "A", "bp3", 105
)
df

## # A tibble: 5 × 3
##   id      measurement value
##   <chr> <chr>      <dbl>
## 1 A     bp1          100
## 2 B     bp1          140
## 3 B     bp2          115
## 4 A     bp2          120
## 5 A     bp3          105

df %>%
  pivot_wider(
    names_from = measurement,
    values_from = value
  )

## # A tibble: 2 × 4
##   id      bp1      bp2      bp3
##   <chr> <dbl> <dbl> <dbl>
## 1 A      100     120     105
## 2 B      140     115      NA
```

### Challenge 9 Question 1:


billboard

```
## # A tibble: 317 × 79
##   artist      track date.entered wk1  wk2  wk3  wk4  wk5  wk6  wk7  wk8
##   <chr>      <chr> <date>    <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1 2 Pac      Baby... 2000-02-26  87   82   72   77   87   94   99   NA
## 2 2Ge+her    The ... 2000-09-02  91   87   92   NA   NA   NA   NA   NA
## 3 3 Doors D... Kryp... 2000-04-08  81   70   68   67   66   57   54   53
## 4 3 Doors D... Loser 2000-10-21  76   76   72   69   67   65   55   59
## 5 504 Boyz    Wobb... 2000-04-15  57   34   25   17   17   31   36   49
## 6 98^0       Give... 2000-08-19  51   39   34   26   26   19    2    2
## 7 A*Teens    Danc... 2000-07-08  97   97   96   95  100   NA   NA   NA
```

```
## 8 Aaliyah I Do... 2000-01-29 84 62 51 41 38 35 35 38
## 9 Aaliyah Try ... 2000-03-18 59 53 38 28 21 18 16 14
## 10 Adams, Yo... Open... 2000-08-26 76 76 74 69 68 67 61 58
## # i 307 more rows
## # i 68 more variables: wk9 <dbl>, wk10 <dbl>, wk11 <dbl>, wk12 <dbl>,
## # wk13 <dbl>, wk14 <dbl>, wk15 <dbl>, wk16 <dbl>, wk17 <dbl>, wk18 <dbl>,
## # wk19 <dbl>, wk20 <dbl>, wk21 <dbl>, wk22 <dbl>, wk23 <dbl>, wk24 <dbl>,
## # wk25 <dbl>, wk26 <dbl>, wk27 <dbl>, wk28 <dbl>, wk29 <dbl>, wk30 <dbl>,
## # wk31 <dbl>, wk32 <dbl>, wk33 <dbl>, wk34 <dbl>, wk35 <dbl>, wk36 <dbl>,
## # wk37 <dbl>, wk38 <dbl>, wk39 <dbl>, wk40 <dbl>, wk41 <dbl>, wk42 <dbl>, ...


billboard_new <- billboard %>%
  pivot_longer(cols = starts_with("wk"),
               names_to = "week",
               values_to = "rank",
               values_drop_na = TRUE) %>%
  mutate(week = parse_number(week))

ggplot(billboard_new, aes(x = week, y = rank)) +
  geom_line(alpha = 0.7) +
  labs(title = "Song Ranks Over Weeks",
       x = "Week",
       y = "Rank") +
  theme_minimal()
```

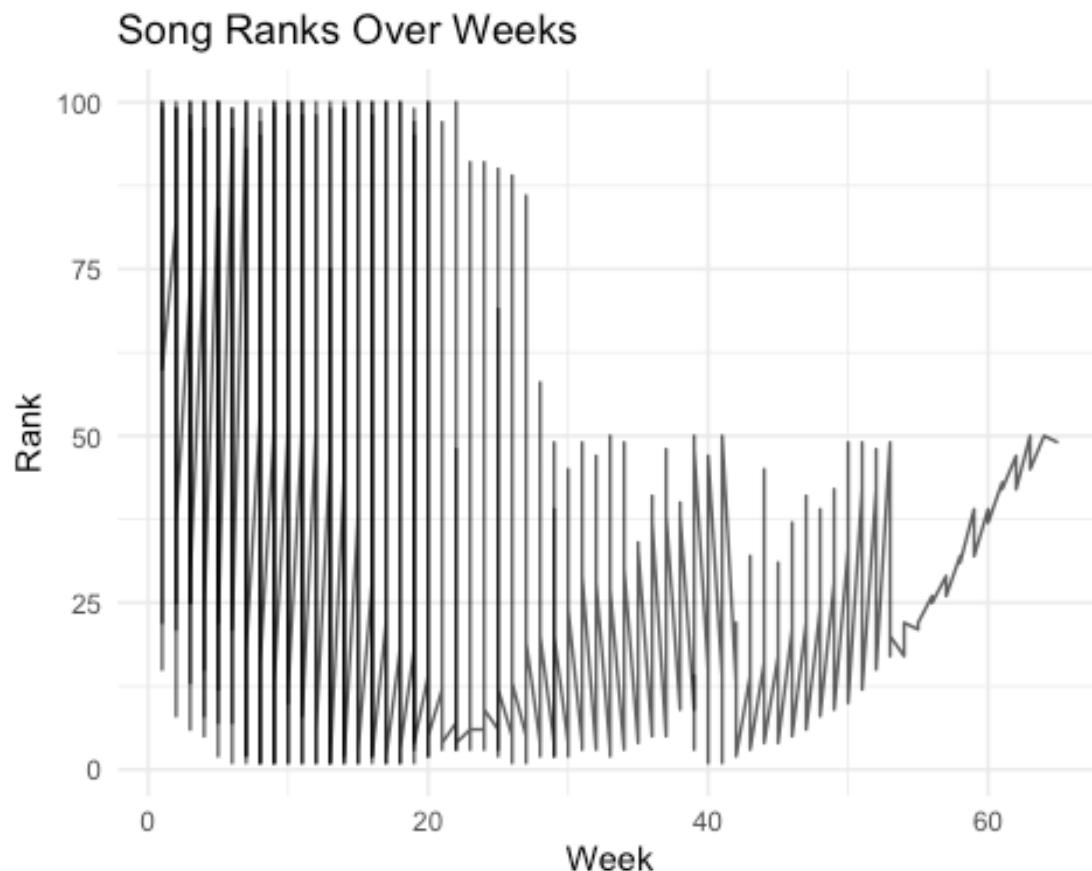


### Challenge 9 Question 2:

cms\_patient\_experience

```
## # A tibble: 500 × 5
##   org_pac_id org_nm          measure_cd measure_title prf_rate
##   <chr>      <chr>          <chr>      <chr>          <dbl>
## 1 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      63
## 2 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      87
## 3 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      86
## 4 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      57
## 5 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      85
## 6 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP... CAHPS for MI...      24
## 7 0446162697 ASSOCIATION OF UNIVERSITY PHYSI... CAHPS_GRP... CAHPS for MI...      59
## 8 0446162697 ASSOCIATION OF UNIVERSITY PHYSI... CAHPS_GRP... CAHPS for MI...      85
## 9 0446162697 ASSOCIATION OF UNIVERSITY PHYSI... CAHPS_GRP... CAHPS for MI...      83
## 10 0446162697 ASSOCIATION OF UNIVERSITY PHYSI... CAHPS_GRP... CAHPS for MI...      63
## #  490 more rows
```

```
cms_wider <- cms_patient_experience %>%
  pivot_wider(names_from = measure_cd,
              values_from = prf_rate,
              id_cols = starts_with("org"))
```

head(cms\_wider)

```
## # A tibble: 6 × 8
##   org_pac_id org_nm CAHPS_GRP_1 CAHPS_GRP_2 CAHPS_GRP_3 CAHPS_GRP_5 CAHPS_GRP_8
##   <chr>      <chr>      <dbl>      <dbl>      <dbl>      <dbl>      <dbl>
## 1 0446157747 USC CA...      63        87        86        57        85
## 2 0446162697 ASSOCI...      59        85        83        63        88
## 3 0547164295 BEAVER...      49        NA        75        44        73
## 4 0749333730 CAPE P...      67        84        85        65        82
## 5 0840104360 ALLIAN...      66        87        87        64        87
## 6 0840109864 REX HO...      73        87        84        67        91
## #  1 more variable: CAHPS_GRP_12 <dbl>
```